

SPEEDFRAC TIEBACK SEAL RECEPTACLE

Casing Size (in)	Maximum OD (in.)	Seal Bore ID (in.)	Min. Bore ID (in.)	Maximum Temp (°F)	Working Pressure psi
7.0 17-26 #	6.000	5.000	4.000	300	10,000
7.0 26-32#	5.938				

FEATURES:

- Polished sealbore can accept 2 ft. of seals
- Accepts top threaded anchor latches
- Full bore ID
- TBR connects with a snap-in
- RH rotation 13 turns under tension to disconnect
- P110 material construction
- Standard 4-1/2" LTC threaded connection on bottom

The **SPEEDFRAC** Tieback Seal Receptacle, is used in applications where a two (2) trip installation of a completion string is required. When run with a **SPEEDFRAC** Horizontal Completion System, the TBR is installed directly on top of the **StimStac** liner top packer and allows for future tiebacks to surface once the work string is removed. Connection to the work string and production casing is made with the use of a threaded latch profile on top and internal sealbore below. Disconnecting from the tieback receptacle is made by righthand rotation while placing the work string in slight tension.



Office Location:


Dynamic Oilfield Services, LLC • 4245 Matlock Road • Bowling Green, KY 42104
Managing Partner: Patrick Parson • Phone (270) 991-1004
www.dynamicofs.com • Email: patrick@dynamicofs.com

SPEEDFRAC

4.5" x 7" TIEBACK RECEPTACLE DIMENSIONAL SPECIFICATIONS

7" Casing Weight Range 26-32#

Dimension	Inches
A	5.875
B	4.500
C	5.000
D	4.000
E	38.580
F	40.500
G	53.400

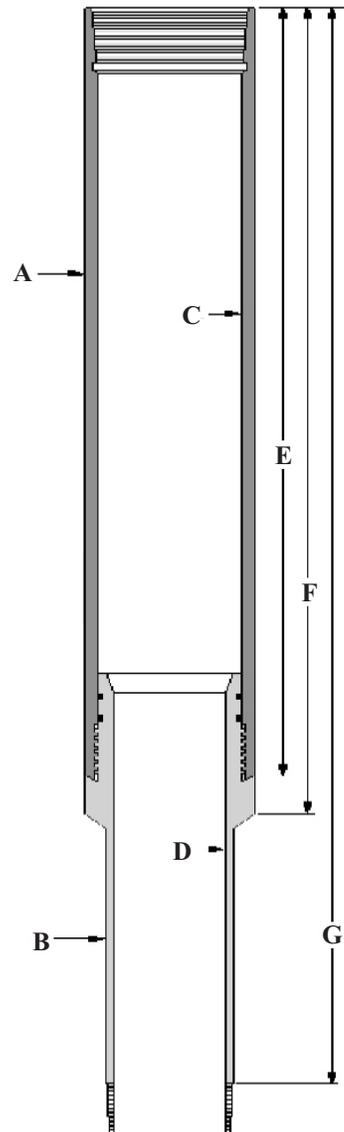

Office Location:

Dynamic Oilfield Services, LLC • 4245 Matlock Road • Bowling Green, KY 42104
Managing Partner: Patrick Parson • Phone (270) 991-1004
www.dynamicofs.com • Email: patrick@dynamicofs.com