


IRRIGATION SCHEDULE

SYMBOL	MANUFACTURER/MODEL	QTY
	Rain Bird 6504-PC, FC	41
	Rain Bird 5004-PC, FC	14
	Rain Bird PESB 2"	9
	Rain Bird PESB 1-1/2"	1
	Hunter HQ-44RC 1"	10
	Febco 765 2"	1
	Hunter PC-400 with (02) PCM-300	1
	Hunter WR-CLIK	1
	Point of Connection 4"	1
	Irrigation Lateral Line: PVC Class 200 SDR 21 1"	815.9 l.f.
	Irrigation Lateral Line: PVC Class 200 SDR 21 1 1/2"	569.7 l.f.
	Irrigation Lateral Line: PVC Class 200 SDR 21 2"	623.2 l.f.
	Irrigation Lateral Line: PVC Class 200 SDR 21 2 1/2"	347.5 l.f.
	Irrigation Mainline: PVC Schedule 40 2 1/2"	612.6 l.f.
	Pipe Sleeve: PVC Class 200 SDR 21 2"	19.8 l.f.
	Pipe Sleeve: PVC Class 200 SDR 21 4"	19.0 l.f.

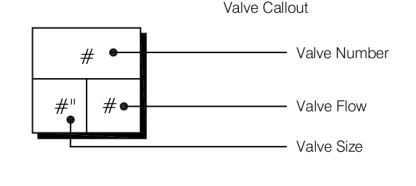

10	2"	70.0
9	2"	70.0
8	2"	56.0
7	2"	56.0
6	2"	70.0
5	2"	56.0
4	1.5"	43.3

3	2"	56.0
2	2"	70.0
1	2"	70.0

- GENERAL NOTES:**
1. JOINT TRENCH IRRIGATION LINES WITH PROPOSED STORM DRAIN LINES WHERE APPLICABLE.
 2. PROVIDE THRUST BLOCKS AT ALL BENDS, TEES, FITTINGS, ETC.
 3. HEAD SPACING AND IRRIGATION COVERAGE PROVIDED ASSUMES NO GREATER THAN 70 PSI IS REQUIRED ON ANY LINE.
 4. CONTRACTOR RESPONSIBLE FOR MARKING ALL EXISTING UTILITIES.
 5. DEMOLITION, REMOVAL, AND RELOCATION OF EXISTING UTILITIES BY OTHERS.
 6. IRRIGATION P.O.C. AND CONTROLLER LOCATION NEEDS TO BE COORDINATED WITH CIVIL PLANS.

4MOST
SPORT GROUP



149 South Broad Street | Grove City | Pennsylvania | 16127

OUTDOOR ATHLETIC FACILITY DESIGNERS & CONSULTANTS

724.870.4249
office@4mostsport.com
www.4mostsport.com

ALL RIGHTS RESERVED
OWNERSHIP OF DOCUMENTS
This document, and the ideas and designs incorporated herein, as an instrument of professional service, is the sole property of 4Most Sport Group LLC, and is not to be used in whole or in part for any other project or purpose without the expressed written authorization of 4Most Sport Group LLC.

CONTRACTOR

City of Milbank, South Dakota	Project Name	Birthplace of American Legion Baseball New Full-Size Baseball Field	Sheet Name	Irrigation Plan
	Project Address	Lake Farley Camp Site Milbank, SD 57252		

No.	Description	Date

FOR REVIEW ONLY
NOT FOR CONSTRUCTION

Project Number	4M-026-AE
Date	06/16/2022
Drawn by	WRC
Checked by	GJD

PF-2.4



1" = 20'