
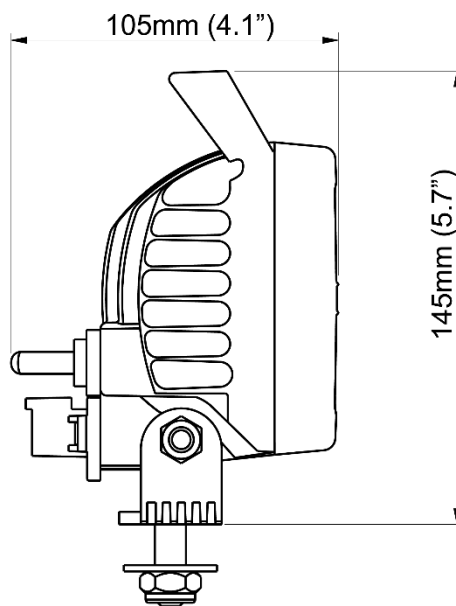



Technical Data

Theoretical Lumens Output	1200lm	Vibration	8Grms 24-2000Hz
Operational Lumens Output	750lm	Lens	PC
Colour Temperature	5700K	Body / Housing	Aluminium
Nominal Voltage DC	12 - 24V	Weight	0.9kg
Input Voltage DC	9 - 32V	IP Rating	IP68, IP6K9K, SAE J1455
Power Consumption	24W	Salt Spray Test	ISO 9227 240H
Nominal Current at	24V=1.0A, 12V=2.0A	EMC	CISPR 25 Class 5, ISO 13766, ISO 14982, ISO 7637-2
Connector	Built-in Deutsch DT-2 (2-pin), Built-in AMP	Operating Temperatures	-40°C... +85°C (Overheat protected)
Mount	Single Bolt M10, Single Bolt M8	Electronics	Isolated


Shock 60G

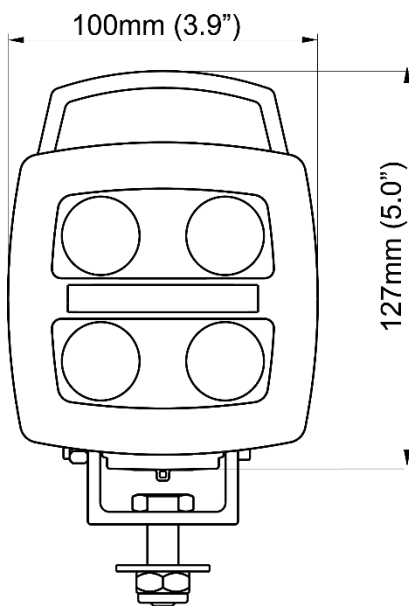


N2401 600lm Diffused



N2401 750lm Wide Flood



N2401 750lm Flood



N2401 750lm High Beam

