

SV-8P

CNC SINKER EDM

SPEED

Introducing the next-generation **SV8P Sinker EDM** with **Mitsubishi** Electric's AI Technology (Maisart) and **M800 Series Control System** to pursue both high accuracy and high productivity

ERGONOMIC DESIGN

- Easy-to-view screen (19-inch)
- Intuitive operations using touch-panel control
- User friendly keyboard and mouse



Mitsubishi
Artificial Intelligence
State-of-the-art




STANDARD FEATURES

- Thermal Buster Improves Accuracy with it's new Thermal Displacement Compensation System and Z-Axis Cooling Mechanism
- SS Jump 5 Optimizes Jump Up and Acceleration Control to Stabilize High-Speed NO-FLUSH Machining (984"/min. @1.6G acceleration in Z and 197"/min. in X, Y)
- NP2 Circuit Provides an Ultra-Fine Matte Finish (0.05µm Ra).
- Glossy Mirror Finish Circuit (LLTX) Improves Mold Releasability without the need for polishing
- Exotic Material Machining (PCD, cBN, & Carbide) with Low Electrode Wear is now possible with the (HPS Circuit)
- Power Master (GF2 Adaptive Control) Reduces Graphite Electrode Wear by as Much as 40%

Integration of Highly Evolved Technology and Advance Control


Thermal Buster

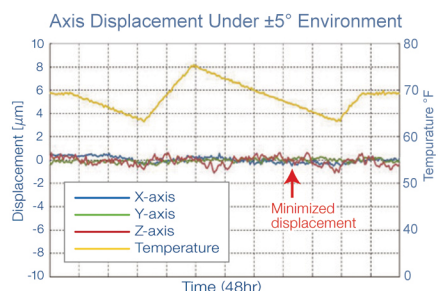

Machining accuracy is improved through a Thermal Displacement Compensation system and Z-Axis cooling mechanism.







Glossy Mirror Finish

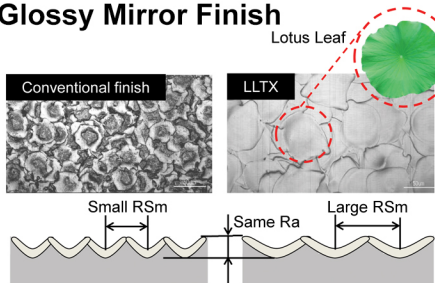

The new Glossy Mirror LLTX Lotus Leaf TeXture circuit achieves a large RSm to improve mold releasability even with the same surface roughness. This provides non-polishing machining of plastic molds and forging dies.

Machining Stabilizing Control: SS Jump 5


SS Jump 5 control is suitable for various shapes, such as the sub-gate shown, by optimizing the smoothing of the jump up operation. Fast jump speed of 984"/min. (1.6G) shortens non-burn time with the high- speed / acceleration control. Machining speed is 40% faster with "IDPM" Intelligent Digital Power Master control.

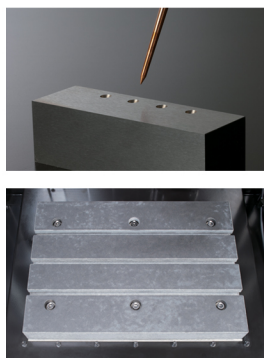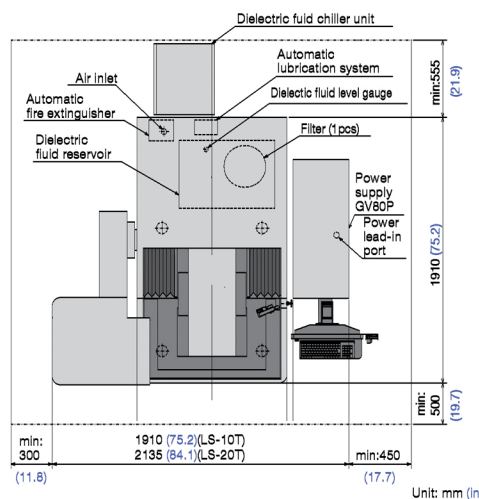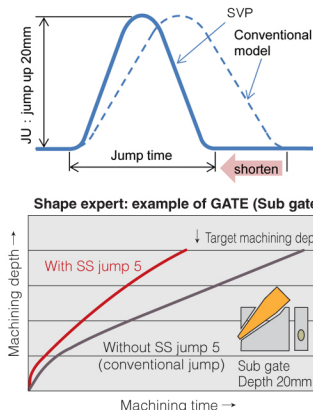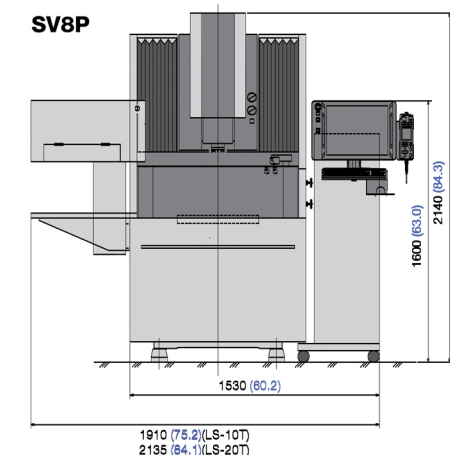

Granite table improves micro fine surface finishes

Initial Machining Control

Faster machining is realized with improved initial machining control for the start of machining after rough milling.



Machining time reduced up to 50% for the start of machining after rough milling

Machine Specifications

	Machine Type	SV8P
Machine Unit	X-axis stroke (inch)	11.8
	Y-axis stroke (inch)	9.8
	Z-axis stroke (inch)	9.8
	Work tank internal dim. (W x D x H) (inch)	31.5 x 20.5 x 11.8
	Dielectric fluid level range (inch)	2.4 ~ 9.8
	Granite Table dimensions (W x D) (inch)	19.7 x 13.8 w 3 T-Slots
	Max. workpiece weight (lb.)	1213
	Max. electrode weight "Manual Change" (lb.)	55
	Table to platen distance (inch)	5.9 ~ 15.7
	Table to EROWA ITS 50 Chuck (inch)	5 ~ 15.7
	Table to 3R MACRO Chuck (inch)	5.2 ~ 15.1
Machine unit dimensions (W x D x H) (inch)	60.2 x 75.2 x 84.3	
Machine unit weigh (lb.)	4409	
Power Supply	Type	GV80P
	Machining current: Peak	80
Control Unit	Program support function	E.S.P.E.R.Advance
	Machining function	Maisart with IDMP3
	Graphic display	19" TFT color LCD
	CPU / type	64-bit / PC
Axis Speeds	Rapid Travel Speed (in/min.)	275
	Max. Jump Speed/Acceleration (in/min/G)	984/1.6
Dielectric Fluid System	Reservoir capacity (gal)	71.3
	Filtering method	Paper cartridge (1pc)
	Temperature control type	Chiller
Machine Layout	Installation dimensions (W x D) (inch)	104.7 x 97.1 w ATC
	Floor space requirement (sq. ft.)	70.6
C-axis	Max. electrode weight "w 20 pos ATC" (lb.)	22 (11 w LS-10 ATC)
	Speed RPM	1 to 30
	Min. indexing angle	.001°
	Min. drive unit	.001°

**MITSUBISHI EDM**

MC Machinery Systems Inc.
85 NorthWest Point Blvd.
Elk Grove Village, IL. 60007
Phone: (630) 616-5920
Fax: (630) 616-4068
www.mcmachinery.com

MC MACHINERY
SYSTEMS, INC.

a subsidiary of Mitsubishi Corporation