BIKE RACK LOCATIONS - VENTNOR

Location		Installation Details								
ID#	Description	Mounting Surface	Inverted 'U' Surface Mount Item No. 1	Inverted 'U' Surface Mount with Foundaton Item No. 2	Oval Rack - Square Tubing Surface Mount Item No. 3	Oval Rack - Square Tubing Surface Mount with Foundaton Item No. 4	Oval Rack - Round Tubing Surface Mount Item No. 5	Oval Rack - Round Tubing Surface Mount with Foundaton Item No. 6	On-Street Parking Corral Custom Rack Item No. 8	Bicycle Parking Capacity
V1	N. Newport Ave. : Location 1	Concrete	2							4
V2	N. Newport Ave. : Location 2	Concrete	2							4
V3	Dorset Ave. - Ventnor Heights : Location 1	Asphalt							1 (3)	6
V4	Dorset Ave. - Ventnor Heights : Location 2	Asphalt							1 (5)	10
V5	S. Little Rock Ave. & Ventnor Ave.	Asphalt							1 (5)	10
V6	Ventnor City Hall : Location 1	Concrete	6							12
V7	Ventnor City Hall : Location 2	No Installation								
V8	Ventnor City Hall : Location 3	No Installation								
V9	Ventnor City Hall : Location 4	Slate Tile	2							4
V10	Ventnor City Hall : Location 5	Concrete	1							2
V11	Ventnor City Hall : Location 6	Concrete	1							2
V12	Ventnor Recreational Complex : Location 1	Unpaved Area						6		12
V13	Ventnor Recreational Complex : Location 2	Unpaved Area						6		12
V14	Ventnor Recreational Complex : Location 3	Unpaved Area						6		12
V15	Ventnor Recreational Complex : Location 4	Unpaved Area						6		12
V16	Ventnor Recreational Complex : Location 5	Unpaved Area						6		12
V17	Ventnor Recreational Complex : Location 6	Unpaved Area						6		12
V18	Ventnor Recreational Complex : Location 7	Unpaved Area						6		12
V19	Ventnor Recreational Complex : Location 8	Unpaved Area						6		12
V20	Ventnor Ave & N. Weymouth Ave.: NW Corner	Concrete	2							4
	Totals		16	0	0	0	0	48	3 (13)	154

NOTE: SINGLE CORRAL LOCATION HAS MULTIPLE RACKS SHOW IN ( ).

REVISIONS			
NO.	DATE	DESCRIPTION	BY

REMINGTON & VERNICK ENGINEERS
CERTIFICATE OF AUTHORIZATION
No. 24GA28003800

FRANK J. SENEY JR.
PROFESSIONAL ENGINEER
NEW JERSEY LICENSE NUMBER
35321

SEAL OF COUNTY OF ATLANTIC 1837 NEW JERSEY

DIVISION OF ENGINEERING


MARK V. SHOURDS
COUNTY ENGINEER
PROFESSIONAL ENGINEER
NEW JERSEY LICENSE NUMBER
24GE 04026400

COUNTY OF ATLANTIC
DEPARTMENT OF REGIONAL PLANNING
AND DEVELOPMENT


VENTNOR INSTALLATION DETAILS RACK LOCATIONS

MARGATE - VENTNOR
BICYCLE INFRASTRUCTURE PROJECT


ATLANTIC COUNTY PROJECT NUMBER (S): HWY-999X-00-2017-009
FEDERAL PROJECT NUMBER (S): CMAQ-0629 (360)
NJDOT JOB NUMBER (S): 5500333
Drawn By: JAR/SPB
Checked By: JAR/SPB/DSK
Date: 08/29/2019
CADD File Name: 0100F002 - Bicycle Rack Locations (Ventnor)
CADD File Path: M:\Transportation_Bridge\Atlantic County\0100F002 - Bicycle Infrastructure\DWG

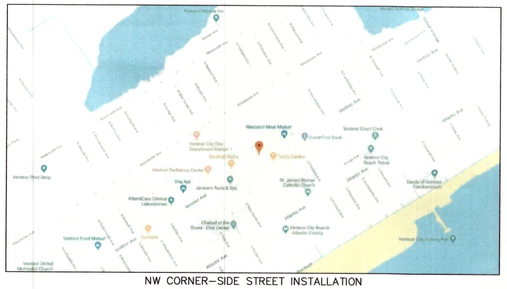


NW CORNER–SIDE STREET INSTALLATION

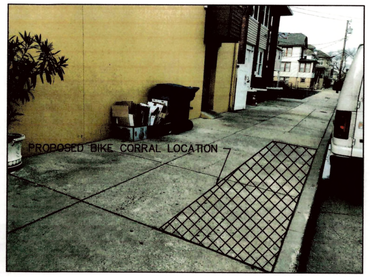



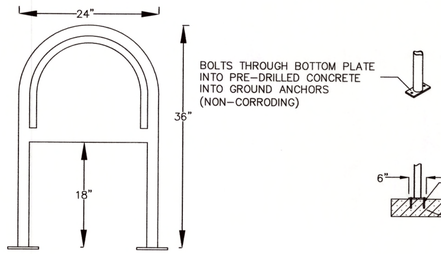

BOLTS THROUGH BOTTOM PLATE
INTO PRE–DRILLED CONCRETE
INTO GROUND ANCHORS
(NON–CORRODING)



NOTES:
- SEE ITEM 1 DETAIL SHEET 4 FOR ADDITIONAL SPACING REQUIREMENTS.
- RACK DIMENSIONS ARE APPROXIMATE AND MAY VARY BASED ON THE MANUFACTURER'S SPECIFICATIONS.


DESCRIPTION OF WORK

INSTALL TWO INVERTED U WITH LOGO PANEL BIKE RACK
ON EXISTING SIDEWALK

Item #	Quantity	Rack Type	Material	Color	Logo	Mounting Surface	Mounting Type
1	2	Inverted U w/Logo Panel	Powder Coated	Red	Pizza	Concrete Sidewalk	Surface

NOTE:
1. PRIOR TO ORDERING BIKE RACKS, THE CONTRACTOR SHALL OBTAIN LOGO DETAILS FROM THE SUPPLIER AND SUBMIT TO THE OWNER FOR REVIEW AND APPROVAL.


LOCATION V1 – N. NEWPORT AVENUE : LOCATION 1

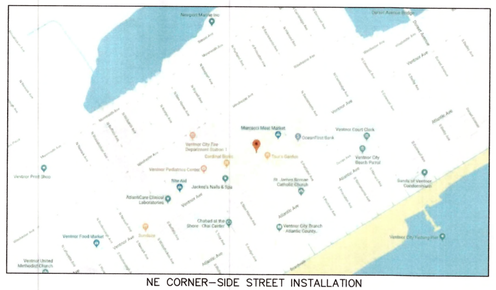


NE CORNER–SIDE STREET INSTALLATION





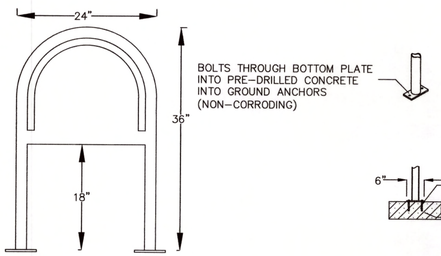

BOLTS THROUGH BOTTOM PLATE
INTO PRE–DRILLED CONCRETE
INTO GROUND ANCHORS
(NON–CORRODING)



NOTES:
- SEE ITEM 1 DETAIL SHEET 4 FOR ADDITIONAL SPACING REQUIREMENTS.
- RACK DIMENSIONS ARE APPROXIMATE AND MAY VARY BASED ON THE MANUFACTURER'S SPECIFICATIONS.

DESCRIPTION OF WORK

INSTALL TWO INVERTED U WITH LOGO PANEL BIKE RACK
ON EXISTING SIDEWALK

Item #	Quantity	Rack Type	Material	Color	Logo	Mounting Surface	Mounting Type
1	2	On-Street Corral	Powder Coated	Red	Coffee Cup	Concrete Sidewalk	Surface

NOTE:
1. PRIOR TO ORDERING BIKE RACKS, THE CONTRACTOR SHALL OBTAIN LOGO DETAILS FROM THE SUPPLIER AND SUBMIT TO THE OWNER FOR REVIEW AND APPROVAL.

LOCATION V2 – N. NEWPORT AVENUE : LOCATION 2

REVISIONS

NO.	DATE	DESCRIPTION	BY

REMINGTON & VERNICK ENGINEERS
CERTIFICATE OF AUTHORIZATION
No. 24GA28003800

FRANK V. SENEY JR.
PROFESSIONAL ENGINEER
NEW JERSEY LICENSE NUMBER
35321

DIVISION OF ENGINEERING

MARK V. SHOURDS
COUNTY ENGINEER
PROFESSIONAL ENGINEER
NEW JERSEY LICENSE NUMBER
24GE 04026400

COUNTY OF ATLANTIC
DEPARTMENT OF REGIONAL PLANNING
AND DEVELOPMENT

VENTNOR INSTALLATION DETAILS
RACK LOCATIONS (V1 & V2)

MARGATE - VENTNOR
BICYCLE INFRASTRUCTURE PROJECT


ATLANTIC COUNTY PROJECT NUMBER (S): HWY-999X-00-2017-009
FEDERAL PROJECT NUMBER (S): CMAQ-0629 (360)
NJDOT JOB NUMBER (S): 5500333
Drawn By: JAR/SPB
Checked By: JAR/SPB/DSK
Date: 08/29/2019
CADD File Name: 0100F002 - Bicycle Rack Locations (Ventnor)
CADD File Path: M:\Transportation_Bridge\Atlantic County\0100F002 - Bicycle Infrastructure\DWG



NORTH SIDE DORSET AVENUE INSTALLATION





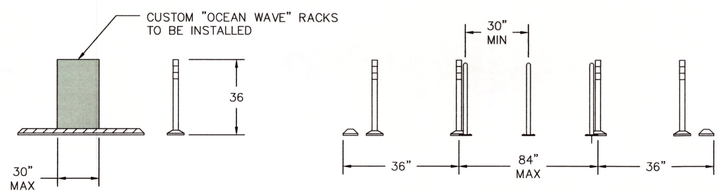

DESCRIPTION OF WORK


INSTALL SINGLE CORRAL WITH THREE ON STREET BIKE RACKS ADJACENT TO EXISTING SIDEWALK

Item #	Quantity	Rack Type	Material	Color	Logo	Mounting Surface	Mounting Type
8	1 (3)	Custom Wave Rack with Foundation	Powder Coated	Blue	None	Concrete Footing	Surface Mount with Foundation

NOTE:
SINGLE CORRAL HAS MULTIPLE RACKS SHOWN IN ( ).

NOTES:
- SEE ITEM 8 DETAIL SHEET FOR ADDITIONAL SPACING REQUIREMENTS AND INSTALLATION INFORMATION.
- RACK DIMENSIONS ARE APPROXIMATE AND MAY VARY BASED ON THE MANUFACTURER'S SPECIFICATIONS.
- PROPOSED RACK LOCATION IS WITHIN ATLANTIC COUNTY RIGHT OF WAY. HOP WILL BE REQUIRED PRIOR TO PERFORMING THE INSTALLATION.


LOCATION V3 - DORSET AVENUE - VENTNOR HEIGHTS : LOCATION 1

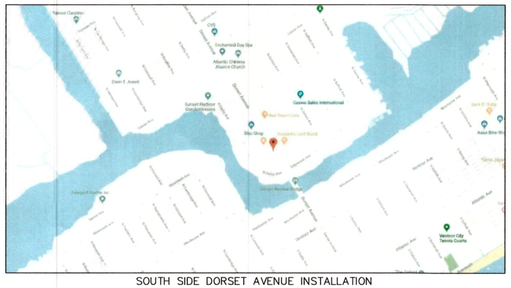

SOUTH SIDE DORSET AVENUE INSTALLATION





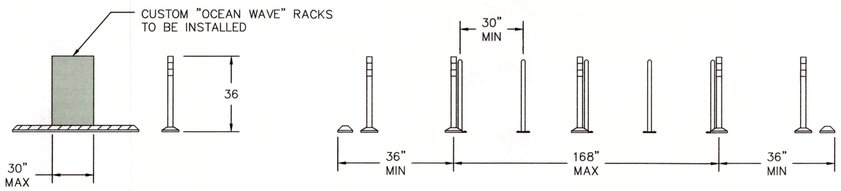

DESCRIPTION OF WORK

INSTALL SINGLE CORRAL WITH FIVE ON STREET BIKE RACKS WITH CORRAL FEATURES ADJACENT TO EXISTING SIDEWALK.

Item #	Quantity	Rack Type	Material	Color	Logo	Mounting Surface	Mounting Type
8	1 (5)	Custom Wave Rack with Foundation	Powder Coated	Blue	None	Concrete Footing	Surface Mount with Foundation

NOTE:
SINGLE CORRAL HAS MULTIPLE RACKS SHOWN IN ( ).

NOTES:
- SEE ITEM 8 DETAIL SHEET FOR ADDITIONAL SPACING REQUIREMENTS AND INSTALLATION INFORMATION.
- RACK DIMENSIONS ARE APPROXIMATE AND MAY VARY BASED ON THE MANUFACTURER'S SPECIFICATIONS.
- PROPOSED RACK LOCATION IS WITHIN ATLANTIC COUNTY RIGHT OF WAY. HOP WILL BE REQUIRED PRIOR TO PERFORMING THE INSTALLATION.

LOCATION V4 - DORSET AVENUE - VENTNOR HEIGHTS : LOCATION 2

REVISIONS

NO.	DATE	DESCRIPTION	BY

REMINGTON & VERNICK ENGINEERS
CERTIFICATE OF AUTHORIZATION
No. 24GA28003800

FRANK J. SENEY JR.
PROFESSIONAL ENGINEER
NEW JERSEY LICENSE NUMBER
35321

DIVISION OF ENGINEERING

MARK V. SHOURDS
COUNTY ENGINEER
PROFESSIONAL ENGINEER
NEW JERSEY LICENSE NUMBER
24GE 04026400

COUNTY OF ATLANTIC
DEPARTMENT OF REGIONAL PLANNING
AND DEVELOPMENT

VENTNOR INSTALLATION DETAILS
RACK LOCATIONS (V3 & V4)


MARGATE - VENTNOR
BICYCLE INFRASTRUCTURE PROJECT


ATLANTIC COUNTY PROJECT NUMBER (S) HWY-999X-00-2017-009
FEDERAL PROJECT NUMBER (S) CMAQ-0629 (360)
NJDOT JOB NUMBER (S) 5500333
Drawn By: JAR/SPB
Checked By: JAR/SPB/DSK Date: 08/29/2019
CADD File Name: 0100F002 - Bicycle Rack Locations (Ventnor)
CADD File Path: M:\Transportation_Bridge\Atlantic County\0100F002 - Bicycle Infrastructure\DWG



SW CORNER–SIDE STREET INSTALLATION



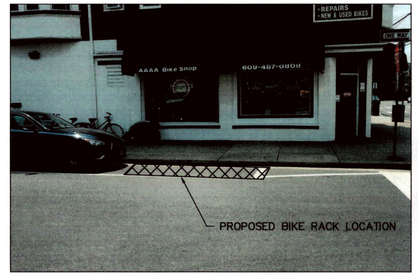

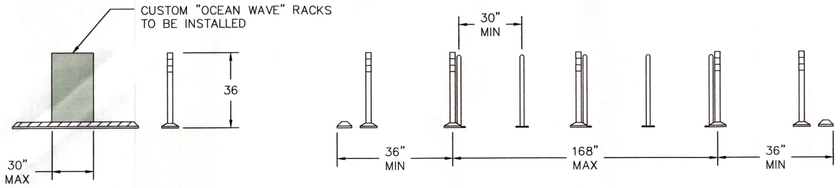

NOTES:
- SEE ITEM 8 DETAIL SHEET FOR ADDITIONAL SPACING REQUIREMENTS AND INSTALLATION INFO.
- RACK DIMENSIONS ARE APPROXIMATE AND MAY VARY BASED ON THE MANUFACTURER'S SPECIFICATIONS.
- PROPOSED RACK LOCATION IS WITHIN THE MUNICIPAL RIGHT OF WAY. THE CONTRACTOR SHALL ATTAIN THE NECESSARY PERMITS FROM THE CITY OF VENTNOR PRIOR TO PERFORMING THE INSTALLATION.

DESCRIPTION OF WORK

INSTALL SINGLE CORRAL WITH FIVE ON STREET BIKE RACKS WITH CORRAL FEATURES ADJACENT TO EXISTING SIDEWALK


Item #	Quantity	Rack Type	Material	Color	Logo	Mounting Surface	Mounting Type
8	1 (5)	Custom Wave Rack with Foundation	Powder Coated	Blue	None	Concrete Footing	Surface Mount with Foundation

NOTE:
SINGLE CORRAL HAS MULTIPLE RACKS SHOWN IN ( ).


LOCATION V5 - S. LITTLE ROCK AVENUE & VENTNOR AVENUE



SOUTH SIDE OCEAN AVENUE INSTALLATION

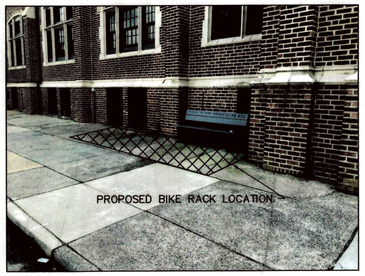



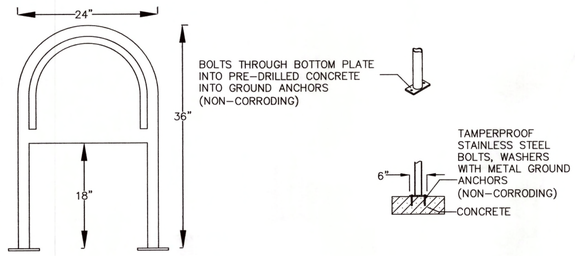

NOTES:
- SEE ITEM 1 DETAIL SHEETS 4 FOR ADDITIONAL SPACING REQUIREMENTS AND INSTALLATION INFORMATION.
- RACK DIMENSIONS ARE APPROXIMATE AND MAY VARY BASED ON THE MANUFACTURER'S SPECIFICATIONS.

DESCRIPTION OF WORK

INSTALL SIX INVERTED U WITH LOGO PANEL BIKE RACKS ON EXISTING SIDEWALK

Item #	Quantity	Rack Type	Material	Color	Logo	Mounting Surface	Mounting Type
1	6	Inverted U w/Logo Panel	Powder Coated	Black	V	Concrete Sidewalk	Surface

NOTE:
1. PRIOR TO ORDERING BIKE RACKS, THE CONTRACTOR SHALL OBTAIN LOGO DETAILS FROM THE SUPPLIER AND SUBMIT TO THE OWNER FOR REVIEW AND APPROVAL.

LOCATION V6 - VENTNOR CITY HALL : LOCATION 1

REVISIONS

NO.	DATE	DESCRIPTION	BY

REMINGTON & VERNICK ENGINEERS
CERTIFICATE OF AUTHORIZATION
No. 24GA28003800

FRANK J. SENEY JR.
PROFESSIONAL ENGINEER
NEW JERSEY LICENSE NUMBER
35321

SEAL OF COUNTY OF ATLANTIC 1837 NEW JERSEY


DIVISION OF ENGINEERING

MARK V. SHOURDS
COUNTY ENGINEER
PROFESSIONAL ENGINEER
NEW JERSEY LICENSE NUMBER
24GE 04026400


COUNTY OF ATLANTIC
DEPARTMENT OF REGIONAL PLANNING AND DEVELOPMENT

VENTNOR INSTALLATION DETAILS
RACK LOCATIONS (V5 & V6)
MARGATE - VENTNOR
BICYCLE INFRASTRUCTURE PROJECT


ATLANTIC COUNTY PROJECT NUMBER (S) HWY-999X-00-2017-009
FEDERAL PROJECT NUMBER (S) CMAQ-0629 (360)
NJDOT JOB NUMBER (S) 5500333
Drawn By: JAR/SPB
Checked By: JAR/SPB/DSK Date: 08/29/2019
CADD File Name: 0100F002 - Bicycle Rack Locations (Ventnor)
CADD File Path: M:\Transportation_Bridge\Atlantic County\0100F002 - Bicycle Infrastructure\DWG

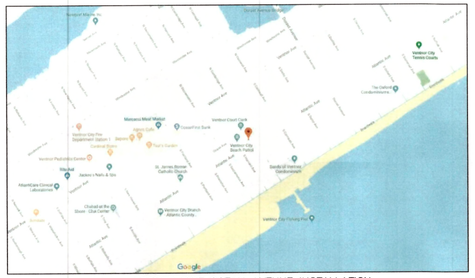

SOUTH SIDE OCEAN AVENUE INSTALLATION





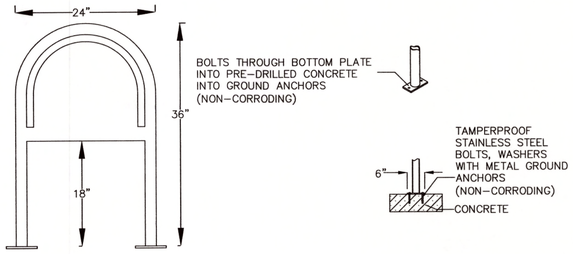

NOTES:
- SEE ITEM 1 DETAIL SHEET FOR ADDITIONAL SPACING REQUIREMENTS AND INSTALLATION INFORMATION.
- RACK DIMENSIONS ARE APPROXIMATE AND MAY VARY BASED ON THE MANUFACTURER'S SPECIFICATIONS.

DESCRIPTION OF WORK

INSTALL TWO INVERTED U WITH LOGO PANEL BIKE RACK
ON EXISTING SIDEWALK. SLATE TILE TO BE MAINTAINED.

Item #	Quantity	Rack Type	Material	Color	Logo	Mounting Surface	Mounting Type
1	2	Inverted U w/Logo Panel	Powder Coated	Black	V	Slate Tile Walkway	Surface


NOTE:
1. PRIOR TO ORDERING BIKE RACKS, THE CONTRACTOR SHALL OBTAIN LOGO DETAILS FROM THE SUPPLIER AND SUBMIT TO THE OWNER FOR REVIEW AND APPROVAL.

LOCATION V9 - VENTNOR CITY HALL : LOCATION 4



NORTH SIDE ATLANTIC AVENUE INSTALLATION



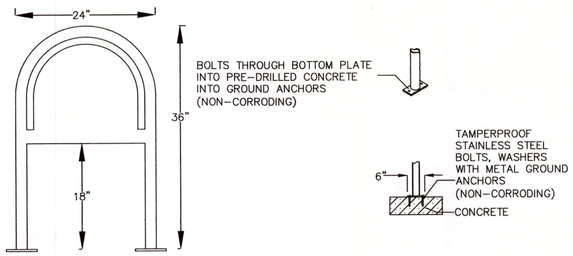

NOTES:
- SEE ITEM 1 DETAIL SHEET 4 FOR ADDITIONAL SPACING REQUIREMENTS AND INSTALLATION.
- RACK DIMENSIONS ARE APPROXIMATE AND MAY VARY BASED ON THE MANUFACTURER'S SPECIFICATIONS.

DESCRIPTION OF WORK

INSTALL ONE INVERTED U WITH LOGO PANEL BIKE RACK
ON EXISTING SIDEWALK

Item #	Quantity	Rack Type	Material	Color	Logo	Mounting Surface	Mounting Type
1	1	Inverted U w/Logo Panel	Powder Coated	Black	V	Concrete Sidewalk	Surface

NOTE:
1. PRIOR TO ORDERING BIKE RACKS, THE CONTRACTOR SHALL OBTAIN LOGO DETAILS FROM THE SUPPLIER AND SUBMIT TO THE OWNER FOR REVIEW AND APPROVAL.

LOCATION V10 - VENTNOR CITY HALL : LOCATION 5

REVISIONS

NO.	DATE	DESCRIPTION	BY

REMINGTON & VERNICK ENGINEERS
CERTIFICATE OF AUTHORIZATION
No. 24GA28003800

FRANK J. SENEY JR.
PROFESSIONAL ENGINEER
NEW JERSEY LICENSE NUMBER
35321

SEAL OF COUNTY OF ATLANTIC 1837 NEW JERSEY

DIVISION OF ENGINEERING

MARK V. SHOURDS
COUNTY ENGINEER
PROFESSIONAL ENGINEER
NEW JERSEY LICENSE NUMBER
24GE 04026400

COUNTY OF ATLANTIC
DEPARTMENT OF REGIONAL PLANNING
AND DEVELOPMENT

VENTNOR INSTALLATION DETAILS RACK LOCATIONS (V9 & V10)

MARGATE - VENTNOR
BICYCLE INFRASTRUCTURE PROJECT

ATLANTIC COUNTY PROJECT NUMBER (S): HWY-999X-00-2017-009
FEDERAL PROJECT NUMBER (S): CMAQ-0629 (360)
NJDOT JOB NUMBER (S): 5500333
Drawn By: JAR/SPB
Checked By: JAR/SPB/DSK
Date: 08/29/2019
25
30
CADD File Name: 0100F002 - Bicycle Rack Locations (Ventnor)
CADD File Path: M:\Transportation_Bridge\Atlantic County\0100F002 - Bicycle Infrastructure\DWG



Ventnor City Tennis Courts
The Oxford Condominiums
Ventnor Court Clerk
Ventnor Fire Department Station 1
Firefighter Museum
Ventnor Pediatrics Center
Ventnor Police Department
Ventnor City Fire Department Station 2
Ventnor Municipal Building
Ventnor City Municipal Building
Ventnor Public Library
Ventnor Fire Department Station 3
Ventnor City Municipal Building
Ventnor City Municipal Building
Ventnor City Municipal Building




SOUTH SIDE N. LITTLE ROCK AVENUE INSTALLATION





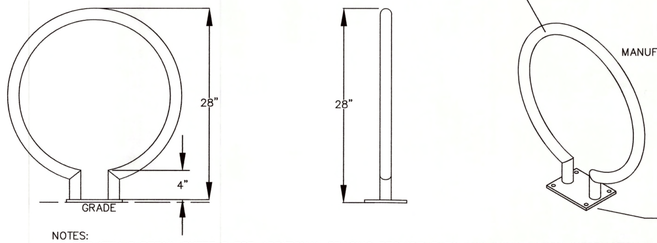

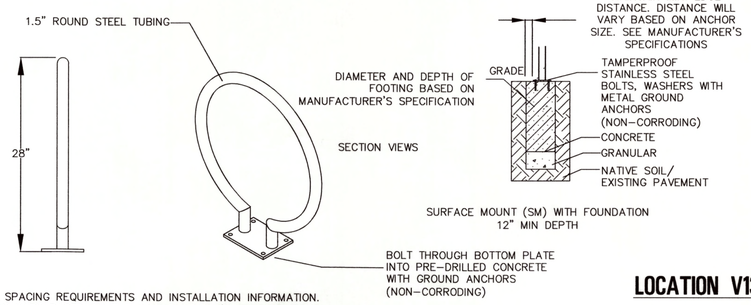

NOTES:
- SEE ITEM 6 DETAIL SHEET 5 FOR ADDITIONAL SPACING REQUIREMENTS AND INSTALLATION INFORMATION.
- RACK DIMENSIONS ARE APPROXIMATE AND MAY VARY BASED ON THE MANUFACTURER'S SPECIFICATIONS.

DESCRIPTION OF WORK

INSTALL SIX CIRCULAR MOUNTED RACK IN GRASS AREA ADJACENT TO EXISTING SIDEWALK


Item #	Quantity	Rack Type	Material	Color	Logo	Mounting Surface	Mounting Type
6	6	Oval (round tubing)	Galvanized	None	None	Grass	Surface Mount with Foundation


LOCATION V13 - VENTNOR RECREATIONAL COMPLEX : LOCATION 2




NE CORNER PARKING LOT INSTALLATION



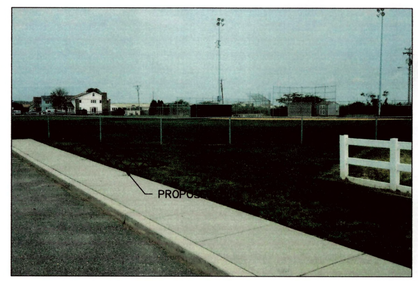

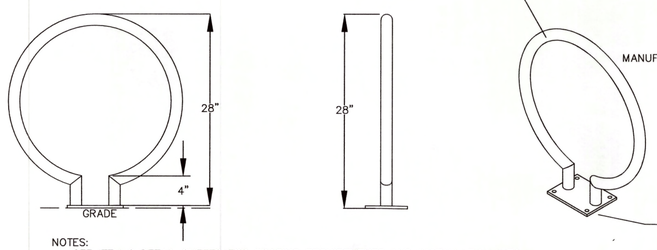

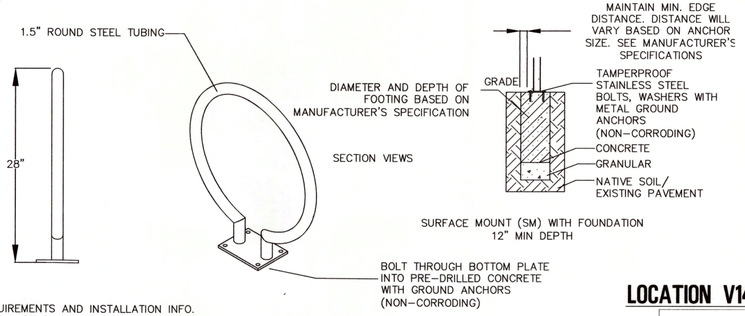

NOTES:
- SEE ITEM 6 DETAIL SHEETS FOR SPACING REQUIREMENTS AND INSTALLATION INFO.
- RACK DIMENSIONS ARE APPROXIMATE AND MAY VARY BASED ON THE MANUFACTURER'S SPECIFICATIONS.

DESCRIPTION OF WORK

INSTALL SIX CIRCULAR MOUNTED RACK IN GRASS AREA ADJACENT TO EXISTING SIDEWALK

Item #	Quantity	Rack Type	Material	Color	Logo	Mounting Surface	Mounting Type
6	6	Oval (round tubing)	Galvanized	None	None	Grass	Surface Mount with Foundation

LOCATION V14 - VENTNOR RECREATIONAL COMPLEX : LOCATION 3

REVISIONS

NO.	DATE	DESCRIPTION	BY

REMINGTON & VERNICK ENGINEERS
CERTIFICATE OF AUTHORIZATION
No. 24GA28003800

FRANK J. SENEY JR.
PROFESSIONAL ENGINEER
NEW JERSEY LICENSE NUMBER
35321

DIVISION OF ENGINEERING


MARK V. SHOURDS
COUNTY ENGINEER
PROFESSIONAL ENGINEER
NEW JERSEY LICENSE NUMBER
24GE 04026400

COUNTY OF ATLANTIC
DEPARTMENT OF REGIONAL PLANNING
AND DEVELOPMENT

VENTNOR INSTALLATION DETAILS
RACK LOCATIONS (V13 & V14)

MARGATE - VENTNOR
BICYCLE INFRASTRUCTURE PROJECT


ATLANTIC COUNTY PROJECT NUMBER (S) HWY-999X-00-2017-009
FEDERAL PROJECT NUMBER (S) CMAQ-0629 (360)
NJDOT JOB NUMBER (S) 5500333
Drawn By: JAR/SPB
Checked By: JAR/SPB/DSK Date: 08/29/2019
CADD File Name: 0100F002 - Bicycle Rack Locations (Ventnor)
CADD File Path: M:\Transportation_Bridge\Atlantic County\0100F002 - Bicycle Infrastructure\DWG

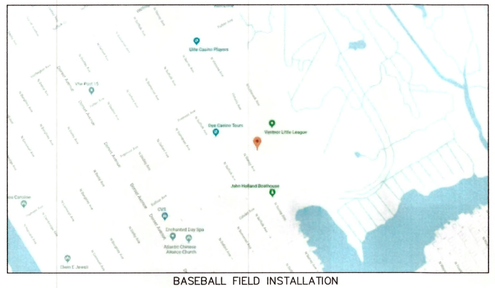


BASEBALL FIELD INSTALLATION





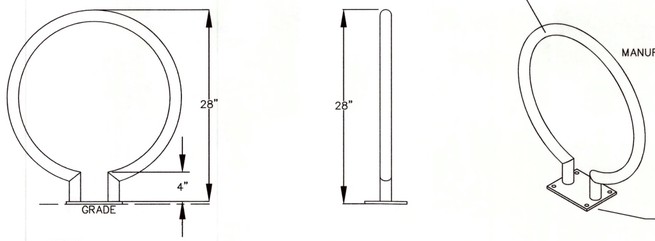

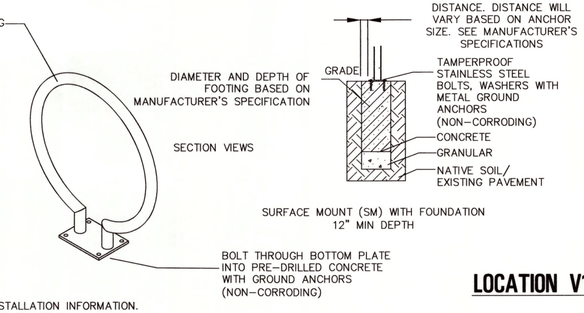

NOTES:
- SEE ITEM 6 DETAIL SHEET FOR ADDITIONAL SPACING REQUIREMENTS AND INSTALLATION INFORMATION.
- RACK DIMENSIONS ARE APPROXIMATE AND MAY VARY BASED ON THE MANUFACTURER'S SPECIFICATIONS.

DESCRIPTION OF WORK

INSTALL SIX CIRCULAR MOUNTED RACK IN GRASS AREA ADJACENT TO EXISTING SIDEWALK

Item #	Quantity	Rack Type	Material	Color	Logo	Mounting Surface	Mounting Type
6	6	Oval (round tubing)	Galvanized	None	None	Grass	Surface Mount with Foundation


LOCATION V15 - VENTNOR RECREATIONAL COMPLEX : LOCATION 4




BASEBALL FIELD INSTALLATION





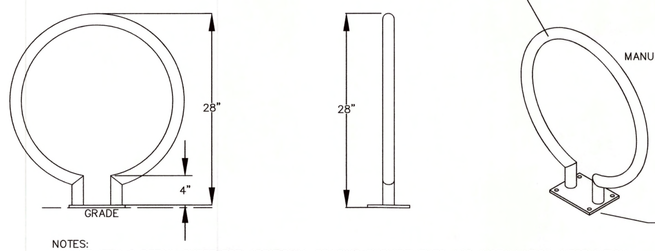

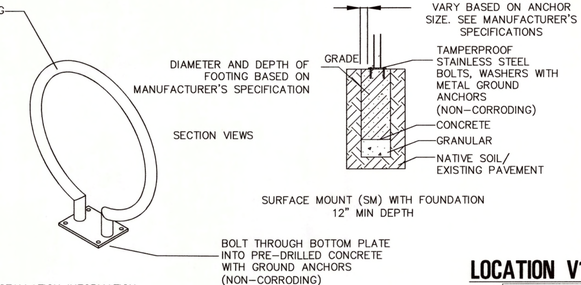

NOTES:
- SEE ITEM 6 DETAIL SHEET FOR ADDITIONAL SPACING REQUIREMENTS AND INSTALLATION INFORMATION.
- RACK DIMENSIONS ARE APPROXIMATE AND MAY VARY BASED ON THE MANUFACTURER'S SPECIFICATIONS.

DESCRIPTION OF WORK

INSTALL SIX INVERTED U WITH LOGO PANEL BIKE RACK ON EXISTING SIDEWALK

Item #	Quantity	Rack Type	Material	Color	Logo	Mounting Surface	Mounting Type
6	6	Oval (round tubing)	Galvanized	None	None	Grass	Surface Mount with Foundation

LOCATION V16 - VENTNOR RECREATIONAL COMPLEX : LOCATION 5

REVISIONS

NO.	DATE	DESCRIPTION	BY

REMINGTON & VERNICK ENGINEERS
CERTIFICATE OF AUTHORIZATION
No. 24GA28003800

FRANK J. SENEY JR.
PROFESSIONAL ENGINEER
NEW JERSEY LICENSE NUMBER
35321

SEAL OF COUNTY OF ATLANTIC 1837 NEW JERSEY

DIVISION OF ENGINEERING

MARK V. SHOURDS
COUNTY ENGINEER
PROFESSIONAL ENGINEER
NEW JERSEY LICENSE NUMBER
24GE 04026400

COUNTY OF ATLANTIC
DEPARTMENT OF REGIONAL PLANNING
AND DEVELOPMENT

VENTNOR INSTALLATION DETAILS RACK LOCATIONS (V15 & V16)

MARGATE - VENTNOR
BICYCLE INFRASTRUCTURE PROJECT


ATLANTIC COUNTY PROJECT NUMBER (S) HWY-999X-00-2017-009
FEDERAL PROJECT NUMBER (S) CMAQ-0629 (360)
NJDOT JOB NUMBER (S) 5500333
Drawn By: JAR/SPB
Checked By: JAR/SPB/DSK Date: 08/29/2019
CADD File Name: 0100F002 - Bicycle Rack Locations (Ventnor)
CADD File Path: M:\Transportation_Bridge\Atlantic County\0100F002 - Bicycle Infrastructure\DWG



BASEBALL FIELD INSTALLATION





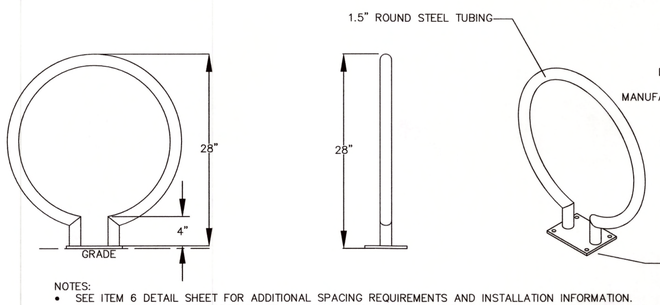

NOTES:
- SEE ITEM 6 DETAIL SHEET FOR ADDITIONAL SPACING REQUIREMENTS AND INSTALLATION INFORMATION.
- RACK DIMENSIONS ARE APPROXIMATE AND MAY VARY BASED ON THE MANUFACTURER'S SPECIFICATIONS.

DESCRIPTION OF WORK

INSTALL SIX CIRCULAR MOUNTED RACK IN GRASS AREA ADJACENT TO EXISTING SIDEWALK

Item #	Quantity	Rack Type	Material	Color	Logo	Mounting Surface	Mounting Type
6	6	Oval (round tubing)	Galvanized	None	None	Grass	Surface Mount with Foundation


LOCATION V17 - VENTNOR RECREATIONAL COMPLEX : LOCATION 6



BASEBALL FIELD INSTALLATION





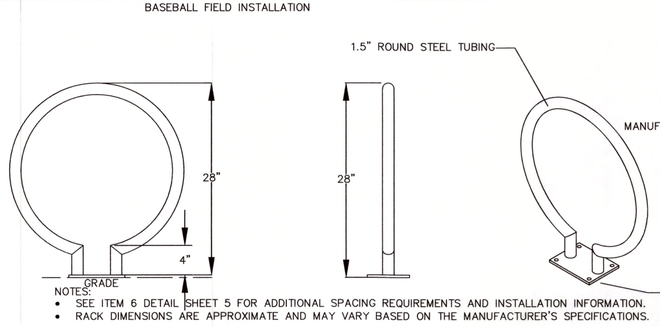

NOTES:
- SEE ITEM 6 DETAIL SHEET 5 FOR ADDITIONAL SPACING REQUIREMENTS AND INSTALLATION INFORMATION.
- RACK DIMENSIONS ARE APPROXIMATE AND MAY VARY BASED ON THE MANUFACTURER'S SPECIFICATIONS.

DESCRIPTION OF WORK

INSTALL SIX INVERTED U WITH LOGO PANEL BIKE RACK ON EXISTING SIDEWALK

Item #	Quantity	Rack Type	Material	Color	Logo	Mounting Surface	Mounting Type
6	6	Oval (round tubing)	Galvanized	None	None	Grass	Surface Mount with Foundation

LOCATION V18 - VENTNOR RECREATIONAL COMPLEX : LOCATION 7

REVISIONS

NO.	DATE	DESCRIPTION	BY

REMINGTON & VERNICK ENGINEERS
CERTIFICATE OF AUTHORIZATION
No. 24GA28003800

FRANK J. SENEY JR.
PROFESSIONAL ENGINEER
NEW JERSEY LICENSE NUMBER
35321

SEAL: COUNTY OF ATLANTIC 1837 NEW JERSEY

DIVISION OF ENGINEERING

MARK V. SHOURDS
COUNTY ENGINEER
PROFESSIONAL ENGINEER
NEW JERSEY LICENSE NUMBER
24GE 04026400

COUNTY OF ATLANTIC
DEPARTMENT OF REGIONAL PLANNING
AND DEVELOPMENT

VENTNOR INSTALLATION DETAILS RACK LOCATIONS (V17 & V18)

MARGATE - VENTNOR
BICYCLE INFRASTRUCTURE PROJECT


ATLANTIC COUNTY PROJECT NUMBER (S): HWY-999X-00-2017-009
FEDERAL PROJECT NUMBER (S): CMAQ-0629 (360)
NJDOT JOB NUMBER (S): 5500333
Drawn By: JAR/SPB
Checked By: JAR/SPB/DSK
Date: 08/29/2019
CADD File Name: 0100F002 - Bicycle Rack Locations (Ventnor)
CADD File Path: M:\Transportation_Bridge\Atlantic County\0100F002 - Bicycle Infrastructure\DWG



BASEBALL FIELD INSTALLATION





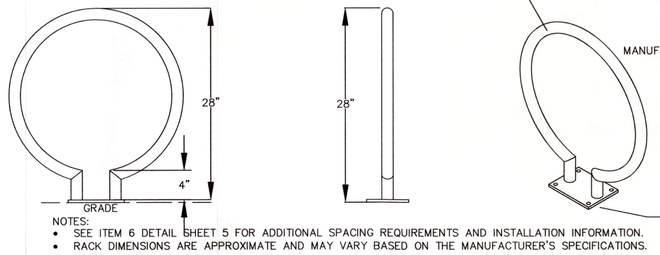


NOTES:
- SEE ITEM 6 DETAIL SHEET 5 FOR ADDITIONAL SPACING REQUIREMENTS AND INSTALLATION INFORMATION.
- RACK DIMENSIONS ARE APPROXIMATE AND MAY VARY BASED ON THE MANUFACTURER'S SPECIFICATIONS.

DESCRIPTION OF WORK

INSTALL SIX CIRCULAR MOUNTED RACK IN GRASS AREA ADJACENT TO EXISTING SIDEWALK

Item #	Quantity	Rack Type	Material	Color	Logo	Mounting Surface	Mounting Type
6	6	Oval (round tubing)	Galvanized	None	None	Grass	Surface Mount with Foundation


LOCATION V19 - VENTNOR RECREATIONAL COMPLEX : LOCATION 8

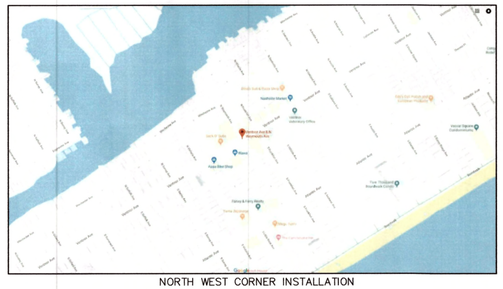

NORTH WEST CORNER INSTALLATION





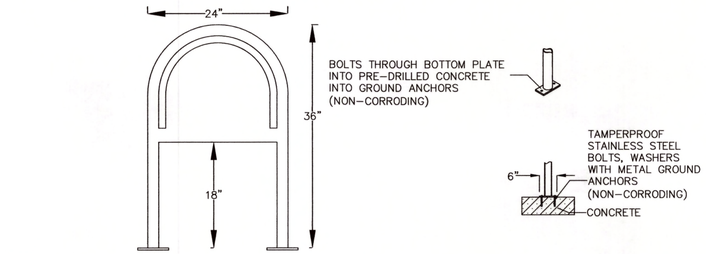

NOTES:
- SEE ITEM 1 DETAIL SHEET 4 FOR ADDITIONAL SPACING REQUIREMENTS.
- RACK DIMENSIONS ARE APPROXIMATE AND MAY VARY BASED ON THE MANUFACTURER'S SPECIFICATIONS.

DESCRIPTION OF WORK

INSTALL TWO INVERTED U RACKS WITH LOGO ON EXISTING CONCRETE SIDEWALK.

Item #	Quantity	Rack Type	Material	Color	Logo	Mounting Surface	Mounting Type
1	2	Inverted U w/Logo Panel	Powder Coated	Red	Bicycle	Concrete	Surface

NOTE:
1. PRIOR TO ORDERING BIKE RACKS, THE CONTRACTOR SHALL OBTAIN LOGO DETAILS FROM THE SUPPLIER AND SUBMIT TO THE OWNER FOR REVIEW AND APPROVAL.

LOCATION V20 - VENTNOR AVE & WEYMOUTH AVE

REVISIONS			
NO.	DATE	DESCRIPTION	BY

REMINGTON & VERNICK ENGINEERS
CERTIFICATE OF AUTHORIZATION
No. 24GA28003800

FRANK J. SENEY JR.
PROFESSIONAL ENGINEER
NEW JERSEY LICENSE NUMBER
35321

SEAL OF COUNTY OF ATLANTIC 1837 NEW JERSEY

DIVISION OF ENGINEERING

MARK V. SHOURDS
COUNTY ENGINEER
PROFESSIONAL ENGINEER
NEW JERSEY LICENSE NUMBER
24GE 04026400

COUNTY OF ATLANTIC
DEPARTMENT OF REGIONAL PLANNING
AND DEVELOPMENT

VENTNOR INSTALLATION DETAILS RACK LOCATIONS (V19 & V20)

MARGATE - VENTNOR
BICYCLE INFRASTRUCTURE PROJECT

ATLANTIC COUNTY PROJECT NUMBER (S): HWY-999X-00-2017-009
FEDERAL PROJECT NUMBER (S): CMAQ-0629 (360)
NJDOT JOB NUMBER (S): 5500333
Drawn By: JAR/SPB
Checked By: JAR/SPB/DSK
Date: 08/29/2019
CADD File Name: 0100F002 - Bicycle Rack Locations (Ventnor)
CADD File Path: M:\Transportation_Bridge\Atlantic County\0100F002 - Bicycle Infrastructure\DWG