
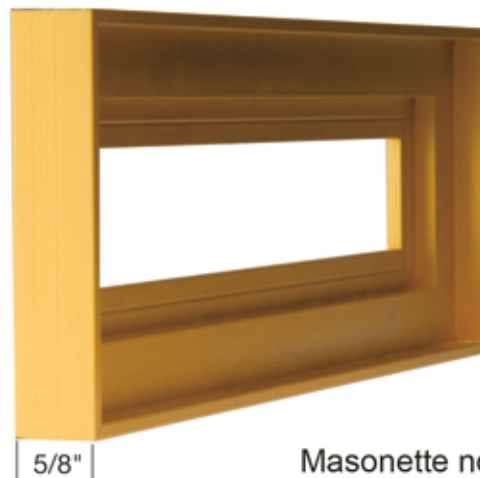


## XTERIOR *Frames for Outdoor Applications*

# Xterior

OUTDOOR FRAMES

- 1/8" wall thickness.
- Frames designed to accommodate materials with thicknesses of 1/16" to 5/16".
- Minimum size 3" x 3".
- Maximum size 36" x 36".
- Anodized colors: Satin Yellow Gold or Satin Silver – hardcoat finish adds durability to the wear of the frame material.
- Mounting Options: double sided tape, silicon adhesive, mechanically fastened (recommended). Mounting hardware is not included.
- Holes provided upon request.
- Always specify inside dimension.

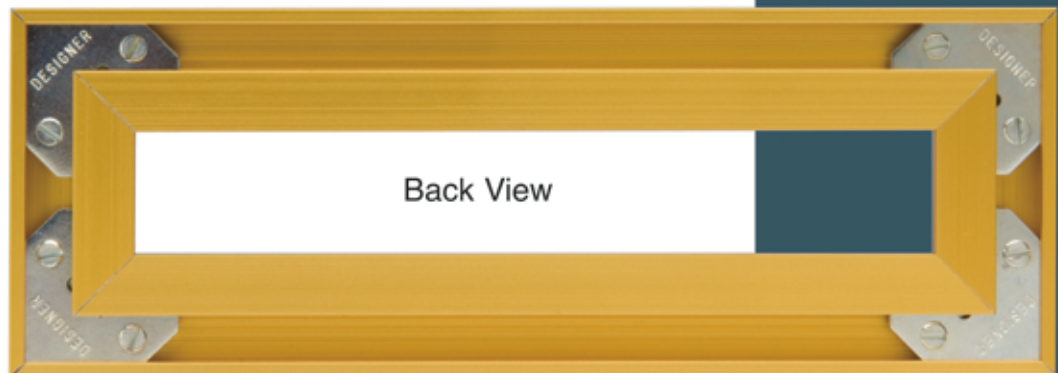

Masonette not included



**B3**  
STAIR B3  
COX  
INVESTMENT  
GROUP

Four corner angles  
are included with  
frame.