




ANTI-SIPHON/QUARTER-TURN ANTI-SIPHON FROST FREE SILLCOCK

SECTION I

Frost Free Sillcock

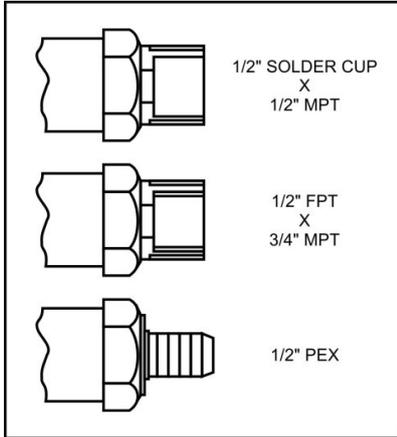


- Multi-Turn Frost Free Sillcock
- lapmo, CSA B64.2 approved
- O-Ring Seal
- Build In Lockshield
- Silver soldered construction
- Outlet with 3/4" Hose thread
- Inlet with 1/2" Male NPT x 1/2" CXC, or 3/4" Male NPT x 1/2" Female NPT, 1/2" PEX
- Max operating pressure: 125 psi water
- operating Temperature: 32°F to 140°F
- Notched flange allows stable installation on siding



Item Number	Item Description
NI0001	1/2" Male x 1/2" Solder x 4"
NI0002	1/2" Male x 1/2" Solder x 6"
NI0003	1/2" Male x 1/2" Solder x 8"
NI0004	1/2" Male x 1/2" Solder x 10"
NI0005	1/2" Male x 1/2" Solder x 12"
NI0006	1/2" Male x 1/2" Solder x 14"
NI0007	3/4" Male x 1/2" Female x 4"
NI0008	3/4" Male x 1/2" Female x 6"
NI0009	3/4" Male x 1/2" Female x 8"
NI0010	3/4" Male x 1/2" Female x 10"
NI0011	3/4" Male x 1/2" Female x 12"
NI0012	3/4" Male x 1/2" Female x 14"
NI0013	1/2" PEX x 4"
NI0014	1/2" PEX x 6"
NI0015	1/2" PEX x 8"
NI0016	1/2" PEX x 10"
NI0017	1/2" PEX x 12"
NI0018	1/2" PEX x 14"



ANTI-SIPHON Frost Free Sillcock

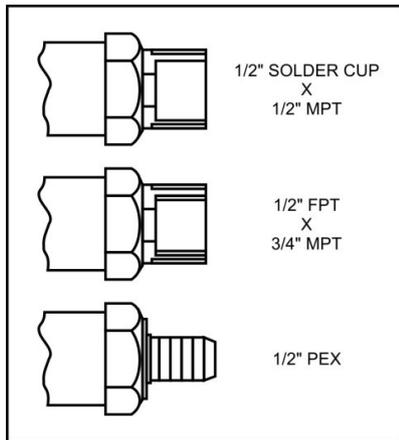


- Multi-Turn Anti siphon Frost Free Sillcock
- Lapmo, CSA B64.2 ,ASSE1019-A approved
- A built in Backflow Preventer checks siphoning back into the water supply. The sillcock drains automatically upon water shut off, if the hose is removed or open.
- Silver soldered construction
- Outlet with 3/4" Hose thread
- Inlet with 1/2" Male NPT x 1/2" CXC, or 3/4" Male NPT x 1/2" Female NPT, 1/2" PEX
- Max operating pressure: 125 psi water
- Operating Temperature: 32°F to 140°F
- Notched flange allows stable installation on siding



Item Number	Item Description
NI0019	1/2" Male x 1/2" Solder x 4"
NI0020	1/2" Male x 1/2" Solder x 6"
NI0021	1/2" Male x 1/2" Solder x 8"
NI0022	1/2" Male x 1/2" Solder x 10"
NI0023	1/2" Male x 1/2" Solder x 12"
NI0024	1/2" Male x 1/2" Solder x 14"
NI0025	3/4" Male x 1/2" Female x 4"
NI0026	3/4" Male x 1/2" Female x 6"
NI0027	3/4" Male x 1/2" Female x 8"
NI0028	3/4" Male x 1/2" Female x 10"
NI0029	3/4" Male x 1/2" Female x 12"
NI0030	3/4" Male x 1/2" Female x 14"
NI0031	1/2" PEX x 4"
NI0032	1/2" PEX x 6"
NI0033	1/2" PEX x 8"
NI0034	1/2" PEX x 10"
NI0035	1/2" PEX x 12"
NI0036	1/2" PEX x 14"



Quarter -Turn Anti-Siphon Frost Free Sillcock

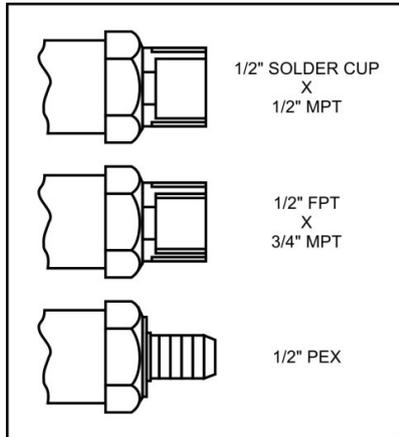

- Quarter-Turn Anti siphon Frost Free Sillcock
- lapmo, CSA B64.2 ,ASSE1019-A approved
- A build in Backflow Preventer checks siphoning back into the water supply. The sillcock drains automatically upon water shut off, if the hose is removed or open.
- Silver soldered construction
- Outlet with 3/4" Hose thread
- Inlet with 1/2" Male NPT x 1/2" CXC, or 3/4" Male NPT x 1/2" Female NPT, 1/2" PEX
- Max operating pressure: 125 psi water
- Operating Temperature: 32°F to 140°F
- Notched flange allows stable installation on siding



Item Number	Item Description
NI0037	1/2" Male x 1/2" Solder x 4"
NI0038	1/2" Male x 1/2" Solder x 6"
NI0039	1/2" Male x 1/2" Solder x 8"
NI0040	1/2" Male x 1/2" Solder x 10"
NI0041	1/2" Male x 1/2" Solder x 12"
NI0042	1/2" Male x 1/2" Solder x 14"
NI0043	3/4" Male x 1/2" Female x 4"
NI0044	3/4" Male x 1/2" Female x 6"
NI0045	3/4" Male x 1/2" Female x 8"
NI0046	3/4" Male x 1/2" Female x 10"
NI0047	3/4" Male x 1/2" Female x 12"
NI0048	3/4" Male x 1/2" Female x 14"
NI0049	1/2" PEX x 4"
NI0050	1/2" PEX x 6"
NI0051	1/2" PEX x 8"
NI0052	1/2" PEX x 10"
NI0053	1/2" PEX x 12"
NI0054	1/2" PEX x 14"