

SITE WIDE FLOORING




FALCON HYBRID 6.5mm



WHITE OAK



NATURAL OAK

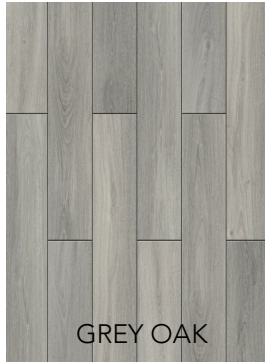


GREY OAK



CAMEL



COFFEE

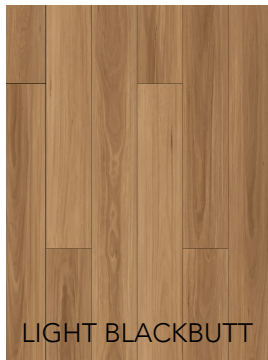

LIGHT BLACKBUTT




BLACKBUTT



SPOTTED GUM

CONSTRUCTION

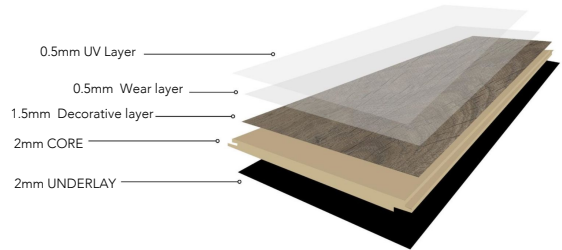

PERFORMANCE

SPECIFICATION	FALCON 6.5MM	SPECIFICATION	FALCON 6.5MM	SPECIFICATION	FALCON 6.5MM
BOARD SIZE	1524 x 230mm	PROFILE	CLICK	MOISTURE PROTECTION	100% WATERPROOF
THICKNESS	6MM	DENSITY	2100KG/M3	SLIP RATED	YES P3
PACK SIZE	2.085M2	CONSTRUCTION	STONE / PLASTIC COMPOSITE	FIRE RATED	YES
BOARDS PER PACK	6 PLANKS	RAFT SIZE	12M x 20M	CLIMATE CONTROL	STANDARD 18-27
FINISH	EMBOSSSED	INSTALL METHOD	FLOATING INSTALLATION	WEAR LAYER	0.5MM
TEXTURE	MATTE	PERIMETER GAP COVERAGE	5-7MM	UNDERLAY	2MM
COLOUR VARIATION	5 PATTERN REPEAT	FLOOR LEVEL OVER 2M	2MM	SCRATCH RESISTANCE	HIGH