


## INSTRUCTIONS FOR HANDLE INSTALLATION

### PARTS INCLUDED:




1.

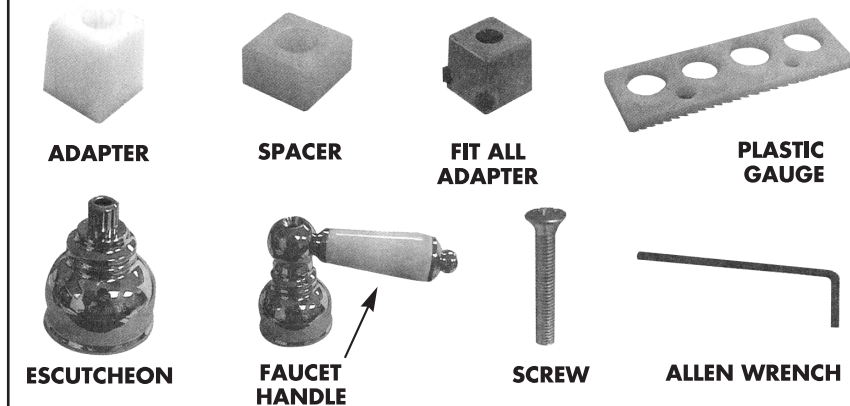

Remove old handles and replace old escutcheons if needed.


2.

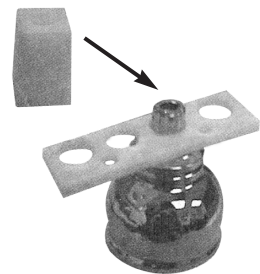

Find the adapter that fits your stem by using the plastic gauge. Note the number by the hole that best fits your stem. Match the number on the adapter with the number on the gauge.

**Note:** The most popular adapters are on the plastic gauge. Additional adapters are included to ensure proper fit for other manufacturers. A metal fit all adapter is included if no other adapter fits your stem.

3.

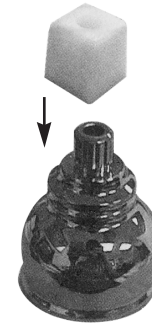

Place adapter on the stem and tap down lightly until fully seated.

4.




Place the handle on the adapter and turn the faucet on and off. If the handle scraps or binds on the trim, use the spacers to raise the handle. Check the clearance again. Add the appropriate amount of spacers to ensure smooth operation.

5.



Use the plastic gauge and the old screw to determine the correct screw from the kit that fits your faucet. Match both the length and thread size, then install screw.

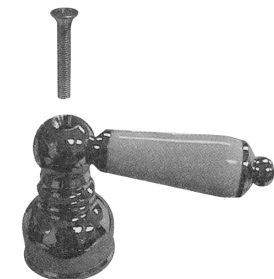

**DO NOT USE ABRASIVE CLEANERS ON THIS PRODUCT**