


INSTRUCTIONS

FLUSH ASSEMBLY

1. Turn off water supply, flush toilet, and use sponge to soak up remaining water in tank.
2. Unbolt bracket (H) and take out handle assembly (A).
3. Put one washer (B) on each side of bracket.
4. Screw tank ball (C) onto lever arm (D) and snap on chain (E).
5. Snap on lever arm over ears on bracket.
6. Install handle by inserting handle arm (F) through tank, attach handle arm with bushing and clip (G).
7. Connect chain to handle arm.
8. Turn on water and check for leaks.

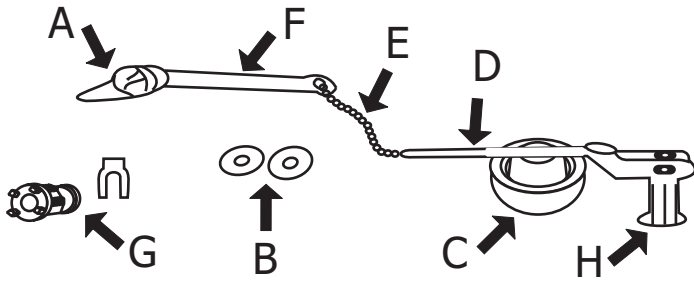

INS-E100-61004