



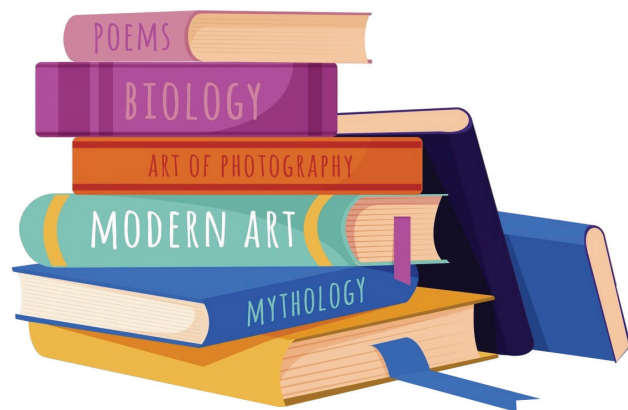

A New Benchmark for Digital Book Printing in India

A high-speed digital inkjet press platform for books, newspapers, transactional documents, and personalized printing. Available in mono, dual Color, or CMYK with up to 1200 dpi and variable web widths (440 mm / 660 mm/ 880 mm), it delivers exceptional throughput (up to ~100,000 A4 impressions/hour) with one of the lowest total costs of ownership in its class

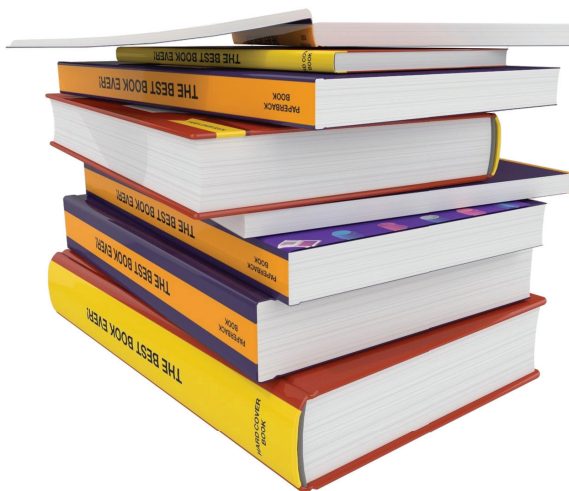

Kridwinn Innovations Private Limited

F-149 First Floor, Sapphire Ninety, Sector 90 Gurugram,
Haryana India - 22505 India
GSTIN / TAX : 06AAJCK7804N1Z2
MSME No : UDYAM – HR-05-0104951



+91-124- 7144741
kridwinn@kridwinn.com
www.kridwinn.com



Digimac Series

High Speed Inkjet Press



Highlights

- **Lowest Total Cost of Ownership**

From capital investment to operations and service, KRIDWINN DIGIMAC is engineered to deliver unmatched value.

- **Reliable. Precise. Proven.**

Built for long runs with consistent, high-quality output that meets the most demanding print applications.

- **Fastest ROI in the Segment**

Recover your investment in as little as 12 months, thanks to exceptional efficiency and uptime & unbeatable operations cost

- **Industrial Speed & Productivity (upto 100,000 A4 Impressions per hour)**

Keep up with high-volume demand without compromising print clarity.

- **Driven by Expertise**

Powered by Team Kridwinn's 20+ years of industrial inkjet experience and best in class after-sales support.

SPECIFICATIONS

DIGIMAC POD HD CMYK - Duplex		
Model* ²	440C (26 heads)	660C (40 heads)
Inkjet Printhead	EPSON i3200 A1	
Native Printhead resolution	600 dpi	
Resolutions	{ 600 x 600 } { 1200 x 600 } dpi	
Max. Speed* ¹	{ 100 } { 55 } m/min	
Max. Media Width	440 mm	660 mm
Max. Printing width	~432 mm	~650 mm
Front / Back registration	± 0.1 mm	
File Format	PDF, & other formats	
Media Thickness	53 - 150 g/m ²	
Ink Type	water based pigment ink (CMYK)	
Drying	Infrared Drying (auto controlled with speed)	
Media Type (Inks suitability)	non-coated, Inkjet coated, news print, wall paper etc	
Max. Roll Diameter	1.27 m (50 inches)	
Working Temperature range	24 - 27 degree C	
Environment Humidity range	50% - 60% RH	
Paper Dust Removal System	Standard, double side	
Anti Static device	Standard	
Sheeter / Stack	Standard , cutting length 150 mm – 660 mm	
Rewinder / Folding System	Optional	
*1- Speed varies with print resolution & substrate type *2 - all specifications are of standard system and may vary due to various factors, perform tests for actual results *3 – please contact our sales team for details on other available models or customisation.		

Kridwinn Innovations Private Limited

F-149 First Floor, Sapphire Ninety, Sector 90 Gurugram,
Haryana India - 22505 India
GSTIN / TAX : 06AAJCK7804N1Z2
MSME No : UDYAM – HR-05-0104951

+91-124- 7144741
kridwinn@kridwinn.com
www.kridwinn.com

