

# NU-WAVE

## SCAFFOLDING SYSTEMS

Phone: 800-428-7200

E-mail: [customerservice@nuwavescaffold.com](mailto:customerservice@nuwavescaffold.com)

[www.nuwavescaffold.com](http://www.nuwavescaffold.com)

Contact us for a Distributor near you!





Phone: 800-428-7200

E-mail: [customerservice@nuwavescaffold.com](mailto:customerservice@nuwavescaffold.com)

[www.nuwavescaffold.com](http://www.nuwavescaffold.com)

Contact us for a Distributor near you!

## Welcome to Nu-Wave!

Exceptional Quality and Pride of Workmanship are Our Top Priorities!

Manufacturing in the USA means a stronger national economy, job growth and the success of American businesses. It also means we place a priority on Quality - Quality that we refuse to sacrifice in favor of a big name and big profits.

At Nu-Wave, our mission is to bring THE Highest Quality products of our kind to the national market so YOU can stand with confidence!

### **CONTENTS**

Scaffolding	3
Scaffolding Accessories and Parts	4
Step-Up Mobile Work Stands	5
Drywall Carts	7
Nu-Wave Green Cart Line	8
Lean Construction Material Handling Carts	9
Dollies	10
Specialty Items	11

**MANUFACTURING PRODUCT IN INDIANAPOLIS, INDIANA**

## SCAFFOLDING

- Easily and quickly assembled by one person without tools
- Platform heights adjust in 4 inch increments in seconds
- Solid steel stack pins secure stacked units
- NO pins required to secure casters
- Ladders are drilled on both sides and Outriggers are interchangeable for easy assembly
- 29.5" Wide End Frame Access Ladders provide safe access to work platforms
- Narrow width allows for rolling through standard commercial doorways without dismantling
- Scaffolds may be stacked to a maximum of 18 ft. (THREE SECTIONS) when a set of 4 Outriggers and a Guardrail Kit with Toe Boards are installed
- Guardrail Kits and Outriggers sold separately

**CAUTION: NEVER MIX COMPETITOR SCAFFOLD COMPONENTS WITH NU-WAVE PRODUCTS, AS THEY ARE NOT BUILT TO THE SAME STRENGTHS, TOLERANCES OR EXACT DIMENSIONS AS NU-WAVE PRODUCTS — OSHA REFERENCE: 1926.451(b)(10)**

### Nu-Wave Scaffolds Available in Classic and Elite Models

**Both Models available in 4 ft., 6 ft. and 8 ft. lengths, and 4 ft. and 6 ft. heights**



660CL/PC5B-S

Classic Scaffold w/Standard Caster



660CL/PIC-5

Classic Scaffold w/Heavy Duty Caster



660EL/PIC-5

Elite Scaffold w/Heavy Duty Caster



Classic Models come with brackets for manual Platform positioning



PC5B-S Classic 5" Locking Caster



PIC-5 Elite 5" Locking Heavy Duty Caster



Elite Models come with an automatic Platform positioning mechanism

## SCAFFOLD ACCESSORIES AND REPLACEMENT PARTS

All Nu-Wave Classic and Elite Scaffold Components are 100% Interchangeable

**PP-6CL: Classic Platform**  
(also comes as PP-4CL and PP-8CL)




**PP-6EL: Elite Platform**  
(also comes as PP-4EL and PP-8EL)



Bottom View of PP-6EL

**PL-6: Scaffold Ladder**  
(Replacement Ladder for Both CL and EL Models)



**CTB-100-4:**  
Platform Brackets for Classic Models




**PBP: Base Plate**  
(For use on CL and EL Models)



**PL-1/2: Half Ladder**  
(Replacement Ladder for 1/2 Scaffold)



**GK-6: Guardrail Kit**  
(Also comes as GK-4 and GK-8)

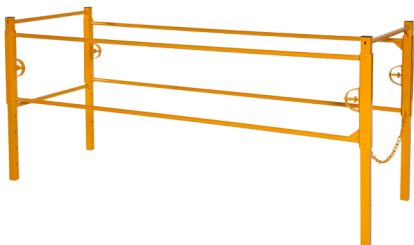

**GKC-6: Guardrail Kit Complete**  
Includes toe boards and brackets  
(Also comes as GKC-4 and GKC-8)




**PT-6: Scaffold Truss**  
(Also comes as PT-4 and PT-8)



**PO-100/4: Outriggers**  
Sold 4 to a Set  
(Casters sold separately)



**GR-6: Guardrail**  
(Also comes as GR-4 and GR-8)



**GRE-2C and GRE-2S:**  
Guardrail End Frames with Midrail Chain or Solid Midrail



### STEP-UPS

Nu-Wave Step-Ups now come in five sizes and serve as utility/material carts and/or convenient work stands. All Nu-Wave Step-Ups are made with 14 gauge Steel Platforms with a non-skid surface and come with Four 5" All Brake Casters. They fold flat for easy storage and convenient transport.



#### COMPACT

Folds for easy transport and storage



#### **SU-4: 4 ft. STEP-UP WORKSTAND:**

50.5" H x 48" L x 22" W  
 Load Capacity: 500 lbs.  
 Shipping Weight: 71 lbs.



#### **SU-5: 5 ft. STEP-UP WORKSTAND:**

61.5" H x 56" L x 25" W  
 Load Capacity: 600 lbs.  
 Shipping Weight: 90 lbs.



#### **SU-6: 6 ft. STEP-UP WORKSTAND:**

72.5" H x 56" L x 25" W  
 Load Capacity: 600 lbs.  
 Shipping Weight: 100 lbs.

### REPLACEMENT PARTS



PC54B-S  
Step-Up Replacement Caster



Step-Up Replacement Caster Adapter



PP-2: SU-4 Replacement Platform  
 (Also comes in PP-3 for the SU-5 and SU-6)

## EXTRA-WIDE STEP-UPS

Nu-Wave Extra-Wide Step-Ups come with all the same step-up features, but are Super-Sized! They still fold flat, too!



### **SU-4XW: 4 ft. EXTRA-WIDE STEP-UP:**

#### FEATURES:

- Length: 48" with platforms
- Width: 30" - fits through doorways
- Height: 50-1/2" w/casters
- Weight: 82 lbs.
- Distributed Load Capacity: 500 lbs.
- Comes with Extra Wide Frame, 3 Platforms and Four 5" All Brake Casters
- *Handrail Sold Separately*



### **SU-5XW: 5 ft. EXTRA-WIDE STEP-UP:**

#### FEATURES:

- Length: 56" with platforms
- Width: 30" - fits through doorways
- Height: 60-1/4" w/casters
- Weight: 101 lbs.
- Distributed Load Capacity: 500 lbs.
- Comes with Extra Wide Frame, 3 Platforms and Four 5" All Brake Casters
- *Handrail Sold Separately*

## STEP-UP ACCESSORY



### **STEP-UP TELESCOPING HANDRAIL:**

Nu-Wave's Step-Up Telescoping Handrail may be used on all Nu-Wave Step-Up Models, regardless of size.

## DRYWALL CARTS

Nu-Wave Drywall Carts come in a variety of sizes and feature unitized tubular steel frame construction, capacities up to 3,000 lbs., electrostatic epoxy powder coating, and a choice of caster configurations and wheel materials to match your needs.

PD-1



### **PD-1: Residential Cart:**

Panel Glide can be ordered separately.  
Smaller Design Moves Well in Limited Work Space  
Inset Back Tube Frame  
Hi-Tech Wheels  
Platform Dimensions: 9" W x 39.25" L  
Overall Dimensions: 47" H x 39.25" L x 17.75" W  
Shipping Weight: 50 lbs. (w/o casters)

PD-2



### **PD-2: Standard Drywall Cart:**

Platform Dimensions: 43.5" L x 12" W  
Overall Dimensions: 43.5" L x 22" W x 47" H  
Shipping Weight: 50 lbs. (w/o casters)

PD-3



### **PD-3: Standard Drywall Cart:**

Platform Dimensions: 43.5" L x 12" W  
Overall Dimensions: 47" H x 49.75" L x 22.5" W  
Shipping Weight: 69 lbs. (w/o casters)

PD-4



### **PD-4: Standard Drywall Cart:**

Platform Dimensions: 43.5" L x 12" W  
Overall Dimensions: 47" H x 49.75" L x 25" W  
Shipping Weight: 75 lbs. (w/o casters)

### **PD-5: Standard Drywall Cart (Not Shown):**

Platform Dimensions: 44" L x 12" W  
Overall Dimensions in Standard Cart Mode:  
44.75" H x 45" L x 24.75" W  
Overall Dimensions in Flat Cart Mode:  
14" H x 45" L x 35.25" W  
Shipping Weight: 72 lbs. (w/o casters)

**PPG-1 and PPG-2: Panel Glides sold separately**

## CASTER OPTIONS



PCHTR-8-S



PCHTS-8-S



PCHTS-8-S/HD



PCRR-8-S



PCRS-8-S



PPLR-S  
Position Lock

## GREEN CART LINE

### NWD-234: DRYWALL CART

FEATURES:

- Larger Wheel Base: 36.5" L x 18.5" W
- 12% Larger than the PD-2 & 3 and 8% Larger than the PD-4
- Larger Platform Deck: 43.75" L x 13" W 8% Larger than the PD-2, 3 & 4
- Bumper/Lifting Handles
- Load Capacity: 2,400 lbs.
- Optional Removable/Replaceable Material Kickers
- Choice of 4 Hi-Tech Swivel Casters or 4 Rubber-to-Metal Swivel Casters
- Comes in Nu-Wave Green -- Easily Distinguishable



NWD-234 Drywall Cart with Removable Material Kickers (Material Kicker Shown here)



### NWD-HD234: HEAVY DUTY CART

FEATURES:

- Comes with all of the features of the NWD-234 listed above but with:
- 8" Heavy Duty Hi-Tech Swivel Casters (Shown left)
  - Load Capacity: 3,000 lbs.



PCHTS-8-S/HD Heavy Duty Caster



PCHTS-8-S/HD-WLK Heavy Duty Caster w/Wheel Lock

### NWD-R11: RESIDENTIAL CART

Nu-Wave's newest residential cart may be small but it's tough!

FEATURES:

- Comes with an Installed Panel Glide for ease in loading and unloading sheets
- Four 8" Swivel Casters
- Load Capacity: 2,000 lbs.
- Weight: 62 lbs.
- Dimensions: 45" H x 40" L x 17" W
- Deck Dimension: 40" L x 9.25" W
- Comes in Nu-Wave Green - Easily Distinguishable



NWD-R11





## LEAN CONSTRUCTION MATERIAL HANDLING CARTS



### NWD-F66: FLAT CART

If you've got a big job, this versatile cart will fit the need! Ideal for steel studs, ceiling grid, doors, tile, etc.

#### FEATURES:

- Load Capacity: 3,200 lbs.
- Comes with 8" Heavy Duty Hi-Tech Swivel Casters with Wheel Locks on All Casters
- Removable Upright Bars
- Weight: 112 lbs.
- Dimensions: 59.5" H x 71" L x 29" W (w/casters)
- Comes in Nu-Wave Green - Easily Distinguishable




### NWD F-44: FLAT CART

ALL THE SAME FEATURES ABOVE, JUST SMALLER:

- Weight: 84 lbs.
- Dimensions: 50.5" H x 49" L x 29" W (w/casters)

### LEAN TREE ADAPTER

Both NWD F-66 and F-44 have modular vertical bars that are removable. The Lean Tree Adapter may be placed in the vertical bar slots making conversion simple. Fits Both Cart Sizes (Adapter Sold Separately)

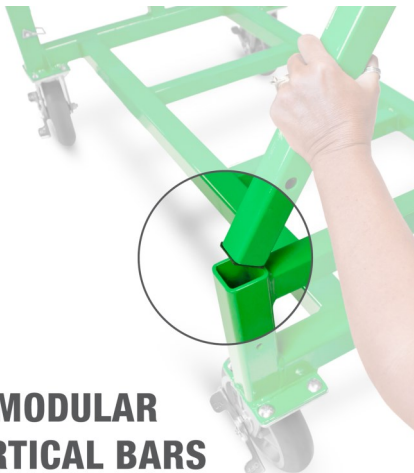

## LEAN CONSTRUCTION MATERIAL HANDLING CARTS



NWD-22XL

### **NWD-22XL: UTILITY CART**

- Load Capacity: 3,200 lbs.
- Platform Dimensions: 48" L x 19" W
- Overall Dimensions: 47" H x 48" L x 29.25" W
- Weight: 102 lbs. w/casters; 78 lbs. w/o casters

### **NWD-22XL/RCB/PPG: UTILITY CART**

All the features of the NWD-22XL with a Recessed Bumper and Panel Glide (Photo Not Shown)

## DOLLIES



### **NWD-PD/1000: PANEL/DOOR DOLLY**

- 10" Duraflex Cushion Rubber Wheels
- Heavy Duty Steel Construction
- Durable Powder-Coated Finish
- Ships Fully Assembled
- 1,000 lb. Weight Capacity

#### SPECS:

Dimensions: 13.25" H x 16" L x 10.5" W  
(4.5" W Interior Channel)  
Weight: 24 lbs.



### **NWD-HPD/1000: PANEL/DOOR DOLLY**

- 10" Duraflex Cushion Rubber Wheels
- Heavy Duty Steel Construction
- Twin Handles for Grasping or Strapping
- Durable Powder-Coated Finish
- Ships Fully Assembled
- 1,000 lb. Weight Capacity

#### SPECS:

Dimensions: 10" H x 18" L x 10.5" W  
(4" W Interior Channel)  
Weight: 25 lbs.



### **NWD-SD/1400: STEEL DOLLY**

#### FEATURES:

- Heavy Duty Steel Construction
- Durable Powder-Coated Finish
- 1,400 lb. Weight Capacity Per Unit

#### SPECS:

Dimensions: 8" H x 12.25" L x 12.25" W (w/wheels)  
Weight: 33 lbs.

## SPECIALTY ITEMS

### **SPLC: SUPER PRO LOCK COMPLETE**

Contains the Super Pro Lock, Telescoping Handrails and Four Mini-Stabilizers to comply with OSHA Standards (Parts shown in green in photo)

#### Features:

- Telescoping handrails on both sides provide extra safety
- 4 Mini Stabilizers widen the base to meet OSHA Standards (Reference 1926.452(w)(6)(i-v)(ii) Height of scaffold-to-base width ratio — shown to the left)



1926.452 (w)(6)(i-v)  
Employees shall not be allowed to ride on scaffolds unless the following conditions exist:

(i) The surface on which the scaffold is being moved is within 3 degrees of level and free of pits, holes and obstructions;

(ii) The height-to-base width ratio of the scaffold during movement is two-to-one (2:1) or less, unless the scaffold is designed and constructed to meet or exceed nationally-recognized stability test requirements such as those listed in paragraph (k) of Appendix A to this subpart (ANSI/SIA A92.5 and A92.6);

(iii) Outrigger frames, when used, are installed on both sides of the scaffold;

(iv) When power systems are used, the propelling force is applied directly to the wheels and does not produce a speed in excess of 1 foot per second (0.3 mps);

(v) No employee is on any part of the scaffold which extends outward beyond the wheels, casters or other supports.

### **STABILIZERS MUST BE USED ON ALL NU-WAVE SUPER PRO LOCK SYSTEMS**

**WARNING:** Use only on clean, level floors. Make sure toggle lever is fully engaged. Follow OSHA standards for scaffold construction and use. Failure to use as directed could cause serious injury.

### **MBK-300: MATERIAL BRACKETS**

#### FEATURES:

- Brackets are for holding ceiling grid, fluorescent lights, conduit, etc.
- For 4' Cross Tees the width of Scaffold/Mains on length of scaffold
- Installs easily over stack pins
- Can be used either on the length or width of the scaffold



## SPECIALTY ITEMS

### **TBX-200: Tool Box**

FEATURES:

- UPS Shippable
- Large Capacity: 28" x 6.75" x 6.5"
- Constructed of 14 Ga. Steel for strength and durability
- Locates on ladder rung for easy installation
- Safety latch pin to hold in position



### **550CL: 550 Classic Scaffold**

FEATURES:

- UPS Shippable
- Non-Stackable
- Utilizes either PC5B-S or PIC-5 scaffold casters
- 24" Wide End Frame Access Ladders provide safe access to work platforms
- Narrow width allows for rolling through narrow places and doorways without dismantling.
- One person can assemble the 550CL quickly without tools.
- Holes on both sides of the end frame aid in ease of assembly
- One person can also adjust platform heights in 4 in. increments in a matter of seconds.
- Load Capacity: 750 lbs.
- Platform: Large 1,305 sq. in. platform surface
- Dimensions: 5' H x 5' L x 2' W



550CL/PIC-5 Shown

***PLEASE CONTACT YOUR LOCAL NU-WAVE DISTRIBUTOR FOR  
CUSTOM COLORS AND ID BRANDING***

Call Nu-Wave Manufacturing at:

1-800-428-7200 or

E-mail us at:

[customerservice@nuwavescaffold.com](mailto:customerservice@nuwavescaffold.com)

Visit us at: [www.nuwavescaffold.com](http://www.nuwavescaffold.com)

**Nu-Wave Manufactures Product in Indianapolis, Indiana**

