



VIVENTO

40 YEARS
1984-2024



PRESTIGE RB-02, PP Beige Cashmere, p. 66




ELEGANTE EK-02, FF Cedar, p. 62

NEW
2024



BASIC ASTORIA VISIOSUN 02, CPL Walnut, p. 116

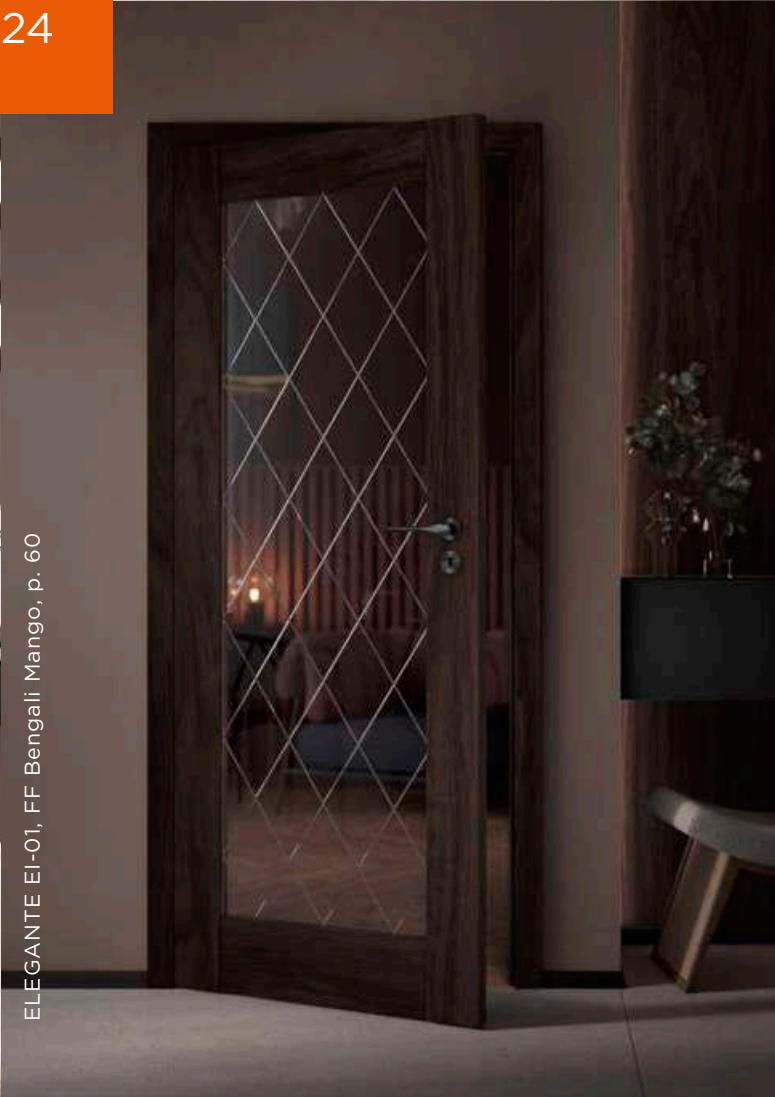

ELEGANTE EI-01, FF Bengali Mango, p. 60

HERO PANELS



HERO 01 p. 206



HERO 02 p. 206



HERO 03 p. 207



HERO 04 p. 207




HERO 05 p. 208



HERO 06 p. 208



HERO 07 p. 209



HERO 08 p. 209

RYFLA PANELS



RYFLA 01 p. 210

TABLE OF CONTENTS

Colours	8
Glazing types	10
Door opening directions	11
Door leaf construction	12
Description of symbols	18

Internal doors

- BRILLIANT Collection	23
- ELEGANTE Collection	43
- PRESTIGE Collection	65
- BASIC Collection	113

Internal entrance doors 143

Made to Measure Doors 150

Door Frames and Accessories 187

Decorative panels

- HERO Collection	204
- RYFLA collection	210

Handles 212

Accessories 216

Technical information 220

VALUABLE INFORMATION

For the latest version of the catalogue, always go to:
vivento.pl/katalog



BRILLIANT COLLECTION



BA p. 24



BB p. 26



BC p. 28



BD p. 30



BE p. 32



BF p. 34



BG p. 36



BH p. 38



BO p. 40

PRESTIGE COLLECTION



RB p. 66



AN p. 68



PA p. 70



PB p. 72



PJ p. 82



PK p. 84



PL p. 86



PN p. 88



MI p. 98



PT p. 100



PU p. 102



PW p. 104

ELEGANTE COLLECTION



EA p. 44



EB p. 46



EC p. 48



ED p. 50



EE p. 52




EF p. 54



EG p. 56



EH p. 58



EI p. 60



EK p. 62



PC p. 74



PE p. 76



PH p. 78



PI p. 80



PO p. 90



PP p. 92



PQ p. 94



PR p. 96



PX p. 106



PY p. 108



PZ p. 110

drzwi na **miarę** VIVENTO

Please contact us if you don't find the door you are looking for. Our Bespoke Doors Department is looking forward to NEW challenges!

Write to us: info@viventopl

BASIC COLLECTION



STANDARD
p. 114



ASTORIA
VISIOSUN
p. 116



ASTORIA
MIRROR
p. 118



ASTORIA
BLACK
p. 120



ASTORIA
GOLD
p. 122



ASTORIA
WHITE
p. 124



PRESTON
p. 128



MANHATTAN
p. 129



FLAVIO
p. 129



BOSTON
p. 130



CLASSIC
p. 130



LAMBRO
p. 131



CENTUR
p. 131



MEDIOLAN
p. 132



PESARO
p. 132



TRIVENTO
p. 133



DALLAS
p. 133



MADRYT
p. 134



MACADI-3
p. 134



CARSON
p. 135



PANAMA
p. 135



PORTO
p. 136



RIMINI
p. 136



SOFIA
p. 137



LIMA
p. 137



VERONA
p. 138



VEDI
p. 138



VENTE
p. 139



SAPPORO
p. 139



ANATOLIA
p. 140



SARA
p. 141

INTERNAL ENTRANCE DOORS



SOLID PLUS
STANDARD
p. 144



SOLID PLUS
ASTORIA
p. 144



SOLID PLUS
FT
p. 144



SOLID PLUS
VEGAS
p. 144



ACOUSTIC
p. 146



EI30, EI60
FIRE ACOUSTIC
p. 148

MADE TO MEASURE DOORS



INVE Versatile Doors
p. 156



SIMPLE Non-rebated Doors
p. 158




Reversed swing doors
p. 160



INVISIBLE flush with
the wall doors p. 162



CONTRAST Doors
p. 164



Dual Colour Doors
p. 166



Angled doors
p. 167



Doors with pet flap
p. 168



INSET doors with access
shutter window p. 170



SWING double-acting doors
p. 172



Double doors
p. 174



Wall-mounted system
sliding doors p. 176



MAGIC wall-mounted system
sliding doors p. 178



LOFT wall-mounted system
sliding doors p. 180



Pocket sliding door system
p. 182



FOLD bifold doors
p. 184

COLOURS

Choose the perfect colour for you!

We offer as many as six Colour Group ranges, so everyone will find a look that works perfectly for them. Dark wood effect tones will add elegance and chic, while light hues will enlarge the space visually. Or would you prefer something more modern and original? If so, search our door ranges for white, grey, black or even navy blue finishes. Choose a door that perfectly matches your interior.

All colours or finishing layers shown in the catalogue have been obtained by printing which, limited as it is, may have affected their real-life lookp. The perception of colour is also influenced by lighting, the type of substrate and its texture, and the colour of the surroundingp. A sample size exhibited here will also have some effect on how one will actually assess its colour and texture, which is why we recommend that you use reference samples and the products on display during a visit to one of our showroomp. The finishing layer sample shown for reference is only one slice of a whole. Decorative foil is made to imitate nature and is varied in itself. Depending on which part of a roll is used, the product may differ from its reference sample, which is not a defect.

PVC GROUP

The door leaves are finished with a high quality PVC film 0.30-0.50 mm thick that creates a wood grain effect (excluding the Supermatt Grey finishing layer). High resistance to mechanical damage, staining and UV radiation makes these doors ideal for use in both residential and public buildingp. The door frames are made in the PP range.



White Grain




Supermatt Grey



Natural Grandson Oak

PP GROUP

The doors are finished with decorative polypropylene-based film 0.20 mm thick coated with a transparent thermosetting varnish to protect its surface from scratchep. A high quality product that can be used in both high foot traffic and residential buildingp.



Supermatt White



White Grain



Supermatt Grey



Light Grey



Beige Cashmere




Navy blue



Natural Grandson Oak

CPL GROUP

The doors feature a high quality two-layer laminate finish 0.20 mm thick consisting of paper impregnated with thermosetting resins and a backing material to give the product elasticity. The laminate has a high surface hardness, resistance to scratching and abrasion, plus in the Luminous Grey and Walnut shades, it provides a natural wood effect thanks to the mechanically produced texture on their surfacep.



Uni White



Uni Grey




Luminous Grey



Uni Anthracite



Walnut



Uni Black

CLPL GROUP

The door leaves and frames in this group are finished with extremely durable CLPL synthetic laminate 0.12-0.25 mm thick. The decorative layer is coated with melamine-acrylic-polyurethane resin, which perfectly protects the surface against abrasion, damage and the effects of light. The high quality facing bears a striking resemblance to beautiful, natural wood grain, which makes it the solution of choice for homes, flats, schools, offices and hotels.



Bleached Larch



Honey Oak




Spanish Oak



Old Oak

FF GROUP

Both the door leaves and frames are covered with abrasion-resistant wood grain finish foil 0.10-0.15 mm thick. Durable and carefully made, they are a perfect choice for customers looking for stunning effect.



Bianco



Sibiu White



Snow Oak



Silver Oak



Cornwall Oak



Halifax Oak



Columbia Walnut



Cedar



Sonoma Oak



Riviera Oak



Amber Oak



Natural Oak Gr



Catania Oak



Delano Oak



Nussbaum Walnut




Bengali Mango



Anthracite Oak

LAK GROUP

The door leaves of this group come with a varnished HDF finish 3 mm or 6 mm thick, coated with a UV filter coating and providing increased scratch resistance. They guarantee trouble-free use for many years. A distinctive quality of this colour group is that the colour of the door leaf differs in shade from that of the door frame, finishes and glazing beads.



White



Bleached Oak



Silver Oak



Scandinavian Elm

VALUABLE INFORMATION



The LAK colour group is characterised by the difference in shade between the door leaf and frame as well as the trim and glazing beads.

GLAZING TYPES

You can create a unique interior with our wide selection of glassep. Our range includes frosted, transparent, motif and coloured glass, all 4 mm thick. Choose one of them to provide your doors with a personalised look and create an interesting decorative effect. For doors installed in your bathroom or bedroom, specially glazed doors have the practical feature of providing privacy. Explore our glazing type range and choose the one that best suits your needs and tastep.



Tempered Satin



Tempered bevelled Satin



Transparent tempered bevelled



Satin VSG 2.2.1



Satin deco



Satin lines



Lacomat



Visiosun



Chinchila



White bark effect



Tempered Satin macadi



Tempered Sapporo Satin



Black VSG 2.2.1



Black Lacobel



Gold Lacobel



Lacobel White



Black Visiosun Lacobel




Mirror




Graphite mirror

DOOR OPENING DIRECTIONS


SINGLE DOORS



Left




Versatile Doors
p. 156




Right

REVERSED SWING




Left




Right

DOUBLE DOORS




Left




Right

FOLD




Left




Right

SLIDING



To left




To right

DOOR LEAF CONSTRUCTION

THE BRILLIANT RAIL AND STILE DOORS

Door leaf thickness 40 mm

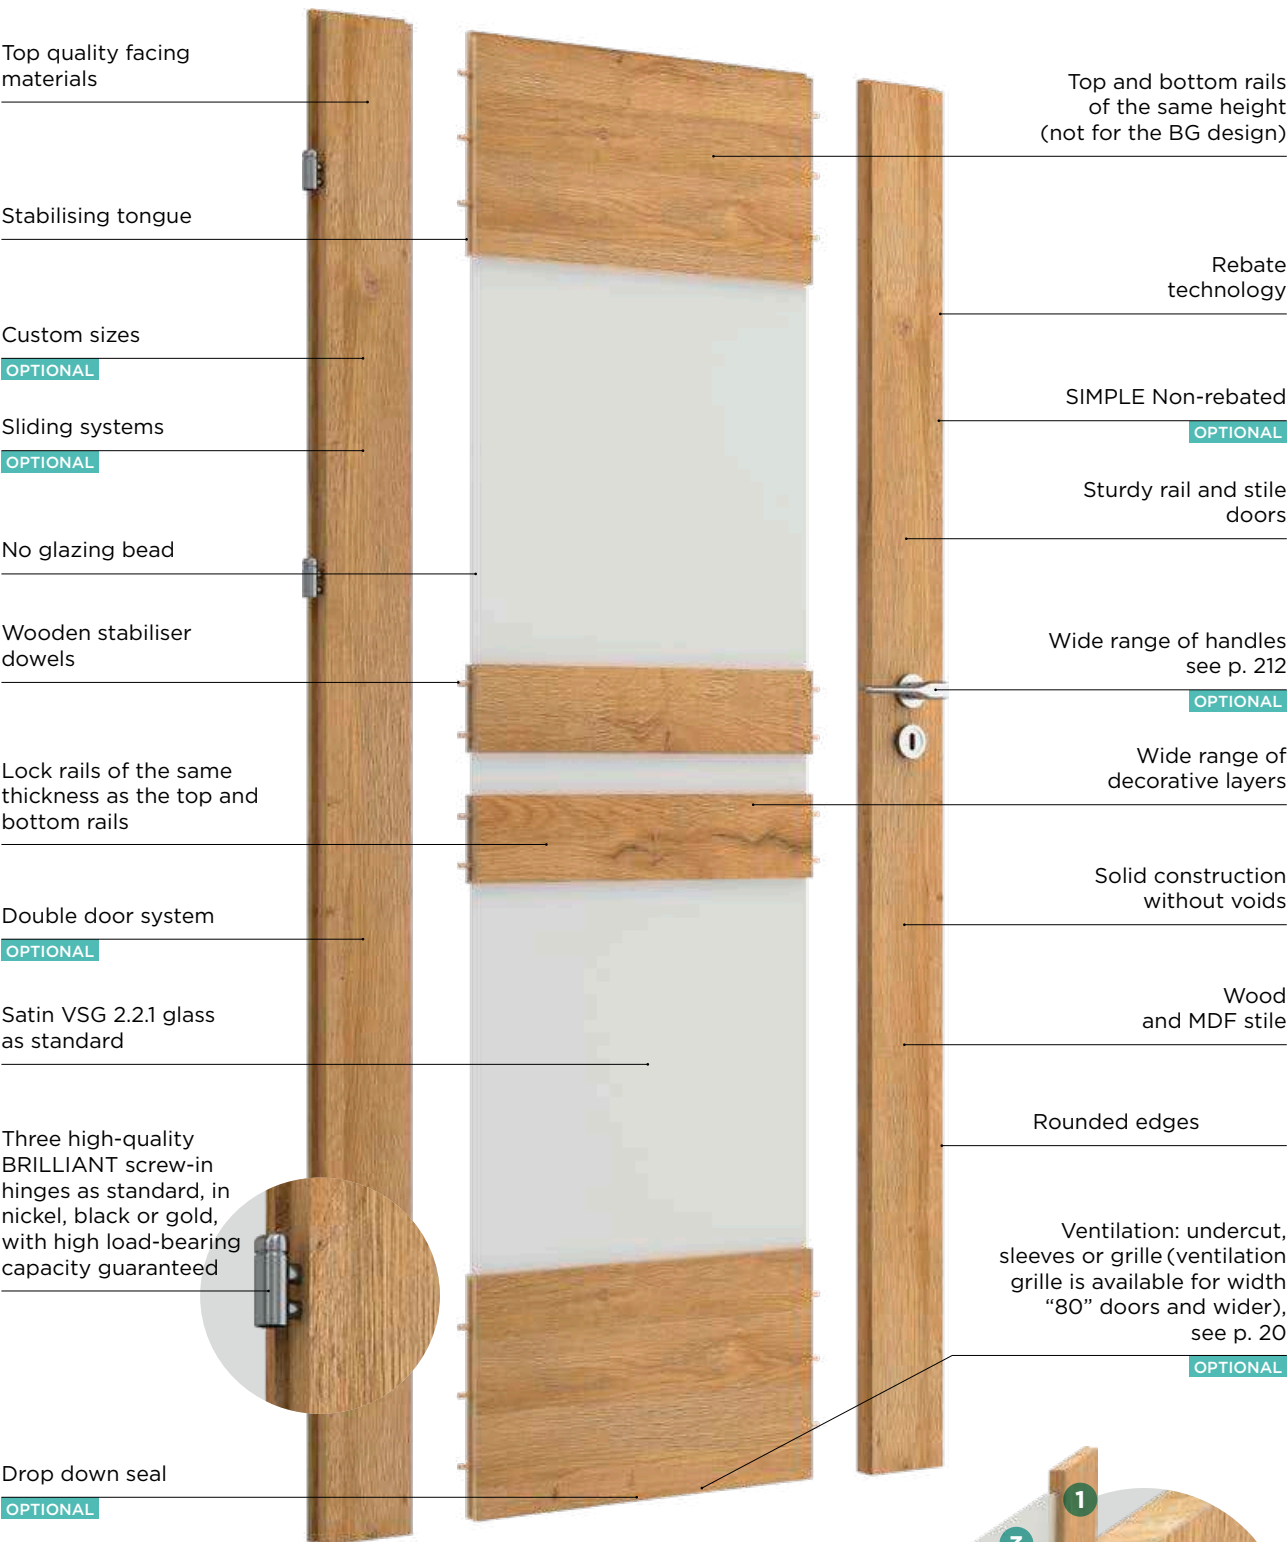


VALUABLE INFORMATION

Remember to select the right colour for the hinge to match the colour of the handle




1. Stile made of wood and MDF composite, thickness 40 mm
2. The MDF rails are all of equal thickness: 30 mm
3. 9 mm panels with decorative layer or glass thickness 4 mm
4. Wooden dowels
5. Stabilising tongues

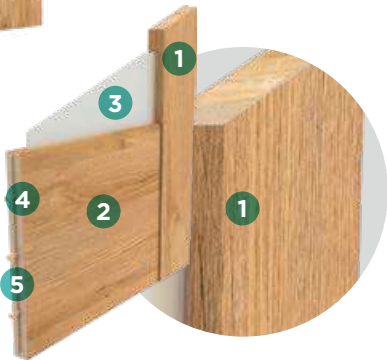

DOOR LEAF CONSTRUCTION

ELEGANTE RAIL AND STILE DOORS


Door leaf thickness 38 mm

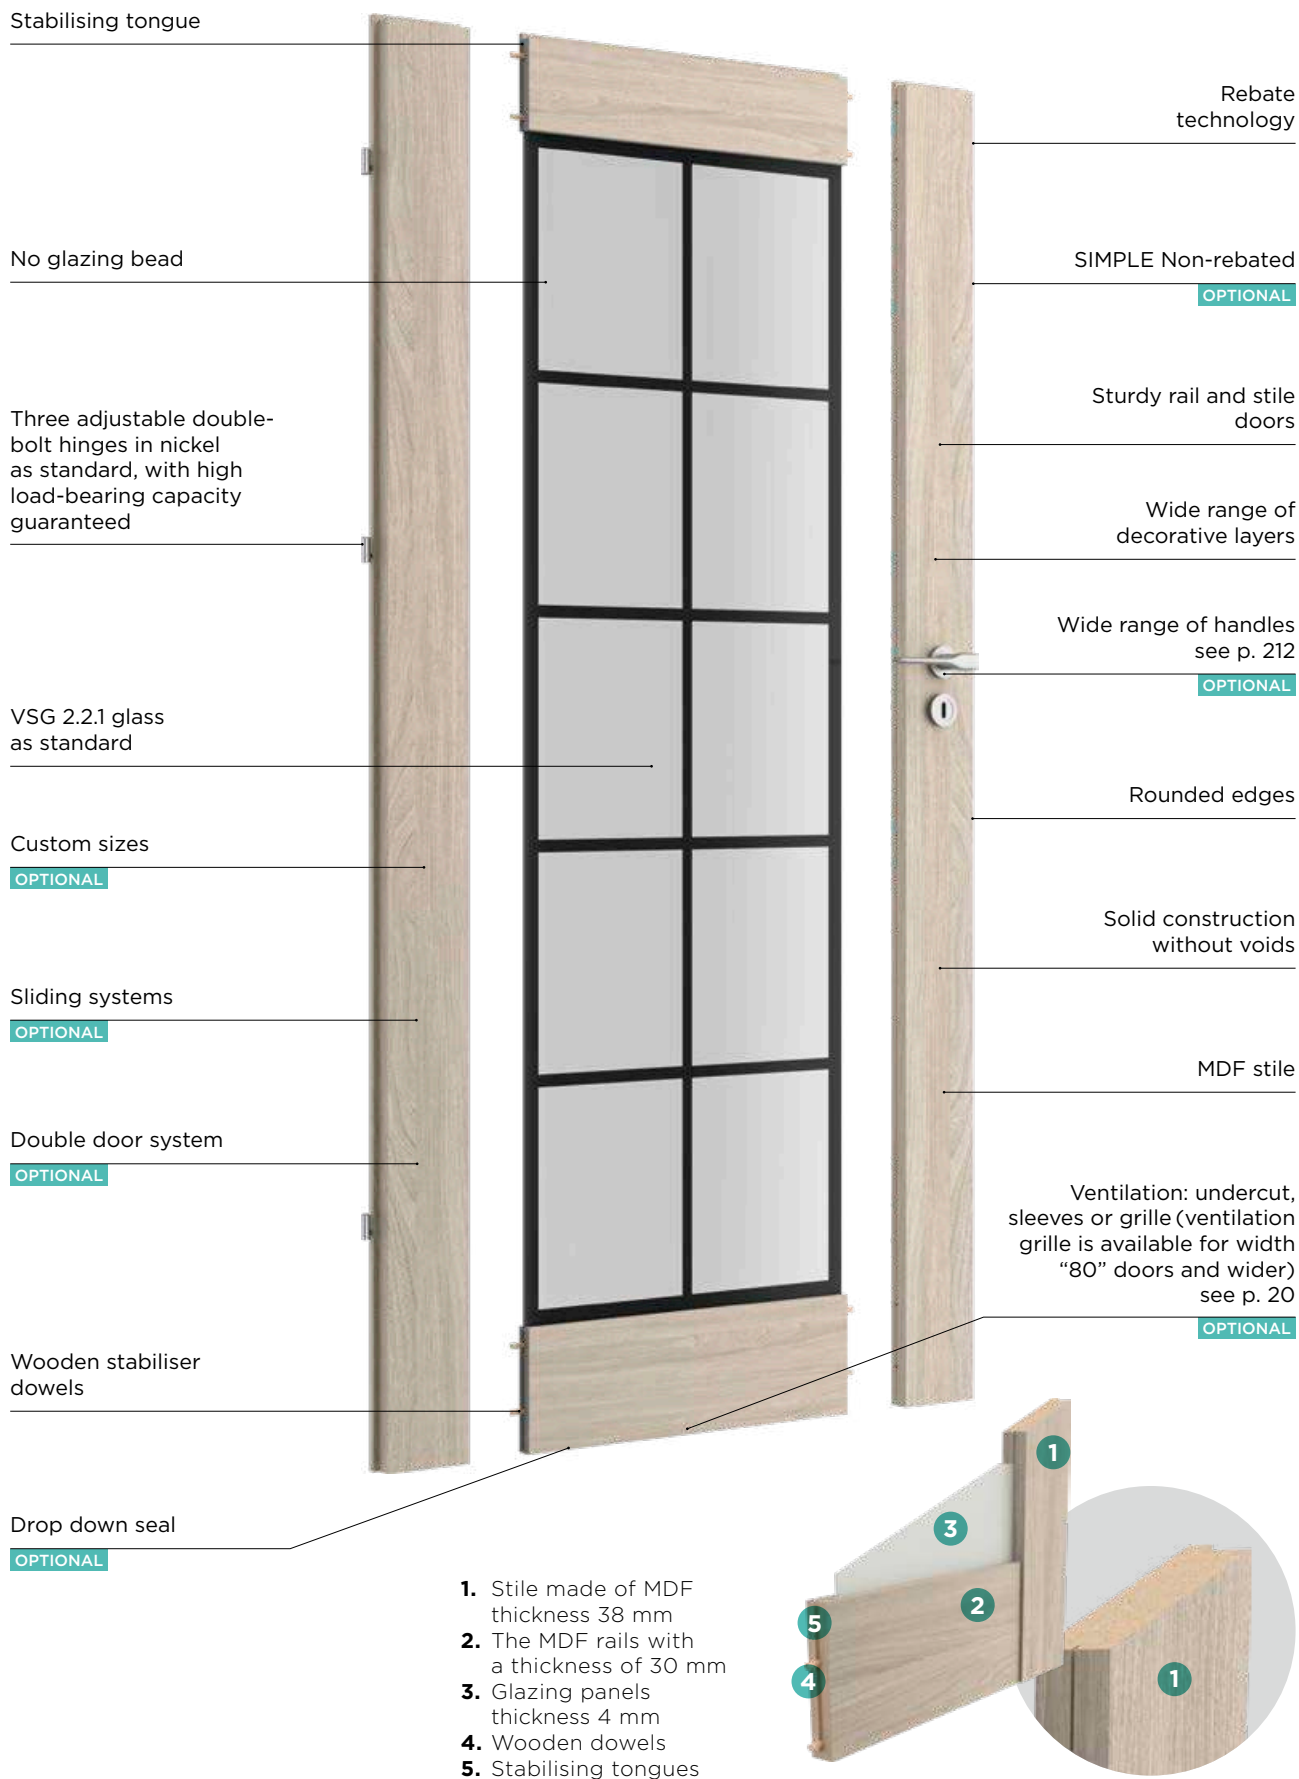


DOOR LEAF CONSTRUCTION

THE PRESTIGE RAIL AND STILE DOORS

Door leaf thickness 38 mm

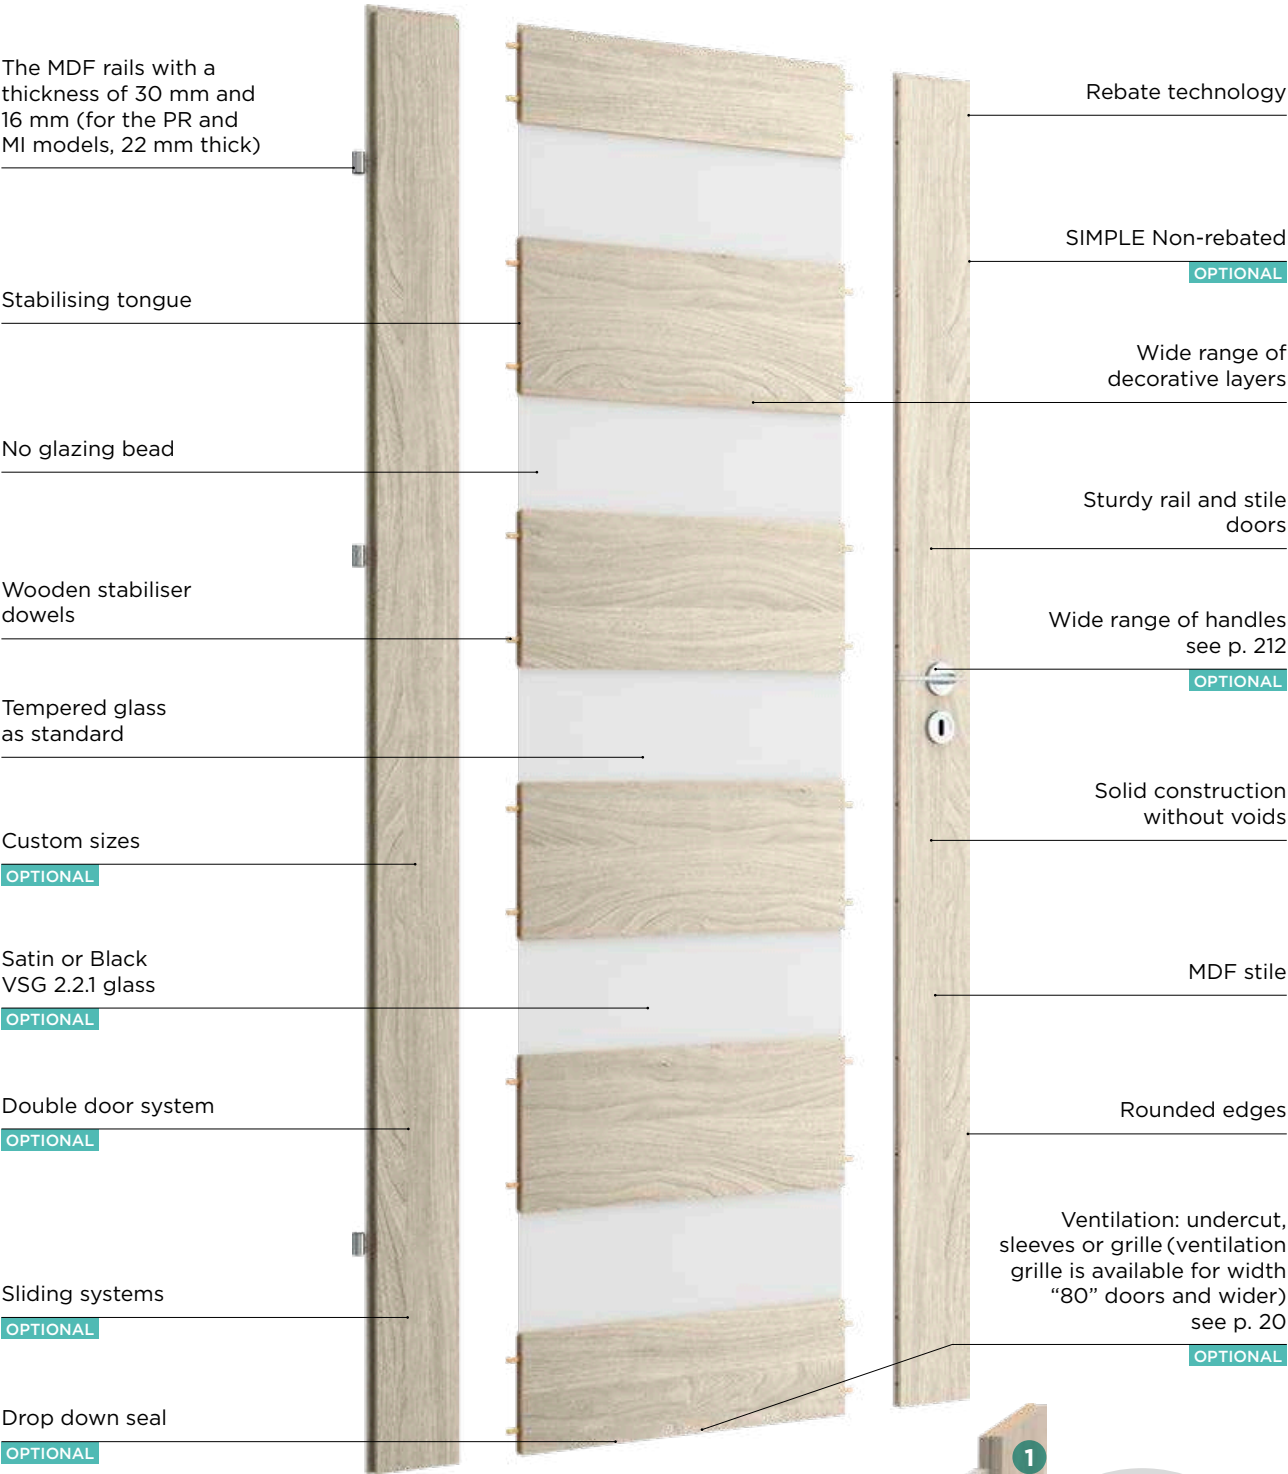

1. Stile made of MDF thickness 38 mm
2. The MDF rails with a thickness of 30 mm and 16 mm (for the PR and MI models, 22 mm thick)
3. Panels 6 or 9 mm thick with decorative layer or 4 mm thick glass
4. Wooden dowels
5. Stabilising tongues

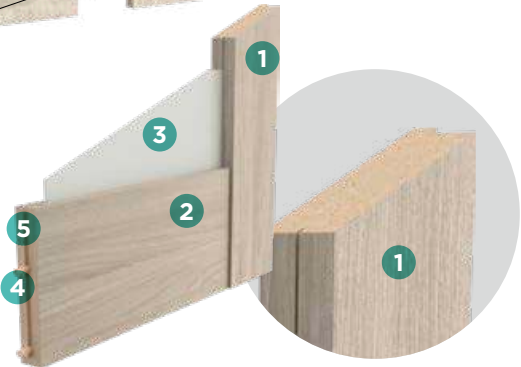

DOOR LEAF CONSTRUCTION

BASIC FLUSH DOORS

Door leaf thickness 40 mm

Door closer reinforcement

OPTIONAL

Standard edge with visible glue thread stitch

The BASIC Collection doors come with glue thread stitches with a sharp edge at the junction of two different materials, the door face and the edging, which is a characteristic quality of the product.



Third hinge for increased load resistance

OPTIONAL

Soft edge (rounded, with edging bevelled towards the door face surface)

OPTIONAL

Sliding systems

OPTIONAL

Timber construction

OPTIONAL

Rebate technology

SIMPLE Non-rebated

OPTIONAL

Custom sizes

OPTIONAL

2 screw-in hinges in zinc white for high load-bearing capacity

Rebate 20 mm

OPTIONAL

Double MDF stile and rail

Double wooden stile and rail

OPTIONAL

Double door system

OPTIONAL

Bi-coloured doors

OPTIONAL

Modern glazing bead

wide selection of glass

Solid core filling

OPTIONAL

Contrast system

OPTIONAL

Reversed-swing system

OPTIONAL

Wide range of handles see p. 212

Beading fixed with headless pins



Wide range of decorative layers

Ventilation: undercut, sleeves or grille see p. 20

OPTIONAL


Drop down seal

OPTIONAL

DOOR LEAF CONSTRUCTION

SOLID PLUS BASIC DOORS

Door leaf thickness 46 mm

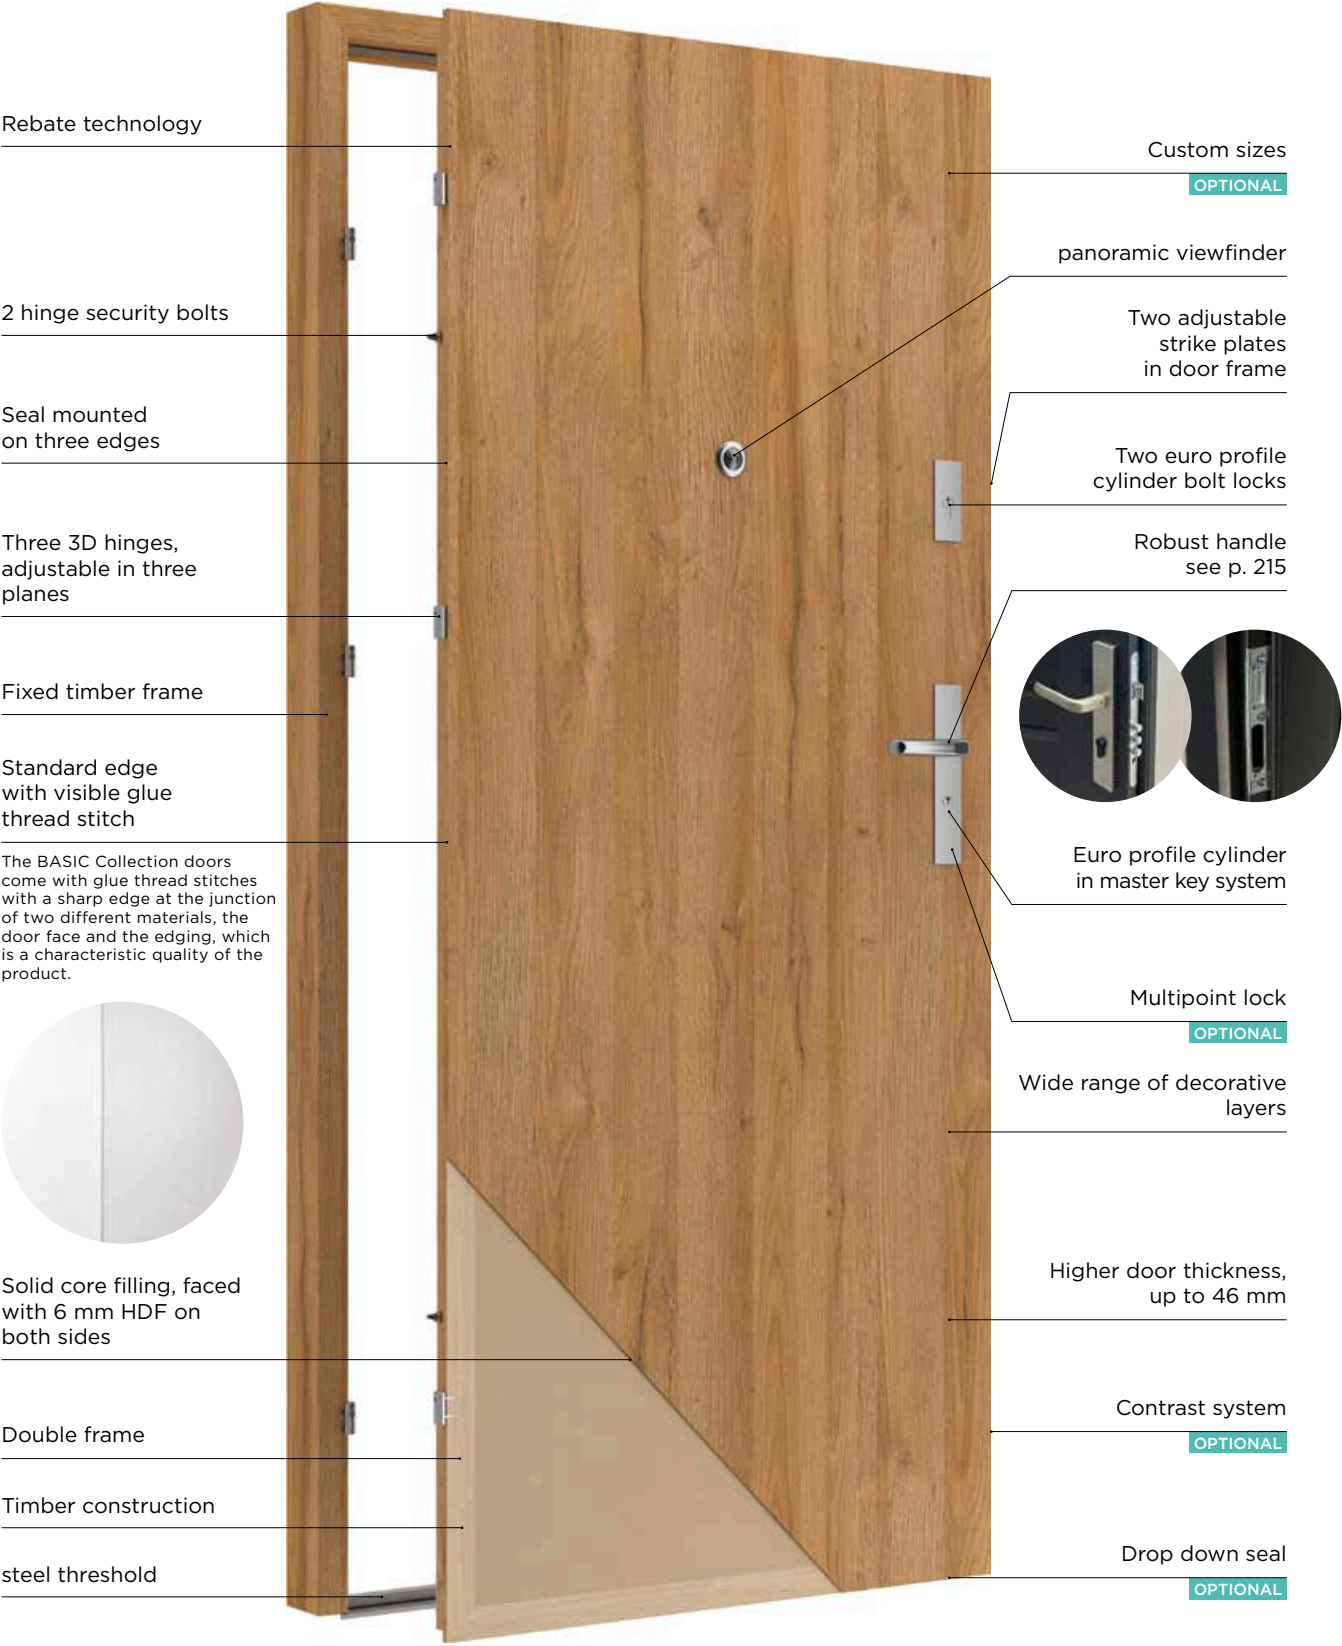

DESCRIPTION OF SYMBOLS

TYPES OF DOOR LEAF CONSTRUCTION

1. Panels with a decorative layer or glass
2. Solid and robust frame in MDF (ELEGANTE and PRESTIGE) or wood and MDF (BRILLIANT)
3. Wooden dowels
4. Stabilising tongues



Rail and Stile Doors




RAIL AND STILE DOORS

Not only are the BRILLIANT, ELEGANTE and PRESTIGE ranges extraordinarily attractive, but they also last extremely long thanks to the rail and stile technology used in all models. It uses a solid, warp-resistant frame of rails and stiles consisting of wood-based panels or including wooden part. All the components are robust, as dowels and so-called stabilising tongues additionally strengthen and stabilise the door leaf. The rail and stile doors can be cut to size by up to 30 mm.

1. HDF outer layer (facing)
2. Strengthening and stabilising "honeycomb" core
3. Double MDF frame



MDF frame

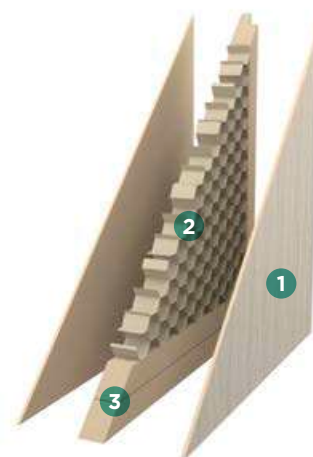


MDF CONSTRUCTION

The construction is based on a sturdy frame made of wood-based MDF with a strengthening and stabilising core layer called "honeycomb". The outer layer is a 3 mm thick wood-based HDF finished with a selected decorative layer. Thanks to the use of a double lower rail, the door can be cut to size by up to 30 mm.

1. HDF outer layer (facing)
2. Strengthening and stabilising "honeycomb" core
3. Double softwood frame



Timber construction

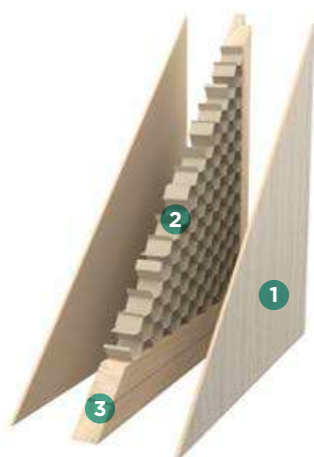


TIMBER FRAME

The technology available in the BASIC doors is a robust and timeless solution. The construction is based on a traditional softwood frame. The core layer is made of a strengthening and stabilising layer called "honeycomb". The outer layer, known as the facing, consists of a 3 mm thick wood-based HDF finished with a selected decorative layer. Thanks to the use of a double lower rail, the timber construction door can be cut to size by up to 60 mm.

1. HDF outer layer (facing)
2. Solid core board
3. Double softwood frame



Solid core board

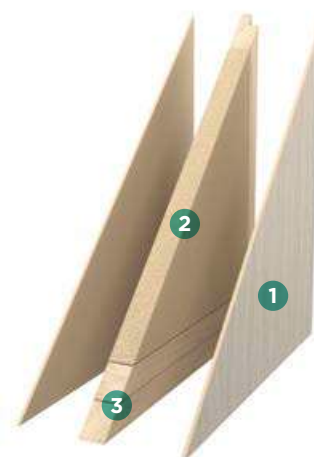

CONSTRUCTION WITH SOLID CORE FILLING

The core, made with a board, is a very durable and sturdy solution. A timber frame provides a basis for the construction, with the core built with a solid board. The outer layer is a 3 mm thick wood-based HDF finished with a decorative layer from a selected colour group. Thanks to the use of a double lower rail, the door can be cut to size by up to 60 mm.

VALUABLE INFORMATION

For structural reasons, ASTORIA models, sliding systems doors and double doors cannot be cut to size by the customer.



DESCRIPTION OF SYMBOLS



Tailor-made

MADE TO MEASURE DOORS

Your order can specify a door with a non-standard width or height, adjusted to the dimensions of an existing door opening. Options include additional hinges required for longer doors or a different lock position. For more information, see p. 150.

made to measure doors

V I V E N T O



Rail and Stile
Doors

RAIL AND STILE DOORS

A solid, warp-resistant frame of rails and stiles consisting of wood-based panels or wood and MDF. All its components are robust, as dowels and so-called stabilising tongues additionally strengthen and stabilise the door leaf. For more information, see p. 12, 13, 14, 17.



MDF
frame

MDF FRAME

MDF frame as standard. Timber frame available for the BASIC door collection at an extra charge. For more information, see p. 15 i 17.



Timber
construction

TIMBER FRAME

A robust solution available as an option for BASIC doorp. Softwood frame with reinforcing core layer, so-called "honeycomb". The facing is made of 3 mm thick wood-based HDF.



Solid core
filling

SOLID CORE BOARD

A standard solution for the SOLID PLUS door collection. Available as an option for BASIC collection doorp. For the "60", "70", "80", "90" and "110" door widths, an extra charge applies for an additional hinge.



Glazing
beads

GLAZING BEADS

BASIC collection doors are fitted with modern glazing beadp. For more information, see p. 15.



VSG 2.2.1
& VSG 3.3.1 Glass

VSG 2.2.1 & VSG 3.3.1 GLASS

Plain on both sides, the glass has increased resistance and mechanical strength. An option for the PRESTIGE door collection, and as standard in the BRILLIANT and ELEGANTE collectionp. For more information, see p. 10.



Tempered
glass

TEMPERED GLASS

Tempered satin glass with a thickness of 4 mm, as standard in the PRESTIGE collection.



60-90



100



100-200

DOOR WIDTH

"60", "70", "80" and "90" widths are available as standard. Other sizes ("100", "110") are charged extra according to the collection and door model selected. We manufacture double doors in the width range of "100" to "200", depending on the collection and door model.



Doors higher by
up to 240 mm



Doors higher by
up to 300 mm



Doors higher by
up to 450 mm

HIGHER DOORS

Remember that your choice is not limited to standard door heights. We can make doors in bespoke sizes and with the features described for your required door collection and for the chosen model.

Doors from the BRILLIANT collection can be extended by 240 mm, the ELEGANTE and PRESTIGE can be extended by 470 mm and doors from the BASIC collection by 450 mm.

Acoustic and Fire doors can be extended by up to 300 mm.



Doors higher by
up to 470 mm



2 hinges
as standard



3 hinges
as standard



Modern nickel
fittings



3D hinges



Black, white
or gold hinges

HARDWARE

The panel door collections, like BRILLIANT, ELEGANTE and PRESTIGE, use 3 screw-in hinges as standard, ensuring excellent door stability and high load bearing capacity. The ELEGANTE and PRESTIGE Collections come with double-bolt hinges covered with a nickel coating for a shiny and smart look. The top class BRI hinges in the BRILLIANT Collection emphasise the modern design of doors made for the most discerning users.

BASIC Collection doors are fitted with 2 hinges as standard (3 in the "90", "100" and "110" doors).

The reinforced doors from the SOLID PLUS Collection are fitted with 3 reinforced 3D hinges (adjustable in three planes).


An additional hinge is required for BASIC doors with solid core filling and the BASIC, BRILLIANT, ELEGANTE and PRESTIGE doors longer by 110 mm to the maximum within the collection.



Nickel hinges fitted as standard
in the BRILLIANT Collection



Black



White



Gold

Hinges fitted in the BRILLIANT Collection as an option at no extra cost



Nickel hinges fitted as standard in
the ELEGANTE & PRESTIGE collections



Galvanised hinges fitted as standard
in the BASIC Collection



3D hinges installed on the SOLID PLUS
doors as standard



SOFT
Edge

EDGE SOFT

Rounded, visually soft rebated door edges are available as an option for the BASIC Collection rebated doorp. Reducing the door's thickness, the edging is bevelled towards the face surface and its end is rounded. This way, the door circumference is highlighted when it is closed. We recommend using the SOFT edge system in combination with the Contrast System. Available finishing layers for the SOFT edge: Uni White, Uni Black, Silver Oak, Cornwall Oak, Halifax Oak, Riviera Oak, Bengali Mango, Nussbaum Walnut.

EDGE FINISH TYPES



SOFT
rebated door



Standard
rebated door



Rebated

REBATED DOORS

As standard in the BRILLIANT, ELEGANTE, PRESTIGE and BASIC collectionp. This system uses a door with a lip (recess, rebate) which overlaps the frame. A lock is concealed in the rebate. All visible hinges and decorative details on the doors highlight the character of both traditionally furnished interiors and modern onep.



SIMPLE
Non-rebated

NON-REBATED DOORS IN THE SIMPLE SYSTEM

Available as an option for the BRILLIANT, ELEGANTE, PRESTIGE and BASIC doorp. This system incorporates a straight door edge that forms a single plane with the door frame. Visually more modern, without decorative details, it is ideal for minimalist interior décor.



Sliding
Non-rebated

NON-REBATED DOORS IN THE SLIDING SYSTEM

A door without a rebate, with straight edges, uses a pull handle instead of a lever handle. A modern and minimalist solution for a wide range of applicationp.

DESCRIPTION OF SYMBOLS

VENTILATION

Doors installed in rooms that require proper ventilation (e.g. bathrooms) must, in accordance with building regulations, have special ventilation openings with a total area of free air gap of 0.022 m². The indicated air throughput is met by the air grille. Other available solutions can also be used, with adequate clearance between the door leaf and the floor, depending on the width of the leaf, so that the total air throughput is 0.022 m².

For detailed information, please find the description of the selected door model. For shorter, made-to-measure doors, check that the chosen form of ventilation is feasible.



Ventilation sleeves



Ventilation sleeves

VENTILATION SLEEVES FOR DOORS: BRILLIANT, ELEGANTE, PRESTIGE I BASIC

PLASTIC



PLASTIC VENTILATION SLEEVES FOR DOORS: BASIC



A wide range of colours to match the colours of the doors

METAL



NUMBER OF SLEEVES IN DOOR LEAVES

Door leaf width	BRILLIANT, ELEGANTE I PRESTIGE	BASIC
60	3	4
70	4	4
80	4	5
90, 100	5	5
110	-	5




Ventilation grille



Ventilation grille

PLASTIC VENTILATION GRILLE

internal dimension 440x90 mm

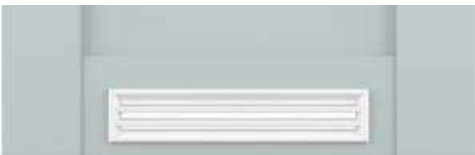

AVAILABLE COLOURS:



STAINLESS STEEL AIR GRILLE

internal dimension 440x90 mm



AVAILABLE COLOURS:



For the BRILLIANT, ELEGANTE and PRESTIGE door collections, the air grille is available for doors with a width no less than “80”. The Acoustic door series is provided with a fire rated air grille (excluding smoke control doors). When using an air grille, you can shorten the door on your own up to a maximum of 30 mm.





Ventilation cut



Ventilation cut

VENTILATION UNDERCUT

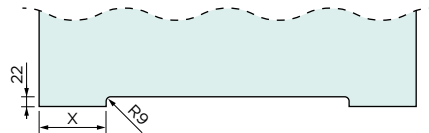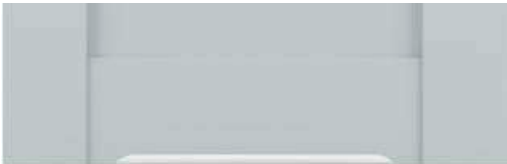

Flush door	X = 150 mm
Rebated stile and rail door	X = 160 mm
Non-rebated stile and rail door	X = 147 mm



Bolt locks

BOLT LOCKS

As standard, the SOLID PLUS reinforced doors are fitted with: Two mortise pin tumbler cylinder locks with a euro profile cylinder (so-called bolt locks) provide tight closure and a feeling of security.



Door viewer

200° PANORAMIC DOOR VIEWER

Standard for the SOLID PLUS door collection. High quality door viewer available in various colourp.



Thresholds

THRESHOLDS

Depending on users' individual needs, a wooden threshold without any decorative layer or a stainless steel threshold, both with seals, can be supplied to match a selected door. Installing a threshold has a positive effect on the door tightness, thermal insulation and aestheticp. They come in standard sizes, and precutting them to size in factory for non-standard doors is not possible.



Drop down seal

DROP DOWN SEAL

Standard Acoustic door component, available as an option in the BRILLIANT, ELEGANTE, PRESTIGE, BASIC and SOLID PLUS door seriep. It provides a barrier that protects rooms from penetration by air, sound, dust, insects and even smoke and fire. It improves sound and thermal insulation.



Sound insulation

ACOUSTIC INSULATION

The special construction of Vivento acoustic doors and a well-thought-out sealing system ensure excellent sound insulation at a level of 32 dB (27 dB for double doors).



Fire resistant EI30/EI60

FIRE EI30/EI60

The practical and reliable Acoustic Fire rated doors (EI30 and EI60) will provide the necessary fire protection in the fire resistance range of EI30 or EI60, respectively.



Door closer

DOOR CLOSER

Fire rated doors are critical for a building's safety, which is why they must meet conditions such as integrity and access control, as well as being fitted with a door closer that is suitable for the width and weight of a door leaf. The Vivento Acoustic fire rated doors come with either surface-mounted or concealed fully approved door closerp. The door closer is an essential accessory for fire rated doors and an option for other door collections.



Reversible doors

REVERSIBLE DOORS

Reversed swing doors or just reverse doors are different from conventional doors in the way they are installed. They swing open towards the interior of a room, as their external side is flush with the wall. In other words, they typically swing in, although they look as if they swung out. For example, they are perfect for small corridorp.



Two-tone doors

DOUBLE-COLOUR DOORS

You can create an original colour accent in your home with this door solution which uses two colours to match different décors in the rooms on both sides of a door. Dual Colour Doors feature the construction of the models from the BASIC Collection within one of the Colour Group rangep.



BRILLIANT BC-01, CPL Uni Anthracite

INTERNAL DOORS

／ **BRILLIANT**

Modern design, top quality materials, exceptional durability. BRILLIANT collection doors are an excellent choice for the most discerning users.

BRILLIANT BA-01, CPL Uni White

BRILLIANT BA /

COLOUR: CPL Uni White



BA-01



BA-02



BA-03



BA-04



BA-05



BA-06

AVAILABLE WIDTHS

- rebated system S2 in mm: „60“=644, „70“=744, „80“=844, „90“=944
- SIMPLE non-rebated system S2 in mm: „60“=618, „70“=718, „80“=818, „90“=918

OPTIONS

- “100” width
- Width smaller than “60”
- Non-standard width

AVAILABLE HEIGHTS

- rebated system H2 in mm: 2030
- SIMPLE non-rebated system H2 in mm: 2017

OPTIONS

- Up to 60 mm shorter
- More than 60 mm shorter (feasibility evaluated case by case)
- Up to 240 mm longer (feasibility evaluated case by case)
- Additional hinge (required for doors that are 110 mm to 240 mm longer)
- Change of lock position and bottom hinge (recommended for doors with a non-standard height)

CONSTRUCTION

- A robust rail and stile construction made of wood and MDF

OPTIONS

- Non-rebated door, SIMPLE system (3 hinges)
- Non-rebated door, wall-mounted standard sliding system, wall-mounted and pocket LOFT doors (excluding the PP colour group)
- Inactive door leaf for double doors, width S2 in mm: 420-609
- Inactive door leaf for double doors, width S2 in mm: 610, 710, 810, 910
- Inactive door leaf for double doors, width S2 in mm: 1010

COMPONENTS


- VSG 2.2.1 satin glass, plain finish on both sides, 4 mm thick
- A mortise key lock (options include a turn and release lock, a lock with a euro profile cylinder or without the bottom hole)
- BRILLIANT screw-in hinges, 3 pc., nickel coloured (black, white or gold options at no extra charge)

OPTIONS

- Door restrictor arm (applies to doors in the SIMPLE system)
- Drop down seal
- Ventilation undercut
- Metal, round or square ventilation sleeves in Nickel or Bronze (pcs)
- Plastic, square ventilation sleeves in Black matt, White, Gold, Satin Chrome or Chrome (pcs)
- Plastic ventilation grille in matt silver for “80”, “90” and “100” doors
- Stainless steel ventilation grille in inox or black color for the door leaf „80”, „90” i „100”


DOOR FRAME VARIANTS

- Fixed: MDF (p. 189)
- Adjustable: DIN (p. 196), available for wall thickness min. 80 mm in the rebated system and min. 100 mm in the non-rebated system.

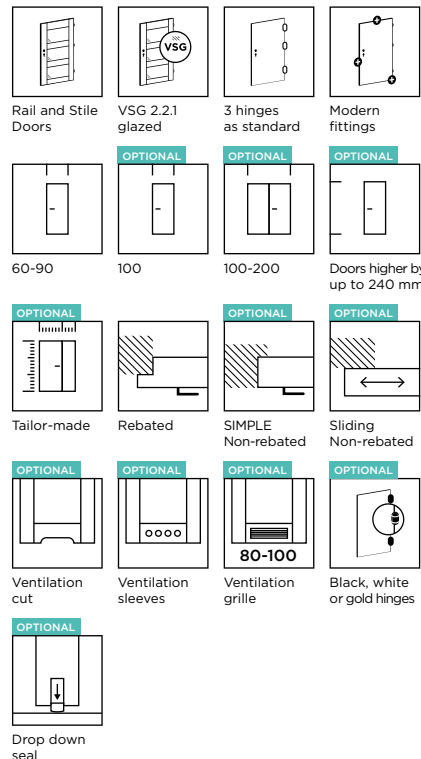


AVAILABLE COLOURS:


PP GROUP

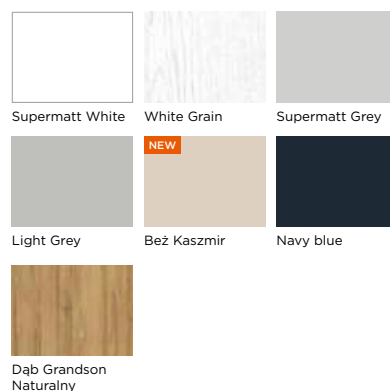

CPL GROUP

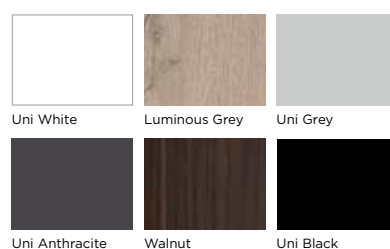

CLPL GROUP




BRILLIANT BB-02, CPL Uni Grey

BRILLIANT BB /



COLOUR: CPL Uni Grey



BB-01



BB-02



BB-03

AVAILABLE WIDTHS

- rebated system S2 in mm: „60“=644, „70“=744, „80“=844, „90“=944
- SIMPLE non-rebated system S2 in mm: „60“=618, „70“=718, „80“=818, „90“=918

OPTIONS

- “100” width
- Width smaller than “60”
- Non-standard width

AVAILABLE HEIGHTS

- rebated system H2 in mm: 2030
- SIMPLE non-rebated system H2 in mm: 2017

OPTIONS

- Up to 60 mm shorter
- More than 60 mm shorter (feasibility evaluated case by case)
- Up to 240 mm longer (feasibility evaluated case by case)
- Additional hinge (required for doors that are 110 mm to 240 mm longer)
- Change of lock position and bottom hinge (recommended for doors with a non-standard height)

CONSTRUCTION

- A robust rail and stile construction made of wood and MDF

OPTIONS

- Non-rebated door, SIMPLE system (3 hinges)
- Non-rebated door, wall-mounted standard sliding system, wall-mounted and pocket LOFT doors (excluding the PP colour group)
- Inactive door leaf for double doors, width S2 in mm: 420-609
- Inactive door leaf for double doors, width S2 in mm: 610, 710, 810, 910
- Inactive door leaf for double doors, width S2 in mm: 1010

COMPONENTS


- VSG 2.2.1 satin glass, plain finish on both sides, 4 mm thick
- A mortise key lock (options include a turn and release lock, a lock with a euro profile cylinder or without the bottom hole)
- BRILLIANT screw-in hinges, 3 pc., nickel coloured (black, white or gold options at no extra charge)

OPTIONS

- Door restrictor arm (applies to doors in the SIMPLE system)
- Drop down seal
- Ventilation undercut
- Metal, round or square ventilation sleeves in Nickel or Bronze (pcs)
- Plastic, square ventilation sleeves in Black matt, White, Gold, Satin Chrome or Chrome (pcs)
- Plastic ventilation grille in matt silver for “80”, “90” and “100” doors
- Stainless steel ventilation grille in inox or black color for the door leaf „80”, „90” i „100”


DOOR FRAME VARIANTS

- Fixed: MDF (p. 189)
- Adjustable: DIN (p. 196), available for wall thickness min. 80 mm in the rebated system and min. 100 mm in the non-rebated system.

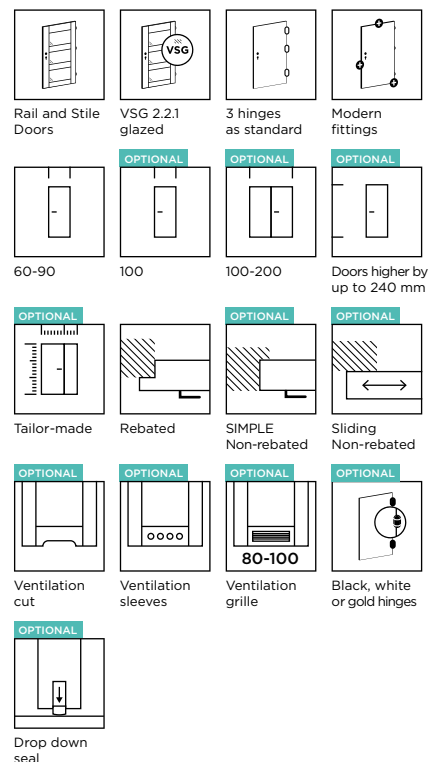


AVAILABLE COLOURS:


PP GROUP

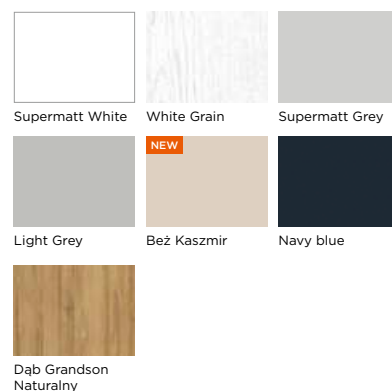

CPL GROUP

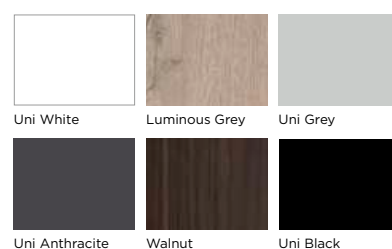


CLPL GROUP



BRILLIANT BC-01, CPL Uni Anthracite

BRILLIANT BC /

COLOUR: CPL Uni Anthracite



BC-01



BC-02



BC-03

AVAILABLE WIDTHS

- rebated system S2 in mm: „60”=644, „70”=744, „80”=844, „90”=944
- SIMPLE non-rebated system S2 in mm: „60”=618, „70”=718, „80”=818, „90”=918

OPTIONS

“100” width

Width smaller than “60”

Non-standard width

AVAILABLE HEIGHTS

- rebated system H2 in mm: 2030
- SIMPLE non-rebated system H2 in mm: 2017

OPTIONS

Up to 60 mm shorter

More than 60 mm shorter (feasibility evaluated case by case)

Up to 240 mm longer (feasibility evaluated case by case)

Additional hinge (required for doors that are 110 mm to 240 mm longer)

Change of lock position and bottom hinge (recommended for doors with a non-standard height)

CONSTRUCTION

- A robust rail and stile construction made of wood and MDF

OPTIONS

Non-rebated door, SIMPLE system (3 hinges)

Non-rebated door, wall-mounted standard sliding system, wall-mounted and pocket LOFT doors (excluding the PP colour group)

Inactive door leaf for double doors, width S2 in mm: 420-609

Inactive door leaf for double doors, width S2 in mm: 610, 710, 810, 910

Inactive door leaf for double doors, width S2 in mm: 1010

COMPONENTS

- VSG 2.2.1 satin glass, plain finish on both sides, 4 mm thick
- A mortise key lock (options include a turn and release lock, a lock with a euro profile cylinder or without the bottom hole)
- BRILLIANT screw-in hinges, 3 pc., nickel coloured (black, white or gold options at no extra charge)

OPTIONS

Door restrictor arm (applies to doors in the SIMPLE system)

Drop down seal

Ventilation undercut

Metal, round or square ventilation sleeves in Nickel or Bronze (pcs)


Plastic, square ventilation sleeves in Black matt, White, Gold, Satin Chrome or Chrome (pcs)

Plastic ventilation grille in matt silver for “80”, “90” and “100” doors

Stainless steel ventilation grille in inox or black color for the door leaf „80”, „90” i „100”


DOOR FRAME VARIANTS

- Fixed: MDF (p. 189)
- Adjustable: DIN (p. 196), available for wall thickness min. 80 mm in the rebated system and min. 100 mm in the non-rebated system.

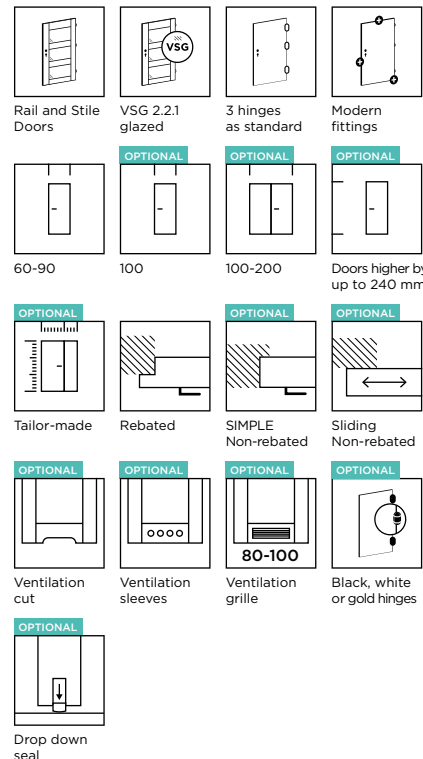


AVAILABLE COLOURS:


PP GROUP

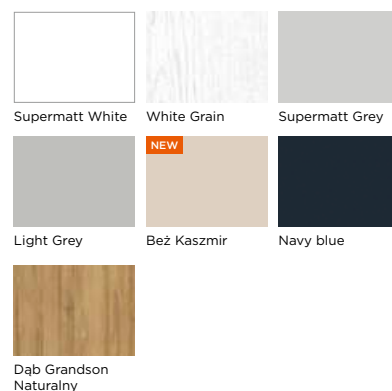

CPL GROUP

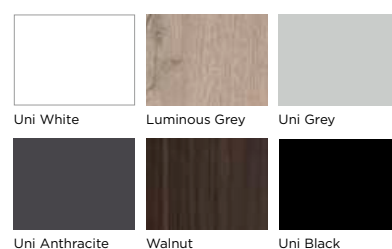

CLPL GROUP



BRILLIANT BD-02, CPL Luminous Grey

BRILLIANT BD /

COLOUR: CPL Luminous Grey



BD-01



BD-02



BD-03



BD-04



BD-05



BD-06

AVAILABLE WIDTHS

- rebated system S2 in mm: „60”=644, „70”=744, „80”=844, „90”=944
- SIMPLE non-rebated system S2 in mm: „60”=618, „70”=718, „80”=818, „90”=918

OPTIONS

“100” width

Width smaller than “60”

Non-standard width

AVAILABLE HEIGHTS

- rebated system H2 in mm: 2030
- SIMPLE non-rebated system H2 in mm: 2017

OPTIONS

Up to 60 mm shorter

More than 60 mm shorter (feasibility evaluated case by case)

Up to 240 mm longer (feasibility evaluated case by case)

Additional hinge (required for doors that are 110 mm to 240 mm longer)

Change of lock position and bottom hinge (recommended for doors with a non-standard height)

CONSTRUCTION

- A robust rail and stile construction made of wood and MDF

OPTIONS

Non-rebated door, SIMPLE system (3 hinges)

Non-rebated door, wall-mounted standard sliding system, wall-mounted and pocket LOFT doors (excluding the PP colour group)

Inactive door leaf for double doors, width S2 in mm: 420-609

Inactive door leaf for double doors, width S2 in mm: 610, 710, 810, 910

Inactive door leaf for double doors, width S2 in mm: 1010

COMPONENTS

- VSG 2.2.1 satin glass, plain finish on both sides, 4 mm thick
- A mortise key lock (options include a turn and release lock, a lock with a euro profile cylinder or without the bottom hole)
- BRILLIANT screw-in hinges, 3 pc., nickel coloured (black, white or gold options at no extra charge)

OPTIONS

Door restrictor arm (applies to doors in the SIMPLE system)

Drop down seal

Ventilation undercut

Metal, round or square ventilation sleeves in Nickel or Bronze (pcs)


Plastic, square ventilation sleeves in Black matt, White, Gold, Satin Chrome or Chrome (pcs)

Plastic ventilation grille in matt silver for “80”, “90” and “100” doors

Stainless steel ventilation grille in inox or black color for the door leaf „80”, „90” i „100”


DOOR FRAME VARIANTS

- Fixed: MDF (p. 189)
- Adjustable: DIN (p. 196), available for wall thickness min. 80 mm in the rebated system and min. 100 mm in the non-rebated system.

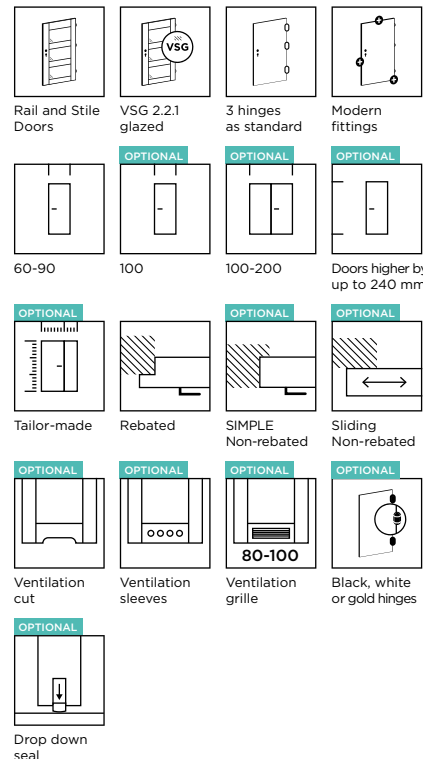


AVAILABLE COLOURS:


PP GROUP

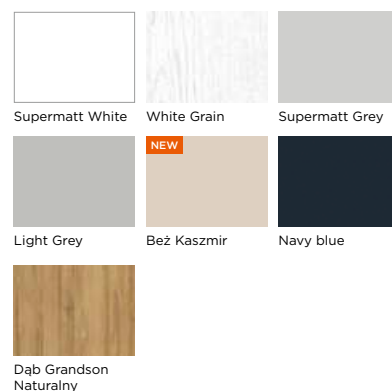

CPL GROUP

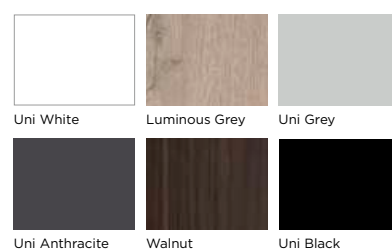

CLPL GROUP





BRILLIANT BE-01, PP Supermatt Grey

BRILLIANT BE /

COLOUR: PP Supermatt Grey



BE-01

BE-02

BE-03

BE-04

BE-05

BE-06

BE-07

BE-08

AVAILABLE WIDTHS

- rebated system S2 in mm: „60“=644, „70“=744, „80“=844, „90“=944
- SIMPLE non-rebated system S2 in mm: „60“=618, „70“=718, „80“=818, „90“=918

OPTIONS

- “100” width
- Width smaller than “60”
- Non-standard width

AVAILABLE HEIGHTS

- rebated system H2 in mm: 2030
- SIMPLE non-rebated system H2 in mm: 2017

OPTIONS

- Up to 60 mm shorter
- More than 60 mm shorter (feasibility evaluated case by case)
- Up to 240 mm longer (feasibility evaluated case by case)
- Additional hinge (required for doors that are 110 mm to 240 mm longer)
- Change of lock position and bottom hinge (recommended for doors with a non-standard height)

CONSTRUCTION

- A robust rail and stile construction made of wood and MDF

OPTIONS

- Non-rebated door, SIMPLE system (3 hinges)
- Non-rebated door, wall-mounted standard sliding system, wall-mounted and pocket LOFT doors (excluding the PP colour group)
- Inactive door leaf for double doors, width S2 in mm: 420-609
- Inactive door leaf for double doors, width S2 in mm: 610, 710, 810, 910
- Inactive door leaf for double doors, width S2 in mm: 1010

COMPONENTS


- VSG 2.2.1 satin glass, plain finish on both sides, 4 mm thick
- A mortise key lock (options include a turn and release lock, a lock with a euro profile cylinder or without the bottom hole)
- BRILLIANT screw-in hinges, 3 pc., nickel coloured (black, white or gold options at no extra charge)

OPTIONS

- Door restrictor arm (applies to doors in the SIMPLE system)
- Drop down seal
- Ventilation undercut
- Metal, round or square ventilation sleeves in Nickel or Bronze (pcs)
- Plastic, square ventilation sleeves in Black matt, White, Gold, Satin Chrome or Chrome (pcs)
- Plastic ventilation grille in matt silver for “80”, “90” and “100” doors
- Stainless steel ventilation grille in inox or black color for the door leaf „80”, „90” i „100”


DOOR FRAME VARIANTS

- Fixed: MDF (p. 189)
- Adjustable: DIN (p. 196), available for wall thickness min. 80 mm in the rebated system and min. 100 mm in the non-rebated system.

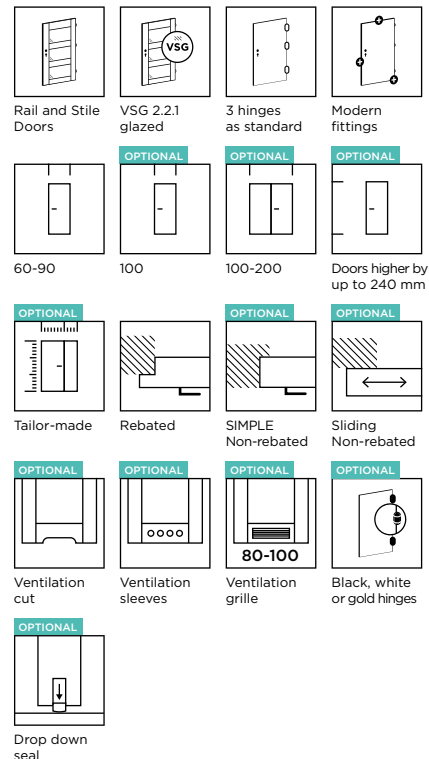


AVAILABLE COLOURS:


PP GROUP

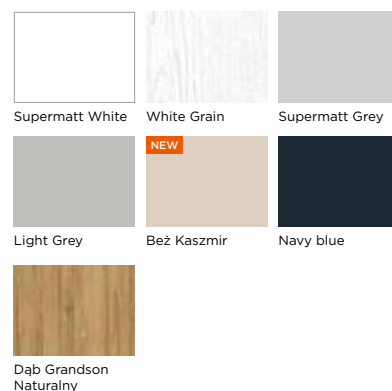

CPL GROUP

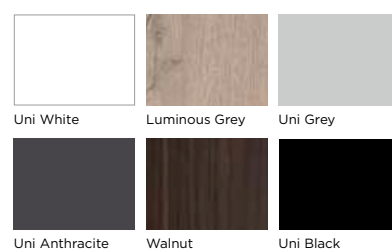

CLPL GROUP



BRILLIANT BF-04, PP White Grain

BRILLIANT BF /



COLOUR: PP White Grain



BF-01



BF-02



BF-03



BF-04



BF-05



BF-06



BF-07



BF-08



BF-09



BF-10



BF-11



BF-12

AVAILABLE WIDTHS

- rebated system S2 in mm: „60“=644, „70“=744, „80“=844, „90“=944
- SIMPLE non-rebated system S2 in mm: „60“=618, „70“=718, „80“=818, „90“=918

OPTIONS

- “100” width
- Width smaller than “60”
- Non-standard width

AVAILABLE HEIGHTS

- rebated system H2 in mm: 2030
- SIMPLE non-rebated system H2 in mm: 2017

OPTIONS

- Up to 60 mm shorter
- More than 60 mm shorter (feasibility evaluated case by case)
- Up to 240 mm longer (feasibility evaluated case by case)
- Additional hinge (required for doors that are 110 mm to 240 mm longer)
- Change of lock position and bottom hinge (recommended for doors with a non-standard height)

CONSTRUCTION

- A robust rail and stile construction made of wood and MDF

OPTIONS

- Non-rebated door, SIMPLE system (3 hinges)
- Non-rebated door, wall-mounted standard sliding system, wall-mounted and pocket LOFT doors (excluding the PP colour group)
- Inactive door leaf for double doors, width S2 in mm: 420-609
- Inactive door leaf for double doors, width S2 in mm: 610, 710, 810, 910
- Inactive door leaf for double doors, width S2 in mm: 1010

COMPONENTS


- VSG 2.2.1 satin glass, plain finish on both sides, 4 mm thick
- A mortise key lock (options include a turn and release lock, a lock with a euro profile cylinder or without the bottom hole)
- BRILLIANT screw-in hinges, 3 pc., nickel coloured (black, white or gold options at no extra charge)

OPTIONS

- Door restrictor arm (applies to doors in the SIMPLE system)
- Drop down seal
- Ventilation undercut
- Metal, round or square ventilation sleeves in Nickel or Bronze (pcs)
- Plastic, square ventilation sleeves in Black matt, White, Gold, Satin Chrome or Chrome (pcs)
- Plastic ventilation grille in matt silver for “80”, “90” and “100” doors
- Stainless steel ventilation grille in inox or black color for the door leaf „80”, „90” i „100”


DOOR FRAME VARIANTS

- Fixed: MDF (p. 189)
- Adjustable: DIN (p. 196), available for wall thickness min. 80 mm in the rebated system and min. 100 mm in the non-rebated system.

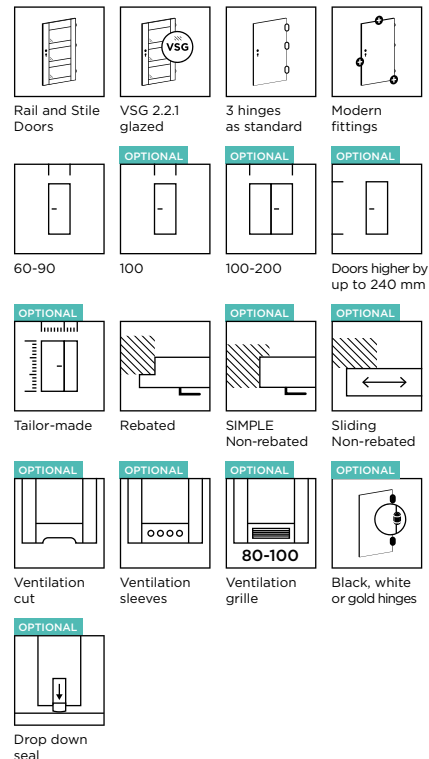


AVAILABLE COLOURS:


PP GROUP

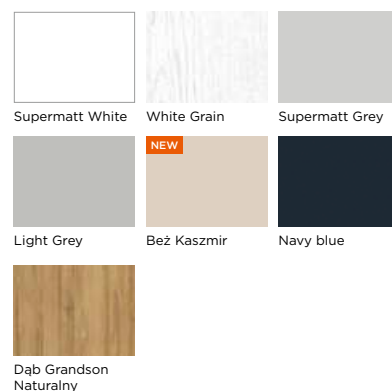

CPL GROUP

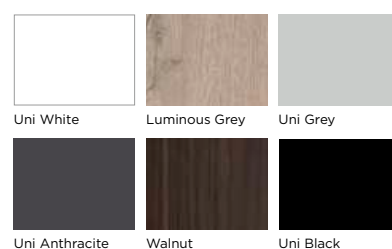

CLPL GROUP



BRILLIANT BG-01, PP Natural Grandson Oak

BRILLIANT BG /



COLOUR: PP Natural Grandson Oak



BG-01



BG-02



BG-03



BG-04



BG-05



BG-06

AVAILABLE WIDTHS

- rebated system S2 in mm: „60”=644, „70”=744, „80”=844, „90”=944
- SIMPLE non-rebated system S2 in mm: „60”=618, „70”=718, „80”=818, „90”=918

OPTIONS

“100” width

Width smaller than “60”

Non-standard width

AVAILABLE HEIGHTS

- rebated system H2 in mm: 2030
- SIMPLE non-rebated system H2 in mm: 2017
- The model is not available as “higher” options, maximum door height H2 in mm is 2030

OPTIONS

Up to 60 mm shorter

More than 60 mm shorter (feasibility evaluated case by case)

Change of lock position and bottom hinge (recommended for doors with a non-standard height)

CONSTRUCTION

- A robust rail and stile construction made of wood and MDF

OPTIONS

Non-rebated door, SIMPLE system (3 hinges)

Non-rebated door, wall-mounted standard sliding system, wall-mounted and pocket LOFT doors (excluding the PP colour group)

Inactive door leaf for double doors, width S2 in mm: 420-609

Inactive door leaf for double doors, width S2 in mm: 610, 710, 810, 910

Inactive door leaf for double doors, width S2 in mm: 1010

COMPONENTS

- VSG 2.2.1 satin glass, plain finish on both sides, 4 mm thick
- A mortise key lock (options include a turn and release lock, a lock with a euro profile cylinder or without the bottom hole)
- BRILLIANT screw-in hinges, 3 pc., nickel coloured (black, white or gold options at no extra charge)

OPTIONS

Door restrictor arm (applies to doors in the SIMPLE system)

Drop down seal

Ventilation undercut

Metal, round or square ventilation sleeves in Nickel or Bronze (pcs.)


Plastic, square ventilation sleeves in Black matt, White, Gold, Satin Chrome or Chrome (pcs.)

Plastic ventilation grille in matt silver for “80”, “90” and “100” doors

Stainless steel ventilation grille in inox or black color for the door leaf „80”, „90” i „100”


DOOR FRAME VARIANTS

- Fixed: MDF (p. 189)
- Adjustable: DIN (p. 196), available for wall thickness min. 80 mm in the rebated system and min. 100 mm in the non-rebated system.

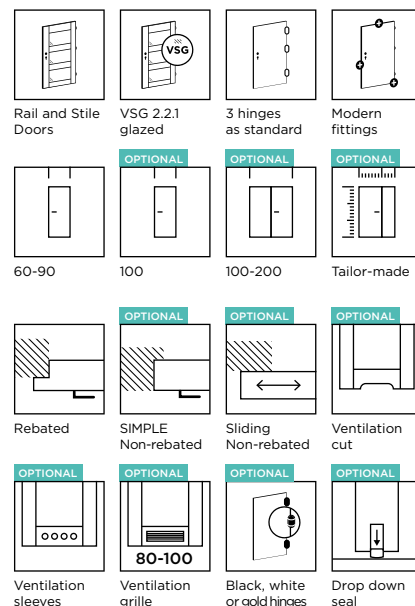


AVAILABLE COLOURS:


PP GROUP

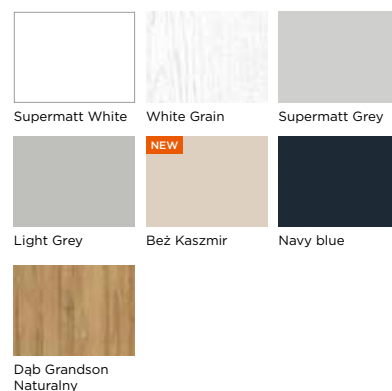

CPL GROUP

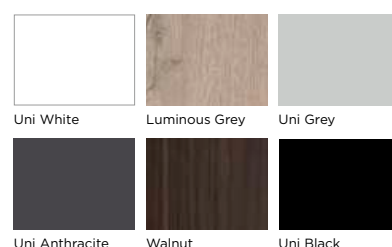

CLPL GROUP





COLOUR: CPL Uni Black



BH-01



BH-02



BH-03



BH-04



BH-05



BH-06

AVAILABLE WIDTHS

- rebated system S2 in mm: „60”=644, „70”=744, „80”=844, „90”=944
- SIMPLE non-rebated system S2 in mm: „60”=618, „70”=718, „80”=818, „90”=918

OPTIONS

“100” width

Width smaller than “60”

Non-standard width

AVAILABLE HEIGHTS

- rebated system H2 in mm: 2030
- SIMPLE non-rebated system H2 in mm: 2017
- The model is not available as “higher” options, maximum door height H2 in mm is 2030

OPTIONS

Up to 60 mm shorter

More than 60 mm shorter (feasibility evaluated case by case)

Change of lock position and bottom hinge (recommended for doors with a non-standard height)

CONSTRUCTION

- A robust rail and stile construction made of wood and MDF

OPTIONS

Non-rebated door, SIMPLE system (3 hinges)

Non-rebated door, wall-mounted standard sliding system, wall-mounted and pocket LOFT doors (excluding the PP colour group)

Inactive door leaf for double doors, width S2 in mm: 420-609

Inactive door leaf for double doors, width S2 in mm: 610, 710, 810, 910

Inactive door leaf for double doors, width S2 in mm: 1010

COMPONENTS

- VSG 2.2.1 satin glass, plain finish on both sides, 4 mm thick
- A mortise key lock (options include a turn and release lock, a lock with a euro profile cylinder or without the bottom hole)
- BRILLIANT screw-in hinges, 3 pc., nickel coloured (black, white or gold options at no extra charge)

OPTIONS

Door restrictor arm (applies to doors in the SIMPLE system)

Drop down seal

Ventilation undercut

Metal, round or square ventilation sleeves in Nickel or Bronze (pcs.)


Plastic, square ventilation sleeves in Black matt, White, Gold, Satin Chrome or Chrome (pcs.)

Plastic ventilation grille in matt silver for “80”, “90” and “100” doors

Stainless steel ventilation grille in inox or black color for the door leaf „80”, „90” i „100”


DOOR FRAME VARIANTS

- Fixed: MDF (p. 189)
- Adjustable: DIN (p. 196), available for wall thickness min. 80 mm in the rebated system and min. 100 mm in the non-rebated system.

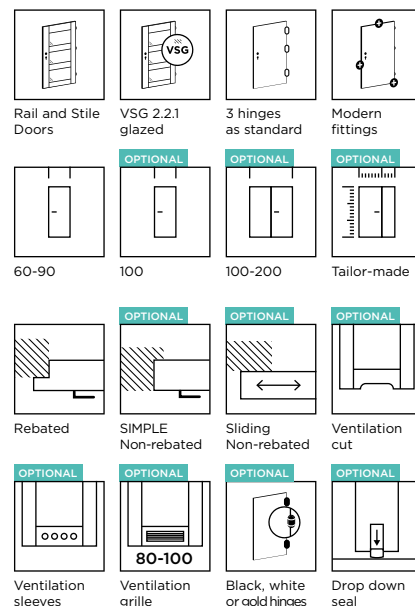


AVAILABLE COLOURS:


PP GROUP

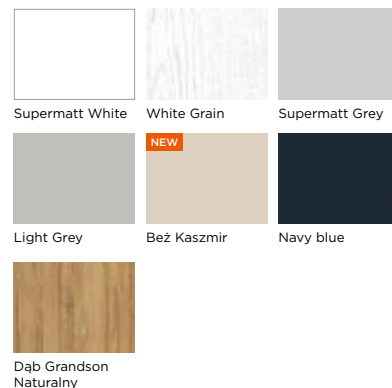

CPL GROUP

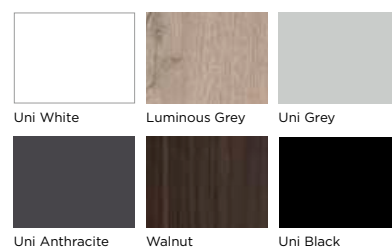

CLPL GROUP






BRILLIANT BO-01 CPL Uni White

BRILLIANT BO /

COLOUR: CPL Uni White



BO-01



BO-02



BO-03



BO-04

Bevelled satin VSG 3.31
Satin bevel, opaque

Clear VSG 3.31 glass, bevelled

Visiosun glass, fluted glass structure
Total door width side S2



In BO-02 model:
satin bevel and glass,
opaque



In BO-03 model:
clear bevel
and glass



BO-05



BO-06



BO-07



BO-08

Rebate side S1: mirror
Total door width side S2: panel

Rebate side S1: panel
Total door width side S2: mirror

Rebate side S1: graphite mirror
Total door width side S2: panel

Rebate side S2: graphite mirror
Total door width side S2: panel

AVAILABLE WIDTHS

- rebated system S2 in mm: „60“=644, „70“=744, „80“=844, „90“=944
- SIMPLE non-rebated system S2 in mm: „60“=618, „70“=718, „80“=818, „90“=918

OPTIONS

“100” width

Width smaller than “60”

Non-standard width

AVAILABLE HEIGHTS

- rebated system H2 in mm: 2030
- SIMPLE non-rebated system H2 in mm: 2017

OPTIONS

Up to 60 mm shorter

More than 60 mm shorter (feasibility evaluated case by case)

Up to 240 mm longer (feasibility evaluated case by case, the maximum height of the BO-01 leaf is 2030 mm)

Additional hinge (required for doors 110 mm to 240 mm longer)

Change of lock position and bottom hinge (recommended for doors with a non-standard height)

CONSTRUCTION

- A robust rail and stile construction made of wood and MDF

OPTIONS

Non-rebated door, SIMPLE system (3 hinges)

Non-rebated door, wall-mounted standard sliding system, wall-mounted and pocket LOFT doors (excluding the PP colour group)

Inactive door leaf for double doors, width S2 in mm: 420-609

Inactive door leaf for double doors, width S2 in mm: 610, 710, 810, 910

Inactive door leaf for double doors, width S2 in mm: 1010

Drop down seal

COMPONENTS

- Satin or Clear glass VSG 3.3.1, 6 mm thick, smooth finish on both sides, or fluted Visiosun glass (BO-04) on the total door width side S2. In models BO-05 to BO-08: Standard or graphite mirror glued on the panel visible on the other side
- Optionally: Satin or Clear VSG 3.3.1 glass, 4 mm thick (without bevel), smooth finish on both sides
- A mortise key lock (options include a turn and release lock, a lock with a euro profile cylinder or without the bottom hole)
- Screw-in hinges, nickel coloured (black, white or gold options at no extra charge), 3 pc.

OPTIONS

Door restrictor arm (applies to doors in the SIMPLE system)

Ventilation undercut

Metal, round or square ventilation sleeves in Nickel or Bronze (pcs.)


Plastic, square ventilation sleeves in Black matt, White, Gold, Satin Chrome or Chrome (pcs.)

Plastic ventilation grille in matt silver for “80”, “90” and “100” doors

Stainless steel ventilation grille in inox or black color for the door leaf „80“, „90“ i „100”


DOOR FRAME VARIANTS

- Fixed: MDF (p. 189)
- Adjustable: DIN (p. 196), available for wall thickness min. 80 mm in the rebated system and min. 100 mm in the non-rebated system.

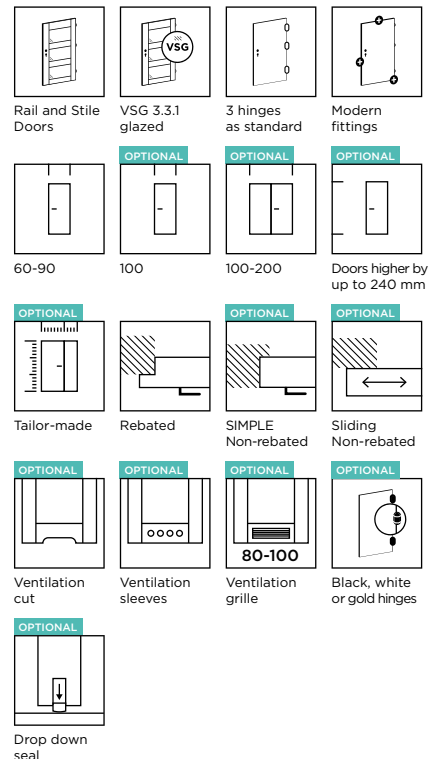


AVAILABLE COLOURS:


PP GROUP

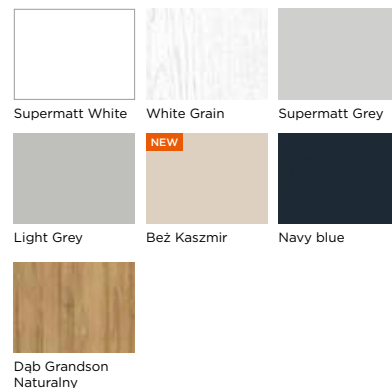

CPL GROUP

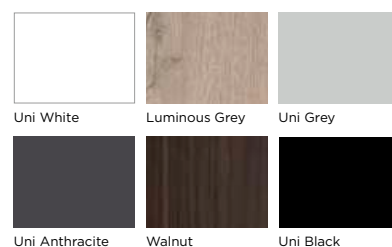

CLPL GROUP





ELEGANTE EC-01, CPL Uni Black

INTERNAL DOORS

／ **ELEGANTE**

Contemporary design combined with the highest quality materials are a guarantee of elegance for every interior.




ELEGANTE EA-01, CPL Uni Black

ELEGANTE EA /

COLOUR: CPL Uni Black

VALUABLE INFORMATION

The layouts of decorative glazing bars varies depending on the height of the door ordered.



EA-01

Clear VSG 22.1 Glass



EA-02

Lacomat VSG 22.1 Glass

AVAILABLE WIDTHS

- rebated system S2 in mm: „60“=644, „70“=744, „80“=844, „90“=944
- SIMPLE non-rebated system S2 in mm: „60“=618, „70“=718, „80“=818, „90“=918

OPTIONS

“100” width

Width smaller than “60”

Non-standard width

AVAILABLE HEIGHTS

- rebated system H2 in mm: 2030
- SIMPLE non-rebated system H2 in mm: 2017

OPTIONS

Up to 60 mm shorter

More than 60 mm shorter

Up to 470 mm longer (feasibility evaluated case by case)

Additional hinge (required for doors that are 110 mm to 470 mm longer)

Additional hinge for SIMPLE non-rebated system (required for doors that are 110 mm to 470 mm longer)

Change of lock position and bottom hinge (recommended for doors with a non-standard height)

CONSTRUCTION

- A robust rail and stile construction made of MDF

OPTIONS

Non-rebated door, SIMPLE system

Non-rebated door, wall-mounted standard sliding system, wall-mounted and pocket LOFT doors

Inactive door leaf for double doors, width S2 in mm: 420-609

Inactive door leaf for double doors, width S2 in mm: 610, 710, 810, 910

Inactive door leaf for double doors, width S2 in mm: 1010

COMPONENTS

- Clear VSG 2.2.1 glass or Lacomat
- A mortise key lock (options include a turn and release lock, a lock with a euro profile cylinder or without the bottom hole)
- Screw-in double-bolt hinges in nickel, 3 pcs. For ZOS frame packages, hinges are in zinc white

OPTIONS

Door restrictor arm (applies to doors in the SIMPLE system)

Drop down seal

Ventilation undercut

Metal, round or square ventilation sleeves in Nickel or Bronze (pcs.)


Plastic, square ventilation sleeves in Black matt, White, Gold, Satin Chrome or Chrome (pcs.)

Plastic ventilation grille in matt silver for “80”, “90” and “100” doors

Stainless steel ventilation grille in inox or black color for the door leaf „80“, „90“ i „100“

DOOR FRAME VARIANTS

- Fixed: timber (p. 188) and MDF (p. 189)
- Adjustable: DIN (p. 196), DUALE (p. 198), ZOS (p. 192)

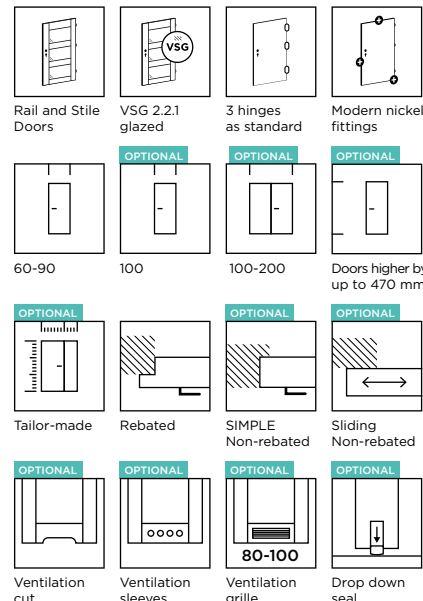

AVAILABLE COLOURS:

PP GROUP



Supermatt White



Natural Grandson Oak

CPL GROUP



Uni White



Luminous Grey



Uni Grey



Uni Anthracite



Walnut



Uni Black

CLPL GROUP



Bleached Larch



Honey Oak



Spanish Oak



Old Oak

FF GROUP



Bianco



Sibiu White



Snow Oak



Silver Oak



Cornwall Oak



Halifax Oak



Columbia Walnut



Cedar



Sonoma Oak



Riviera Oak



Catania Oak



Delano Oak



Nussbaum Walnut



Bengali Mango



Anthracite Oak




ELEGANTE EB-02 FF Catania Oak

ELEGANTE EB /

COLOUR: CPL Uni Black

VALUABLE INFORMATION

The layouts of decorative glazing bars varies depending on the height of the door ordered.



EB-01

Clear VSG 22.1 Glass



EB-02

Lacomat VSG 22.1 Glass

AVAILABLE WIDTHS

- rebated system S2 in mm: „60“=644, „70“=744, „80“=844, „90“=944
- SIMPLE non-rebated system S2 in mm: „60“=618, „70“=718, „80“=818, „90“=918

OPTIONS

“100” width

Width smaller than “60”

Non-standard width

AVAILABLE HEIGHTS

- rebated system H2 in mm: 2030
- SIMPLE non-rebated system H2 in mm: 2017

OPTIONS

Up to 60 mm shorter

More than 60 mm shorter

Up to 470 mm longer (feasibility evaluated case by case)

Additional hinge (required for doors that are 110 mm to 470 mm longer)

Additional hinge for SIMPLE non-rebated system (required for doors that are 110 mm to 470 mm longer)

Change of lock position and bottom hinge (recommended for doors with a non-standard height)

CONSTRUCTION

- A robust rail and stile construction made of MDF

OPTIONS

Non-rebated door, SIMPLE system

Non-rebated door, wall-mounted standard sliding system, wall-mounted and pocket LOFT doors

Inactive door leaf for double doors, width S2 in mm: 420-609

Inactive door leaf for double doors, width S2 in mm: 610, 710, 810, 910

Inactive door leaf for double doors, width S2 in mm: 1010

COMPONENTS

- Clear VSG 2.2.1 glass or Lacomat
- A mortise key lock (options include a turn and release lock, a lock with a euro profile cylinder or without the bottom hole)
- Screw-in double-bolt hinges in nickel, 3 pcs. For ZOS frame packages, hinges are in zinc white

OPTIONS

Door restrictor arm (applies to doors in the SIMPLE system)

Drop down seal

Ventilation undercut

Metal, round or square ventilation sleeves in Nickel or Bronze (pcs.)


Plastic, square ventilation sleeves in Black matt, White, Gold, Satin Chrome or Chrome (pcs.)

Plastic ventilation grille in matt silver for “80”, “90” and “100” doors

Stainless steel ventilation grille in inox or black color for the door leaf „80“, „90“ i „100“

DOOR FRAME VARIANTS

- Fixed: timber (p. 188) and MDF (p. 189)
- Adjustable: DIN (p. 196), DUALE (p. 198), ZOS (p. 192)

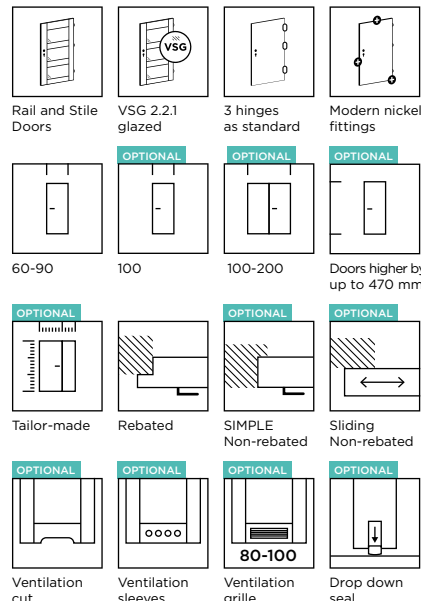

AVAILABLE COLOURS:

PP GROUP



Supermatt White



Natural Grandson Oak

CPL GROUP



Uni White



Luminous Grey



Uni Grey



Uni Anthracite



Walnut



Uni Black

CLPL GROUP



Bleached Larch



Honey Oak



Spanish Oak



Old Oak

FF GROUP



Bianco



Sibiu White



Snow Oak



Silver Oak



Cornwall Oak



Halifax Oak



Columbia Walnut



Cedar



Sonoma Oak



Riviera Oak



Catania Oak



Delano Oak



Nussbaum Walnut



Bengali Mango



Anthracite Oak


ELEGANTE EC-01, CPL Uni Black

ELEGANTE EC /

COLOUR: CPL Uni Black

VALUABLE INFORMATION

The layouts of decorative glazing bars varies depending on the height of the door ordered.



EC-01

Clear VSG 22.1 Glass



EC-02

Lacomat VSG 22.1 Glass

AVAILABLE WIDTHS

- rebated system S2 in mm: „60“=644, „70“=744, „80“=844, „90“=944
- SIMPLE non-rebated system S2 in mm: „60“=618, „70“=718, „80“=818, „90“=918

OPTIONS

“100” width

Width smaller than “60”

Non-standard width

AVAILABLE HEIGHTS

- rebated system H2 in mm: 2030
- SIMPLE non-rebated system H2 in mm: 2017

OPTIONS

Up to 60 mm shorter

More than 60 mm shorter

Up to 470 mm longer (feasibility evaluated case by case)

Additional hinge (required for doors that are 110 mm to 470 mm longer)

Additional hinge for SIMPLE non-rebated system (required for doors that are 110 mm to 470 mm longer)

Change of lock position and bottom hinge (recommended for doors with a non-standard height)

CONSTRUCTION

- A robust rail and stile construction made of MDF

OPTIONS

Non-rebated door, SIMPLE system

Non-rebated door, wall-mounted standard sliding system, wall-mounted and pocket LOFT doors

Inactive door leaf for double doors, width S2 in mm: 420-609

Inactive door leaf for double doors, width S2 in mm: 610, 710, 810, 910

Inactive door leaf for double doors, width S2 in mm: 1010

COMPONENTS

- Clear VSG 2.2.1 glass or Lacomat
- A mortise key lock (options include a turn and release lock, a lock with a euro profile cylinder or without the bottom hole)
- Screw-in double-bolt hinges in nickel, 3 pcs. For ZOS frame packages, hinges are in zinc white

OPTIONS

Door restrictor arm (applies to doors in the SIMPLE system)

Drop down seal

Ventilation undercut

Metal, round or square ventilation sleeves in Nickel or Bronze (pcs.)


Plastic, square ventilation sleeves in Black matt, White, Gold, Satin Chrome or Chrome (pcs.)

Plastic ventilation grille in matt silver for “80”, “90” and “100” doors

Stainless steel ventilation grille in inox or black color for the door leaf „80“, „90“ i „100“

DOOR FRAME VARIANTS

- Fixed: timber (p. 188) and MDF (p. 189)
- Adjustable: DIN (p. 196), DUALE (p. 198), ZOS (p. 192)

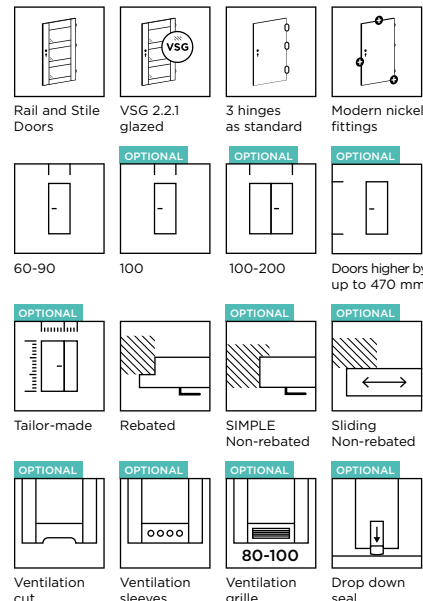

AVAILABLE COLOURS:

PP GROUP



Supermatt White



Natural Grandson Oak

CPL GROUP



Uni White



Luminous Grey



Uni Grey



Uni Anthracite



Walnut



Uni Black

CLPL GROUP



Bleached Larch



Honey Oak



Spanish Oak



Old Oak

FF GROUP



Bianco



Sibiu White



Snow Oak



Silver Oak



Cornwall Oak



Halifax Oak



Columbia Walnut



Cedar



Sonoma Oak



Riviera Oak



Catania Oak



Delano Oak



Nussbaum Walnut



Bengali Mango



Anthracite Oak




ELEGANTE ED-02, FF Snow Oak

ELEGANTE ED

COLOUR: CPL Uni Black

VALUABLE INFORMATION

The layouts of decorative glazing bars varies depending on the height of the door ordered.



ED-01

Clear VSG 22.1 Glass



ED-02

Lacomat VSG 22.1 Glass

AVAILABLE WIDTHS

- rebated system S2 in mm: „60“=644, „70“=744, „80“=844, „90“=944
- SIMPLE non-rebated system S2 in mm: „60“=618, „70“=718, „80“=818, „90“=918

OPTIONS

“100” width

Width smaller than “60”

Non-standard width

AVAILABLE HEIGHTS

- rebated system H2 in mm: 2030
- SIMPLE non-rebated system H2 in mm: 2017

OPTIONS

Up to 60 mm shorter

More than 60 mm shorter

Up to 470 mm longer (feasibility evaluated case by case)

Additional hinge (required for doors that are 110 mm to 470 mm longer)

Additional hinge for SIMPLE non-rebated system (required for doors that are 110 mm to 470 mm longer)

Change of lock position and bottom hinge (recommended for doors with a non-standard height)

CONSTRUCTION

- A robust rail and stile construction made of MDF

OPTIONS

Non-rebated door, SIMPLE system

Non-rebated door, wall-mounted standard sliding system, wall-mounted and pocket LOFT doors

Inactive door leaf for double doors, width S2 in mm: 420-609

Inactive door leaf for double doors, width S2 in mm: 610, 710, 810, 910

Inactive door leaf for double doors, width S2 in mm: 1010

COMPONENTS

- Clear VSG 2.2.1 glass or Lacomat
- A mortise key lock (options include a turn and release lock, a lock with a euro profile cylinder or without the bottom hole)
- Screw-in double-bolt hinges in nickel, 3 pcs. For ZOS frame packages, hinges are in zinc white

OPTIONS

Door restrictor arm (applies to doors in the SIMPLE system)

Drop down seal

Ventilation undercut

Metal, round or square ventilation sleeves in Nickel or Bronze (pcs.)


Plastic, square ventilation sleeves in Black matt, White, Gold, Satin Chrome or Chrome (pcs.)

Plastic ventilation grille in matt silver for “80”, “90” and “100” doors

Stainless steel ventilation grille in inox or black color for the door leaf „80“, „90“ i „100“

DOOR FRAME VARIANTS

- Fixed: timber (p. 188) and MDF (p. 189)
- Adjustable: DIN (p. 196), DUALE (p. 198), ZOS (p. 192)

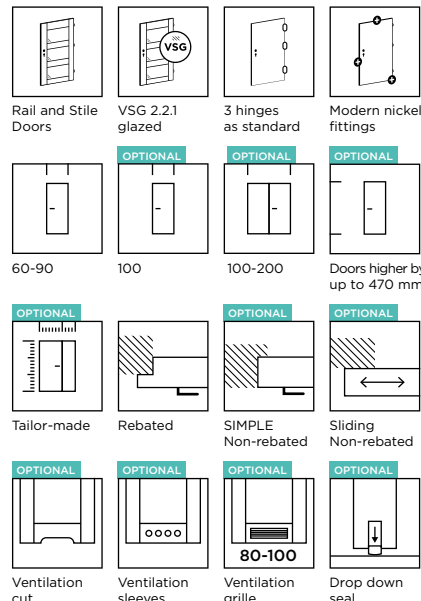

AVAILABLE COLOURS:

PP GROUP



Supermatt White



Natural Grandson Oak

CPL GROUP



Uni White



Luminous Grey



Uni Grey



Uni Anthracite



Walnut



Uni Black

CLPL GROUP



Bleached Larch



Honey Oak



Spanish Oak



Old Oak

FF GROUP



Bianco



Sibiu White



Snow Oak



Silver Oak



Cornwall Oak



Halifax Oak



Columbia Walnut



Cedar



Sonoma Oak



Riviera Oak



Catania Oak



Delano Oak



Nussbaum Walnut



Bengali Mango



Anthracite Oak



ELEGANTE EE-01: CPL Uni White

ELEGANTE EE /

COLOUR: CPL Uni White

VALUABLE INFORMATION



The layouts of decorative glazing bars varies depending on the height of the door ordered.

The white colour tone of glazing bars best matches the CPL Uni White finish.



EE-01



EE-02

AVAILABLE WIDTHS

- rebated system S2 in mm: „60“=644, „70“=744, „80“=844, „90“=944
- SIMPLE non-rebated system S2 in mm: „60“=618, „70“=718, „80“=818, „90“=918

OPTIONS

“100” width

Width smaller than “60”

Non-standard width

AVAILABLE HEIGHTS

- rebated system H2 in mm: 2030
- SIMPLE non-rebated system H2 in mm: 2017

OPTIONS

Up to 60 mm shorter

More than 60 mm shorter

Up to 470 mm longer (feasibility evaluated case by case)

Additional hinge (required for doors that are 110 mm to 470 mm longer)

Additional hinge for SIMPLE non-rebated system (required for doors that are 110 mm to 470 mm longer)

Change of lock position and bottom hinge (recommended for doors with a non-standard height)

CONSTRUCTION

- A robust rail and stile construction made of MDF

OPTIONS

Non-rebated door, SIMPLE system

Non-rebated door, wall-mounted standard sliding system, wall-mounted and pocket LOFT doors

Inactive door leaf for double doors, width S2 in mm: 420-609

Inactive door leaf for double doors, width S2 in mm: 610, 710, 810, 910

Inactive door leaf for double doors, width S2 in mm: 1010

COMPONENTS

- Clear VSG 2.2.1 glass or Lacomat
- A mortise key lock (options include a turn and release lock, a lock with a euro profile cylinder or without the bottom hole)
- Screw-in double-bolt hinges in nickel, 3 pcs. For ZOS frame packages, hinges are in zinc white

OPTIONS

Door restrictor arm (applies to doors in the SIMPLE system)

Drop down seal

Ventilation undercut

Metal, round or square ventilation sleeves in Nickel or Bronze (pcs.)


Plastic, square ventilation sleeves in Black matt, White, Gold, Satin Chrome or Chrome (pcs.)

Plastic ventilation grille in matt silver for “80”, “90” and “100” doors

Stainless steel ventilation grille in inox or black color for the door leaf „80“, „90“ i „100“

DOOR FRAME VARIANTS

- Fixed: timber (p. 188) and MDF (p. 189)
- Adjustable: DIN (p. 196), DUALE (p. 198), ZOS (p. 192)

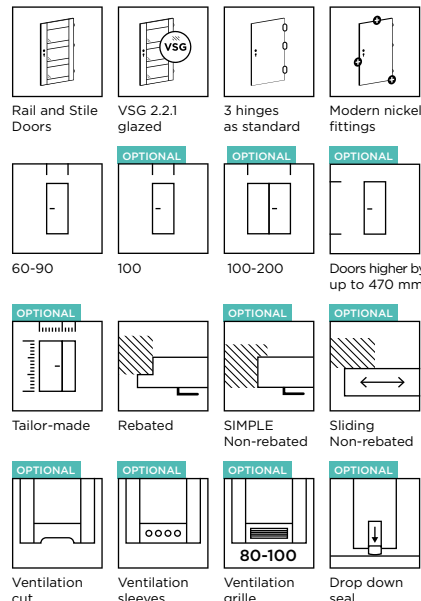

AVAILABLE COLOURS:

PP GROUP



Supermatt White



Natural Grandson Oak

CPL GROUP



Uni White



Luminous Grey



Uni Grey



Uni Anthracite



Walnut



Uni Black

CLPL GROUP



Bleached Larch



Honey Oak



Spanish Oak



Old Oak

FF GROUP



Bianco



Sibiu White



Snow Oak



Silver Oak



Cornwall Oak



Halifax Oak



Columbia Walnut



Cedar



Sonoma Oak



Riviera Oak



Catania Oak



Delano Oak



Nussbaum Walnut



Bengali Mango



Anthracite Oak



ELEGANTE EF-01, CPL Uni Anthracite

ELEGANTE EF

COLOUR: CPL Uni Anthracite

VALUABLE INFORMATION

The layouts of decorative glazing bars varies depending on the height of the door ordered.

The white colour tone of glazing bars best matches the CPL Uni White finish.



EF-01



EF-02

Clear VSG 22.1 Glass

Lacomat VSG 22.1 Glass

AVAILABLE WIDTHS

- rebated system S2 in mm: „60“=644, „70“=744, „80“=844, „90“=944
- SIMPLE non-rebated system S2 in mm: „60“=618, „70“=718, „80“=818, „90“=918

OPTIONS

“100” width

Width smaller than “60”

Non-standard width

AVAILABLE HEIGHTS

- rebated system H2 in mm: 2030
- SIMPLE non-rebated system H2 in mm: 2017

OPTIONS

Up to 60 mm shorter

More than 60 mm shorter

Up to 470 mm longer (feasibility evaluated case by case)

Additional hinge (required for doors that are 110 mm to 470 mm longer)

Additional hinge for SIMPLE non-rebated system (required for doors that are 110 mm to 470 mm longer)

Change of lock position and bottom hinge (recommended for doors with a non-standard height)

CONSTRUCTION

- A robust rail and stile construction made of MDF

OPTIONS

Non-rebated door, SIMPLE system

Non-rebated door, wall-mounted standard sliding system, wall-mounted and pocket LOFT doors

Inactive door leaf for double doors, width S2 in mm: 420-609

Inactive door leaf for double doors, width S2 in mm: 610, 710, 810, 910

Inactive door leaf for double doors, width S2 in mm: 1010

COMPONENTS

- Clear VSG 2.2.1 glass or Lacomat
- A mortise key lock (options include a turn and release lock, a lock with a euro profile cylinder or without the bottom hole)
- Screw-in double-bolt hinges in nickel, 3 pcs. For ZOS frame packages, hinges are in zinc white

OPTIONS

Door restrictor arm (applies to doors in the SIMPLE system)

Drop down seal

Ventilation undercut

Metal, round or square ventilation sleeves in Nickel or Bronze (pcs.)


Plastic, square ventilation sleeves in Black matt, White, Gold, Satin Chrome or Chrome (pcs.)

Plastic ventilation grille in matt silver for “80”, “90” and “100” doors

Stainless steel ventilation grille in inox or black color for the door leaf „80“, „90“ i „100“

DOOR FRAME VARIANTS

- Fixed: timber (p. 188) and MDF (p. 189)
- Adjustable: DIN (p. 196), DUALE (p. 198), ZOS (p. 192)

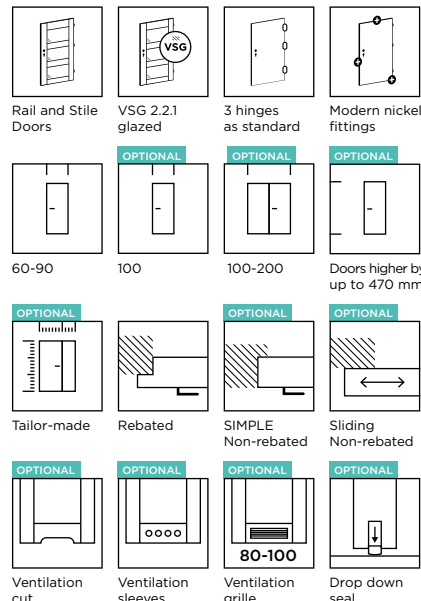

AVAILABLE COLOURS:

PP GROUP



Supermatt White



Natural Grandson Oak

CPL GROUP



Uni White



Luminous Grey



Uni Grey



Uni Anthracite



Walnut



Uni Black

CLPL GROUP



Bleached Larch



Honey Oak



Spanish Oak



Old Oak

FF GROUP



Bianco



Sibiu White



Snow Oak



Silver Oak



Cornwall Oak



Halifax Oak



Columbia Walnut



Cedar



Sonoma Oak



Riviera Oak



Catania Oak



Delano Oak



Nussbaum Walnut



Bengali Mango



Anthracite Oak



ELEGANTE EG-01, CPL Uni Grey

ELEGANTE EG /

COLOUR: CPL Uni Grey

VALUABLE INFORMATION



The layouts of decorative glazing bars varies depending on the height of the door ordered.

The white colour tone of glazing bars best matches the CPL Uni White finish.



EG-01

Clear VSG 22.1 Glass



EG-02

Lacomat VSG 22.1 Glass

AVAILABLE WIDTHS

- rebated system S2 in mm: „60“=644, „70“=744, „80“=844, „90“=944
- SIMPLE non-rebated system S2 in mm: „60“=618, „70“=718, „80“=818, „90“=918

OPTIONS

“100” width

Width smaller than “60”

Non-standard width

AVAILABLE HEIGHTS

- rebated system H2 in mm: 2030
- SIMPLE non-rebated system H2 in mm: 2017

OPTIONS

Up to 60 mm shorter

More than 60 mm shorter

Up to 470 mm longer (feasibility evaluated case by case)

Additional hinge (required for doors that are 110 mm to 470 mm longer)

Additional hinge for SIMPLE non-rebated system (required for doors that are 110 mm to 470 mm longer)

Change of lock position and bottom hinge (recommended for doors with a non-standard height)

CONSTRUCTION

- A robust rail and stile construction made of MDF

OPTIONS

Non-rebated door, SIMPLE system

Non-rebated door, wall-mounted standard sliding system, wall-mounted and pocket LOFT doors

Inactive door leaf for double doors, width S2 in mm: 420-609

Inactive door leaf for double doors, width S2 in mm: 610, 710, 810, 910

Inactive door leaf for double doors, width S2 in mm: 1010

COMPONENTS

- Clear VSG 2.2.1 glass or Lacomat
- A mortise key lock (options include a turn and release lock, a lock with a euro profile cylinder or without the bottom hole)
- Screw-in double-bolt hinges in nickel, 3 pcs. For ZOS frame packages, hinges are in zinc white

OPTIONS

Door restrictor arm (applies to doors in the SIMPLE system)

Drop down seal

Ventilation undercut

Metal, round or square ventilation sleeves in Nickel or Bronze (pcs.)


Plastic, square ventilation sleeves in Black matt, White, Gold, Satin Chrome or Chrome (pcs.)

Plastic ventilation grille in matt silver for “80”, “90” and “100” doors

Stainless steel ventilation grille in inox or black color for the door leaf „80“, „90“ i „100“

DOOR FRAME VARIANTS

- Fixed: timber (p. 188) and MDF (p. 189)
- Adjustable: DIN (p. 196), DUALE (p. 198), ZOS (p. 192)

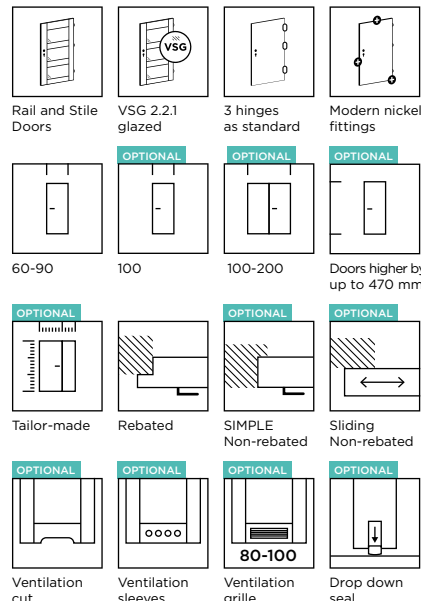

AVAILABLE COLOURS:

PP GROUP



Supermatt White



Natural Grandson Oak

CPL GROUP



Uni White



Luminous Grey



Uni Grey



Uni Anthracite



Walnut



Uni Black

CLPL GROUP



Bleached Larch



Honey Oak



Spanish Oak



Old Oak

FF GROUP



Bianco



Sibiu White



Snow Oak



Silver Oak



Cornwall Oak



Halifax Oak



Columbia Walnut



Cedar



Sonoma Oak



Riviera Oak



Catania Oak



Delano Oak



Nussbaum Walnut



Bengali Mango



Anthracite Oak



ELEGANTE EH-02, CLPL Bleached Larch

ELEGANTE EH /

COLOUR: CLPL Bleached Larch

VALUABLE INFORMATION

The layouts of decorative glazing bars varies depending on the height of the door ordered.

The white colour tone of glazing bars best matches the CPL Uni White finish.



EH-01



EH-02

Clear VSG 22.1 Glass

Lacomat VSG 22.1 Glass

AVAILABLE WIDTHS

- rebated system S2 in mm: „60“=644, „70“=744, „80“=844, „90“=944
- SIMPLE non-rebated system S2 in mm: „60“=618, „70“=718, „80“=818, „90“=918

OPTIONS

“100” width

Width smaller than “60”

Non-standard width

AVAILABLE HEIGHTS

- rebated system H2 in mm: 2030
- SIMPLE non-rebated system H2 in mm: 2017

OPTIONS

Up to 60 mm shorter

More than 60 mm shorter

Up to 470 mm longer (feasibility evaluated case by case)

Additional hinge (required for doors that are 110 mm to 470 mm longer)

Additional hinge for SIMPLE non-rebated system (required for doors that are 110 mm to 470 mm longer)

Change of lock position and bottom hinge (recommended for doors with a non-standard height)

CONSTRUCTION

- A robust rail and stile construction made of MDF

OPTIONS

Non-rebated door, SIMPLE system

Non-rebated door, wall-mounted standard sliding system, wall-mounted and pocket LOFT doors

Inactive door leaf for double doors, width S2 in mm: 420-609

Inactive door leaf for double doors, width S2 in mm: 610, 710, 810, 910

Inactive door leaf for double doors, width S2 in mm: 1010

COMPONENTS

- Clear VSG 2.2.1 glass or Lacomat
- A mortise key lock (options include a turn and release lock, a lock with a euro profile cylinder or without the bottom hole)
- Screw-in double-bolt hinges in nickel, 3 pcs. For ZOS frame packages, hinges are in zinc white

OPTIONS

Door restrictor arm (applies to doors in the SIMPLE system)

Drop down seal

Ventilation undercut

Metal, round or square ventilation sleeves in Nickel or Bronze (pcs.)


Plastic, square ventilation sleeves in Black matt, White, Gold, Satin Chrome or Chrome (pcs.)

Plastic ventilation grille in matt silver for “80”, “90” and “100” doors

Stainless steel ventilation grille in inox or black color for the door leaf „80“, „90“ i „100“

DOOR FRAME VARIANTS

- Fixed: timber (p. 188) and MDF (p. 189)
- Adjustable: DIN (p. 196), DUALE (p. 198), ZOS (p. 192)

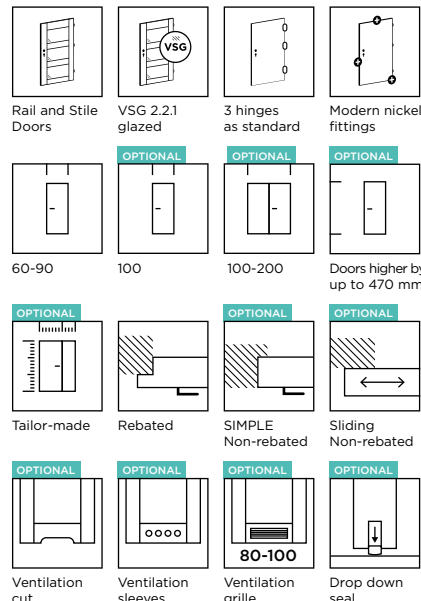

AVAILABLE COLOURS:

PP GROUP



Supermatt White



Natural Grandson Oak

CPL GROUP



Uni White



Luminous Grey



Uni Grey



Uni Anthracite



Walnut



Uni Black

CLPL GROUP



Bleached Larch



Honey Oak



Spanish Oak



Old Oak

FF GROUP



Bianco



Sibiu White



Snow Oak



Silver Oak



Cornwall Oak



Halifax Oak



Columbia Walnut



Cedar



Sonoma Oak



Riviera Oak



Catania Oak



Delano Oak



Nussbaum Walnut



Bengali Mango



Anthracite Oak

NEW

ELEGANTE EI-01, FF Bengali Mango

ELEGANTE EI /



COLOUR: CPL Uni Black

VALUABLE INFORMATION

The layouts of decorative glazing bars varies depending on the height of the door ordered.



EI-01



EI-02



AVAILABLE WIDTHS

- rebated system S2 in mm: „60“=644, „70“=744, „80“=844, „90“=944
- SIMPLE non-rebated system S2 in mm: „60“=618, „70“=718, „80“=818, „90“=918

OPTIONS

“100” width

Width smaller than “60”

Non-standard width

For door leaves with a non-standard width, the diamond-shaped glazing arrangement is not symmetrical (it is for the standard width doors).

AVAILABLE HEIGHTS

- rebated system H2 in mm: 2030
- SIMPLE non-rebated system H2 in mm: 2017

OPTIONS

Up to 60 mm shorter

More than 60 mm shorter

Up to 470 mm longer (feasibility evaluated case by case)

Additional hinge (required for doors that are 110 mm to 470 mm longer)

Additional hinge for SIMPLE non-rebated system (required for doors that are 110 mm to 470 mm longer)

Change of lock position and bottom hinge (recommended for doors with a non-standard height)

CONSTRUCTION

- A robust rail and stile construction made of MDF

OPTIONS

Non-rebated door, SIMPLE system

Non-rebated door, wall-mounted standard sliding system, wall-mounted and pocket LOFT doors

Inactive door leaf for double doors, width S2 in mm: 610, 710, 810, 910

Inactive door leaf for double doors, width S2 in mm: 1010

COMPONENTS

- Tempered Clear Caro or Satin Caro safety glass
- A mortise key lock (options include a turn and release lock, a lock with a euro profile cylinder or without the bottom hole)
- Screw-in double-bolt hinges in nickel, 3 pcs. For ZOS frame packages, hinges are in zinc white

OPTIONS

Door restrictor arm (applies to doors in the SIMPLE system)

Drop down seal

Ventilation undercut

Metal, round or square ventilation sleeves in Nickel or Bronze (pcs.)


Plastic, square ventilation sleeves in Black matt, White, Gold, Satin Chrome or Chrome (pcs.)

Plastic ventilation grille in matt silver for “80”, “90” and “100” doors

Stainless steel ventilation grille in inox or black color for the door leaf „80“, „90“ i „100”

DOOR FRAME VARIANTS

- Fixed: timber (p. 188) and MDF (p. 189)
- Adjustable: DIN (p. 196), DUALE (p. 198), ZOS (p. 192)

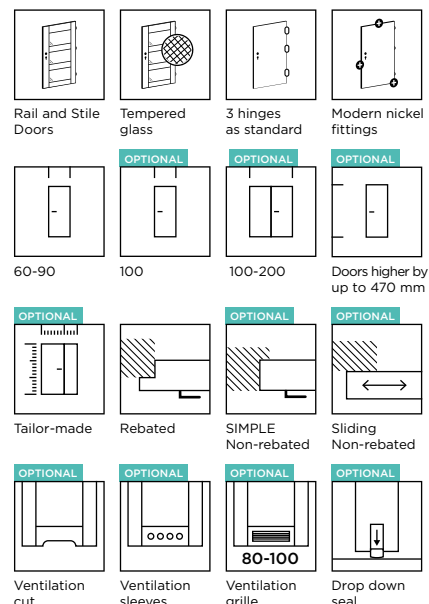

AVAILABLE COLOURS:

PP GROUP



Supermatt White



Natural Grandson Oak

CPL GROUP



Uni White



Luminous Grey



Uni Grey



Uni Anthracite



Walnut



Uni Black

CLPL GROUP



Bleached Larch



Honey Oak



Spanish Oak



Old Oak

FF GROUP



Bianco



Sibiu White



Snow Oak



Silver Oak



Cornwall Oak



Halifax Oak



Columbia Walnut



Cedar



Sonoma Oak



Riviera Oak



Catania Oak



Delano Oak



Nussbaum Walnut



Bengali Mango



Anthracite Oak

NEW

ELEGANTE EK-02, FF Cedar

ELEGANTE EK /



COLOUR: CPL Uni Black

VALUABLE INFORMATION

The layouts of decorative glazing bars varies depending on the height of the door ordered.



EK-01



EK-02



AVAILABLE WIDTHS

- rebated system S2 in mm: „60“=644, „70“=744, „80“=844, „90“=944
- SIMPLE non-rebated system S2 in mm: „60“=618, „70“=718, „80“=818, „90“=918

OPTIONS

“100” width

Width smaller than “60”

Non-standard width

AVAILABLE HEIGHTS

- rebated system H2 in mm: 2030
- SIMPLE non-rebated system H2 in mm: 2017

OPTIONS

Up to 60 mm shorter

More than 60 mm shorter

Up to 470 mm longer (feasibility evaluated case by case)

Additional hinge (required for doors that are 110 mm to 470 mm longer)

Additional hinge for SIMPLE non-rebated system (required for doors that are 110 mm to 470 mm longer)

Change of lock position and bottom hinge (recommended for doors with a non-standard height)

CONSTRUCTION

- A robust rail and stile construction made of MDF

OPTIONS

Non-rebated door, SIMPLE system

Non-rebated door, wall-mounted standard sliding system, wall-mounted and pocket LOFT doors

Inactive door leaf for double doors, width S2 in mm: 420-609

Inactive door leaf for double doors, width S2 in mm: 610, 710, 810, 910

Inactive door leaf for double doors, width S2 in mm: 1010

COMPONENTS

- Tempered Clear Bi-Line or Satin Bi-Line glass
- A mortise key lock (options include a turn and release lock, a lock with a euro profile cylinder or without the bottom hole)
- Screw-in double-bolt hinges in nickel, 3 pcs. For ZOS frame packages, hinges are in zinc white

OPTIONS

Door restrictor arm (applies to doors in the SIMPLE system)

Drop down seal

Ventilation undercut

Metal, round or square ventilation sleeves in Nickel or Bronze (pcs.)


Plastic, square ventilation sleeves in Black matt, White, Gold, Satin Chrome or Chrome (pcs.)

Plastic ventilation grille in matt silver for “80”, “90” and “100” doors

Stainless steel ventilation grille in inox or black color for the door leaf „80“, „90“ i „100“

DOOR FRAME VARIANTS

- Fixed: timber (p. 188) and MDF (p. 189)
- Adjustable: DIN (p. 196), DUALE (p. 198), ZOS (p. 192)

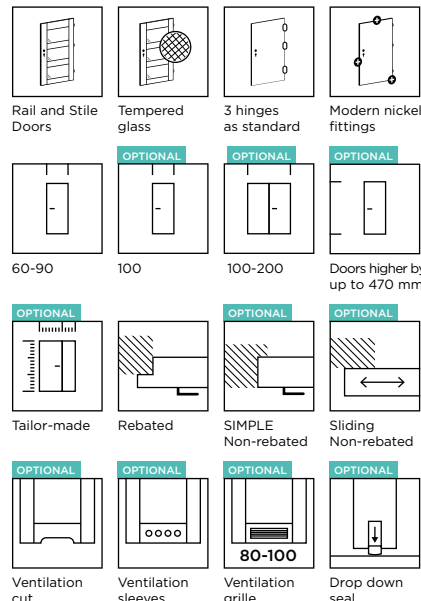

AVAILABLE COLOURS:

PP GROUP



Supermatt White



Natural Grandson Oak

CPL GROUP



Uni White



Luminous Grey



Uni Grey



Uni Anthracite



Walnut



Uni Black

CLPL GROUP



Bleached Larch



Honey Oak



Spanish Oak



Old Oak

FF GROUP



Bianco



Sibiu White



Snow Oak



Silver Oak



Cornwall Oak



Halifax Oak



Columbia Walnut



Cedar



Sonoma Oak



Riviera Oak



Catania Oak



Delano Oak



Nussbaum Walnut



Bengali Mango



Anthracite Oak



PRESTIGE PO-11, CPL Uni White

INTERNAL DOORS



PRESTIGE

A subtle complement or a striking contrast?
PRESTIGE collection doors combine elegance with
an interesting form. They guarantee privacy and add
a unique character to your interior.

NEW

PRESTIGE RB-02, PP Beige Cashmere

PRESTIGE
RB /



COLOUR: PP Beige Cashmere



RB-01

RB-02

RB-03

RB-04

AVAILABLE WIDTHS

- rebated system S2 in mm: „60“=644, „70“=744, „80“=844, „90“=944
- SIMPLE non-rebated system S2 in mm: „60“=618, „70“=718, „80“=818, „90“=918

OPTIONS

“100” width

Width smaller than “60”

Non-standard width, door with Satin deco, Lacomat or Satin VSG 2.2.1 or Black glass

AVAILABLE HEIGHTS

- rebated system H2 in mm: 2030
- SIMPLE non-rebated system H2 in mm: 2017

OPTIONS

Up to 60 mm shorter

More than 60 mm shorter (feasibility evaluated case by case) door with Satin deco, Lacomat or Satin VSG 2.2.1 or Black glass

Up to 470 mm longer (feasibility evaluated case by case) door with Satin deco, Lacomat or Satin VSG 2.2.1 or Black glass

Additional hinge (required for doors that are 110 mm to 470 mm longer)

Additional hinge for SIMPLE non-rebated system (required for doors that are 110 mm to 470 mm longer)

Change of lock position and bottom hinge (recommended for doors with a non-standard height)

CONSTRUCTION

- A robust rail and stile construction made of MDF

OPTIONS

Non-rebated door, SIMPLE system

Non-rebated door, wall-mounted standard sliding system, wall-mounted and pocket LOFT doors

Inactive door leaf for double doors, width S2 in mm: 420-609

Inactive door leaf for double doors, width S2 in mm: 610, 710, 810, 910

Inactive door leaf for double doors, width S2 in mm: 1010

COMPONENTS

- Tempered Satin glass, 4 mm thick
- A mortise key lock (options include a turn and release lock, a lock with a euro profile cylinder or without the bottom hole)
- Screw-in double-bolt hinges in nickel, 3 pcs. For ZOS frame packages, hinges are in zinc white

OPTIONS

Door restrictor arm (applies to doors in the SIMPLE system)

Drop down seal

Ventilation undercut

Metal, round or square ventilation sleeves in Nickel or Bronze (pcs.)


Plastic, square ventilation sleeves in Black matt, White, Gold, Satin Chrome or Chrome (pcs.)

Plastic ventilation grille in matt silver for “80”, “90” and “100” doors

Stainless steel ventilation grille in inox or black color for the door leaf „80“, „90“ i „100“

DOOR FRAME VARIANTS

- Fixed: timber (p. 188) and MDF (p. 189)
- Adjustable: DIN (p. 196), DUALE (p. 198), ZOS (p. 192)

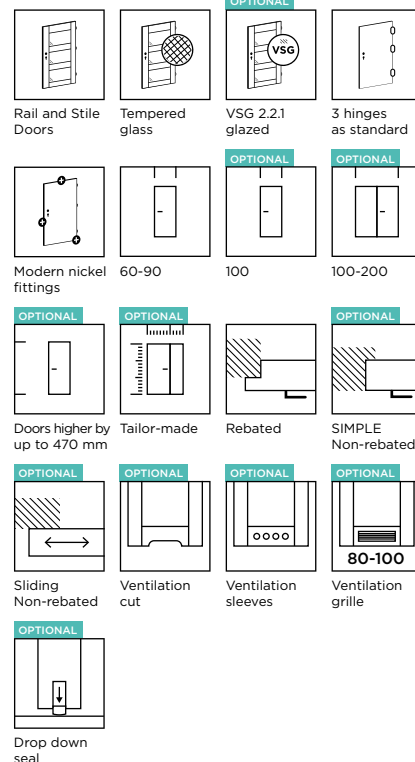

AVAILABLE COLOURS:

PP GROUP



CPL GROUP



Uni White

FF GROUP



Bianco

PRESTIGE AN-02, FF Bianco

PRESTIGE AN /

COLOUR: FF Columbia Walnut



AN-01



AN-02



AN-03



AN-04



AN-05

AVAILABLE WIDTHS

- rebated system S2 in mm: „60“=644, „70“=744, „80“=844, „90“=944
- SIMPLE non-rebated system S2 in mm: „60“=618, „70“=718, „80“=818, „90“=918

OPTIONS

“100” width

Width smaller than “60”

Non-standard width, door with Satin deco, Lacomat or Satin VSG 2.2.1 or Black glass

AVAILABLE HEIGHTS

- rebated system H2 in mm: 2030
- SIMPLE non-rebated system H2 in mm: 2017

OPTIONS

Up to 60 mm shorter

More than 60 mm shorter (feasibility evaluated case by case)
door with Satin deco, Lacomat or Satin VSG 2.2.1 or Black glass

Up to 470 mm longer (feasibility evaluated case by case)
door with Satin deco, Lacomat or Satin VSG 2.2.1 or Black glass

Additional hinge (required for doors that are 110 mm to 470 mm longer)

Additional hinge for SIMPLE non-rebated system (required for doors that are 110 mm to 470 mm longer)

Change of lock position and bottom hinge (recommended for doors with a non-standard height)

CONSTRUCTION

- A robust rail and stile construction made of MDF

OPTIONS

Non-rebated door, SIMPLE system

Non-rebated door, wall-mounted standard sliding system, wall-mounted and pocket LOFT doors

Inactive door leaf for double doors, width S2 in mm: 420-609

Inactive door leaf for double doors, width S2 in mm: 610, 710, 810, 910

Inactive door leaf for double doors, width S2 in mm: 1010

COMPONENTS

- Tempered Satin glass, 4 mm thick
- A mortise key lock (options include a turn and release lock, a lock with a euro profile cylinder or without the bottom hole)
- Screw-in double-bolt hinges in nickel, 3 pcs. For ZOS frame packages, hinges are in zinc white

OPTIONS

Door restrictor arm (applies to doors in the SIMPLE system)

Drop down seal

Ventilation undercut

Metal, round or square ventilation sleeves in Nickel or Bronze (pcs.)


Plastic, square ventilation sleeves in Black matt, White, Gold, Satin Chrome or Chrome (pcs.)

Plastic ventilation grille in matt silver for “80”, “90” and “100” doors

Stainless steel ventilation grille in inox or black color for the door leaf „80“, „90“ i „100”


DOOR FRAME VARIANTS

- Fixed: timber (p. 188) and MDF (p. 189)
- Adjustable: DIN (p. 196), DUALE (p. 198), ZOS (p. 192)

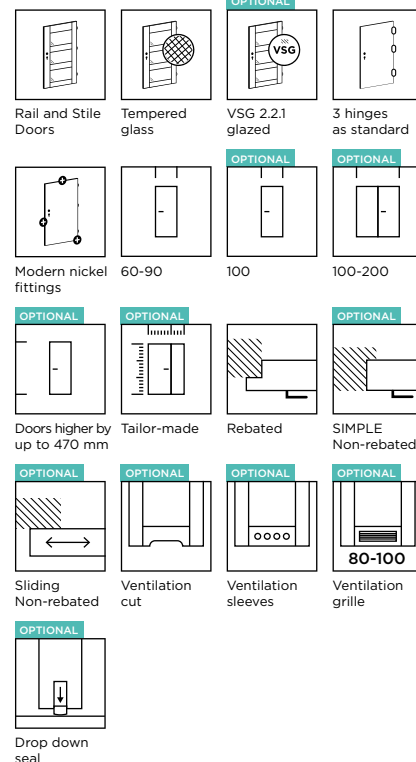


AVAILABLE COLOURS:


PP GROUP




CPL GROUP

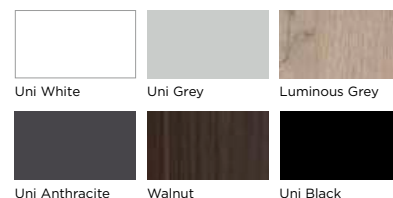

CLPL GROUP

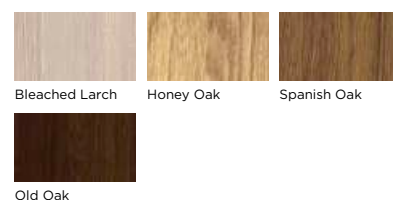

FF GROUP

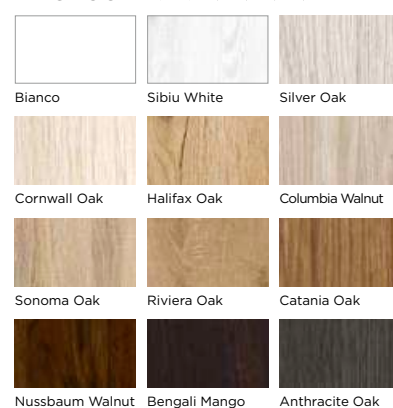



PRESTIGE PA-02_FF Bengali Mango

PRESTIGE PA /

COLOUR: FF Riviera Oak



PA-01

PA-02

PA-03

PA-04

PA-05

PA-06

PA-07

PA-08

PA-09

AVAILABLE WIDTHS

- rebated system S2 in mm: „60“=644, „70“=744, „80“=844, „90“=944
- SIMPLE non-rebated system S2 in mm: „60“=618, „70“=718, „80“=818, „90“=918

OPTIONS

“100” width

Width smaller than “60”

Non-standard width, door with Satin deco, Lacomat or Satin VSG 2.2.1 or Black glass

AVAILABLE HEIGHTS

- rebated system H2 in mm: 2030
- SIMPLE non-rebated system H2 in mm: 2017

OPTIONS

Up to 60 mm shorter

More than 60 mm shorter (feasibility evaluated case by case)
door with Satin deco, Lacomat or Satin VSG 2.2.1 or Black glass

Up to 470 mm longer (feasibility evaluated case by case) door with Satin deco, Lacomat or Satin VSG 2.2.1 or Black glass

Additional hinge (required for doors that are 110 mm to 470 mm longer)

Additional hinge for SIMPLE non-rebated system (required for doors that are 110 mm to 470 mm longer)

Change of lock position and bottom hinge (recommended for doors with a non-standard height)

CONSTRUCTION

- A robust rail and stile construction made of MDF

OPTIONS

Non-rebated door, SIMPLE system

Non-rebated door, wall-mounted standard sliding system, wall-mounted and pocket LOFT doors

Inactive door leaf for double doors, width S2 in mm: 420-609

Inactive door leaf for double doors, width S2 in mm: 610, 710, 810, 910

Inactive door leaf for double doors, width S2 in mm: 1010

COMPONENTS

- Tempered Satin glass, 4 mm thick
- A mortise key lock (options include a turn and release lock, a lock with a euro profile cylinder or without the bottom hole)
- Screw-in double-bolt hinges in nickel, 3 pcs. For ZOS frame packages, hinges are in zinc white

OPTIONS

Door restrictor arm (applies to doors in the SIMPLE system)

Drop down seal

Ventilation undercut

Metal, round or square ventilation sleeves in Nickel or Bronze (pcs.)


Plastic, square ventilation sleeves in Black matt, White, Gold, Satin Chrome or Chrome (pcs.)

Plastic ventilation grille in matt silver for “80”, “90” and “100” doors

Stainless steel ventilation grille in inox or black color for the door leaf „80“, „90“ i „100”


DOOR FRAME VARIANTS

- Fixed: timber (p. 188) and MDF (p. 189)
- Adjustable: DIN (p. 196), DUALE (p. 198), ZOS (p. 192)

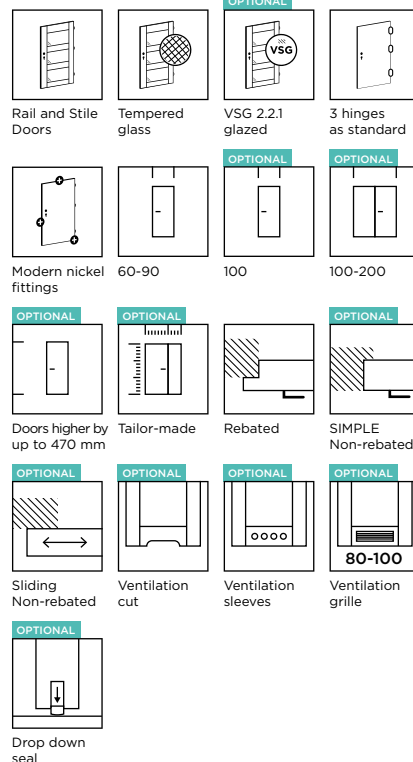


AVAILABLE COLOURS:


CPL GROUP

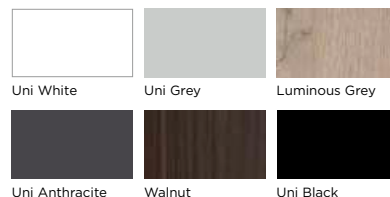

CLPL GROUP

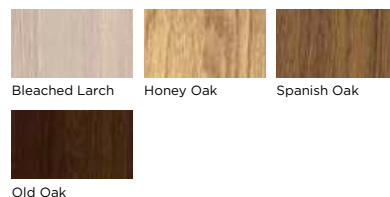

FF GROUP

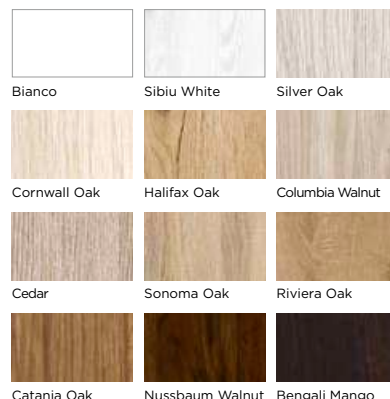

PRESTIGE PB-02, CPL Uni White

PRESTIGE **PB** /



COLOUR: FF Nussbaum Walnut



PB-01

PB-02

PB-03

PB-04

PB-05

PB-06

PB-07

AVAILABLE WIDTHS

- rebated system S2 in mm: „60“=644, „70“=744, „80“=844, „90“=944
- SIMPLE non-rebated system S2 in mm: „60“=618, „70“=718, „80“=818, „90“=918

OPTIONS

“100” width

Width smaller than “60”

Non-standard width, door with Satin deco, Lacomat or Satin VSG 2.2.1 or Black glass

AVAILABLE HEIGHTS

- rebated system H2 in mm: 2030
- SIMPLE non-rebated system H2 in mm: 2017

OPTIONS

Up to 60 mm shorter

More than 60 mm shorter (feasibility evaluated case by case)
door with Satin deco, Lacomat or Satin VSG 2.2.1 or Black glass

Up to 470 mm longer (feasibility evaluated case by case)
door with Satin deco, Lacomat or Satin VSG 2.2.1 or Black glass

Additional hinge (required for doors that are 110 mm to 470 mm longer)

Additional hinge for SIMPLE non-rebated system (required for doors that are 110 mm to 470 mm longer)

Change of lock position and bottom hinge (recommended for doors with a non-standard height)

CONSTRUCTION

- A robust rail and stile construction made of MDF

OPTIONS

Non-rebated door, SIMPLE system

Non-rebated door, wall-mounted standard sliding system, wall-mounted and pocket LOFT doors

Inactive door leaf for double doors, width S2 in mm: 420-609

Inactive door leaf for double doors, width S2 in mm: 610, 710, 810, 910

Inactive door leaf for double doors, width S2 in mm: 1010

COMPONENTS

- Tempered Satin glass, 4 mm thick
- A mortise key lock (options include a turn and release lock, a lock with a euro profile cylinder or without the bottom hole)
- Screw-in double-bolt hinges in nickel, 3 pcs. For ZOS frame packages, hinges are in zinc white

OPTIONS

Door restrictor arm (applies to doors in the SIMPLE system)

Drop down seal

Ventilation undercut

Metal, round or square ventilation sleeves in Nickel or Bronze (pcs.)


Plastic, square ventilation sleeves in Black matt, White, Gold, Satin Chrome or Chrome (pcs.)

Plastic ventilation grille in matt silver for “80”, “90” and “100” doors

Stainless steel ventilation grille in inox or black color for the door leaf „80“, „90“ i „100”


DOOR FRAME VARIANTS

- Fixed: timber (p. 188) and MDF (p. 189)
- Adjustable: DIN (p. 196), DUALE (p. 198), ZOS (p. 192)

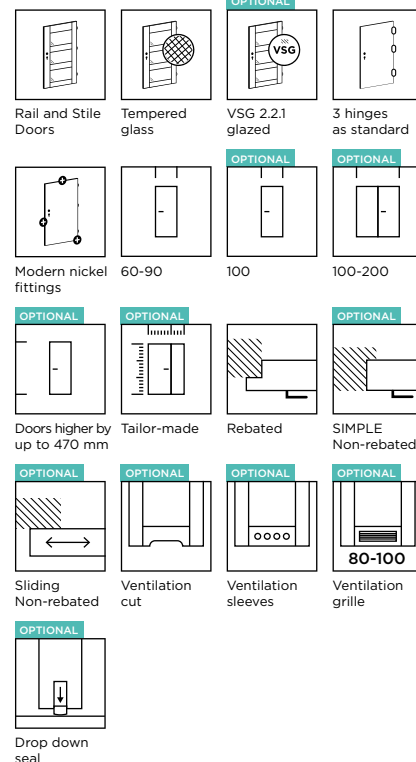


AVAILABLE COLOURS:


PP GROUP




CPL GROUP



CLPL GROUP

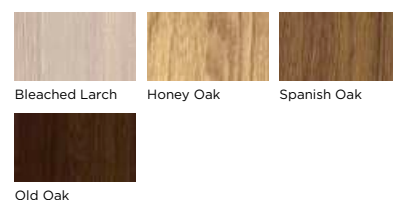

FF GROUP

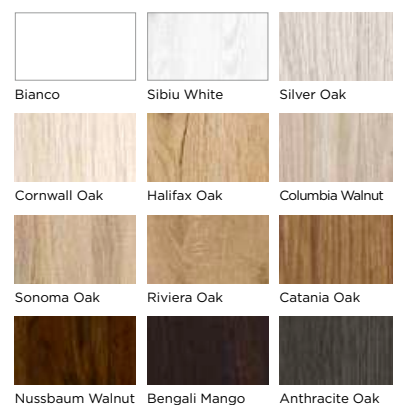

PRESTIGE PC-02, FF Nussbaum Walnut

PRESTIGE PC /



COLOUR: FF Sonoma Oak



PC-01



PC-02



PC-03



PC-04



PC-05



PC-06

AVAILABLE WIDTHS

- rebated system S2 in mm: „60“=644, „70“=744, „80“=844, „90“=944
- SIMPLE non-rebated system S2 in mm: „60“=618, „70“=718, „80“=818, „90“=918

OPTIONS

“100” width

Width smaller than “60”

Non-standard width, door with Satin deco, Lacomat or Satin VSG 2.2.1 or Black glass

AVAILABLE HEIGHTS

- rebated system H2 in mm: 2030
- SIMPLE non-rebated system H2 in mm: 2017

OPTIONS

Up to 60 mm shorter

More than 60 mm shorter (feasibility evaluated case by case)
door with Satin deco, Lacomat or Satin VSG 2.2.1 or Black glass

Up to 470 mm longer (feasibility evaluated case by case)
door with Satin deco, Lacomat or Satin VSG 2.2.1 or Black glass

Additional hinge (required for doors that are 110 mm to 470 mm longer)

Additional hinge for SIMPLE non-rebated system (required for doors that are 110 mm to 470 mm longer)

Change of lock position and bottom hinge (recommended for doors with a non-standard height)

CONSTRUCTION

- A robust rail and stile construction made of MDF

OPTIONS

Non-rebated door, SIMPLE system

Non-rebated door, wall-mounted standard sliding system, wall-mounted and pocket LOFT doors

Inactive door leaf for double doors, width S2 in mm: 420-609

Inactive door leaf for double doors, width S2 in mm: 610, 710, 810, 910

Inactive door leaf for double doors, width S2 in mm: 1010

COMPONENTS

- Tempered Satin glass, 4 mm thick
- A mortise key lock (options include a turn and release lock, a lock with a euro profile cylinder or without the bottom hole)
- Screw-in double-bolt hinges in nickel, 3 pcs. For ZOS frame packages, hinges are in zinc white

OPTIONS

Door restrictor arm (applies to doors in the SIMPLE system)

Drop down seal

Ventilation undercut

Metal, round or square ventilation sleeves in Nickel or Bronze (pcs.)


Plastic, square ventilation sleeves in Black matt, White, Gold, Satin Chrome or Chrome (pcs.)

Plastic ventilation grille in matt silver for “80”, “90” and “100” doors

Stainless steel ventilation grille in inox or black color for the door leaf „80“, „90“ i „100”


DOOR FRAME VARIANTS

- Fixed: timber (p. 188) and MDF (p. 189)
- Adjustable: DIN (p. 196), DUALE (p. 198), ZOS (p. 192)

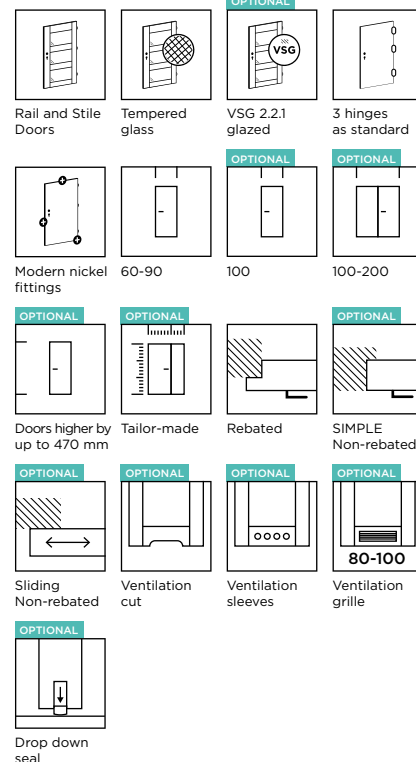


AVAILABLE COLOURS:


CPL GROUP

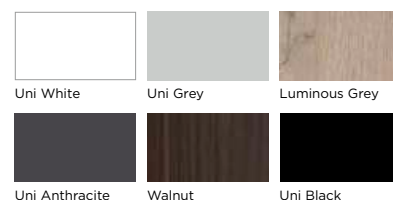

CLPL GROUP

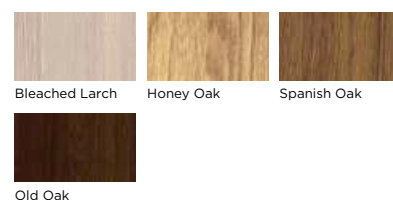

FF GROUP

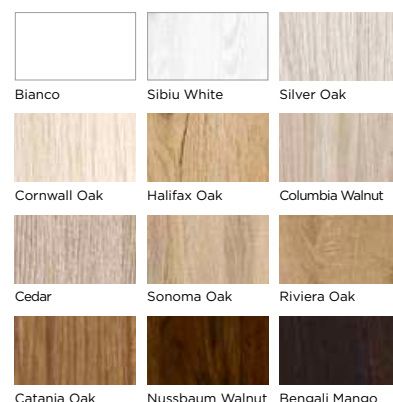

PRESTIGE PE-02, CPL Uni Anthracite

PRESTIGE PE /

COLOUR: FF Sibiu White



PE-01



PE-02



PE-03



PE-04



PE-05



PE-06

AVAILABLE WIDTHS

- rebated system S2 in mm: „60“=644, „70“=744, „80“=844, „90“=944
- SIMPLE non-rebated system S2 in mm: „60“=618, „70“=718, „80“=818, „90“=918

OPTIONS

“100” width

Width smaller than “60”

Non-standard width, door with Satin deco, Lacomat or Satin VSG 2.2.1 or Black glass

AVAILABLE HEIGHTS

- rebated system H2 in mm: 2030
- SIMPLE non-rebated system H2 in mm: 2017
- The model is not available as “higher” options, maximum door height H2 in mm is 2030

OPTIONS

Up to 60 mm shorter

More than 60 mm shorter (feasibility evaluated case by case)
door with Satin deco, Lacomat or Satin VSG 2.2.1 or Black glass

Change of lock position and bottom hinge (recommended for doors with a non-standard height)

CONSTRUCTION

- A robust rail and stile construction made of MDF

OPTIONS

Non-rebated door, SIMPLE system

Non-rebated door, wall-mounted standard sliding system, wall-mounted and pocket LOFT doors

Inactive door leaf for double doors, width S2 in mm: 420-609

Inactive door leaf for double doors, width S2 in mm: 610, 710, 810, 910

Inactive door leaf for double doors, width S2 in mm: 1010

COMPONENTS

- Tempered Satin glass, 4 mm thick
- A mortise key lock (options include a turn and release lock, a lock with a euro profile cylinder or without the bottom hole)
- Screw-in double-bolt hinges in nickel, 3 pcs. For ZOS frame packages, hinges are in zinc white

OPTIONS

Door restrictor arm (applies to doors in the SIMPLE system)

Drop down seal

Ventilation undercut

Metal, round or square ventilation sleeves in Nickel or Bronze (pcs.)


Plastic, square ventilation sleeves in Black matt, White, Gold, Satin Chrome or Chrome (pcs.)

Plastic ventilation grille in matt silver for “80”, “90” and “100” doors

Stainless steel ventilation grille in inox or black color for the door leaf „80“, „90“ i „100“

DOOR FRAME VARIANTS

- Fixed: timber (p. 188) and MDF (p. 189)
- Adjustable: DIN (p. 196), DUALE (p. 198), ZOS (p. 192)

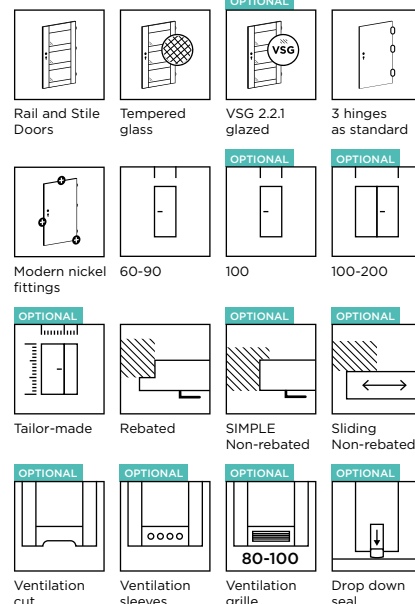

AVAILABLE COLOURS:

PP GROUP



Supermatt White

Natural Grandson Oak

CPL GROUP



Uni White

Uni Grey

Luminous Grey



Uni Anthracite

Walnut

Uni Black

CLPL GROUP



Bleached Larch

Honey Oak

Spanish Oak



Old Oak

FF GROUP



Bianco

Sibiu White

Silver Oak



Cornwall Oak

Halifax Oak

Columbia Walnut



Sonoma Oak

Riviera Oak

Catania Oak




Nussbaum Walnut

Bengali Mango

Anthracite Oak

PRESTIGE PH-02, FF Cornwall Oak

PRESTIGE PH /

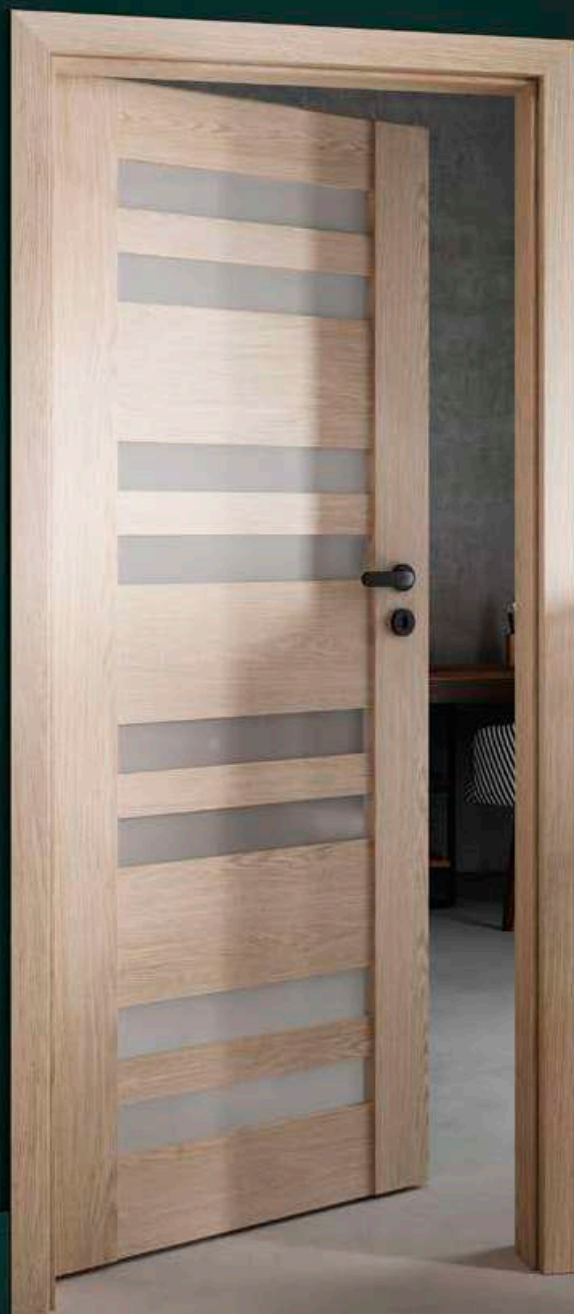

COLOUR: CLPL Old Oak



PH-01



PH-02



PH-03



PH-04



PH-05



PH-06

AVAILABLE WIDTHS

- rebated system S2 in mm: „60“=644, „70“=744, „80“=844, „90“=944
- SIMPLE non-rebated system S2 in mm: „60“=618, „70“=718, „80“=818, „90“=918

OPTIONS

“100” width

Width smaller than “60”

Non-standard width, door with Satin deco, Lacomat or Satin VSG 2.2.1 or Black glass

AVAILABLE HEIGHTS

- rebated system H2 in mm: 2030
- SIMPLE non-rebated system H2 in mm: 2017

OPTIONS

Up to 60 mm shorter

More than 60 mm shorter (feasibility evaluated case by case)
door with Satin deco, Lacomat or Satin VSG 2.2.1 or Black glass

Up to 470 mm longer (feasibility evaluated case by case)
door with Satin deco, Lacomat or Satin VSG 2.2.1 or Black glass

Additional hinge (required for doors that are 110 mm to 470 mm longer)

Additional hinge for SIMPLE non-rebated system (required for doors that are 110 mm to 470 mm longer)

Change of lock position and bottom hinge (recommended for doors with a non-standard height)

CONSTRUCTION

- A robust rail and stile construction made of MDF

OPTIONS

Non-rebated door, SIMPLE system

Non-rebated door, wall-mounted standard sliding system, wall-mounted and pocket LOFT doors

Inactive door leaf for double doors, width S2 in mm: 420-609

Inactive door leaf for double doors, width S2 in mm: 610, 710, 810, 910

Inactive door leaf for double doors, width S2 in mm: 1010

COMPONENTS

- Tempered Satin glass, 4 mm thick
- A mortise key lock (options include a turn and release lock, a lock with a euro profile cylinder or without the bottom hole)
- Screw-in double-bolt hinges in nickel, 3 pcs. For ZOS frame packages, hinges are in zinc white

OPTIONS

Door restrictor arm (applies to doors in the SIMPLE system)

Drop down seal

Ventilation undercut

Metal, round or square ventilation sleeves in Nickel or Bronze (pcs.)


Plastic, square ventilation sleeves in Black matt, White, Gold, Satin Chrome or Chrome (pcs.)

Plastic ventilation grille in matt silver for “80”, “90” and “100” doors

Stainless steel ventilation grille in inox or black color for the door leaf „80“, „90“ i „100”


DOOR FRAME VARIANTS

- Fixed: timber (p. 188) and MDF (p. 189)
- Adjustable: DIN (p. 196), DUALE (p. 198), ZOS (p. 192)

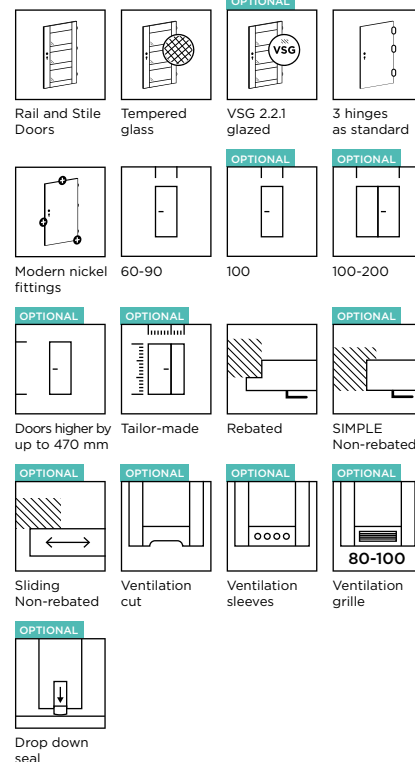


AVAILABLE COLOURS:


CPL GROUP

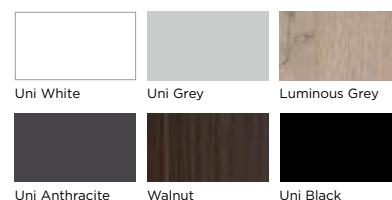

CLPL GROUP

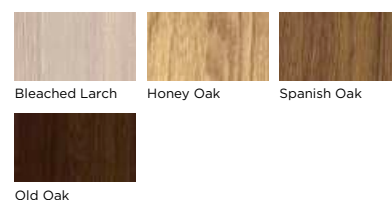

FF GROUP

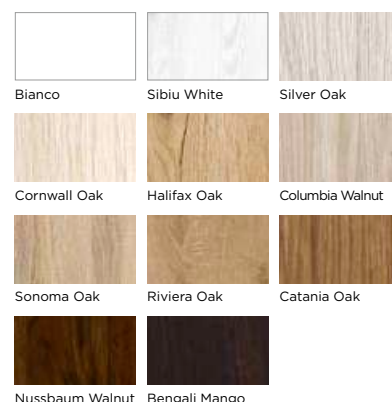

PRESTIGE PI-02, CLPL Spanish Oak

PRESTIGE PI /

COLOUR: FF Bengali Mango




PI-01



PI-02



PI-03



PI-04



PI-05



PI-06

AVAILABLE WIDTHS

- rebated system S2 in mm: „60“=644, „70“=744, „80“=844, „90“=944
- SIMPLE non-rebated system S2 in mm: „60“=618, „70“=718, „80“=818, „90“=918

OPTIONS

“100” width

Width smaller than “60”

Non-standard width, door with Satin deco, Lacomat or Satin VSG 2.2.1 or Black glass

AVAILABLE HEIGHTS

- rebated system H2 in mm: 2030
- SIMPLE non-rebated system H2 in mm: 2017

OPTIONS

Up to 60 mm shorter

More than 60 mm shorter (feasibility evaluated case by case)
door with Satin deco, Lacomat or Satin VSG 2.2.1 or Black glass

Up to 470 mm longer (feasibility evaluated case by case)
door with Satin deco, Lacomat or Satin VSG 2.2.1 or Black glass

Additional hinge (required for doors that are 110 mm to 470 mm longer)

Additional hinge for SIMPLE non-rebated system (required for doors that are 110 mm to 470 mm longer)

Change of lock position and bottom hinge (recommended for doors with a non-standard height)

CONSTRUCTION

- A robust rail and stile construction made of MDF

OPTIONS

Non-rebated door, SIMPLE system

Non-rebated door, wall-mounted standard sliding system, wall-mounted and pocket LOFT doors

Inactive door leaf for double doors, width S2 in mm: 420-609

Inactive door leaf for double doors, width S2 in mm: 610, 710, 810, 910

Inactive door leaf for double doors, width S2 in mm: 1010

COMPONENTS

- Tempered Satin glass, 4 mm thick
- A mortise key lock (options include a turn and release lock, a lock with a euro profile cylinder or without the bottom hole)
- Screw-in double-bolt hinges in nickel, 3 pcs. For ZOS frame packages, hinges are in zinc white

OPTIONS

Door restrictor arm (applies to doors in the SIMPLE system)

Drop down seal

Ventilation undercut

Metal, round or square ventilation sleeves in Nickel or Bronze (pcs.)


Plastic, square ventilation sleeves in Black matt, White, Gold, Satin Chrome or Chrome (pcs.)

Plastic ventilation grille in matt silver for “80”, “90” and “100” doors

Stainless steel ventilation grille in inox or black color for the door leaf „80“, „90“ i „100”


DOOR FRAME VARIANTS

- Fixed: timber (p. 188) and MDF (p. 189)
- Adjustable: DIN (p. 196), DUALE (p. 198), ZOS (p. 192)

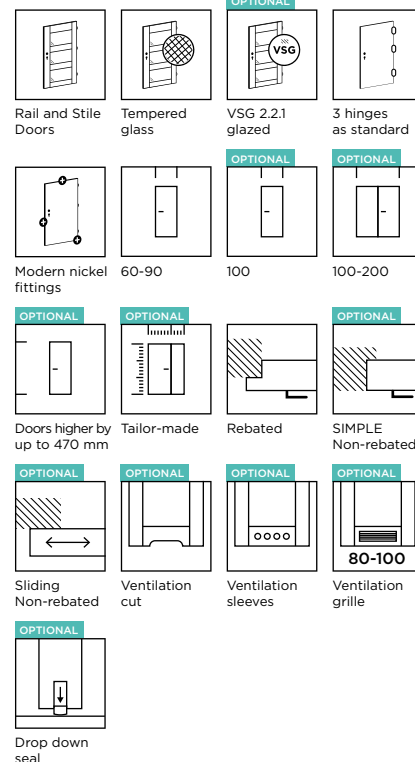


AVAILABLE COLOURS:


CPL GROUP

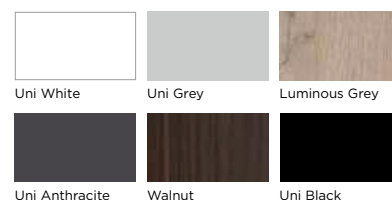

CLPL GROUP

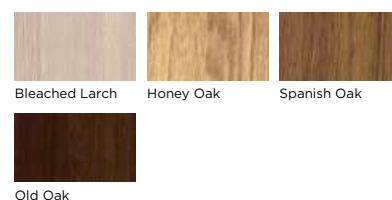

FF GROUP

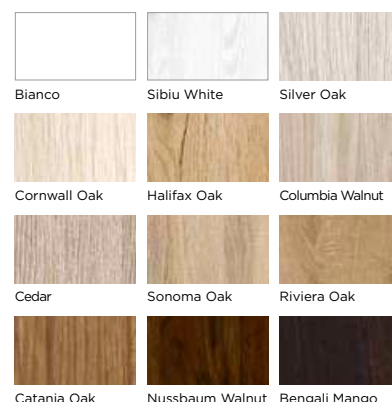



COLOUR: FF Columbia Walnut



PJ-01



PJ-02



PJ-03



PJ-04



PJ-05



PJ-06

AVAILABLE WIDTHS

- rebated system S2 in mm: „60“=644, „70“=744, „80“=844, „90“=944
- SIMPLE non-rebated system S2 in mm: „60“=618, „70“=718, „80“=818, „90“=918

OPTIONS

“100” width

Width smaller than “60”

Non-standard width, door with Satin deco, Lacomat or Satin VSG 2.2.1 or Black glass

AVAILABLE HEIGHTS

- rebated system H2 in mm: 2030
- SIMPLE non-rebated system H2 in mm: 2017

OPTIONS

Up to 60 mm shorter

More than 60 mm shorter (feasibility evaluated case by case)
door with Satin deco, Lacomat or Satin VSG 2.2.1 or Black glass

Up to 470 mm longer (feasibility evaluated case by case)
door with Satin deco, Lacomat or Satin VSG 2.2.1 or Black glass

Additional hinge (required for doors that are 110 mm to 470 mm longer)

Additional hinge for SIMPLE non-rebated system (required for doors that are 110 mm to 470 mm longer)

Change of lock position and bottom hinge (recommended for doors with a non-standard height)

CONSTRUCTION

- A robust rail and stile construction made of MDF

OPTIONS

Non-rebated door, SIMPLE system

Non-rebated door, wall-mounted standard sliding system, wall-mounted and pocket LOFT doors

Inactive door leaf for double doors, width S2 in mm: 420-609

Inactive door leaf for double doors, width S2 in mm: 610, 710, 810, 910

Inactive door leaf for double doors, width S2 in mm: 1010

COMPONENTS

- Tempered Satin glass, 4 mm thick
- A mortise key lock (options include a turn and release lock, a lock with a euro profile cylinder or without the bottom hole)
- Screw-in double-bolt hinges in nickel, 3 pcs. For ZOS frame packages, hinges are in zinc white

OPTIONS

Door restrictor arm (applies to doors in the SIMPLE system)

Drop down seal

Ventilation undercut

Metal, round or square ventilation sleeves in Nickel or Bronze (pcs.)


Plastic, square ventilation sleeves in Black matt, White, Gold, Satin Chrome or Chrome (pcs.)

Plastic ventilation grille in matt silver for “80”, “90” and “100” doors

Stainless steel ventilation grille in inox or black color for the door leaf „80“, „90“ i „100”


DOOR FRAME VARIANTS

- Fixed: timber (p. 188) and MDF (p. 189)
- Adjustable: DIN (p. 196), DUALE (p. 198), ZOS (p. 192)

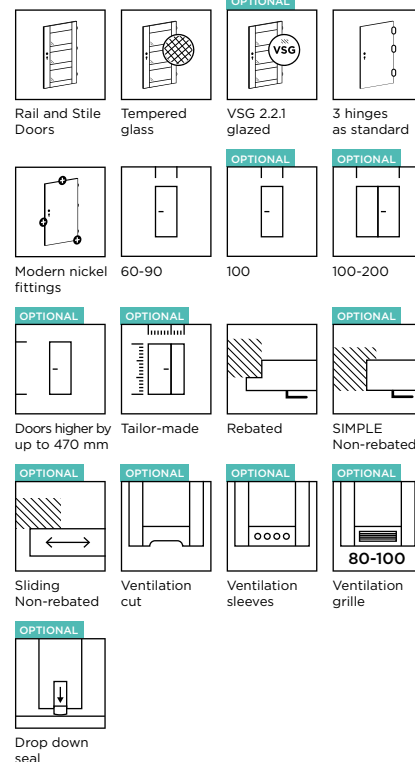


AVAILABLE COLOURS:


PP GROUP




CPL GROUP

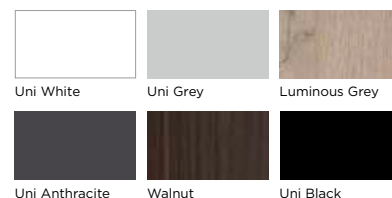

CLPL GROUP

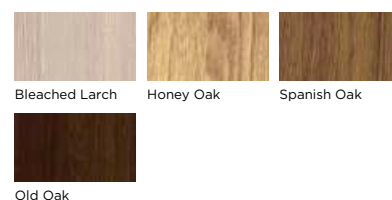

FF GROUP

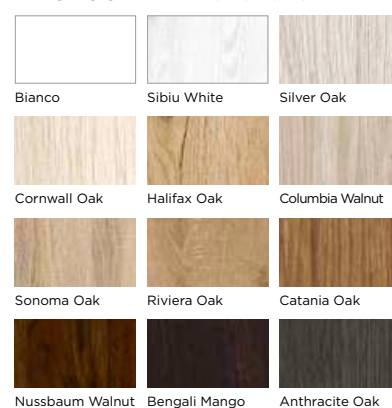



PRESTIGE PK-02, CLPL Honey Oak

PRESTIGE PK /

COLOUR: CLPL Honey Oak



PK-01



PK-02



PK-03



PK-04



PK-05



PK-06



PK-07



PK-08

AVAILABLE WIDTHS

- rebated system S2 in mm: „60“=644, „70“=744, „80“=844, „90“=944
- SIMPLE non-rebated system S2 in mm: „60“=618, „70“=718, „80“=818, „90“=918

OPTIONS

“100” width

Width smaller than “60”

Non-standard width, door with Satin deco, Lacomat or Satin VSG 2.2.1 or Black glass

AVAILABLE HEIGHTS

- rebated system H2 in mm: 2030
- SIMPLE non-rebated system H2 in mm: 2017

OPTIONS

Up to 60 mm shorter

More than 60 mm shorter (feasibility evaluated case by case)
door with Satin deco, Lacomat or Satin VSG 2.2.1 or Black glass

Up to 470 mm longer (feasibility evaluated case by case)
door with Satin deco, Lacomat or Satin VSG 2.2.1 or Black glass

Additional hinge (required for doors that are 110 mm to 470 mm longer)

Additional hinge for SIMPLE non-rebated system (required for doors that are 110 mm to 470 mm longer)

Change of lock position and bottom hinge (recommended for doors with a non-standard height)

CONSTRUCTION

- A robust rail and stile construction made of MDF

OPTIONS

Non-rebated door, SIMPLE system

Non-rebated door, wall-mounted standard sliding system, wall-mounted and pocket LOFT doors

Inactive door leaf for double doors, width S2 in mm: 420-609

Inactive door leaf for double doors, width S2 in mm: 610, 710, 810, 910

Inactive door leaf for double doors, width S2 in mm: 1010

COMPONENTS

- Tempered Satin glass, 4 mm thick
- A mortise key lock (options include a turn and release lock, a lock with a euro profile cylinder or without the bottom hole)
- Screw-in double-bolt hinges in nickel, 3 pcs. For ZOS frame packages, hinges are in zinc white

OPTIONS

Door restrictor arm (applies to doors in the SIMPLE system)

Drop down seal

Ventilation undercut

Metal, round or square ventilation sleeves in Nickel or Bronze (pcs.)


Plastic, square ventilation sleeves in Black matt, White, Gold, Satin Chrome or Chrome (pcs.)

Plastic ventilation grille in matt silver for “80”, “90” and “100” doors

Stainless steel ventilation grille in inox or black color for the door leaf „80“, „90“ i „100“


DOOR FRAME VARIANTS

- Fixed: timber (p. 188) and MDF (p. 189)
- Adjustable: DIN (p. 196), DUALE (p. 198), ZOS (p. 192)

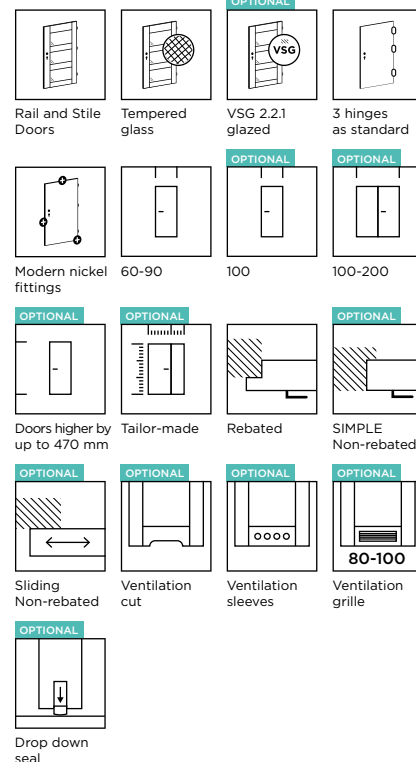


AVAILABLE COLOURS:


CPL GROUP

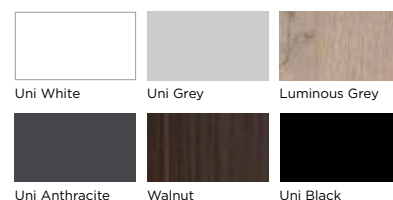

CLPL GROUP

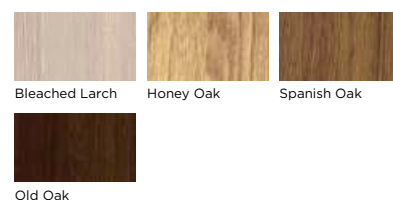

FF GROUP

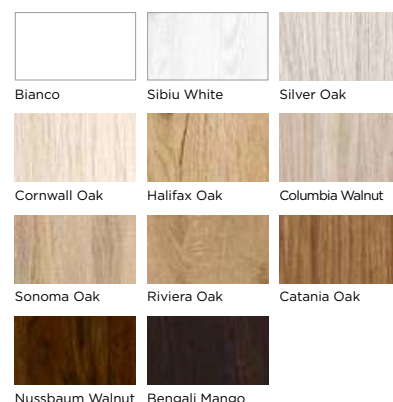



PRESTIGE PL-02, CLPL Old Oak

PRESTIGE PL /

COLOUR: CLPL Honey Oak



PL-01



PL-02



PL-03



PL-04



PL-05



PL-06

AVAILABLE WIDTHS

- rebated system S2 in mm: „60“=644, „70“=744, „80“=844, „90“=944
- SIMPLE non-rebated system S2 in mm: „60“=618, „70“=718, „80“=818, „90“=918

OPTIONS

“100” width

Width smaller than “60”

Non-standard width, door with Satin deco, Lacomat or Satin VSG 2.2.1 or Black glass

AVAILABLE HEIGHTS

- rebated system H2 in mm: 2030
- SIMPLE non-rebated system H2 in mm: 2017

OPTIONS

Up to 60 mm shorter

More than 60 mm shorter (feasibility evaluated case by case)
door with Satin deco, Lacomat or Satin VSG 2.2.1 or Black glass

Up to 470 mm longer (feasibility evaluated case by case)
door with Satin deco, Lacomat or Satin VSG 2.2.1 or Black glass

Additional hinge (required for doors that are 110 mm to 470 mm longer)

Additional hinge for SIMPLE non-rebated system (required for doors that are 110 mm to 470 mm longer)

Change of lock position and bottom hinge (recommended for doors with a non-standard height)

CONSTRUCTION

- A robust rail and stile construction made of MDF

OPTIONS

Non-rebated door, SIMPLE system

Non-rebated door, wall-mounted standard sliding system, wall-mounted and pocket LOFT doors

Inactive door leaf for double doors, width S2 in mm: 420-609

Inactive door leaf for double doors, width S2 in mm: 610, 710, 810, 910

Inactive door leaf for double doors, width S2 in mm: 1010

COMPONENTS

- Tempered Satin glass, 4 mm thick
- A mortise key lock (options include a turn and release lock, a lock with a euro profile cylinder or without the bottom hole)
- Screw-in double-bolt hinges in nickel, 3 pcs. For ZOS frame packages, hinges are in zinc white

OPTIONS

Door restrictor arm (applies to doors in the SIMPLE system)

Drop down seal

Ventilation undercut

Metal, round or square ventilation sleeves in Nickel or Bronze (pcs.)


Plastic, square ventilation sleeves in Black matt, White, Gold, Satin Chrome or Chrome (pcs.)

Plastic ventilation grille in matt silver for “80”, “90” and “100” doors

Stainless steel ventilation grille in inox or black color for the door leaf „80“, „90“ i „100“


DOOR FRAME VARIANTS

- Fixed: timber (p. 188) and MDF (p. 189)
- Adjustable: DIN (p. 196), DUALE (p. 198), ZOS (p. 192)

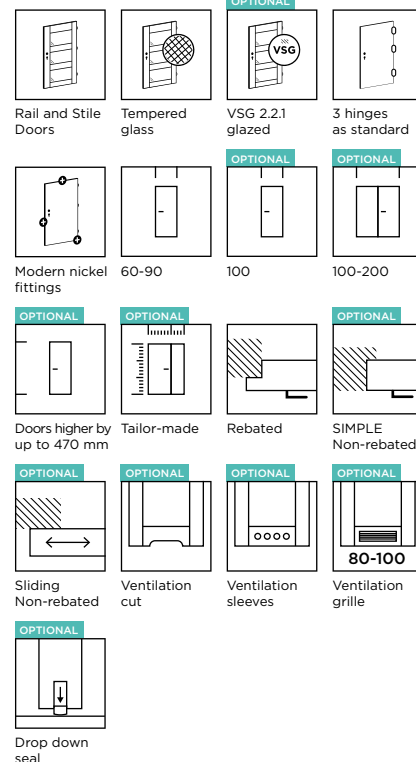


AVAILABLE COLOURS:


PP GROUP




CPL GROUP

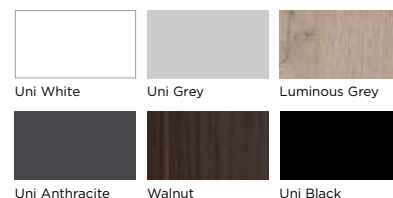

CLPL GROUP

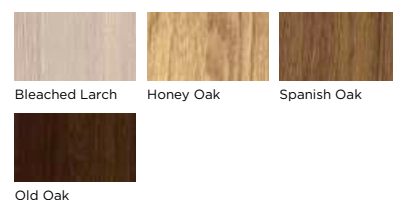

FF GROUP

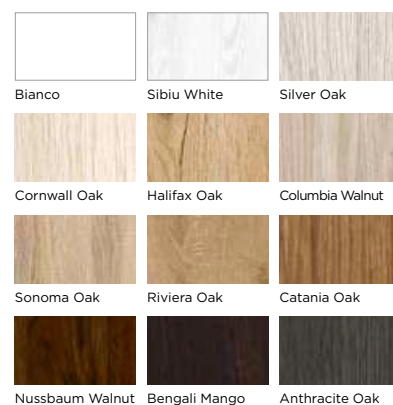



PRESTIGE PN-01 CPL Walnut

PRESTIGE PN /

COLOUR: FF Cornwall Oak



PN-01



PN-02



PN-03



PN-04



PN-05



PN-06

AVAILABLE WIDTHS

- rebated system S2 in mm: „60“=644, „70“=744, „80“=844, „90“=944
- SIMPLE non-rebated system S2 in mm: „60“=618, „70“=718, „80“=818, „90“=918

OPTIONS

“100” width

Width smaller than “60”

Non-standard width, door with Satin deco, Lacomat or Satin VSG 2.2.1 or Black glass

AVAILABLE HEIGHTS

- rebated system H2 in mm: 2030
- SIMPLE non-rebated system H2 in mm: 2017
- The model is not available as “higher” options, maximum door height H2 in mm is 2030

OPTIONS

Up to 60 mm shorter

More than 60 mm shorter (feasibility evaluated case by case)
door with Satin deco, Lacomat or Satin VSG 2.2.1 or Black glass

Change of lock position and bottom hinge (recommended for doors with a non-standard height)

CONSTRUCTION

- A robust rail and stile construction made of MDF

OPTIONS

Non-rebated door, SIMPLE system

Non-rebated door, wall-mounted standard sliding system, wall-mounted and pocket LOFT doors

Inactive door leaf for double doors, width S2 in mm: 420-609

Inactive door leaf for double doors, width S2 in mm: 610, 710, 810, 910

Inactive door leaf for double doors, width S2 in mm: 1010

COMPONENTS

- Tempered Satin glass, 4 mm thick
- A mortise key lock (options include a turn and release lock, a lock with a euro profile cylinder or without the bottom hole)
- Screw-in double-bolt hinges in nickel, 3 pcs. For ZOS frame packages, hinges are in zinc white

OPTIONS

Door restrictor arm (applies to doors in the SIMPLE system)

Drop down seal

Ventilation undercut

Metal, round or square ventilation sleeves in Nickel or Bronze (pcs.)


Plastic, square ventilation sleeves in Black matt, White, Gold, Satin Chrome or Chrome (pcs.)

Plastic ventilation grille in matt silver for “80”, “90” and “100” doors

Stainless steel ventilation grille in inox or black color for the door leaf „80“, „90“ i „100”


DOOR FRAME VARIANTS

- Fixed: timber (p. 188) and MDF (p. 189)
- Adjustable: DIN (p. 196), DUALE (p. 198), ZOS (p. 192)

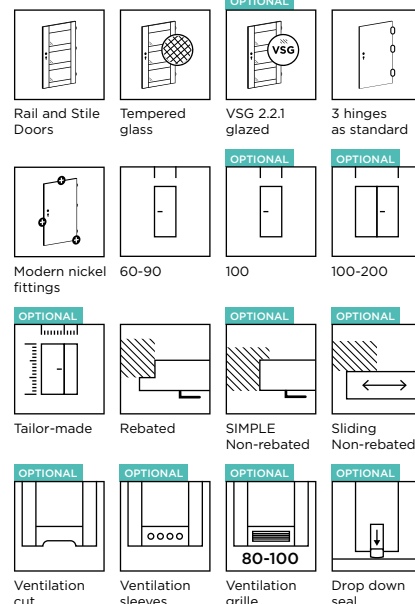


AVAILABLE COLOURS:


PP GROUP




CPL GROUP

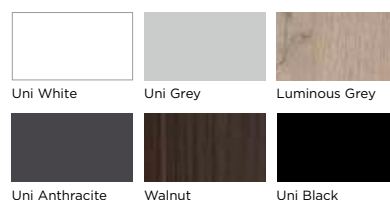

CLPL GROUP

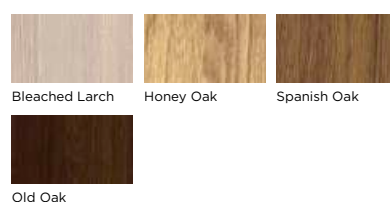

FF GROUP

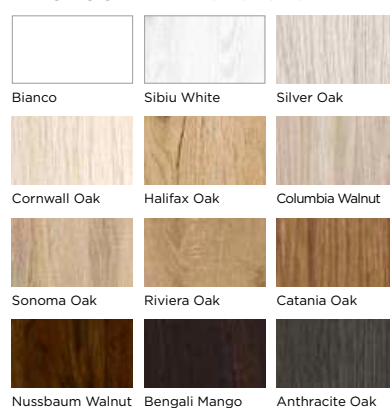



PRESTIGE PO-02, PP Supernatt White

PRESTIGE PO /

COLOUR: FF Columbia Walnut



PO-01



PO-02

Tempered bevelled Satin glass



PO-03

Tempered bevelled clear glass



PO-04



PO-05

Tempered bevelled Satin glass



PO-06

Tempered bevelled clear glass



PO-07

Rebate side S1: mirror
Total door width side S2: panel




PO-08

Rebate side S1: panel
Total door width side S2: mirror



PO-09

Rebate side S1: graphite mirror
Total door width side S2: panel



PO-10

Rebate side S1: panel
Total door width side S2: graphite mirror



PO-11

visiosun glass, fluted structure of the glass
on the full side S2



In PO-02 and PO-05 models:
clear bevel



In PO-03 and PO-06 models:
clear bevel and glass

AVAILABLE WIDTHS

- rebated system S2 in mm: „60“=644, „70“=744, „80“=844, „90“=944
- SIMPLE non-rebated system S2 in mm: „60“=618, „70“=718, „80“=818, „90“=918

OPTIONS

“100” width

Width smaller than “60”

Non-standard width

AVAILABLE HEIGHTS

- rebated system H2 in mm: 2030
- SIMPLE non-rebated system H2 in mm: 2017

OPTIONS

Up to 60 mm shorter

More than 60 mm shorter (feasibility evaluated case by case) Door with Satin or clear bevelled tempered glass (clear bevel) or Satin VSG 3.3.1 glass, plain on both sides (satin bevel, opaque)

Up to 470 mm longer (feasibility evaluated case by case) Door with Satin or clear tempered glass, bevelled (clear bevel) or Satin VSG 3.3.1, plain finish on both sides (satin opaque bevel); PO-01 not available in the longer option

Additional hinge (required for doors that are 110 mm to 470 mm longer)

Additional hinge for SIMPLE non-rebated system (required for doors that are 110 mm to 470 mm longer)

Change of lock position and bottom hinge (recommended for doors with a non-standard height)

CONSTRUCTION

- A robust rail and stile construction made of MDF

OPTIONS

Non-rebated door, SIMPLE system

Non-rebated door, wall-mounted standard sliding system, wall-mounted and pocket LOFT doors

Inactive door leaf for double doors, width S2 in mm: 420-609

Inactive door leaf for double doors, width S2 in mm: 610, 710, 810, 910

Inactive door leaf for double doors, width S2 in mm: 1010

COMPONENTS

- Satin glass, clear tempered bevelled (clear bevel), 4 mm thick, or Visiosun. In PO-07 - PO-10 models: standard mirror or graphite mirror glued on the panel that faces the other side of the door
- A mortise key lock (options include a turn and release lock, a lock with a euro profile cylinder or without the bottom hole)
- Screw-in hinges, 3 pcs. For ZOS frame packages, hinges are in zinc white

OPTIONS

Door restrictor arm (applies to doors in the SIMPLE system)

Drop down seal

Ventilation undercut

Metal, round or square ventilation sleeves in Nickel or Bronze (pcs.)


Plastic, square ventilation sleeves in Black matt, White, Gold, Satin Chrome or Chrome (pcs.)

Plastic ventilation grille in matt silver for “80”, “90” and “100” doors

Stainless steel ventilation grille in inox or black color for the door leaf „80“, „90“ i „100”


DOOR FRAME VARIANTS

- Fixed: timber (p. 188) and MDF (p. 189)
- Adjustable: DIN (p. 196), DUALE (p. 198), ZOS (p. 192)

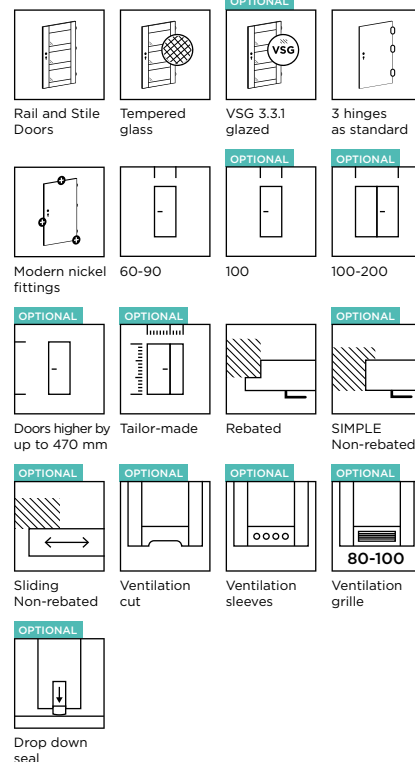


AVAILABLE COLOURS:


PP GROUP




CPL GROUP

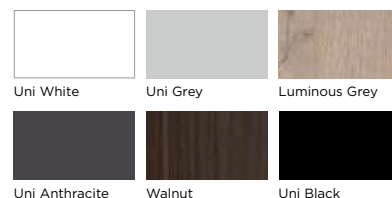

CLPL GROUP

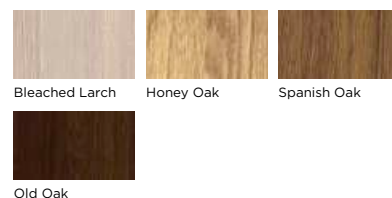

FF GROUP

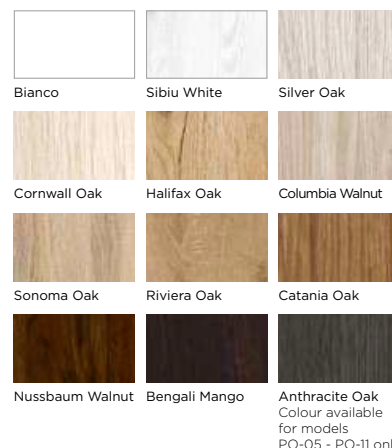

PRESTIGE PP-02, FF Columbia Walnut

PRESTIGE PP /

COLOUR: FF Columbia Walnut



PP-01



PP-02



PP-03



PP-04



PP-05



PP-06

AVAILABLE WIDTHS

- rebated system S2 in mm: „60“=644, „70“=744, „80“=844, „90“=944
- SIMPLE non-rebated system S2 in mm: „60“=618, „70“=718, „80“=818, „90“=918

OPTIONS

“100” width

Width smaller than “60”

Non-standard width, door with Satin deco, Lacomat or Satin VSG 2.2.1 or Black glass

AVAILABLE HEIGHTS

- rebated system H2 in mm: 2030
- SIMPLE non-rebated system H2 in mm: 2017

OPTIONS

Up to 60 mm shorter

More than 60 mm shorter (feasibility evaluated case by case)
door with Satin deco, Lacomat or Satin VSG 2.2.1 or Black glass

Up to 470 mm longer (feasibility evaluated case by case)
door with Satin deco, Lacomat or Satin VSG 2.2.1 or Black glass

Additional hinge (required for doors that are 110 mm to 470 mm longer)

Additional hinge for SIMPLE non-rebated system (required for doors that are 110 mm to 470 mm longer)

Change of lock position and bottom hinge (recommended for doors with a non-standard height)

CONSTRUCTION

- A robust rail and stile construction made of MDF

OPTIONS

Non-rebated door, SIMPLE system

Non-rebated door, wall-mounted standard sliding system, wall-mounted and pocket LOFT doors

Inactive door leaf for double doors, width S2 in mm: 420-609

Inactive door leaf for double doors, width S2 in mm: 610, 710, 810, 910

Inactive door leaf for double doors, width S2 in mm: 1010

COMPONENTS

- Tempered Satin glass, 4 mm thick
- A mortise key lock (options include a turn and release lock, a lock with a euro profile cylinder or without the bottom hole)
- Screw-in double-bolt hinges in nickel, 3 pcs. For ZOS frame packages, hinges are in zinc white

OPTIONS

Door restrictor arm (applies to doors in the SIMPLE system)

Drop down seal

Ventilation undercut

Metal, round or square ventilation sleeves in Nickel or Bronze (pcs.)


Plastic, square ventilation sleeves in Black matt, White, Gold, Satin Chrome or Chrome (pcs.)

Plastic ventilation grille in matt silver for “80”, “90” and “100” doors

Stainless steel ventilation grille in inox or black color for the door leaf „80“, „90“ i „100“


DOOR FRAME VARIANTS

- Fixed: timber (p. 188) and MDF (p. 189)
- Adjustable: DIN (p. 196), DUALE (p. 198), ZOS (p. 192)

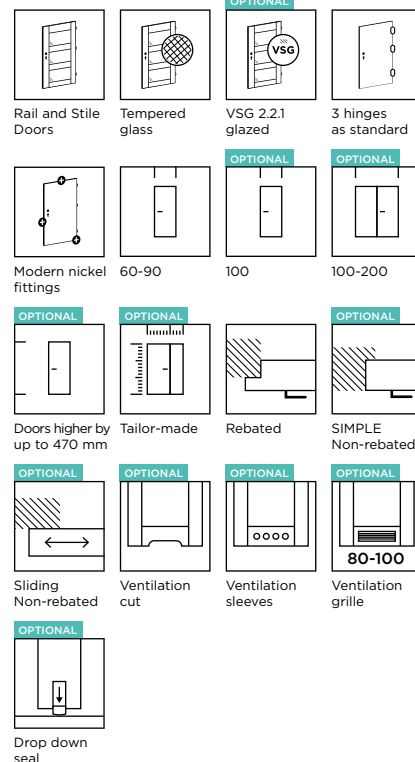


AVAILABLE COLOURS:


PP GROUP




CPL GROUP

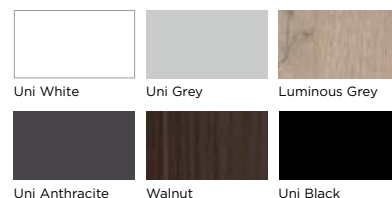

CLPL GROUP

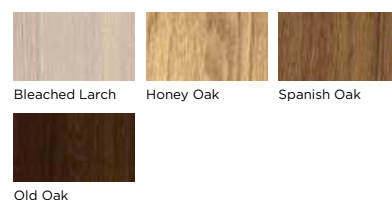

FF GROUP

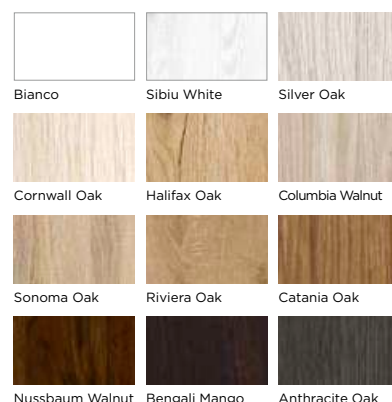



COLOUR: FF Bianco



PQ-01



PQ-02



PQ-03



PQ-04

AVAILABLE WIDTHS

- rebated system S2 in mm: „60“=644, „70“=744, „80“=844, „90“=944
- SIMPLE non-rebated system S2 in mm: „60“=618, „70“=718, „80“=818, „90“=918

OPTIONS

“100” width

Width smaller than “60”

Non-standard width, door with Satin deco, Lacomat or Satin VSG 2.2.1 or Black glass

AVAILABLE HEIGHTS

- rebated system H2 in mm: 2030
- SIMPLE non-rebated system H2 in mm: 2017

OPTIONS

Up to 60 mm shorter

More than 60 mm shorter (feasibility evaluated case by case)
door with Satin deco, Lacomat or Satin VSG 2.2.1 or Black glass

Up to 470 mm longer (feasibility evaluated case by case)
door with Satin deco, Lacomat or Satin VSG 2.2.1 or Black glass

Additional hinge (required for doors that are 110 mm to 470 mm longer)

Additional hinge for SIMPLE non-rebated system (required for doors that are 110 mm to 470 mm longer)

Change of lock position and bottom hinge (recommended for doors with a non-standard height)

CONSTRUCTION

- A robust rail and stile construction made of MDF

OPTIONS

Non-rebated door, SIMPLE system

Non-rebated door, wall-mounted standard sliding system, wall-mounted and pocket LOFT doors

Inactive door leaf for double doors, width S2 in mm: 420-609

Inactive door leaf for double doors, width S2 in mm: 610, 710, 810, 910

Inactive door leaf for double doors, width S2 in mm: 1010

COMPONENTS

- Tempered Satin glass, 4 mm thick
- A mortise key lock (options include a turn and release lock, a lock with a euro profile cylinder or without the bottom hole)
- Screw-in hinges, 3 pcs. For ZOS frame packages, hinges are in zinc white

OPTIONS

Door restrictor arm (applies to doors in the SIMPLE system)

Drop down seal

Ventilation undercut

Metal, round or square ventilation sleeves in Nickel or Bronze (pcs.)


Plastic, square ventilation sleeves in Black matt, White, Gold, Satin Chrome or Chrome (pcs.)

Plastic ventilation grille in matt silver for “80”, “90” and “100” doors

Stainless steel ventilation grille in inox or black color for the door leaf „80“, „90“ i „100”

DOOR FRAME VARIANTS

- Fixed: timber (p. 188) and MDF (p. 189)
- Adjustable: DIN (p. 196), DUALE (p. 198), ZOS (p. 192)

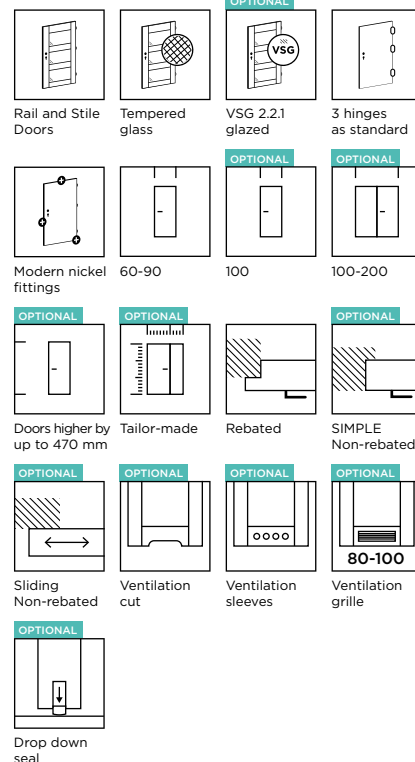

AVAILABLE COLOURS:


FF GROUP



PRESTIGE PR-02, FF Bianco

PRESTIGE PR

COLOUR: FF Sibiu White



PR-01



PR-02



PR-03
Layout for sizes
"60", "80" and "100"



PR-03
Configuration for
size "70"



PR-03
Configuration for
size "90"



PR-04
Layout for sizes
"60", "80" and "100"



PR-04
Configuration for
size "70"



PR-04
Configuration for
size "90"

AVAILABLE WIDTHS

- rebated system S2 in mm: „60“=644, „70“=744, „80“=844, „90“=944
- SIMPLE non-rebated system S2 in mm: „60“=618, „70“=718, „80“=818, „90“=918

OPTIONS

“100” width

AVAILABLE HEIGHTS

- rebated system H2 in mm: 2030
- SIMPLE non-rebated system H2 in mm: 2017
- The model is not available as “higher” options, maximum door height H2 in mm is 2030

OPTIONS

Up to 60 mm shorter

Additional hinge for SIMPLE non-rebated system

CONSTRUCTION

- A robust rail and stile construction made of MDF

OPTIONS

Non-rebated door, SIMPLE system

Non-rebated door, wall-mounted standard sliding system, wall-mounted and pocket LOFT doors

Inactive door leaf for double doors, width S2 in mm: 644, 744, 844, 944 (extra charge for non-standard door frame width)

Inactive door leaf for double doors, szer. S2 w mm: 1044 (extra charge for non-standard door frame width)

COMPONENTS

- Tempered Satin glass, 4 mm thick
- A mortise key lock (options include a turn and release lock, a lock with a euro profile cylinder or without the bottom hole)
- Screw-in double-bolt hinges in nickel, 3 pcs. For ZOS frame packages, hinges are in zinc white

OPTIONS

Door restrictor arm (applies to doors in the SIMPLE system)

Drop down seal

Ventilation undercut

Metal, round or square ventilation sleeves in Nickel or Bronze (pcs.)


Plastic, square ventilation sleeves in Black matt, White, Gold, Satin Chrome or Chrome (pcs.)

Plastic ventilation grille in matt silver for “80”, “90” and “100” doors

Stainless steel ventilation grille in inox or black color for the door leaf „80”, „90” i „100”


DOOR FRAME VARIANTS

- Fixed: timber (p. 188) and MDF (p. 189)
- Adjustable: DIN (p. 196), DUALE (p. 198), ZOS (p. 192)

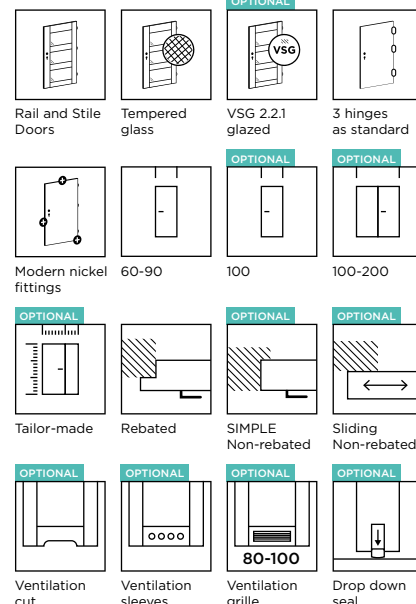


AVAILABLE COLOURS:


CPL GROUP

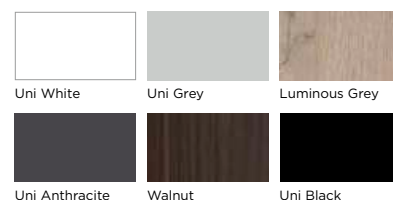

CLPL GROUP

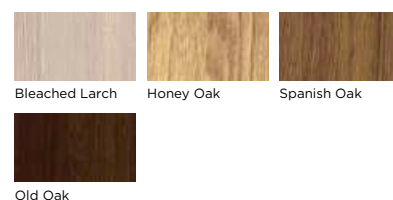

FF GROUP

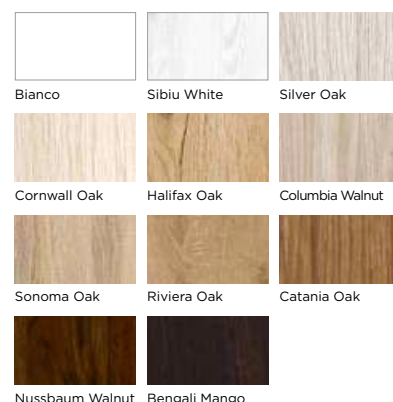



COLOUR: CLPL Honey Oak



MI-01



MI-02
width 60



MI-02
width 70



MI-02
width 80



MI-02
width 90



MI-02
width 100

AVAILABLE WIDTHS

- rebated system S2 in mm: „60“=644, „70“=744, „80“=844, „90“=944
- SIMPLE non-rebated system S2 in mm: „60“=618, „70“=718, „80“=818, „90“=918

OPTIONS

“100” width

AVAILABLE HEIGHTS

- rebated system H2 in mm: 2030
- SIMPLE non-rebated system H2 in mm: 2017
- The model is not available as “higher” options, maximum door height H2 in mm is 2030

OPTIONS

Up to 60 mm shorter

Additional hinge for SIMPLE non-rebated system

CONSTRUCTION

- A robust rail and stile construction made of MDF

OPTIONS

Non-rebated door, SIMPLE system

Non-rebated door, wall-mounted standard sliding system, wall-mounted and pocket LOFT doors

Inactive door leaf for double doors, width S2 in mm: 644, 744, 844, 944 (extra charge for non-standard door frame width)

COMPONENTS

- VSG 2.2.1 Black glass, plain on both sides
- A mortise key lock (options include a turn and release lock, a lock with a euro profile cylinder or without the bottom hole)
- Screw-in hinges, 3 pcs. For ZOS frame packages, hinges are in zinc white

OPTIONS

Door restrictor arm (applies to doors in the SIMPLE system)

Drop down seal

Ventilation undercut

Metal, round or square ventilation sleeves in Nickel or Bronze (pcs.)


Plastic, square ventilation sleeves in Black matt, White, Gold, Satin Chrome or Chrome (pcs.)

Plastic ventilation grille in matt silver for “80” and “90” doors

Stainless steel ventilation grille in inox or black color for the door leaf „80“, „90“ i „100”

DOOR FRAME VARIANTS

- Fixed: timber (p. 188) and MDF (p. 189)
- Adjustable: DIN (p. 196), DUALE (p. 198), ZOS (p. 192)

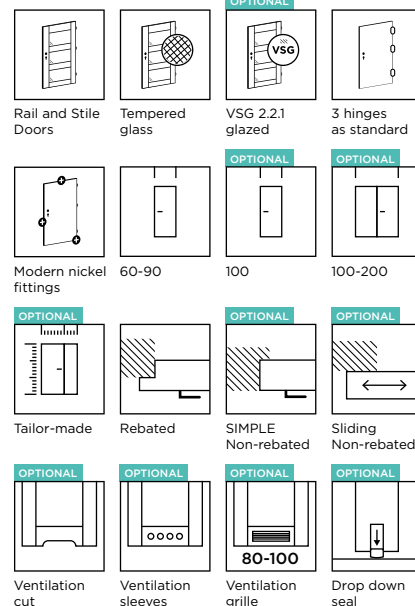

AVAILABLE COLOURS:

CLPL GROUP



Honey Oak

PRESTIGE PT-02, CLPL Spanish Oak

PRESTIGE PT

COLOUR: CPL Uni Anthracite



PT-01



PT-02



PT-03



PT-04



PT-05



PT-06

AVAILABLE WIDTHS

- rebated system S2 in mm: „60“=644, „70“=744, „80“=844, „90“=944
- SIMPLE non-rebated system S2 in mm: „60“=618, „70“=718, „80“=818, „90“=918

OPTIONS

“100” width

Width smaller than “60”

Non-standard width, door with Satin deco, Lacomat or Satin VSG 2.2.1 or Black glass

AVAILABLE HEIGHTS

- rebated system H2 in mm: 2030
- SIMPLE non-rebated system H2 in mm: 2017
- The model is not available as “higher” options, maximum door height H2 in mm is 2030

OPTIONS

Up to 60 mm shorter

More than 60 mm shorter (feasibility evaluated case by case)
door with Satin deco, Lacomat or Satin VSG 2.2.1 or Black glass

Change of lock position and bottom hinge (recommended for doors with a non-standard height)

CONSTRUCTION

- A robust rail and stile construction made of MDF

OPTIONS

Non-rebated door, SIMPLE system

Non-rebated door, wall-mounted standard sliding system, wall-mounted and pocket LOFT doors

Inactive door leaf for double doors, width S2 in mm: 420-609

Inactive door leaf for double doors, width S2 in mm: 610, 710, 810, 910

Inactive door leaf for double doors, width S2 in mm: 1010

COMPONENTS

- Tempered Satin glass, 4 mm thick
- A mortise key lock (options include a turn and release lock, a lock with a euro profile cylinder or without the bottom hole)
- Screw-in double-bolt hinges in nickel, 3 pcs. For ZOS frame packages, hinges are in zinc white

OPTIONS

Door restrictor arm (applies to doors in the SIMPLE system)

Drop down seal

Ventilation undercut

Metal, round or square ventilation sleeves in Nickel or Bronze (pcs.)


Plastic, square ventilation sleeves in Black matt, White, Gold, Satin Chrome or Chrome (pcs.)

Plastic ventilation grille in matt silver for “80”, “90” and “100” doors

Stainless steel ventilation grille in inox or black color for the door leaf „80“, „90“ i „100”


DOOR FRAME VARIANTS

- Fixed: timber (p. 188) and MDF (p. 189)
- Adjustable: DIN (p. 196), DUALE (p. 198), ZOS (p. 192)

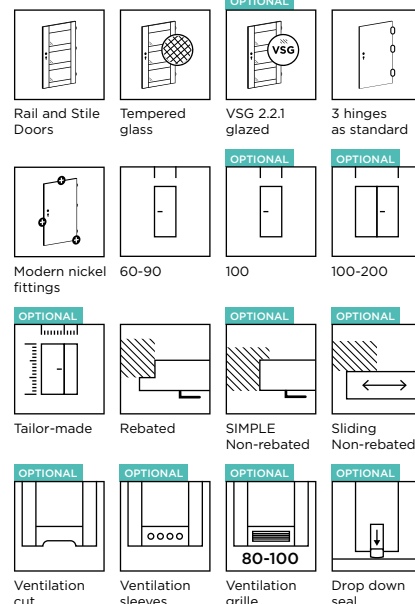


AVAILABLE COLOURS:


CPL GROUP

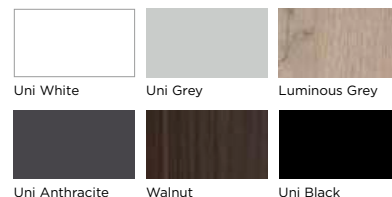

CLPL GROUP

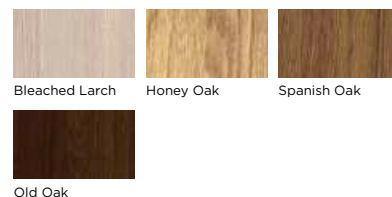

FF GROUP

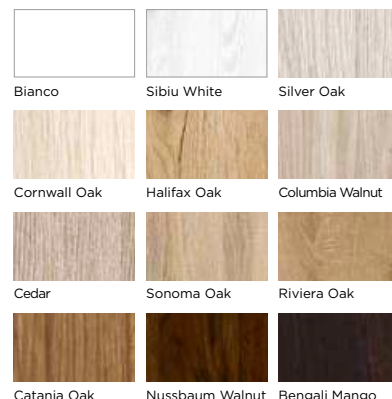



PRESTIGE PU-02, CPE Uni Black

PRESTIGE PU /

COLOUR: FF Cornwall Oak



PU-01



PU-02



PU-03



PU-04



PU-05



PU-06

AVAILABLE WIDTHS

- rebated system S2 in mm: „60“=644, „70“=744, „80“=844, „90“=944
- SIMPLE non-rebated system S2 in mm: „60“=618, „70“=718, „80“=818, „90“=918

OPTIONS

“100” width

Width smaller than “60”

Non-standard width, door with Satin deco, Lacomat or Satin VSG 2.2.1 or Black glass

AVAILABLE HEIGHTS

- rebated system H2 in mm: 2030
- SIMPLE non-rebated system H2 in mm: 2017
- The model is not available as “higher” options, maximum door height H2 in mm is 2030

OPTIONS

Up to 60 mm shorter

More than 60 mm shorter (feasibility evaluated case by case) door with Satin deco, Lacomat or Satin VSG 2.2.1 or Black glass

Change of lock position and bottom hinge (recommended for doors with a non-standard height)

CONSTRUCTION

- A robust rail and stile construction made of MDF

OPTIONS

Non-rebated door, SIMPLE system

Non-rebated door, wall-mounted standard sliding system, wall-mounted and pocket LOFT doors

Inactive door leaf for double doors, width S2 in mm: 420-609

Inactive door leaf for double doors, width S2 in mm: 610, 710, 810, 910

Inactive door leaf for double doors, width S2 in mm: 1010

COMPONENTS

- Tempered Satin glass, 4 mm thick
- A mortise key lock (options include a turn and release lock, a lock with a euro profile cylinder or without the bottom hole)
- Screw-in double-bolt hinges in nickel, 3 pcs. For ZOS frame packages, hinges are in zinc white

OPTIONS

Door restrictor arm (applies to doors in the SIMPLE system)

Drop down seal

Ventilation undercut

Metal, round or square ventilation sleeves in Nickel or Bronze (pcs.)


Plastic, square ventilation sleeves in Black matt, White, Gold, Satin Chrome or Chrome (pcs.)

Plastic ventilation grille in matt silver for “80”, “90” and “100” doors

Stainless steel ventilation grille in inox or black color for the door leaf „80“, „90“ i „100”

DOOR FRAME VARIANTS

- Fixed: timber (p. 188) and MDF (p. 189)
- Adjustable: DIN (p. 196), DUALE (p. 198), ZOS (p. 192)

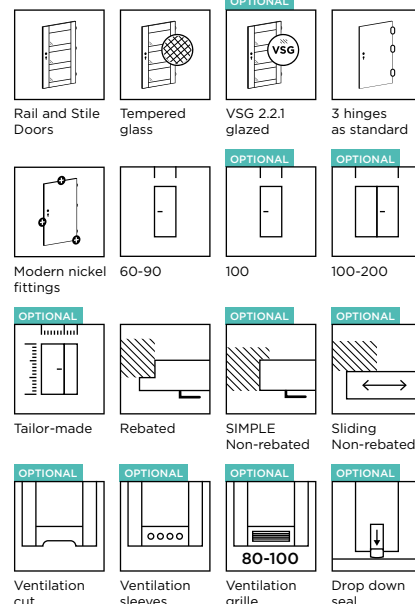

AVAILABLE COLOURS:

PP GROUP



Supermatt White



Natural Grandson Oak

CPL GROUP



Uni White



Uni Grey



Luminous Grey



Uni Anthracite



Walnut



Uni Black

CLPL GROUP



Bleached Larch



Honey Oak



Spanish Oak



Old Oak

FF GROUP



Bianco



Sibiu White



Silver Oak



Cornwall Oak



Halifax Oak



Columbia Walnut



Sonoma Oak



Riviera Oak



Catania Oak



Nussbaum Walnut



Bengali Mango



Anthracite Oak



PRESTIGE PW-01, FF Bianco

PRESTIGE
PW /

COLOUR: CPL Uni Black



PW-01



PW-02



PW-03

AVAILABLE WIDTHS

- rebated system S2 in mm: „60“=644, „70“=744, „80“=844, „90“=944
- SIMPLE non-rebated system S2 in mm: „60“=618, „70“=718, „80“=818, „90“=918

OPTIONS

“100” width

Width smaller than “60”

Non-standard width, door with Satin deco, Lacomat or Satin VSG 2.2.1 or Black glass

AVAILABLE HEIGHTS

- rebated system H2 in mm: 2030
- SIMPLE non-rebated system H2 in mm: 2017
- The model is not available as “higher” options, maximum door height H2 in mm is 2030

OPTIONS

Up to 60 mm shorter

More than 60 mm shorter (feasibility evaluated case by case)
door with Satin deco, Lacomat or Satin VSG 2.2.1 or Black glass

Change of lock position and bottom hinge (recommended for doors with a non-standard height)

CONSTRUCTION

- A robust rail and stile construction made of MDF

OPTIONS

Non-rebated door, SIMPLE system

Non-rebated door, wall-mounted standard sliding system, wall-mounted and pocket LOFT doors

Inactive door leaf for double doors, width S2 in mm: 420-609

Inactive door leaf for double doors, width S2 in mm: 610, 710, 810, 910

Inactive door leaf for double doors, width S2 in mm: 1010

COMPONENTS

- Tempered Satin glass, 4 mm thick
- A mortise key lock (options include a turn and release lock, a lock with a euro profile cylinder or without the bottom hole)
- Screw-in double-bolt hinges in nickel, 3 pcs. For ZOS frame packages, hinges are in zinc white

OPTIONS

Door restrictor arm (applies to doors in the SIMPLE system)

Drop down seal

Ventilation undercut

Metal, round or square ventilation sleeves in Nickel or Bronze (pcs.)


Plastic, square ventilation sleeves in Black matt, White, Gold, Satin Chrome or Chrome (pcs.)

Plastic ventilation grille in matt silver for “80”, “90” and “100” doors

Stainless steel ventilation grille in inox or black color for the door leaf „80“, „90“ i „100”


DOOR FRAME VARIANTS

- Fixed: timber (p. 188) and MDF (p. 189)
- Adjustable: DIN (p. 196), DUALE (p. 198), ZOS (p. 192)

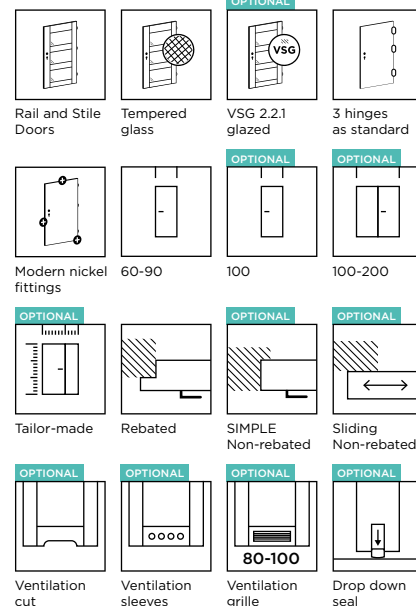


AVAILABLE COLOURS:


PP GROUP




CPL GROUP

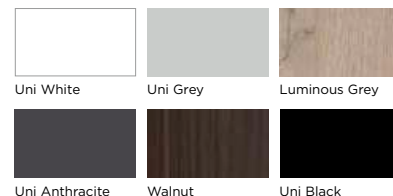

CLPL GROUP

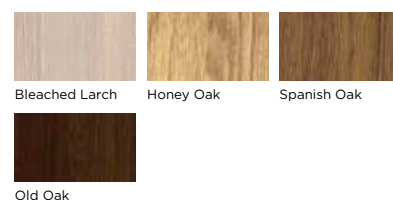

FF GROUP

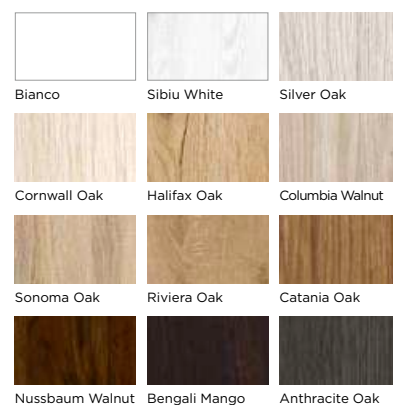

PRESTIGE PX-02, FF Catania Oak

PRESTIGE PX /

COLOUR: FF Snow Oak



PX-01



PX-02



PX-03



PX-04



PX-05



PX-06



PX-07



PX-08

AVAILABLE WIDTHS

- rebated system S2 in mm: „60“=644, „70“=744, „80“=844, „90“=944
- SIMPLE non-rebated system S2 in mm: „60“=618, „70“=718, „80“=818, „90“=918

OPTIONS

“100” width

Width smaller than “60”

Non-standard width, door with Satin deco, Lacomat or Satin VSG 2.2.1 or Black glass

AVAILABLE HEIGHTS

- rebated system H2 in mm: 2030
- SIMPLE non-rebated system H2 in mm: 2017
- The model is not available as “higher” options, maximum door height H2 in mm is 2030

OPTIONS

Up to 60 mm shorter

More than 60 mm shorter (feasibility evaluated case by case)
door with Satin deco, Lacomat or Satin VSG 2.2.1 or Black glass

Change of lock position and bottom hinge (recommended for doors with a non-standard height)

CONSTRUCTION

- A robust rail and stile construction made of MDF

OPTIONS

Non-rebated door, SIMPLE system

Non-rebated door, wall-mounted standard sliding system, wall-mounted and pocket LOFT doors

Inactive door leaf for double doors, width S2 in mm: 420-609

Inactive door leaf for double doors, width S2 in mm: 610, 710, 810, 910

Inactive door leaf for double doors, width S2 in mm: 1010

COMPONENTS

- Tempered Satin glass, 4 mm thick
- A mortise key lock (options include a turn and release lock, a lock with a euro profile cylinder or without the bottom hole)
- Screw-in double-bolt hinges in nickel, 3 pcs. For ZOS frame packages, hinges are in zinc white

OPTIONS

Door restrictor arm (applies to doors in the SIMPLE system)

Drop down seal

Ventilation undercut

Metal, round or square ventilation sleeves in Nickel or Bronze (pcs.)


Plastic, square ventilation sleeves in Black matt, White, Gold, Satin Chrome or Chrome (pcs.)

Plastic ventilation grille in matt silver for “80”, “90” and “100” doors

Stainless steel ventilation grille in inox or black color for the door leaf „80“, „90“ i „100”


DOOR FRAME VARIANTS

- Fixed: timber (p. 188) and MDF (p. 189)
- Adjustable: DIN (p. 196), DUALE (p. 198), ZOS (p. 192)

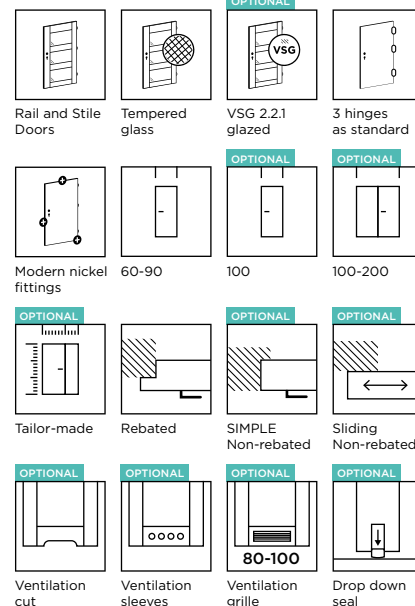

AVAILABLE COLOURS:

FF GROUP

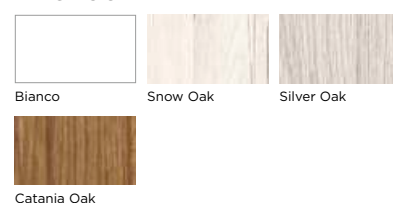



PRESTIGE PY-02, FF Snow Oak

PRESTIGE
PY /

COLOUR: FF Snow Oak



PY-01

PY-02

PY-03

PY-04

PY-05

PY-06

PY-07

PY-08

AVAILABLE WIDTHS

- rebated system S2 in mm: „60“=644, „70“=744, „80“=844, „90“=944
- SIMPLE non-rebated system S2 in mm: „60“=618, „70“=718, „80“=818, „90“=918

OPTIONS

“100” width

Width smaller than “60”

Non-standard width, door with Satin deco, Lacomat or Satin VSG 2.2.1 or Black glass

AVAILABLE HEIGHTS

- rebated system H2 in mm: 2030
- SIMPLE non-rebated system H2 in mm: 2017
- The model is not available as “higher” options, maximum door height H2 in mm is 2030

OPTIONS

Up to 60 mm shorter

More than 60 mm shorter (feasibility evaluated case by case)
door with Satin deco, Lacomat or Satin VSG 2.2.1 or Black glass

Change of lock position and bottom hinge (recommended for doors with a non-standard height)

CONSTRUCTION

- A robust rail and stile construction made of MDF

OPTIONS

Non-rebated door, SIMPLE system

Non-rebated door, wall-mounted standard sliding system, wall-mounted and pocket LOFT doors

Inactive door leaf for double doors, width S2 in mm: 420-609

Inactive door leaf for double doors, width S2 in mm: 610, 710, 810, 910

Inactive door leaf for double doors, width S2 in mm: 1010

COMPONENTS

- Tempered Satin glass, 4 mm thick
- A mortise key lock (options include a turn and release lock, a lock with a euro profile cylinder or without the bottom hole)
- Screw-in double-bolt hinges in nickel, 3 pcs. For ZOS frame packages, hinges are in zinc white

OPTIONS

Door restrictor arm (applies to doors in the SIMPLE system)

Drop down seal

Ventilation undercut

Metal, round or square ventilation sleeves in Nickel or Bronze (pcs.)


Plastic, square ventilation sleeves in Black matt, White, Gold, Satin Chrome or Chrome (pcs.)

Plastic ventilation grille in matt silver for “80”, “90” and “100” doors

Stainless steel ventilation grille in inox or black color for the door leaf „80“, „90“ i „100”


DOOR FRAME VARIANTS

- Fixed: timber (p. 188) and MDF (p. 189)
- Adjustable: DIN (p. 196), DUALE (p. 198), ZOS (p. 192)

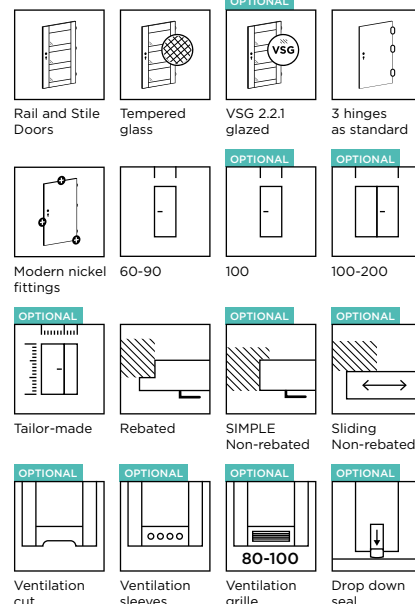

AVAILABLE COLOURS:

FF GROUP

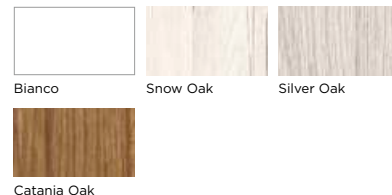



COLOUR: FF Anthracite Oak



PZ-01



PZ-02



PZ-03



PZ-04



PZ-05



PZ-06

AVAILABLE WIDTHS

- rebated system S2 in mm: „60“=644, „70“=744, „80“=844, „90“=944
- SIMPLE non-rebated system S2 in mm: „60“=618, „70“=718, „80“=818, „90“=918

OPTIONS

“100” width

Width smaller than “60”

Non-standard width, door with Satin deco, Lacomat or Satin VSG 2.2.1 or Black glass

AVAILABLE HEIGHTS

- rebated system H2 in mm: 2030
- SIMPLE non-rebated system H2 in mm: 2017

OPTIONS

Up to 60 mm shorter

More than 60 mm shorter (feasibility evaluated case by case)
door with Satin deco, Lacomat or Satin VSG 2.2.1 or Black glass

Up to 470 mm longer (feasibility evaluated case by case)
door with Satin deco, Lacomat or Satin VSG 2.2.1 or Black glass

Additional hinge (required for doors that are 110 mm to 470 mm longer)

Additional hinge for SIMPLE non-rebated system (required for doors that are 110 mm to 470 mm longer)

Change of lock position and bottom hinge (recommended for doors with a non-standard height)

CONSTRUCTION

- A robust rail and stile construction made of MDF

OPTIONS

Non-rebated door, SIMPLE system

Non-rebated door, wall-mounted standard sliding system, wall-mounted and pocket LOFT doors

Inactive door leaf for double doors, width S2 in mm: 420-609

Inactive door leaf for double doors, width S2 in mm: 610, 710, 810, 910

Inactive door leaf for double doors, width S2 in mm: 1010

COMPONENTS

- Tempered Satin glass, 4 mm thick
- A mortise key lock (options include a turn and release lock, a lock with a euro profile cylinder or without the bottom hole)
- Screw-in double-bolt hinges in nickel, 3 pcs. For ZOS frame packages, hinges are in zinc white

OPTIONS

Door restrictor arm (applies to doors in the SIMPLE system)

Drop down seal

Ventilation undercut

Metal, round or square ventilation sleeves in Nickel or Bronze (pcs.)


Plastic, square ventilation sleeves in Black matt, White, Gold, Satin Chrome or Chrome (pcs.)

Plastic ventilation grille in matt silver for “80”, “90” and “100” doors

Stainless steel ventilation grille in inox or black color for the door leaf „80“, „90“ i „100”


DOOR FRAME VARIANTS

- Fixed: timber (p. 188) and MDF (p. 189)
- Adjustable: DIN (p. 196), DUALE (p. 198), ZOS (p. 192)

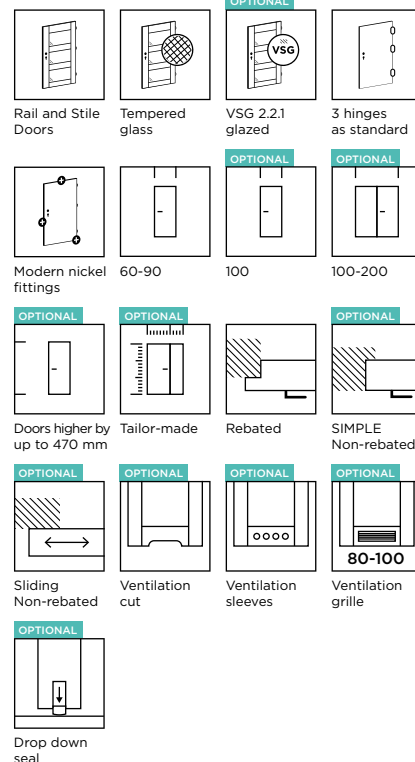


AVAILABLE COLOURS:


PP GROUP




CPL GROUP

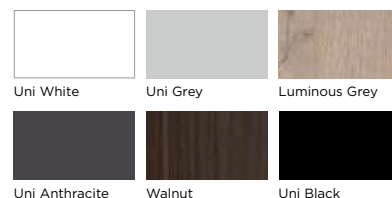

CLPL GROUP

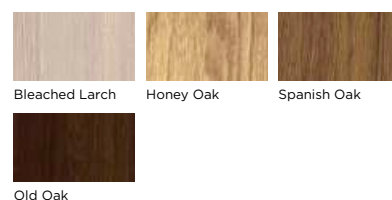

FF GROUP

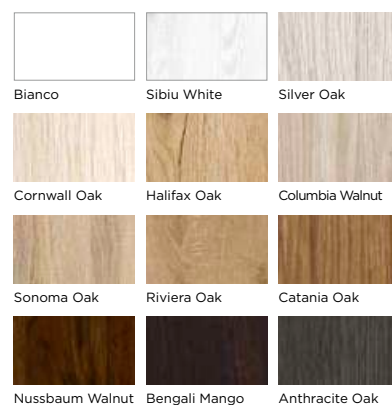

BASIC PRESTON 01, FF Cornwall Oak




INTERNAL DOORS

／ **BASIC**

Timeless, durable and functional. BASIC collection doors blend in perfectly with any space, whether at home or in the office. Available in a wide range of colours and glazing options.

BASIC STANDARD

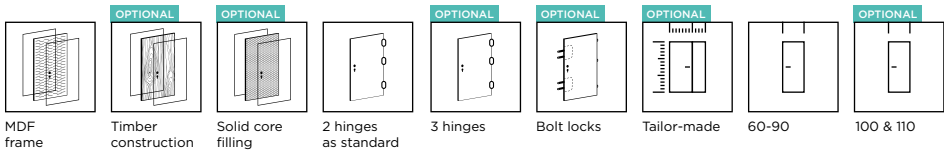

BASIC Standard 01, PP Beige Cashmere



STANDARD 01
FF Silver Oak

AVAILABLE WIDTHS

- rebated system S2 in mm: „60“=644, „70“=744, „80“=844 mm, „90“=944
- SIMPLE non-rebated system S2 in mm: „60“=618, „70“=718, „80“=818, „90“=918
- minimum sash width S2 in mm: 244
- maximum sash width S2 in mm: 1144

OPTIONS

- Widths “100” and “110”
- Up to 5 mm narrower
- Narrower by more than 5 mm
- Wider

AVAILABLE HEIGHTS


- rebated system H2 in mm: 2030
- SIMPLE non-rebated system H2 in mm: 2017

OPTIONS

- Up to 60 mm shorter
- More than 60 mm shorter
- Up to 10 mm longer
- 11 mm to 450 mm longer (except for the LAK colour group)
- Additional hinge (required for “110” doors, doors longer by 110 mm to 450 mm, and doors with a solid core infill)
- Additional hinge for SIMPLE non-rebated system (required for “110” doors, doors longer by 110 mm to 450 mm, and doors with a solid core infill)
- Additional hinge for Reversed-Swing Doors (required for “110” doors, doors longer by 110 mm to 450 mm, and doors with a solid core infill)
- Change of lock position and bottom hinge (recommended for doors with a non-standard height)

PORTHOLE OPTIONAL



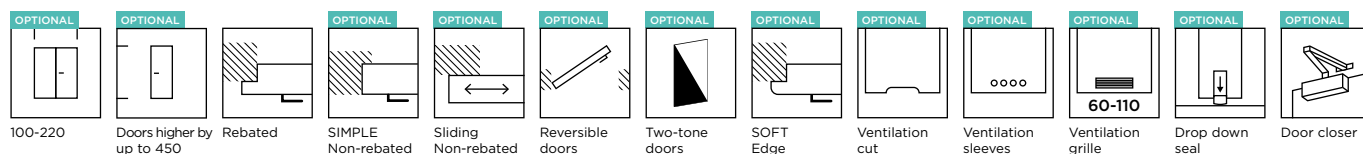

CONSTRUCTION

- MDF frame
- Core: stabilising layer known as "honeycomb"
- Surface made of 3 mm thick HDF

OPTIONS

Timber frame

Solid core board (extra charge applies for an additional hinge)

Dual Colour door within one colour group

Door leaf, Contrast system

Door leaf, Contrast system ABS (for SIMPLE and sliding non-rebated doors)

SOFT rebated edge in: Uni White, Uni Black, Silver Oak, Cornwall Oak, Halifax Oak, Riviera Oak, Bengali Mango, Nussbaum Walnut

Non-rebated door, SIMPLE system

Non-rebated door, wall-mounted standard sliding system, wall-mounted and pocket LOFT doors

Non-rebated door leaf, MAGIC sliding system

Door leaf, reversed swing system

Inactive door leaf for double doors (extra charge applies for timber rails and stiles)

Inactive door leaf for double doors, width S2 under 610 mm (extra charge for timber rails and stiles applies)

Reinforcement for surface-mounted door closer (required for every door core infill variant)

Rebate 20 mm

COMPONENTS

- A mortise key lock (options include a turn and release lock, a lock with a euro profile cylinder or without the bottom hole)
- Screw-in hinges in zinc white for FF and LAK colour groups, and nickel for the other colour groups. See table below for the number of hinges:

Core: "honeycomb"		Core: Solid board		OPTIONAL
„60“-„80“	2 pcs.	„60“-„90“	3 pcs.	OPTIONAL
„90“-„110“	3 pcs.	„100“-„110“	4 pcs.	OPTIONAL

OPTIONS

Euro profile lock, bolt-type (a surcharge for adjustable keeper plate for timber or MDF fixed frames applies)

Top lock with core

Upper euro profile lock, bolt-type (a surcharge for adjustable keeper plate for timber or MDF fixed frames applies)

Multipoint RC2 anti-theft strip lock (for doors with timber or MDF fixed frames)

3D hinges adjustable in three planes (available complete with a frame fitted with the 3D hinges: fixed timber or fixed MDF)

door restrictor arm (applies to the width of S2 in mm from: 720 to 1110)

200° Panoramic door viewer

Drop down seal

Ventilation undercut

Metal, round or square ventilation sleeves in Nickel or Bronze (pcs.)

Plastic, square ventilation sleeves in Black matt, White, Gold, Satin Chrome or Chrome (pcs.)

Plastic, round ventilation sleeves - Wide range of colours (package)

Plastic ventilation grille in a colour of your choice: white, silver matt, grey, oak, walnut

Stainless steel air grille in inox or black

Double-sided reinforcement with SS sheet metal panel (package), horizontal, with a maximum height of 170 mm

Double-sided reinforcement with SS sheet metal panel (package), horizontal higher than 170 mm or vertical

PORTHOLE WITH LACOMAT OR CLEAR GLASS IN NICKEL, BLACK OR GOLD

A surcharge for Solid core board and Additional hinge

Outside Ø 240 mm, inside Ø 135 mm (minimum door leaf width 340 mm)

Outside Ø 320 mm, inside Ø 215 mm (minimum door leaf width 420 mm)

Outside Ø 400 mm, inside Ø 280 mm (minimum door leaf width 500 mm)

Glazing with safety glass or one-way glass pane

DOOR FRAME VARIANTS

- Fixed: timber (p. 188) and MDF (p. 189)
- Adjustable: DIN (p. 196), DUALE (p. 198), ZOS (p. 192)
- Steel: fixed (p. 202), square - large (p. 202), adjustable (p. 203)

AVAILABLE COLOURS:

PVC GROUP



White Grain

Natural Grandson Oak

PP GROUP



Supermatt White

White Grain

Light Grey



Beige Cashmere

Navy blue

Natural Grandson Oak

CPL GROUP



Uni White

Luminous Grey

Uni Grey



Uni Anthracite

Walnut

Uni Black

CLPL GROUP



Honey Oak

Spanish Oak

Old Oak

FF GROUP



Bianco

Sibiu White

Snow Oak



Silver Oak

Cornwall Oak

Halifax Oak



Columbia Walnut

Sonoma Oak

Riviera Oak



Natural Oak Gr

Amber Oak

Catania Oak



Delano Oak

Nussbaum Walnut

Bengali Mango



Anthracite Oak

LAK GROUP

Maximum door leaf height 2040 mm



White

Bleached Oak

Silver Oak




Scandinavian Elm

For detailed technical drawings with dimensions go to the technical section on p. 222.



BASIC ASTORIA VISIOSUN

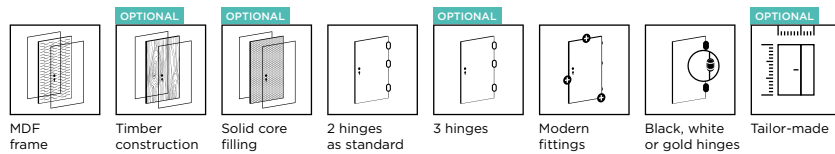

BASIC ASTORIA VISIOSUN 02, CPL Walnut




COLOUR: CPL Walnut




01

02

03

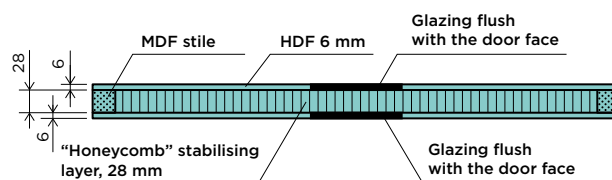

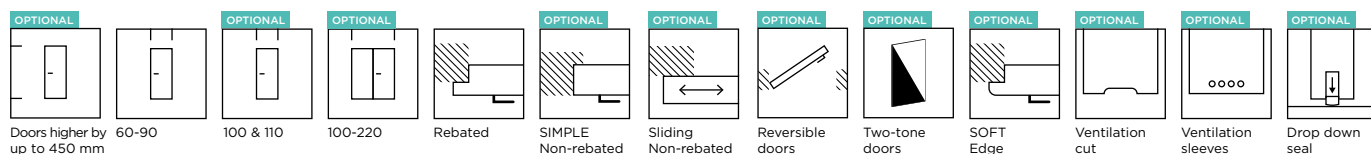

AVAILABLE WIDTHS

- rebated system S2 in mm: „60“=644, „70“=744, „80“=844, „90“=944
- SIMPLE non-rebated system S2 in mm: „60“=618, „70“=718, „80“=818, „90“=918

OPTIONS

Widths “100” and “110”

Up to 5 mm narrower

Narrower by more than 5 mm

Wider

AVAILABLE HEIGHTS

- rebated system H2 in mm: 2030
- SIMPLE non-rebated system H2 in mm: 2017
- For structural reasons, customers cannot cut ASTORIA models to size on their own

OPTIONS

Up to 60 mm shorter

More than 60 mm shorter

Up to 10 mm longer

11 mm to 450 mm longer

Additional hinge (required for 110 doors with solid core board, doors longer by 110 mm to 450 mm doors with a solid core infill)

Additional hinge for SIMPLE non-rebated system (required for 110 doors with solid core board, doors longer by 110 mm to 450 mm doors with a solid core infill)

Additional hinge for Reversed-Swing Doors (required for “110” doors, doors longer by 110 mm to 450 mm, and doors with a solid core infill)

Change of lock position and bottom hinge (recommended for doors with a non-standard height)

CONSTRUCTION

- MDF frame
- Core: stabilising layer known as “honeycomb”
- Surface made of 6 mm thick HDF panel (3 mm for solid core filling)

OPTIONS

Timber frame

Solid core board (extra charge applies for an additional hinge)

Two colour door leaf within one colour group

Door leaf, Contrast system

Door leaf, Contrast system ABS (for SIMPLE and sliding non-rebated doors)

SOFT rebated edge in: Uni White, Uni Black, Silver Oak, Cornwall Oak, Halifax Oak, Riviera Oak, Bengali Mango, Nussbaum Walnut

Non-rebated door, SIMPLE system

Non-rebated door, wall-mounted standard sliding system, wall-mounted and pocket LOFT doors

Non-rebated door leaf, MAGIC sliding system

Door leaf, reversed swing system

Inactive door leaf for double doors (extra charge applies for timber rails and stiles)

Reinforcement for surface-mounted door closer (required for every door core infill variant)

Rebate 20 mm

COMPONENTS

- Black Lacobel with fluted horizontal texture and a width of 55 mm for ASTORIA 01 or 160 mm for ASTORIA 02 and ASTORIA 03
- A mortise key lock (options include a turn and release lock, a lock with a euro profile cylinder or without the bottom hole)
- BRILLIANT screw-in hinges in black, 2 pc. (3 pc. in the “90” door leaf). Colour changes at no extra charge. Double-bolt hinges in nickel on doors with a solid core panel (3 pc.).

OPTIONS

Door restrictor arm (applies to the width of S2 in mm from: 720 to 1110)

Drop down seal

3D hinges adjustable in three planes (available complete with a frame fitted with the 3D hinges: fixed timber or fixed MDF)

Ventilation undercut

Plastic, square ventilation sleeves in Black matt, White, Gold, Satin Chrome or Chrome (pcs.), only available for type 01 for min. “70” width

Metal, round or square ventilation sleeves in Nickel or Bronze (pcs.), only available for type 01 for min. “70” width

DOOR FRAME VARIANTS

- Fixed: MDF (p. 189)
- Adjustable: DIN (p. 196)

AVAILABLE COLOURS:

PP GROUP



Supermatt White



White Grain



Light Grey



Beige Cashmere



Navy blue



Natural Grandson Oak

CPL GROUP



Uni White



Luminous Grey



Uni Grey



Uni Anthracite



Walnut



Uni Black

CLPL GROUP



Honey Oak



Spanish Oak



Old Oak

FF GROUP



Bianco



Sibiu White



Snow Oak



Silver Oak



Cornwall Oak



Halifax Oak



Columbia Walnut



Sonoma Oak



Riviera Oak



Natural Oak Gr



Amber Oak



Catania Oak



Delano Oak



Nussbaum Walnut



Bengali Mango




Anthracite Oak

For detailed technical drawings with dimensions go to the technical section on p. 222.



BASIC ASTORIA MIRROR

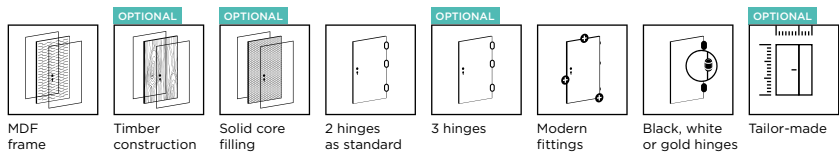



BASIC ASTORIA MIRROR 02, CPL Uni Grey, ościeżnica CPL Uni White

COLOUR: CPL Uni Grey



01 02 03

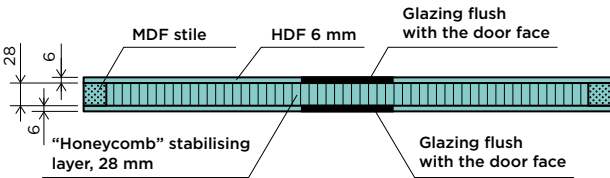

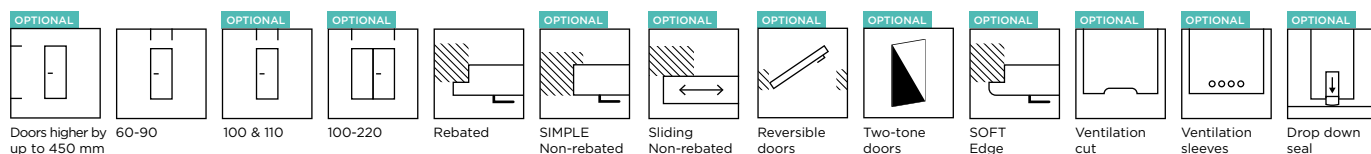

AVAILABLE WIDTHS

- rebated system S2 in mm: „60“=644, „70“=744, „80“=844, „90“=944
- SIMPLE non-rebated system S2 in mm: „60“=618, „70“=718, „80“=818, „90“=918

OPTIONS

Widths „100“ and „110“

Up to 5 mm narrower

Narrower by more than 5 mm

Wider

AVAILABLE HEIGHTS

- rebated system H2 in mm: 2030
- SIMPLE non-rebated system H2 in mm: 2017
- For structural reasons, customers cannot cut ASTORIA models to size on their own

OPTIONS

Up to 60 mm shorter

More than 60 mm shorter

Up to 10 mm longer

11 mm to 450 mm longer

Additional hinge (required for 110 doors with solid core board, doors longer by 110 mm to 450 mm doors with a solid core infill)

Additional hinge for SIMPLE non-rebated system (required for 110 doors with solid core board, doors longer by 110 mm to 450 mm doors with a solid core infill)

Additional hinge for Reversed-Swing Doors (required for „110“ doors, doors longer by 110 mm to 450 mm, and doors with a solid core infill)

Change of lock position and bottom hinge (recommended for doors with a non-standard height)

CONSTRUCTION

- MDF frame
- Core: stabilising layer known as “honeycomb”
- Surface made of 6 mm thick HDF panel (3 mm for solid core filling)

OPTIONS

Timber frame

Solid core board (extra charge applies for an additional hinge, the HDF thickness changes to 3 mm)

Two colour door leaf within one colour group

Door leaf, Contrast system

Door leaf, Contrast system ABS (for SIMPLE and sliding non-rebated doors)

SOFT rebated edge in: Uni White, Uni Black, Silver Oak, Cornwall Oak, Halifax Oak, Riviera Oak, Bengali Mango, Nussbaum Walnut

Non-rebated door, SIMPLE system

Non-rebated door, wall-mounted standard sliding system, wall-mounted and pocket LOFT doors

Non-rebated door leaf, MAGIC sliding system

Door leaf, reversed swing system

Inactive door leaf for double doors (extra charge applies for timber rails and stiles)

Reinforcement for the surface-mounted door closer (required for each door core infill variant)

Rebate 20 mm

COMPONENTS

- Graphite mirror, 55 mm wide in the ASTORIA 01 model or with a width of 160 mm on models ASTORIA 02 and ASTORIA 03
- A mortise key lock (options include a turn and release lock, a lock with a euro profile cylinder or without the bottom hole)
- BRILLIANT screw-in hinges in nickel, 2 pcp. (3 pcp. in the “90” door leaf). Colour changes at no extra charge. Double-bolt hinges in nickel on doors with a solid core panel (3 pcp.).

OPTIONS

Door restrictor arm (applies to the width of S2 in mm from: 720 to 1110)

Drop down seal

3D hinges adjustable in three planes (available complete with a frame fitted with the 3D hinges: fixed timber or fixed MDF)

Ventilation undercut

Plastic, square ventilation sleeves in Black matt, White, Gold, Satin Chrome or Chrome (pcs.), only available for type 01 for min. “70” width


Metal, round or square ventilation sleeves in Nickel or Bronze (pcs.), only available for type 01 for min. “70” width

DOOR FRAME VARIANTS


- Fixed: MDF (p. 189)
- Adjustable: DIN (p. 196)

AVAILABLE COLOURS:

PP GROUP

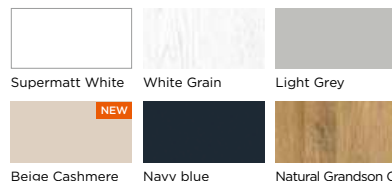


CPL GROUP

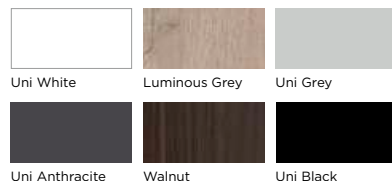

CLPL GROUP




FF GROUP

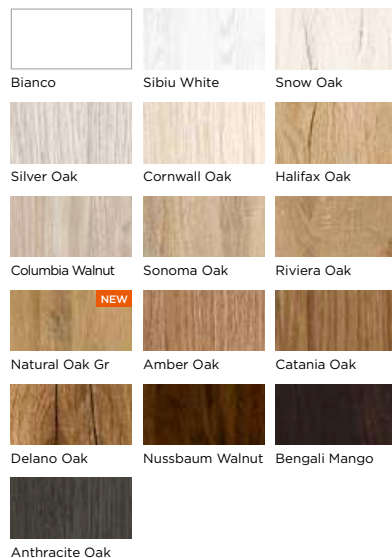



For detailed technical drawings with dimensions go to the technical section on p. 222.


BASIC ASTORIA BLACK

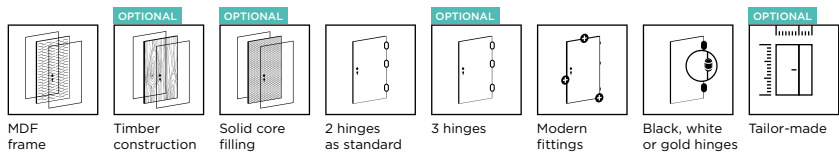

BASIC ASTORIA BLACK 01, FF Bianco, ościeżnica Uni Black, obrzeże Uni Black

COLOUR: FF Bianco

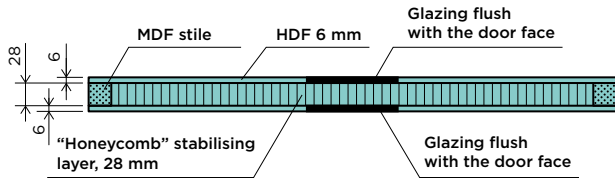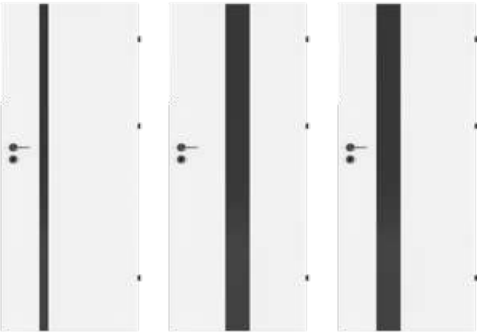

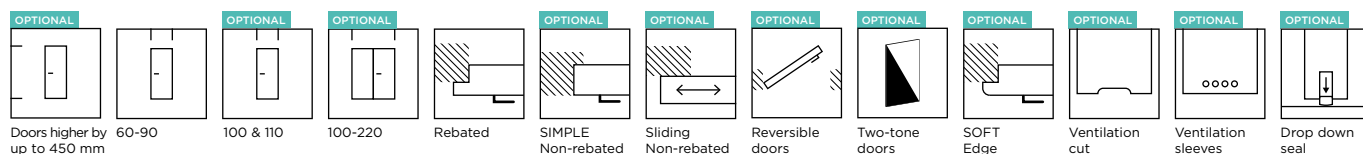

AVAILABLE WIDTHS

- rebated system S2 in mm: „60“=644, „70“=744, „80“=844, „90“=944
- SIMPLE non-rebated system S2 in mm: „60“=618, „70“=718, „80“=818, „90“=918

OPTIONS

Widths “100” and “110”

Up to 5 mm narrower

Narrower by more than 5 mm

Wider

AVAILABLE HEIGHTS

- rebated system H2 in mm: 2030
- SIMPLE non-rebated system H2 in mm: 2017
- For structural reasons, customers cannot cut ASTORIA models to size on their own

OPTIONS

Up to 60 mm shorter

More than 60 mm shorter

Up to 10 mm longer

11 mm to 450 mm longer

Additional hinge (required for 110 doors with solid core board, doors longer by 110 mm to 450 mm doors with a solid core infill)

Additional hinge for SIMPLE non-rebated system (required for 110 doors with solid core board, doors longer by 110 mm to 450 mm doors with a solid core infill)

Additional hinge for Reversed-Swing Doors (required for “110” doors, doors longer by 110 mm to 450 mm, and doors with a solid core infill)

Change of lock position and bottom hinge (recommended for doors with a non-standard height)

CONSTRUCTION

- MDF frame
- Core: stabilising layer known as “honeycomb”
- Surface made of 6 mm thick HDF panel (3 mm for solid core filling)

OPTIONS

Timber frame

Solid core board (extra charge applies for an additional hinge, the HDF thickness changes to 3 mm)

Two colour door leaf within one colour group

Door leaf, Contrast system

Door leaf, Contrast system ABS (for SIMPLE and sliding non-rebated doors)

SOFT rebated edge in: Uni White, Uni Black, Silver Oak, Cornwall Oak, Halifax Oak, Riviera Oak, Bengali Mango, Nussbaum Walnut

Non-rebated door, SIMPLE system

Non-rebated door, wall-mounted standard sliding system, wall-mounted and pocket LOFT doors

Non-rebated door leaf, MAGIC sliding system

Door leaf, reversed swing system

Inactive door leaf for double doors

(extra charge applies for timber rails and stiles)

Reinforcement for the surface-mounted door closer (required for each door core infill variant)

Rebate 20 mm

COMPONENTS

- Black Lacobel 55 me wide in the ASTORIA 01 model or with a width of 160 mm on models ASTORIA 02 and ASTORIA 03
- A mortise key lock (options include a turn and release lock, a lock with a euro profile cylinder or without the bottom hole)
- BRILLIANT screw-in hinges in black, 2 pcp. (3 pcp. in the “90” door leaf). Colour changes at no extra charge. Double-bolt hinges in nickel on doors with a solid core panel (3 pcp.).

OPTIONS

Door restrictor arm (applies to the width of S2 in mm from: 720 to 1110)

Drop down seal

3D hinges adjustable in three planes (available complete with a frame fitted with the 3D hinges: fixed timber or fixed MDF)

Ventilation undercut

Plastic, square ventilation sleeves in Black matt, White, Gold, Satin Chrome or Chrome (pcs.), only available for type 01 for min. “70” width

Metal, round or square ventilation sleeves in Nickel or Bronze (pcs.), only available for type 01 for min. “70” width

DOOR FRAME VARIANTS

- Fixed: MDF (p. 189)
- Adjustable: DIN (p. 196)

AVAILABLE COLOURS:

PP GROUP



Supermatt White

White Grain

Light Grey



Beige Cashmere

Navy blue

Natural Grandson Oak

CPL GROUP



Uni White

Luminous Grey

Uni Grey



Uni Anthracite

Walnut

Uni Black

CLPL GROUP



Honey Oak

Spanish Oak

Old Oak

FF GROUP



Bianco

Sibiu White

Snow Oak



Silver Oak

Cornwall Oak

Halifax Oak



Columbia Walnut

Sonoma Oak

Riviera Oak



Natural Oak Gr

Amber Oak

Catania Oak



Delano Oak

Nussbaum Walnut


Bengali Mango



Anthracite Oak

For detailed technical drawings with dimensions go to the technical section on p. 222.

BASIC ASTORIA GOLD

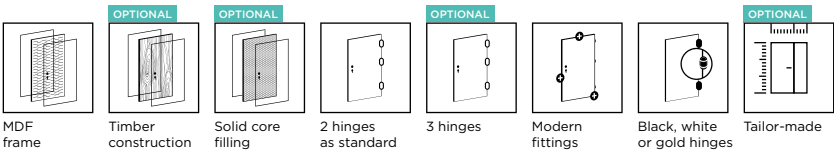



BASIC ASTORIA GOLD 01, FF Bengali Mango

COLOUR: FF Bengali Mango



01 02 03

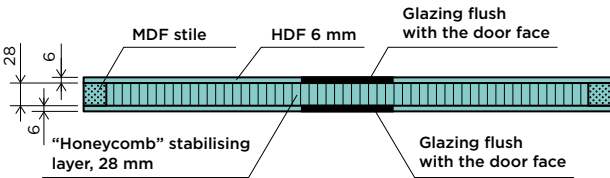

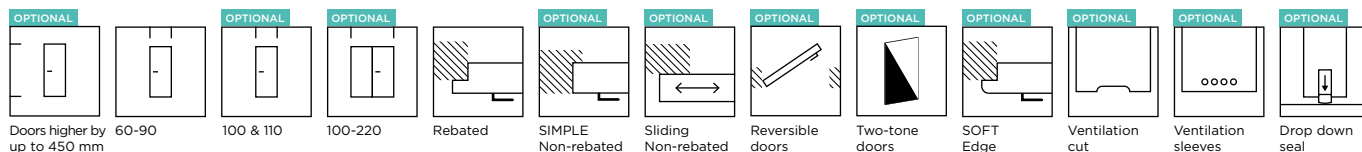

AVAILABLE WIDTHS

- rebated system S2 in mm: „60“=644, „70“=744, „80“=844, „90“=944
- SIMPLE non-rebated system S2 in mm: „60“=618, „70“=718, „80“=818, „90“=918

OPTIONS

Widths “100” and “110”

Up to 5 mm narrower

Narrower by more than 5 mm

Wider

AVAILABLE HEIGHTS

- rebated system H2 in mm: 2030
- SIMPLE non-rebated system H2 in mm: 2017
- For structural reasons, customers cannot cut ASTORIA models to size on their own

OPTIONS

Up to 60 mm shorter

More than 60 mm shorter

Up to 10 mm longer

11 mm to 450 mm longer

Additional hinge (required for 110 doors with solid core board, doors longer by 110 mm to 450 mm doors with a solid core infill)

Additional hinge for SIMPLE non-rebated system (required for 110 doors with solid core board, doors longer by 110 mm to 450 mm doors with a solid core infill)

Additional hinge for Reversed-Swing Doors (required for “110” doors, doors longer by 110 mm to 450 mm, and doors with a solid core infill)

Change of lock position and bottom hinge (recommended for doors with a non-standard height)

CONSTRUCTION

- MDF frame
- Core: stabilising layer known as “honeycomb”
- Surface made of 6 mm thick HDF panel (3 mm for solid core filling)

OPTIONS

Timber frame

Solid core board (extra charge applies for an additional hinge, the HDF thickness changes to 3 mm)

Two colour door leaf within one colour group

Door leaf, Contrast system

Door leaf, Contrast system ABS (for SIMPLE and sliding non-rebated doors)

SOFT rebated edge in: Uni White, Uni Black, Silver Oak, Cornwall Oak, Halifax Oak, Riviera Oak, Bengali Mango, Nussbaum Walnut

Non-rebated door, SIMPLE system

Non-rebated door, wall-mounted standard sliding system, wall-mounted and pocket LOFT doors

Non-rebated door leaf, MAGIC sliding system

Door leaf, reversed swing system

Inactive door leaf for double doors (extra charge applies for timber rails and stiles)

Reinforcement for the surface-mounted door closer (required for each door core infill variant)

Rebate 20 mm

COMPONENTS

- Gold Lacobel 55 mm wide in the ASTORIA 01 model or with a width of 160 mm on models ASTORIA 02 and ASTORIA 03
- A mortise key lock (options include a turn and release lock, a lock with a euro profile cylinder or without the bottom hole)
- BRILLIANT screw-in hinges in gold, 2 pcp. (3 pcp. in the “90” door leaf). Colour changes at no extra charge. Double-bolt hinges in nickel on doors with a solid core panel (3 pcp.).

OPTIONS

Door restrictor arm (applies to the width of S2 in mm from: 720 to 1110)

Drop down seal

3D hinges adjustable in three planes (available complete with a frame fitted with the 3D hinges: fixed timber or fixed MDF)

Ventilation undercut

Plastic, square ventilation sleeves in Black matt, White, Gold, Satin Chrome or Chrome (pcs.), only available for type 01 for min. “70” width

Metal, round or square ventilation sleeves in Nickel or Bronze (pcs.), only available for type 01 for min. “70” width

DOOR FRAME VARIANTS

- Fixed: MDF (p. 189)
- Adjustable: DIN (p. 196)

AVAILABLE COLOURS:

PP GROUP



Supermatt White

White Grain

Light Grey



Beige Cashmere

Navy blue

Natural Grandson Oak

CPL GROUP



Uni White

Luminous Grey

Uni Grey



Uni Anthracite

Walnut

Uni Black

CLPL GROUP



Honey Oak

Spanish Oak

Old Oak

FF GROUP



Bianco

Sibiu White

Snow Oak



Silver Oak

Cornwall Oak

Halifax Oak



Columbia Walnut

Sonoma Oak

Riviera Oak



Natural Oak Gr

Amber Oak

Catania Oak



Delano Oak

Nussbaum Walnut


Bengali Mango



Anthracite Oak



For detailed technical drawings with dimensions go to the technical section on p. 222.


BASIC ASTORIA WHITE

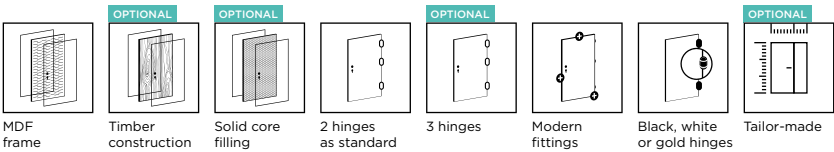

BASIC ASTORIA WHITE 01, CPL Uni White

COLOUR: CPL Uni White

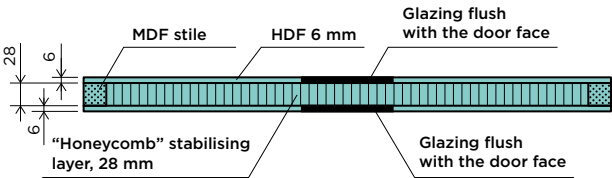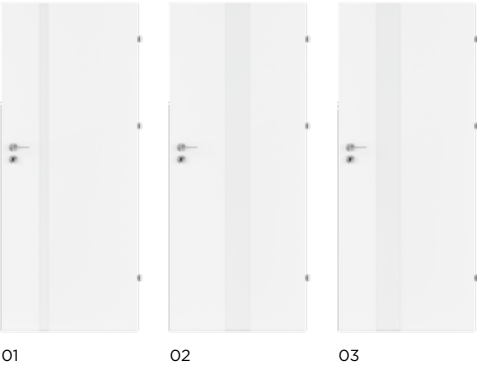

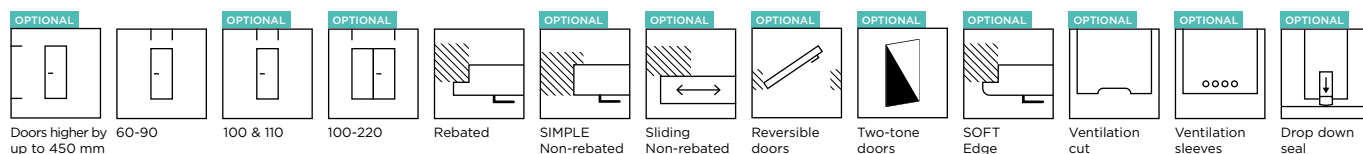

AVAILABLE WIDTHS

- rebated system S2 in mm: „60“=644, „70“=744, „80“=844, „90“=944
- SIMPLE non-rebated system S2 in mm: „60“=618, „70“=718, „80“=818, „90“=918

OPTIONS

Widths “100” and “110”

Up to 5 mm narrower

Narrower by more than 5 mm

Wider

AVAILABLE HEIGHTS

- rebated system H2 in mm: 2030
- SIMPLE non-rebated system H2 in mm: 2017
- For structural reasons, customers cannot cut ASTORIA models to size on their own

OPTIONS

Up to 60 mm shorter

More than 60 mm shorter

Up to 10 mm longer

11 mm to 450 mm longer

Additional hinge (required for 110 doors with solid core board, doors longer by 110 mm to 450 mm doors with a solid core infill)

Additional hinge for SIMPLE non-rebated system (required for 110 doors with solid core board, doors longer by 110 mm to 450 mm doors with a solid core infill)

Additional hinge for Reversed-Swing Doors (required for “110” doors, doors longer by 110 mm to 450 mm, and doors with a solid core infill)

Change of lock position and bottom hinge (recommended for doors with a non-standard height)

CONSTRUCTION

- MDF frame
- Core: stabilising layer known as “honeycomb”
- Surface made of 6 mm thick HDF panel (3 mm for solid core filling)

OPTIONS

Timber frame

Solid core board (extra charge applies for an additional hinge, the HDF thickness changes to 3 mm)

Two colour door leaf within one colour group

Door leaf, Contrast system

Door leaf, Contrast system ABS (for SIMPLE and sliding non-rebated doors)

SOFT rebated edge in: Uni White, Uni Black, Silver Oak, Cornwall Oak, Halifax Oak, Riviera Oak, Bengali Mango, Nussbaum Walnut

Non-rebated door, SIMPLE system

Non-rebated door, wall-mounted standard sliding system, wall-mounted and pocket LOFT doors

Non-rebated door leaf, MAGIC sliding system

Door leaf, reversed swing system

Inactive door leaf for double doors (extra charge applies for timber rails and stiles)

Reinforcement for the surface-mounted door closer (required for each door core infill variant)

Rebate 20 mm

COMPONENTS

- White Lacobel 55 mm wide in the ASTORIA 01 model or with a width of 160 mm on models ASTORIA 02 and ASTORIA 03
- A mortise key lock (options include a turn and release lock, a lock with a euro profile cylinder or without the bottom hole)
- BRILLIANT screw-in hinges in white, 2 pc., 2 pcs. (3 pc. in the “90” door leaf). Colour changes at no extra charge. Double-bolt hinges in nickel on doors with a solid core panel (3 pc.).

OPTIONS

Door restrictor arm (applies to the width of S2 in mm from: 720 to 1110)

Drop down seal

3D hinges adjustable in three planes (available complete with a frame fitted with the 3D hinges: fixed timber or fixed MDF)

Ventilation undercut

Plastic, square ventilation sleeves in Black matt, White, Gold, Satin Chrome or Chrome (pcs.), only available for type 01 for min. “70”

Metal, round or square ventilation sleeves in Nickel or Bronze (pcs.), only available for type 01 for min. “70” width

DOOR FRAME VARIANTS

- Fixed: MDF (p. 189)
- Adjustable: DIN (p. 196)

AVAILABLE COLOURS:

PP GROUP



Supermatt White

White Grain

Light Grey



Beige Cashmere

Navy blue

Natural Grandson Oak

CPL GROUP



Uni White

Luminous Grey

Uni Grey



Uni Anthracite

Walnut

Uni Black

CLPL GROUP



Honey Oak

Spanish Oak

Old Oak

FF GROUP



Bianco

Sibiu White

Snow Oak



Silver Oak

Cornwall Oak

Halifax Oak



Columbia Walnut

Sonoma Oak

Riviera Oak



Natural Oak Gr

Amber Oak

Catania Oak



Delano Oak

Nussbaum Walnut

Bengali Mango



Anthracite Oak

For detailed technical drawings with dimensions go to the technical section on p. 222.



COMMON FEATURES OF THE BASIC COLLECTION

AVAILABLE WIDTHS

- rebated system S2 in mm: „60“=644, „70“=744, „80“=844 mm, „90“=944
- SIMPLE non-rebated system S2 in mm: „60“=618, „70“=718, „80“=818, „90“=918
- minimum sash width S2 in mm: 610 (lower widths available for STANDARD 01, p. 114)

OPTIONS

Widths “100” and “110”

Up to 5 mm narrower

Narrower by more than 5 mm

Wider

AVAILABLE HEIGHTS

- rebated system H2 in mm: 2030
- SIMPLE non-rebated system H2 in mm: 2017

OPTIONS

Up to 60 mm shorter

More than 60 mm shorter

Up to 10 mm longer

11 mm to 450 mm longer (A maximum door height for the LAK colour group is 2040 mm)


The finishing and construction method of the door leaf allows for length correction by cutting at the bottom, but not by more than 60 mm for door leaves on a timber frame, and 30 mm for door leaves on an MDF frame. Cutting double and non-rebated doors for sliding systems on your own is not possible.

Additional hinge (required for “110” doors, doors longer by 110 mm to 450 mm, and doors with a solid core infill)

Additional hinge for SIMPLE non-rebated system (required for “110” doors, doors longer by 110 mm to 450 mm, and doors with a solid core infill)

Additional hinge for Reversed-Swing Doors (required for “110” doors, doors longer by 110 mm to 450 mm, and doors with a solid core infill)

Change of lock position and bottom hinge (recommended for doors with a non-standard height)

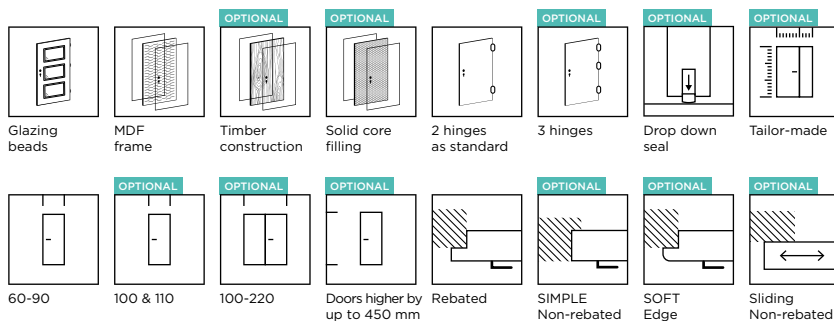

COMMON FEATURES OF THE **BASIC** COLLECTION

CONSTRUCTION

- MDF frame
- Core: stabilising layer known as "honeycomb"
- Surface made of 3 mm thick HDF

OPTIONS

Timber frame

Solid core board (extra charge applies for an additional hinge)

Two colour door leaf within one colour group

Door leaf, Contrast system

Door leaf, Contrast system ABS (for SIMPLE and sliding non-rebated doors)

SOFT rebated edge in: Uni White, Uni Black, Silver Oak, Cornwall Oak, Halifax Oak, Riviera Oak, Bengali Mango, Nussbaum Walnut

Non-rebated door, SIMPLE system

Non-rebated door, wall-mounted standard sliding system, wall-mounted and pocket LOFT doors (The PRESTON model is not available as a sliding door in a cassette due to the thickness of the glazing beads)

Non-rebated door leaf, MAGIC sliding system

Door leaf, reversed swing system

Inactive door leaf for double doors (min. width S2 in mm = 610 for the glazed version, narrower are only available in STANDARD 01 version, extra charge applies for timber rails and stiles)

Inactive door leaf for double doors, Width S2 in mm: 244-610 (for STANDARD 01 version only 01, extra charge for timber rails and stiles applies)

Reinforcement for the surface-mounted door closer (required for each door core infill variant)

Rebate 20 mm

COMPONENTS

- Glass: Satin deco th. 4 mm, White Bark effect glass for the CLASSIC model, Satin macadi glass for the MADRYT and MACADI-3 models, Satin Sapporo glass for the SAPPORO model
- A mortise key lock (options include a turn and release lock, a lock with a euro profile cylinder or without the bottom hole)
- Screw hinges, 2 pcs. (3 pcs. in the „90“, „100“ i „110“ door leaf) in Zinc White for color groups FF or LAK and Nickel for other color groups.

Core: "honeycomb"		Core: Solid board		OPTIONAL
„60“-„80“	2 pcs.	„60“-„90“	3 pcs.	OPTIONAL
„90“-„110“	3 pcs.	„100“-„110“	4 pcs.	OPTIONAL

OPTIONS

Door restrictor arm (applies to the width of S2 in mm from: 720 to 1110)

Drop down seal

Ventilation undercut

Metal, round or square ventilation sleeves in Nickel or Bronze (pcs.)

Plastic, square ventilation sleeves in Black matt, White, Gold, Satin Chrome or Chrome (pcs.)

Plastic, round ventilation sleeves - Wide range of colours (package)

Plastic ventilation grille in a colour of your choice: White, silver matt, grey, oak, walnut

Stainless steel air grille in inox or Black

DOOR FRAME VARIANTS

- Fixed: timber (p. 188) and MDF (p. 189)
- Adjustable: DIN (p. 196), DUALE (p. 198), ZOS (p. 192)
- Steel: fixed (p. 202), square - large (p. 202), adjustable (p. 203)


AVAILABLE COLOURS:

CPL GROUP

Not available for the CARSON model




FF GROUP

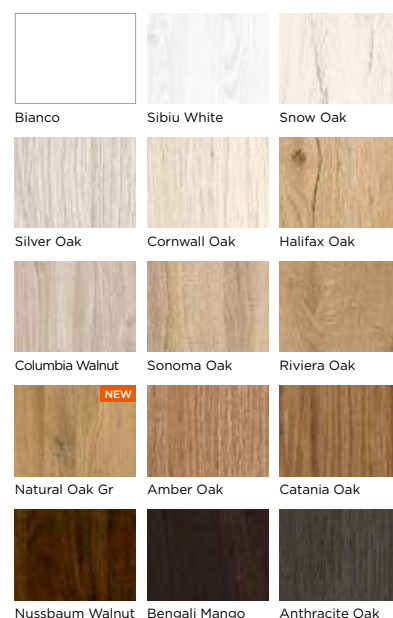

LAK GROUP

Maximum door leaf height 2040 mm



White available
for the Classic
door leaf

VALUABLE INFORMATION

The maximum door leaf
height in the LAK color
group is 2040 mm.



For detailed technical
drawings with dimension
go to the technical section
on p. 220.



BASIC PRESTON

For descriptions, colours available in the BASIC Collection, and an extra charge table, go to p. 126-127.



PRESTON 01, FF Cornwall Oak



AVAILABLE COLOURS:

CPL GROUP



CLPL GROUP



FF GROUP



DIN PLUS CLASS ARCHITRAVES

For PRESTON doors, we recommend the DIN PLUS CLASS architraves with the shape corresponding to the glazing bead of the PRESTON model. See p. 200.

BASIC MANHATTAN



MANHATTAN 4/4
FF Halifax Oak



0/4

1/4

2/4

3/4

4/4

AVAILABLE COLOURS:

- CPL, FF, LAK (p. 127)

AVAILABLE TYPES OF GLAZING

- standard: Satin deco
- as a no-cost option: Chinchila or Transparent

OPTIONS

glazing change available for an extra fee: Lacomat lub Satin lines

BASIC FLAVIO



FLAVIO 03
FF Cornwall Oak



01

02

03

AVAILABLE COLOURS:

- CPL, FF, LAK (p. 127)

AVAILABLE TYPES OF GLAZING

- standard: Satin deco
- as a no-cost option: Chinchila or Transparent

OPTIONS

glazing change available for an extra fee: Lacomat lub Satin lines

BASIC BOSTON

For descriptions, colours available in the BASIC Collection, and an extra charge table, go to p. 126-127.



BOSTON 05
LAK Scandinavian Elm



AVAILABLE COLOURS:

- CPL, FF, LAK (p. 127)

AVAILABLE TYPES OF GLAZING

- standard: Satin deco
- as a no-cost option: Chinchila or Transparent

OPTIONS

glazing change available for an extra fee: Lacomat lub Satin lines

BASIC CLASSIC



CLASSIC 03
LAK White



White bark effect door
glazing as standard.

AVAILABLE COLOURS:

- CPL, FF, LAK (p. 127)

AVAILABLE TYPES OF GLAZING

- standard: White bark effect
- as a no-cost option: Chinchila or Transparent

OPTIONS

glazing change available for an extra fee: Satin deco, Lacomat lub Satin lines

BASIC LAMBRO



LAMBRO 5/5
FF Catania Oak



0/5

1/5

2/5

3/5

4/5

5/5

AVAILABLE COLOURS:

- CPL, FF, LAK (p. 127)

AVAILABLE TYPES OF GLAZING

- standard: Satin deco
- as a no-cost option: Chinchila or Transparent

OPTIONS

glazing change available for an extra fee: Lacomat lub Satin lines

BASIC CENTUR



CENTUR 3/3
FF Amber Oak



0/3

1/3v1

1/3v2

2/3

3/3

AVAILABLE COLOURS:

- CPL, FF, LAK (p. 127)

AVAILABLE TYPES OF GLAZING

- standard: Satin deco
- as a no-cost option: Chinchila or Transparent

OPTIONS

glazing change available for an extra fee: Lacomat lub Satin lines

BASIC MEDIOLAN

For descriptions, colours available in the BASIC Collection, and an extra charge table, go to p. 126-127.



MEDIOLAN 6/6
FF Bengali Mango



0/6 2/6 4/6 6/6

AVAILABLE COLOURS:

- CPL, FF, LAK (p. 127)

AVAILABLE TYPES OF GLAZING

- standard: Satin deco
- as a no-cost option: Chinchila or Transparent


OPTIONS

glazing change available for an extra fee: Lacomat lub Satin lines

BASIC PESARO



PESARO 5/5
FF Bengali Mango

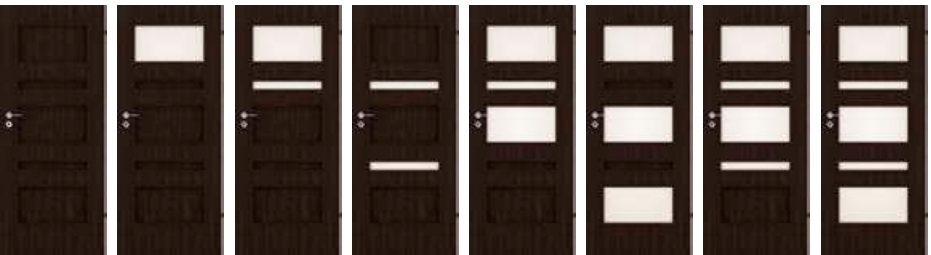

0/5 1/5 2/5 v1 2/5 v2 3/5 v1 3/5 v2 4/5 5/5

AVAILABLE COLOURS:

- CPL, FF, LAK (p. 127)

AVAILABLE TYPES OF GLAZING

- standard: Satin deco
- as a no-cost option: Chinchila or Transparent

OPTIONS

glazing change available for an extra fee: Lacomat lub Satin lines

BASIC TRIVENTO



TRIVENTO 3/3
LAK Bleached Oak



0/3

1/3 v1

1/3 v2

2/3 v1

2/3 v2

3/3

AVAILABLE COLOURS:

- CPL, FF, LAK (p. 127)

AVAILABLE TYPES OF GLAZING

- standard: Satin deco
- as a no-cost option: Chinchila or Transparent

OPTIONS

glazing change available for an extra fee: Lacomat lub Satin lines

BASIC DALLAS



DALLAS 4/4
LAK Bleached Oak



0/4

1/4

2/4

3/4

4/4

AVAILABLE COLOURS:

- CPL, FF, LAK (p. 127)

AVAILABLE TYPES OF GLAZING

- standard: Satin deco
- as a no-cost option: Chinchila or Transparent

OPTIONS

glazing change available for an extra fee: Lacomat lub Satin lines

BASIC MADRYT

For descriptions, colours available in the BASIC Collection, and an extra charge table, go to p. 126-127.



MADRYT 3/3
FF Bengali Mango



0/3

1/3

2/3

3/3



Satin macadi door
glazing as standard.

AVAILABLE COLOURS:

- CPL, FF, LAK (p. 127)

AVAILABLE TYPES OF GLAZING

- standard: Satin macadi
- as a no-cost option: Satin deco, Chinchila or Transparent

OPTIONS

glazing change available for an extra fee: Lacomat lub Satin lines

BASIC MACADI-3



MACADI-3 3/3
FF Cornwall Oak



0/3

1/3

2/3

3/3



Satin macadi door
glazing as standard.

AVAILABLE COLOURS:

- CPL, FF, LAK (p. 127)

AVAILABLE TYPES OF GLAZING

- standard: Satin macadi
- as a no-cost option: Satin deco, Chinchila or Transparent

OPTIONS

glazing change available for an extra fee: Lacomat lub Satin lines

CARSON model available in the FF and LAK colour groups.

BASIC CARSON



CARSON 04
LAK Bleached Oak



01

02

03

04

05

06

07

AVAILABLE COLOURS:

- FF, LAK (p. 127)

AVAILABLE TYPES OF GLAZING

- standard: Satin deco
- as a no-cost option: Chinchila or Transparent

OPTIONS

glazing change available for an extra fee: Lacomat lub Satin lines

BASIC PANAMA



PANAMA 3/3
LAK Silver Oak



0/3

1/3 v1

1/3 v2

2/3 v1

2/3 v2

3/3

AVAILABLE COLOURS:

- CPL, FF, LAK (p. 127)

AVAILABLE TYPES OF GLAZING

- standard: Satin deco
- as a no-cost option: Chinchila or Transparent

OPTIONS


glazing change available for an extra fee: Lacomat lub Satin lines

BASIC PORTO

For descriptions, colours available in the BASIC Collection, and an extra charge table, go to p. 126-127.



PORTO 6/6
FF Riviera Oak

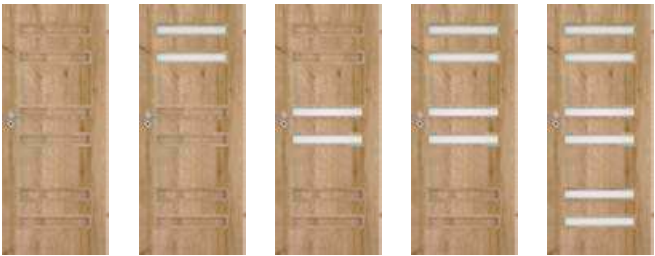

0/6 2/6v1 2/6v2 4/6 6/6

AVAILABLE COLOURS:

- CPL, FF, LAK (p. 127)

AVAILABLE TYPES OF GLAZING

- standard: Satin deco
- as a no-cost option: Chinchila or Transparent

OPTIONS

glazing change available for an extra fee: Lacomat lub Satin lines

BASIC RIMINI



RIMINI 5/5
FF Nussbaum Walnut



0/5 1/5 2/5 3/5 4/5 5/5

AVAILABLE COLOURS:

- CPL, FF, LAK (p. 127)

AVAILABLE TYPES OF GLAZING

- standard: Satin deco
- as a no-cost option: Chinchila or Transparent

OPTIONS

glazing change available for an extra fee: Lacomat lub Satin lines

BASIC SOFIA



SOFIA 3/3
LAK Silver Oak



0/3

1/3

2/3

3/3

AVAILABLE COLOURS:

- CPL, FF, LAK (p. 127)

AVAILABLE TYPES OF GLAZING

- standard: Satin deco
- as a no-cost option: Chinchila or Transparent

OPTIONS

glazing change available for an extra fee: Lacomat lub Satin lines

BASIC LIMA



LIMA 3/3
LAK Silver Oak



0/3

1/3

3/3

1/1

2/2

AVAILABLE COLOURS:

- CPL, FF, LAK (p. 127)

AVAILABLE TYPES OF GLAZING

- standard: Satin deco
- as a no-cost option: Chinchila or Transparent

OPTIONS

glazing change available for an extra fee: Lacomat lub Satin lines

BASIC VERONA

For descriptions, colours available in the BASIC Collection, and an extra charge table, go to p. 126-127.



VERONA 4/4
LAK Bleached Oak



0/4 1/4 2/4 3/4 4/4

- AVAILABLE COLOURS:**
- CPL, FF, LAK (p. 127)
- AVAILABLE TYPES OF GLAZING**
- standard: Satin deco
 - as a no-cost option: Chinchila or Transparent

OPTIONS

glazing change available for an extra fee: Lacomat lub Satin lines

BASIC VEDI



VEDI 5/5
LAK Silver Oak



0/5 1/5 2/5 3/5 4/5 5/5

- AVAILABLE COLOURS:**
- CPL, FF, LAK (p. 127)
- AVAILABLE TYPES OF GLAZING**
- standard: Satin deco
 - as a no-cost option: Chinchila or Transparent

OPTIONS

glazing change available for an extra fee: Lacomat lub Satin lines

BASIC VENTE



VENTE 4/4
FF Silver Oak



0/4

1/4

2/4

3/4

4/4

AVAILABLE COLOURS:

- CPL, FF, LAK (p. 127)

AVAILABLE TYPES OF GLAZING

- standard: Satin deco
- as a no-cost option: Chinchila or Transparent

OPTIONS

glazing change available for an extra fee: Lacomat lub Satin lines

BASIC SAPPORO



SAPPORO 4/4
FF Amber Oak



0/4

1/4

2/4

3/4

4/4



Satin Sapporo door
glazing as standard

AVAILABLE COLOURS:

- CPL, FF, LAK (p. 127)

AVAILABLE TYPES OF GLAZING

- standard: Satin sapporo
- as a no-cost option: Satin deco, Chinchila or Transparent

OPTIONS

glazing change available for an extra fee: Lacomat lub Satin lines


BASIC ANATOLIA



ANATOLIA 01
PVC White Grain

AVAILABLE COLOURS:

PVC GROUP



Frames are manufactured in the PP group colours.

AVAILABLE WIDTHS

- rebated system S2 in mm: „60“=644, „70“=744, „80“=844, „90“=944
- SIMPLE non-rebated system S2 in mm: „60“=618, „70“=718, „80“=818, „90“=918
- minimum sash width S2 in mm: 610
- maximum sash width S2 in mm: 944

OPTIONS

Up to 5 mm narrower	70,00 (86,10)
6 mm to 10 mm narrower	95,00 (116,85)

AVAILABLE HEIGHTS

- rebated system H2 in mm: 2030
- SIMPLE non-rebated system H2 in mm: 2017

OPTIONS

Up to 60 mm shorter	50,00 (61,50)
61 mm to 140 mm shorter	60,00 (73,80)
Up to 10 mm longer	60,00 (73,80)
Additional hinge (required for solid core infill door leaves)	20,00 (24,60)
Additional hinge for SIMPLE non-rebated system	90,00 (110,70)
Additional hinge for Reversed-Swing Doors	150,00 (184,50)
Change of lock position and bottom hinge (recommended for doors with a non-standard height)	70,00 (86,10)

CONSTRUCTION

- Timber frame
- Core: stabilising layer known as “honeycomb”
- face layer made of wood effect pressed HDF with a thickness of 3 mm

OPTIONS

Solid core board (extra charge applies for an additional hinge)	250,00 (307,50)
Two colour door leaf within one colour group	50,00%
Door leaf, Contrast system	55,00 (67,65)
Door leaf, Contrast system ABS (for SIMPLE and sliding non-rebated doors)	70,00 (86,10)
SOFT rebated edge in: Uni White, Uni Black, Silver Oak, Cornwall Oak, Halifax Oak, Riviera Oak, Bengali Mango, Nussbaum Walnut	95,00 (116,85)
Non-rebated door, SIMPLE system	200,00 (246,00)
Non-rebated door, wall-mounted standard sliding system, wall-mounted and pocket LOFT doors	50,00 (61,50)
Non-rebated door leaf, MAGIC sliding system	100,00 (123,00)
Door leaf, reversed swing system	300,00 (369,00)
Inactive door leaf for double doors S2 in mm: 610, 710, 810, 910	90,00 (110,70)
Reinforcement for the surface-mounted door closer (required for each door core infill variant)	45,00 (55,35)
Rebate 20 mm	60,00 (73,80)

COMPONENTS

- A mortise key lock (options include a turn and release lock, a lock with a euro profile cylinder or without the bottom hole)
- Screw hinges, 2 pcs. (3 pcp. in the “90” door leaf) in Nickel. For the ZOS frame package, hinges are in Zinc White

OPTIONS

Euro profile cylinder lock, with bolts (for timber or MDF fixed frames, a surcharge for the adjustable striker applies)	50,00 (61,50)
Top lock with core	40,00 (49,20)
Upper lock: euro profile, with bolts (for timber or MDF fixed frames, a surcharge for the adjustable striker applies)	40,00 (49,20)
Multipoint lock (in doors with fixed timber or MDF frames)	390,00 (479,70)
3D hinges adjustable in three planes (available complete with a frame fitted with the 3D hinges: fixed timber or fixed MDF)	40,00 (49,20)
Door restrictor arm (S2 in mm: from 720 to 944)	650,00 (799,50)
200° Panoramic door viewer	100,00 (123,00)
Drop down seal	99,00 (121,77)
Ventilation undercut	30,00 (36,90)
Metal, round or square ventilation sleeves in Nickel or Bronze (pcs.)	30,00 (36,90)
Plastic, square ventilation sleeves in Black matt, White, Gold, Satin Chrome or Chrome (pcs.)	16,00 (19,68)
Plastic, round ventilation sleeves – Wide range of colours (package)	20,00 (24,60)
Plastic ventilation grille in a colour of your choice: White, silver matt, grey, oak, walnut	60,00 (73,80)
Stainless steel air grille in inox or Black	299,00 (367,77)

DOOR FRAME VARIANTS

- Fixed: timber (p. 188) and MDF (p. 189)
- Adjustable: DIN (p. 196), DUALE (p. 198), ZOS (p. 192)

BASIC SARA



SARA 01
PVC White Grain



SARA 01 SARA 02



SARA 03 SARA 04

PVC GROUP



White Grain Natural Grandson Oak
Frames are manufactured in the PP group colours.

AVAILABLE WIDTHS

- rebated system S2 in mm: „60“=644, „70“=744, „80“=844, „90“=944
- SIMPLE non-rebated system S2 in mm: „60“=618, „70“=718, „80“=818, „90“=918
- minimum sash width S2 in mm: 610
- maximum sash width S2 in mm: 944

OPTIONS

Up to 5 mm narrower	70,00 (86,10)
6 mm to 10 mm narrower	95,00 (116,85)

AVAILABLE HEIGHTS

- rebated system H2 in mm: 2030
- SIMPLE non-rebated system H2 in mm: 2017

OPTIONS

Up to 60 mm shorter	50,00 (61,50)
61 mm to 140 mm shorter	60,00 (73,80)
Up to 10 mm longer	60,00 (73,80)
Additional hinge (required for solid core infill door leaves)	20,00 (24,60)
Additional hinge for SIMPLE non-rebated system	90,00 (110,70)
Additional hinge for Reversed-Swing Doors	150,00 (184,50)
Change of lock position and bottom hinge (recommended for doors with a non-standard height)	70,00 (86,10)

CONSTRUCTION

- Timber frame
- Core: stabilising layer known as "honeycomb"
- Face layer made of flat pressed HDF, 3 mm thick

OPTIONS

Solid core board (extra charge applies for an additional hinge)	250,00 (307,50)
Two colour door leaf within one colour group	50,00%
Door leaf, Contrast system	55,00 (67,65)
Door leaf, Contrast system ABS (for SIMPLE and sliding non-rebated doors)	70,00 (86,10)
SOFT rebated edge in: Uni White, Uni Black, Silver Oak, Cornwall Oak, Halifax Oak, Riviera Oak, Bengali Mango, Nussbaum Walnut	95,00 (116,85)
Non-rebated door, SIMPLE system	200,00 (246,00)
Non-rebated door, wall-mounted standard sliding system, wall-mounted and pocket LOFT doors	50,00 (61,50)
Non-rebated door leaf, MAGIC sliding system	100,00 (123,00)
Door leaf, reversed swing system	300,00 (369,00)
Inactive door leaf for double doors S2 in mm: 610, 710, 810, 910	90,00 (110,70)
Reinforcement for the surface-mounted door closer (required for each door core infill variant)	45,00 (55,35)
Rebate 20 mm	60,00 (73,80)

COMPONENTS

- Satin deco glass, 4 mm thick
- A mortise key lock (options include a turn and release lock, a lock with a euro profile cylinder or without the bottom hole)
- Screw hinges, 2 pcs. (3 pcs. for the "90" door leaf) in Nickel. For the ZOS frame package, hinges are in Zinc White

OPTIONS

Euro profile cylinder lock, with bolts (for timber or MDF fixed frames, a surcharge for the adjustable striker applies)	50,00 (61,50)
Top lock with core	40,00 (49,20)
Upper lock: euro profile, with bolts (for timber or MDF fixed frames, a surcharge for the adjustable striker applies)	40,00 (49,20)
Multipoint lock (in doors with fixed timber or MDF frames)	390,00 (479,70)
3D hinges adjustable in three planes (available complete with a frame fitted with the 3D hinges: fixed timber or fixed MDF)	40,00 (49,20)
Door restrictor arm (S2 in mm: from 720 to 944)	650,00 (799,50)
200° Panoramic door viewer	100,00 (123,00)
Drop down seal	99,00 (121,77)
Ventilation undercut	30,00 (36,90)
Metal, round or square ventilation sleeves in Nickel or Bronze (pcs.)	30,00 (36,90)
Plastic, square ventilation sleeves in Black matt, White, Gold, Satin Chrome or Chrome (pcs.)	16,00 (19,68)
Plastic, round ventilation sleeves - Wide range of colours (package)	20,00 (24,60)
Plastic ventilation grille in a colour of your choice: White, silver matt, grey, oak, walnut	60,00 (73,80)
Stainless steel air grille in inox or Black	299,00 (367,77)

DOOR FRAME VARIANTS

- Fixed: timber (p. 188) and MDF (p. 189)
- Adjustable: DIN (p. 196), DUALE (p. 198), ZOS (p. 192)

325



SOLID PLUS FT 02 Inox, PP Navy blue

SOLID PLUS /

SOLID PLUS doors are designed for use as internal entrance doors. The complete doorset consists of a 46 mm thick door leaf, a 90 mm wide fixed timber door frame, a steel threshold, a door viewer and a handle with euro profile cylinder.

When placing an order for an ASTORIA model, please specify the type (01, 02 or 03) and variant: BLACK, MIRROR, GOLD or WHITE.

For technological reasons, a door viewer cannot be installed in the SOLID PLUS ASTORIA 02 and ASTORIA 03 models with "60" and "70" widths.

COLOUR:
PVC Natural Grandson Oak



SOLID PLUS
ASTORIA 01



SOLID PLUS
ASTORIA 02



SOLID PLUS
ASTORIA 03



SOLID PLUS
STANDARD

COLOUR:
PP Navy blue



SOLID PLUS
FT 02



SOLID PLUS
FT 03

COLOUR:
PVC White Grain



SOLID PLUS
VEGAS 07



SOLID PLUS
VEGAS 09



SOLID PLUS
VEGAS 10




SOLID PLUS
VEGAS 12



SOLID PLUS
VEGAS 13



For SOLID PLUS FT doors, inlays are available in the Inox or Black colours

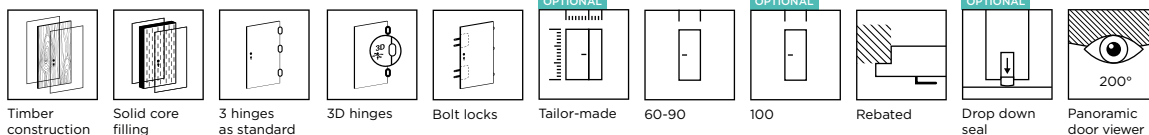

AVAILABLE WIDTHS

- rebated system S2 in mm: „60“=644, „70“=744, „80“=844, „90“=944

OPTIONS

“100” width

Up to 5 mm narrower

Narrower by more than 5 mm

Wider

AVAILABLE HEIGHTS

- rebated system H2 in mm: 2030

OPTIONS

Up to 60 mm shorter

More than 60 mm shorter

Up to 10 mm longer

Additional hinge (required for the 100 door leaf)

Change of lock position and bottom hinge (recommended for doors with a non-standard height)

CONSTRUCTION

- Timber frame
- Core: Solid board
- Surface made of 6 mm thick HDF

OPTIONS

Door leaf, Contrast system

Timber threshold with seal, without a decorative layer

Reinforcement for surface-mounted door closer

COMPONENTS

Door leaf:

- Mortise euro profile cylinder, bolt type, 2 pcs.
- Screw hinges 3D, adjustable in three planes, 3 pcs. in Zinc White
- 200° Panoramic door viewer (not for SOLID PLUS ASTORIA 02 or ASTORIA 03 with widths of “60” and “70”)
- Hinge security bolts, 2 pcs.
- Seal

Fixed timber door frame:

- Adjustable keep plate, adjustable upper keep plate
- Screw hinges 3D, adjustable in three planes, 3 pcs. in Zinc White
- Seal
- Installation kit

Accessories:

- Stainless steel sheet threshold with seal
- XEN handle with top escutcheon in inox colour (see p. 215)
- euro profile cylinder in master key system, size 30/45G, nickel

OPTIONS

Multipoint RC2 anti-theft lock

Drop down seal

DOOR FRAME VARIANTS

- Fixed timber 44×90 mm (p. 188)
- as an option: adjustable timber 54×100 mm
- Frames in the PP colour group are available for the PVC colour group doors

OPTIONS

Non-standard width

Non-standard height: longer by up to 10 mm

Non-standard height: shorter

Change of door strike and bottom hinge positions (recommended for door frames with a non-standard height)

Additional hinge (required for the “100” door frame)

Multipoint lock strike

AVAILABLE COLOURS:

As per the range of your selected door and door frame model:

- SOLID PLUS ASTORIA, see p. 116-125
- SOLID PLUS STANDARD, FT, see p. 115
- SOLID PLUS VEGAS, colors from the group PVC, see p. 115

ACOUSTIC /

Our technical doors are designed for use as internal entrance doors. The single door version ensures acoustic insulation at the level of 32 dB, double door version = 27 dB. The thickness of the door leaf is 50 mm. The threshold and the euro profile cylinder are not included as standard. For available euro profile cylinders, go to p. 212-216.



Remember your accessories.

Check out our range of entrance door handles.

See p. 215.

AVAILABLE WIDTHS

- rebated system S2 in mm: „80“=844, „90“=944

OPTIONS

Widths “100” and “110”
Up to 5 mm narrower
Narrower by more than 5 mm
Wider

AVAILABLE HEIGHTS

- rebated system H2 in mm: 2030

OPTIONS

Up to 60 mm shorter
More than 60 mm shorter
Up to 10 mm longer
Length from 11 mm to 300 mm
Additional hinge (required for the “100” and “110” doors, and doors that are 110 mm to 300 mm longer)
Change of lock position and bottom hinge (recommended for doors with a non-standard height)
Customising striker and bottom hinge in inactive leaves of double doors

CONSTRUCTION

Door leaf:

- Three-layer fire-resistant chipboard without a frame, with wooden strip glued around the perimeter
- Surface made of 3 mm thick HDF

OPTIONS

Inactive door leaf for double doors
Customised door for customer's lock to be installed

COMPONENTS

Door leaf:

- Mortise, euro profile cylinder lock
- Screw hinges, adjustable, 3 pcs.
- Drop down seal

Door frame:

- Striker R1,5 (ppoż)
- Screw hinges, adjustable, 3 pcs.
- Soundproofing seal
- Installation kit

Accessories:

- OVAL 1701 handle with bottom pull for an insert
- euro profile cylinder 35/40

OPTIONS


Fire rated air grille 300 mm x 150 mm
Top lock with core
200° Panoramic door viewer
GROOM 200 surface-mounted door closer with sprung arm, silver
GROOM 200 door closer for double doors (2 pcs.) with adjustable action (1 pc.)
Concealed door closer ITS96
Concealed door closer ITS96 for double doors
Concealed door closer ITS96 GSR with rail, for double leaf doors with door co-ordinator

DOOR FRAME VARIANTS

- Fixed timber 54×100 mm (p. 188)
- as an option: adjustable timber 54×100 mm (bespoke pricing)
- Frames in the PP colour group are available for the PVC colour group doors


OPTIONS - TIMBER DOOR FRAME

Double door frame 100-200
Non-standard width
Non-standard height: longer by up to 10 mm
Non-standard height: longer from 11 mm to 300 mm
Non-standard height: shorter
Change of door strike and bottom hinge positions (recommended for door frames with a non-standard height)
Adjustable upper striker
DES7, 12 V symmetrical fail-safe electric strike
Additional hinge (for door sizes of “100”, “110” and lengths from 110 mm to 300 mm)

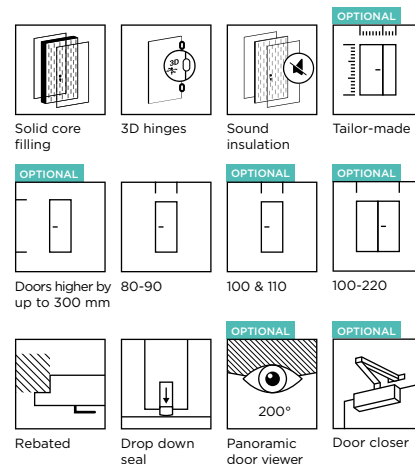


AVAILABLE COLOURS:


PVC GROUP



PP GROUP

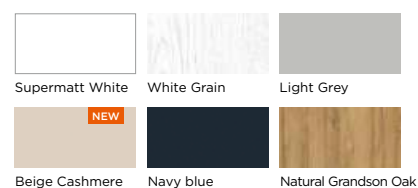


CPL GROUP

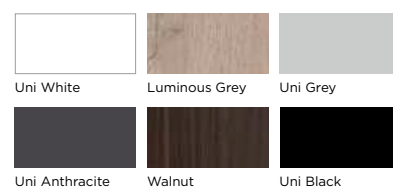

CLPL GROUP



FF GROUP

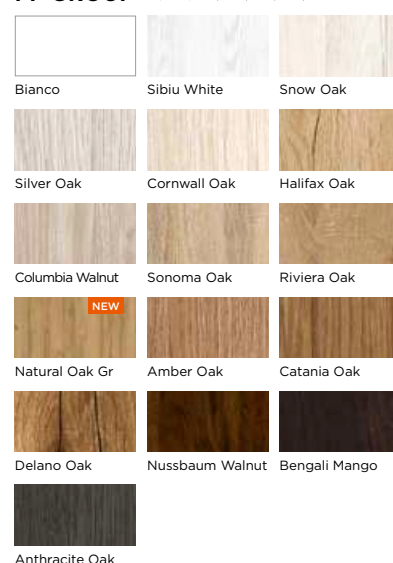

VALUABLE INFORMATION

Available orders of bespoke sized technical doors:
size W=900 mm with a door opening angle of 90 degrees.
Ask our Sales Department for details.





INTERNAL ENTRANCE DOORS
EI30, FIRE ACOUSTIC, FF Riviera Oak

EI30, EI60 FIRE ACOUSTIC

Our fire rated technical doors are designed for use as internal entrance doors. The single door version ensures acoustic insulation at the level of 32 dB, double door version = 27 dB. The thickness of the EI30 door leaf is 50 mm, and for the EI60 door it is 60 mm.

Technical fire rated doors can be installed on masonry walls (115 mm min. th.), concrete or reinforced concrete walls (100 mm min. th.), cellular concrete walls (min. th. of 150 mm for EI30 and 175 mm for EI60) or gypsum board rated EI30 or EI60, respectively, for fire resistance (100 mm min. th.).

The threshold is not part of the standard equipment. For the available euro profile cylinders, go to na p. 216.

Fire doors must be fitted with a fire rated door closer.

AVAILABLE WIDTHS

- rebated system S2 in mm: „80“=844, „90“=944
- SIMPLE non-rebated system S2 in mm: „80“=818, „90“=918

OPTIONS

Widths “100” and “110”

Up to 5 mm narrower

Narrower by more than 5 mm

Wider

AVAILABLE HEIGHTS

- rebated system H2 in mm: 2030
- SIMPLE non-rebated system H2 in mm: 2017

OPTIONS

Up to 60 mm shorter

More than 60 mm shorter

Up to 10 mm longer

Length from 11 mm to 300 mm

Additional hinge (required for the “100” and “110” doors, and doors that are 110 mm to 300 mm longer)

Change of lock position and bottom hinge (recommended for doors with a non-standard height)

Customising striker and bottom hinge in inactive leaves of double doors

CONSTRUCTION

Door leaf:

- Three-layer fire-resistant chipboard without a frame, with wooden strip glued around the perimeter
- Surface made of 3 mm thick HDF

Door frame:

- Timber, fixed: 54 x 100 mm

OPTIONS

Inactive door leaf for double doors

Non-rebated door, SIMPLE system

Customised door for customer's lock to be installed

COMPONENTS

Door leaf:

- Mortise, euro profile cylinder lock
- Screw hinges, adjustable, 3 pcs.
- Drop down seal

Door frame:

- Striker R1,5 (ppož)
- Screw hinges, adjustable, 3 pcs.
- Soundproofing seal
- Intumescent door seal, and intumescent smoke seal for smoke-proof doors
- Installation kit

Accessories:

- OVAL 1701 handle with bottom pull for an insert
- euro profile cylinder 35/40 (in the EI60 door euro profile cylinder 40/40)
- GROOM 200 surface-mounted door closer with sprung arm, silver

OPTIONS

Fire rated air grille 300 mm x 150 mm (Not for smoke-proof doors)

Top lock with core

GROOM 200 door closer for double doors (2 pcs.) with adjustable action (1 pc.)

Concealed door closer ITS96

Concealed door closer ITS96 for double doors

Concealed door closer ITS96 GSR with rail, for double leaf doors with door co-ordinator

DOOR FRAME VARIANTS

- Fixed timber 54×100 mm (p. 188)
- option: adjustable timber 54×100 mm (bespoke pricing)
- Frames in the PP colour group are available for the PVC colour group doors

OPTIONS - TIMBER DOOR FRAME

Double door frame 100-200

door frame for the SIMPLE non-rebated system

Non-standard width

Non-standard height: longer by up to 10 mm

Non-standard height: longer from 11 mm to 300 mm

Non-standard height: shorter


Change of door strike and bottom hinge positions (recommended for door frames with a non-standard height)

Adjustable upper striker

Fire rated electric strike, obverse 447 FIRE, 6-12 V, 12 V or 24 V


Additional hinge (required for doors “100”, “110” and longer from 110 mm to 300 mm)

Smoke-proof doors (smoke seal in the frame)

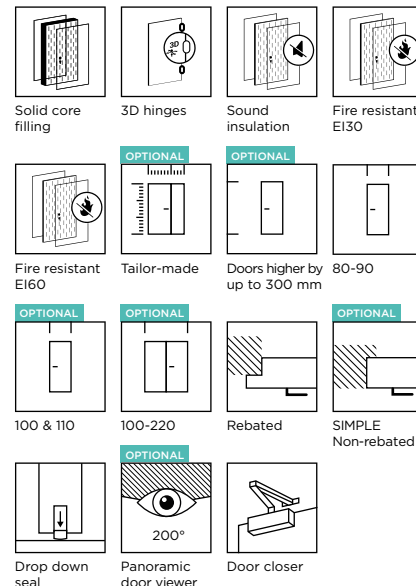


AVAILABLE COLOURS:


PVC GROUP



PP GROUP

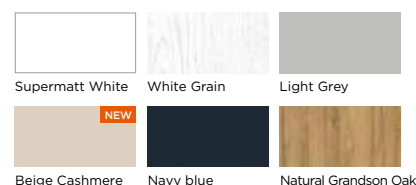


CPL GROUP

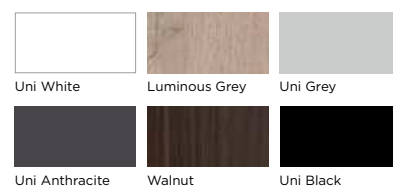

CLPL GROUP



FF GROUP

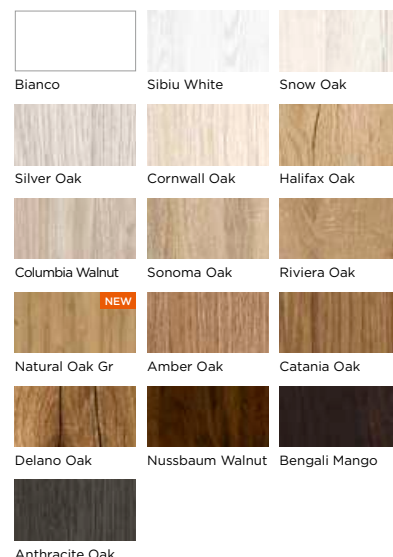

VALUABLE INFORMATION

Available orders of bespoke sized technical doors:
size W=900 mm with a door opening angle of 90 degrees.
Ask our Sales Department for details.





-15 cm

52°

38°

185 cm

85 cm

TALLER DOOR OPTIONS



BRILLIANT COLLECTION DOORS

SPREAD YOUR WINGS

Your choice is not limited to standard door sizes. Taller, lower, wider or narrower doors are not a problem. We can make doors in bespoke sizes and with the features described for your required door collection and for the chosen model.

NON-STANDARD WIDTH

- "100" width
- Width smaller than "60"
- Non-standard width

NON-STANDARD HEIGHT

- Up to 60 mm shorter
- More than 60 mm shorter (feasibility evaluated case by case)
- Up to 240 mm longer (feasibility evaluated case by case)
- Additional hinge (required for doors 110 mm to 240 mm longer)
- Additional hinge for SIMPLE non-rebated system (required for doors that are 110 mm to 240 mm longer)
- Change of lock position and bottom hinge (recommended for doors with a non-standard height)

For more information on non-standard doors, see p. 150 - 185 "Made to Measure Doors".

made to measure doors



PRESTIGE AND ELEGANTE COLLECTION DOORS

VALUABLE INFORMATION

What a door will look like depends on the non-standard height, whereas the modification must be agreed on an individual basis. Modification options for taller doors shown here are only for reference.



NON-STANDARD WIDTH

"100" width

Width smaller than "60"

Non-standard width, door with Satin deco, Lacomat or Satin VSG 2.2.1 or Black glass

NON-STANDARD HEIGHT

Up to 60 mm shorter

More than 60 mm shorter (feasibility evaluated case by case) door with Satin deco, Lacomat or Satin VSG 2.2.1 or Black glass

Up to 470 mm longer (feasibility evaluated case by case) door with Satin deco, Lacomat or Satin VSG 2.2.1 or Black glass

Additional hinge (required for doors that are 110 mm to 470 mm longer)

Additional hinge for SIMPLE non-rebated system (required for doors that are 110 mm to 470 mm longer)

Change of lock position and bottom hinge (recommended for doors with a non-standard height)

For non-standard widths or PRESTIGE door heights, the Tempered Satin glazing needs to be replaced with Satin deco, Lacomat, Satin VSG 2.2.1 or Black.

TALLER DOOR OPTIONS



BASIC COLLECTION DOORS

VALUABLE INFORMATION

What a door will look like depends on the non-standard height, whereas the modification must be agreed on an individual basis. Modification options for taller doors shown here are only for reference.



NON-STANDARD WIDTH

- Widths "100" and "110"
- Up to 5 mm narrower
- Narrower by more than 5 mm
- Wider

NON-STANDARD HEIGHT

- Up to 60 mm shorter
- More than 60 mm shorter
- Up to 10 mm longer
- 11 mm to 450 mm longer (except for the LAK colour group)
- Additional hinge (required for 110 doors with solid core board, and doors that are 110 mm to 450 mm longer)
- Additional hinge for SIMPLE non-rebated system (required for doors that are 110 mm to 450 mm longer)
- Change of lock position and bottom hinge (recommended for doors with a non-standard height)

The finishing and construction method of the door leaf allows for length correction by cutting at the bottom, but not by more than 60 mm for door leaves on a timber frame, and 30 mm for door leaves on an MDF frame. Cutting double and non-rebated doors for sliding systems on your own is not possible.

DOOR FRAMES FOR NON-STANDARD SIZE DOORS

drzwi na  iare

TIMBER FIXED DOOR FRAME



NON-STANDARD WIDTH

Widths "100" and "110"
Non-standard width

NON-STANDARD HEIGHT

Shorter
Up to 10 mm longer
Additional hinge
Change of door strike and bottom hinge positions (recommended for door frames with a non-standard height)

MDF FIXED DOOR FRAME



NON-STANDARD WIDTH

Widths "100" and "110"
Non-standard width

NON-STANDARD HEIGHT

Shorter
Up to 10 mm longer
11 mm to 470 mm longer
Additional hinge
Additional hinge for SIMPLE non-rebated system
Change of door strike and bottom hinge positions (recommended for door frames with a non-standard height)

ADJUSTABLE DIN DOOR FRAME



NON-STANDARD WIDTH

Widths "100" and "110"
Double door frame 100-200
Non-standard width
Non-standard width of adjustable angle

NON-STANDARD HEIGHT

Shorter
Up to 10 mm longer
11 mm to 470 mm longer
Additional hinge
Change of door strike and bottom hinge positions (recommended for door frames with a non-standard height)
Non-standard height of adjustable angle

"DUALE" DUAL RANGE ADJUSTABLE FRAME



NON-STANDARD WIDTH

Widths "100" and "110"
Double door frame 100-200
Non-standard width
Non-standard width of adjustable angle


NON-STANDARD HEIGHT

Shorter
Up to 10 mm longer
11 mm to 470 mm longer
Additional hinge
Change of door strike and bottom hinge positions (recommended for door frames with a non-standard height)
Non-standard height of adjustable angle



INVE
VERSATILE
DOORS /

drzwi na zmianę
VIVENTO

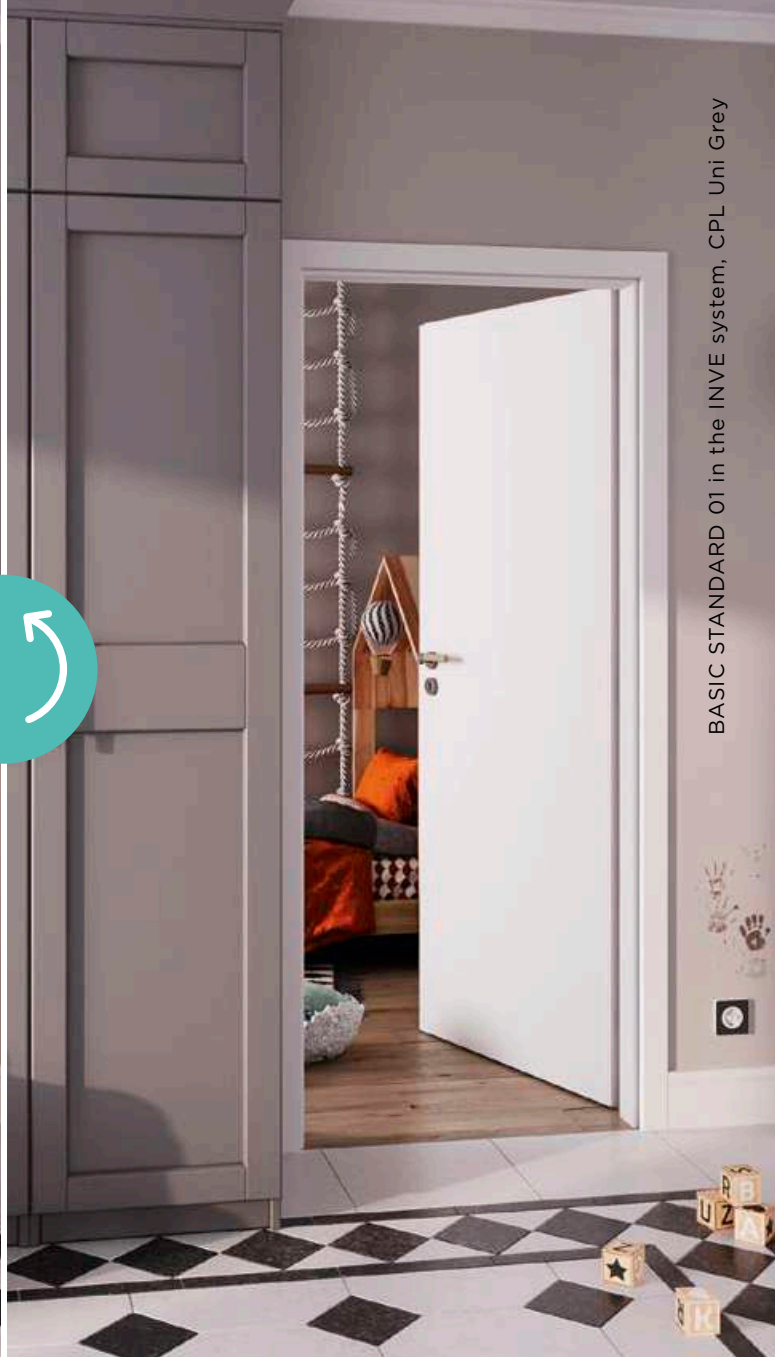

BASIC STANDARD 01 in the INVE system, CPL Uni Grey

READY FOR A CHANGE

We created the Vivento INVE door with your comfort in mind. Their proprietary design provides an option to reverse the opening direction without any hassle by swapping the positions of door frame jambs and reversing the door leaf. A unique solution with a clear purpose, this will give you a freedom of choice. You don't have to decide on the hand of your door at the time of purchase, but you can do it in the peace and quiet of your home. Vivento INVE doors are always ready for the change.

And this is not all yet. Also worth noting is the unusual connection between the frame head and jambs, as well as the door rebate. The rebate is 3 mm high on the shorter sides and 13 mm high on the longer ones. Add to this symmetrical layout of the hinges and a lock mounted right halfway up the door height, and you will get a practical door with an exceptionally interesting design.

The versatility of this model is also a significant asset in property building projects. The door you order can be used as left- or right-handed, depending on your current needs. You only need to follow a few steps to swap the door's handing. You no longer face any limits. Vivento INVE – stylish, convenient, made to last.



AVAILABLE WIDTHS

- rebated system S2 in mm: „60”=644, „70”=744, „80”=844, „90”=944
- SIMPLE non-rebated system S2 in mm: „60”=618, „70”=718, „80”=818, „90”=918

OPTIONS

Widths “100” and “110”

AVAILABLE HEIGHTS

- rebated system H2 in mm: 2024
- SIMPLE non-rebated system H2 in mm: 2017

CONSTRUCTION

- MDF frame
- Core: stabilising layer known as “honeycomb”
- Surface made of 3 mm thick HDF

OPTIONS

Timber frame

Solid core board (extra charge applies for an additional hinge)

Two colour door leaf within one colour group

Door leaf, Contrast system

Non-rebated door, SIMPLE system

COMPONENTS

- A symmetrical mortise sash lock (options include a turn and release lock or with a euro profile cylinder)
- innovative hinges in Zinc White (possible change to white or black for an additional charge), 2 pcs.

OPTIONS

Changing hinge colour from zinc white to white or black

Additional hinge (required for doors with a solid core infill)

Additional hinge for SIMPLE non-rebated system

Door restrictor arm (S2 in mm: from 720 to 1110)

DOOR FRAME VARIANTS

- Adjustable: DIN (p. 196)

OPTIONS

Widths “100” and “110”

Changing hinge colour from zinc white to white or black

Additional hinge

Door frame for SIMPLE non-rebated system (adjustment range 100-120)

Additional hinge for SIMPLE non-rebated system

AVAILABLE COLOURS:

PVC GROUP



White Grain



Natural Grandson Oak

PP GROUP



Supermatt White



White Grain



Light Grey



Beige Cashmere



Navy blue



Natural Grandson Oak

CPL GROUP



Uni White



Luminous Grey



Uni Grey



Uni Anthracite



Walnut



Uni Black

CLPL GROUP



Honey Oak



Spanish Oak



Old Oak

FF GROUP



Bianco



Sibiu White



Snow Oak



Silver Oak



Cornwall Oak



Halifax Oak



Columbia Walnut



Sonoma Oak



Riviera Oak



Natural Oak Gr



Amber Oak



Catania Oak



Delano Oak



Nussbaum Walnut



Bengali Mango



Anthracite Oak

LAK GROUP

Maximum door leaf height 2040 mm



White



Bleached Oak



Silver Oak



Scandinavian Elm

For detailed technical drawings with dimensions, go to the technical section on p. 227



SIMPLE NON-REBATED DOORS /

drzwi na **miarę**
VIVENTO

The doors in the SIMPLE system do not use a rebate, namely, their edges are square and the door leaf is flush with the frame. It is a modern solution used in interiors furnished according to a variety of styles.

They are manufactured in all the varied models from the BRILLIANT, ELEGANTE, PRESTIGE and BASIC collections. Equipped as standard with built-in hinges, adjustable in three planes (3 hinges for the BRILLIANT Collection, 2 hinges for the ELEGANTE, PRESTIGE and BASIC collections) and a magnetic lock as a sash lock, euro profile cylinder or mortise latch versions to choose from (without the bottom hole) to ensure silent closing.

Changing the height of the SIMPLE door will make changing the hinge and lock positions necessary. When ordering the SIMPLE double doors, please note the required size of the installation opening (see p. 225).



Mortise hinge, adjustable in three planes



Magnetic lock in the door leaf



Adjustable magnetic lock strike in the door frame

SIMPLE NON-REBATED DOORS

drzwi na  iare

AVAILABLE WIDTHS

- SIMPLE non-rebated system S2 in mm: „60”=618, „70”=718, „80”=818, „90”=918
- other sizes available at an extra charge, as per the range of your selected door and door frame model

CONSTRUCTION

- As per the range of your selected door and door frame model

OPTIONS

Change of lock and bottom hinge positions

COMPONENTS

Door leaf:

- A magnetic sash lock in satin chrome (options include a turn and release lock with a bolt diameter reduction, a lock with a euro profile cylinder or a mortise latch without the bottom hole) Possible change from satin chrome to white or black for an extra charge
- A standard mortise key lock for double rebated doors where the door leaves come together (can be changed to a euro profile cylinder lock or a lock without a bottom hole).
- Mortise hinges, adjustable in three planes, in chrome (3 hinges for the BRILLIANT Collection, 2 hinges for the ELEGANTE, PRESTIGE and BASIC collections, possible change to white, black or gold at no extra charge)

Door frame:

- Mortise hinges, adjustable in three planes, in chrome (3 hinges for the door frame complete with a door leaf in the BRILLIANT Collection, 2 hinges for the ELEGANTE, PRESTIGE and BASIC collections, possible change to white, black or gold at no extra charge)
- Magnetic lock strike Chrome (B), White (B), Black (B)
- Seal
- Installation kit

OPTIONS

Rod diameter reducer for WC lock (required)

Change of magnetic lock colour from satin chrome to White, Black or Gold

Additional hinge for door leaf (required for BRILLIANT, “110” door leaves, and doors longer by more than 110 mm)

Other options at an extra charge as per the range of your selected door and door frame model.

AVAILABLE COLOURS

- As per the range of your selected door and door frame model


DOOR FRAME VARIANTS

- Fixed: timber (p. 188) and MDF in the 44 mm × 100 mm size (p. 189)
- Adjustable: DIN adjustment range min. (100-120) and more (p. 196)


OPTIONS

Additional hinge in door frame (required for frames ordered for BRILLIANT, “110” doors, and doors longer by more than 110 mm)

COLOURS OF MORTISE HINGES AVAILABLE IN SIMPLE SYSTEM

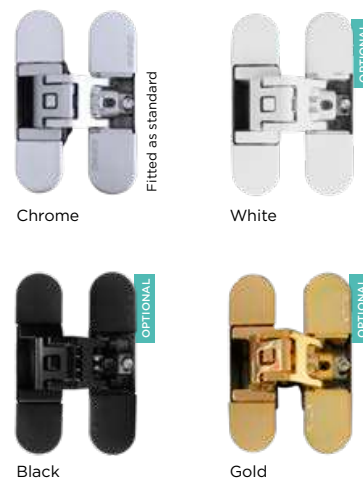

CAUTION



Install handles with separate keyhole cover plates (escutcheons)



For detailed technical drawings with dimensions, go to the technical section on p. 224-225



REVERSED SWING DOORS /

drzwi na **piarę**
VIVENTO

Reversed swing doors or just reverse doors are different from conventional doors in the way they are installed. They swing open towards the interior of a room, and their external side is flush with the wall. With this solution, you can customise the swing of the door to suit the layout of your interior and maintain its functionality and good look at the same time. For example, they are perfect for small corridors.

The reversed swing door system is available for the BASIC collection, complete with a DIN adjustable frame with a minimum adjustment range of 100-120. For full specifications, including door colours, please see the relevant BASIC models (str. 113-141) and the section on DIN adjustable frames (p. 196).

Frames in reverse system are available only with fixed angle with 80 mm architrave and movable angle with 60 mm architrave in standard 45° connection, for wall with a minimum thickness of 100 mm. It is possible to deliver a DIN adjustable frame for the reversed swing system with a 90-degree architrave joint for an additional charge.



Frame for the reversed-swing system with an 80 mm architrave at a 45° angle



OPTIONAL

Frame for the reversed-swing system with an 80 mm architrave at a 90° angle

VALUABLE INFORMATION



When you order a reversed swing door, note the flooring transition which should be right under the door leaf after installation.

AVAILABLE WIDTHS

- rebated system S2 in mm: „60”=644, „70”=744, „80”=844, „90”=944

OPTIONS

Widths “100” and “110”
Up to 5 mm narrower
Narrower by more than 5 mm
Wider

AVAILABLE HEIGHTS

- rebated system H2 in mm: 2029

OPTIONS

Up to 60 mm shorter
More than 60 mm shorter
Up to 10 mm longer
11 mm to 450 mm longer (except for the LAK colour group)
Additional hinge (required for 110 doors with solid core board, „110”, longer than 110 mm to 450 mm)
Change of lock position and bottom hinge (recommended for doors with a non-standard height)

CONSTRUCTION

- As per the range of your selected door model

OPTIONS

Change of magnetic lock colour from Chrome to White, Black or Gold
Change of hinge colour from Chrome to White, Black or Gold
Change of lock and bottom hinge positions

COMPONENTS

Door leaf:

- A magnetic sash lock in satin chrome (options include a turn and release lock with a bolt diameter reduction, a lock with a euro profile cylinder or a mortise latch without the bottom hole) Possible change from satin chrome to white or black for an extra charge.
- 2 mortise hinges, adjustable in three planes in chrome (possible change to white, black or gold for an extra charge)

Door frame:

- 2 mortise hinges, adjustable in three planes (possible change to white, black or gold for an extra charge)
- Magnetic lock strike Chrome (B), White (B), Black (B)
- Seal
- Installation kit

OPTIONS

Rod diameter reducer for WC lock (required)
Drop down seal
Ventilation undercut
Metal, round or square ventilation sleeves in Nickel or Bronze (pcs.)
Plastic, square ventilation sleeves in matt black, White, Gold, Satin Chrome or Chrome (pcs.)
Plastic, round ventilation sleeves – Wide range of colours (package)
Plastic ventilation grille in a colour of your choice: White, silver matt, grey, oak, walnut
Stainless steel air grille in inox or Black

AVAILABLE COLOURS:

- As per the range of your selected door model

DOOR FRAME VARIANTS


- Adjustable: DIN adjustment range min. 100-120 and larger (p. 196)

OPTIONS

Widths “100” and “110”
Non-standard width
Shorter
Up to 10 mm longer
11 mm to 450 mm longer
Additional hinge in door frame (required for “110” door frames, longer than 110 mm)
Frame comes with the 90° joint of its components
Change of hinge colour from Chrome to White, Black or Gold
Change of lock position and bottom hinge (recommended for doors with a non-standard height)
Other options at an extra charge as per the range of your selected BASIC door.

drzwi na iarę

HINGE COLOURS AVAILABLE FOR REVERSED SWING DOORS

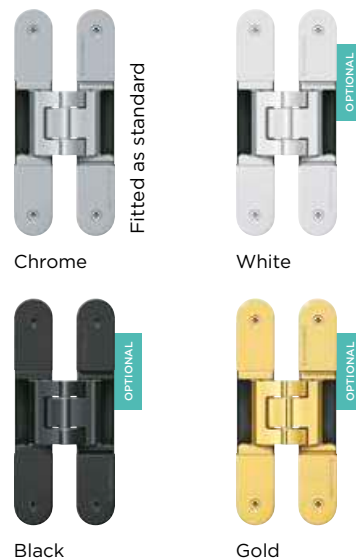

CAUTION



Install handles with separate keyhole cover plates (escutcheons)



For detailed technical drawings with dimensions go to the technical section on p. 226



INVISIBLE FLUSH WITH THE WALL DOORS

drzwi na **malować**
VIVENTO

A unique door offering spectacular arrangement opportunities. The all-aluminium fixed frame in combination with a non-rebated door leaf are installed flush with the wall surface, making the door INVISIBLE. The effect is enhanced by finishing the door with a PAINT-ME foil, which can be coated with wall paints, wallpaper or using decorative plaster, for example. You can also choose to finish the door with one of the decorative layers from our range.

The INVISIBLE door comes with 2 mortise hinges and a magnetic sash lock as standard (options include a turn and release lock, a lock with a euro profile cylinder or a mortise latch without the bottom hole). The frame construction differs depending on whether it is fixed in a masonry or gypsum board wall. When coating the door yourself, you need to apply a supplied primer to the frame, whereas if finished with the PAINT-ME foil, the door is ready to be painted on. Apply paint or stick wallpaper with the door leaf laid flat.

When placing your order, remember to specify the type of wall to fix your frame in (masonry or plasterboard) and the door opening angle of 180°, which is out-swing standard, or 90°, which is the inward reverse-swing option.

CAUTION



Install handles
with separate
keyhole cover plates
(escutcheons)



INVISIBLE – FLUSH WITH WALL DOORS

AVAILABLE WIDTHS

- system INVISIBLE S2 in mm: „60”=644, „70”=744, „80”=844, „90”=944

OPTIONS

Widths “100” and “110”

Up to 5 mm narrower

Narrower by more than 5 mm

Wider

AVAILABLE HEIGHTS

- outswing door leaf, 180° H2 in mm: 2020
- inswing door leaf, 90° H2 in mm: 2030

OPTIONS

Up to 60 mm shorter

More than 60 mm shorter

Up to 10 mm longer

11 mm to 450 mm longer

Additional hinge (required for “110” doors, longer by 110 mm to 450 mm, doors with a solid core infill)

Change of lock position and bottom hinge (recommended for doors with a non-standard height)

CONSTRUCTION

- MDF frame
- Core: stabilising layer known as “honeycomb”
- Surface made of 3 mm thick HDF

OPTIONS

Timber frame

Solid core board (extra charge applies for an additional hinge)

COMPONENTS

Door leaf:

- Concealed hinges, 2 pcs. Possibility of changing the color from satin chrome to black, at no extra charge.
- A magnetic sash lock (options include a turn and release lock with a bolt diameter reduction, a lock with a euro profile cylinder or a mortise latch without the bottom hole).

Aluminium door frame:

- Concealed hinges, 2 pcs. Possibility of changing the color from satin chrome to black, at no extra charge
- Striker
- Seal
- Installation kit
- Acrylic primer

OPTIONS

Rod diameter reducer for WC lock (required)

Change of magnetic lock colour from satin chrome to White or Black

Door restrictor arm (applies to the width of S2 in mm from: 720 to 1110), for the 180° outswing door

Drop down seal

Ventilation undercut

Plastic, round ventilation sleeves – Wide range of colours (package)

Metal, round or square ventilation sleeves in Nickel or Bronze (pcs.)

Plastic air grille in white or matt silver

Stainless steel air grille in inox or Black

DOOR FRAME VARIANTS

- Fixed aluminium for masonry or gypsum board walls
- Available colours: aluminium (standard), white RAL 9003, black RAL 9005

OPTIONS

Widths “100” and “110”

Non-standard width

Non-standard height

Change of door strike and bottom hinge positions (recommended for doors with a non-standard height)

Additional hinge (required for the “110” frame and frames that are 110 mm to 450 mm longer and to the door leaf with a solid core infill)

drzwi na iare

AVAILABLE COLOURS:



PAINT-ME
film for diy painting or wallpapering

PVC GROUP



White Grain



Natural Grandson Oak

PP GROUP



Supermatt White



White Grain



Light Grey



Beige Cashmere



Navy blue



Natural Grandson Oak

CPL GROUP



Uni White



Luminous Grey



Uni Grey



Uni Anthracite



Walnut



Uni Black

CLPL GROUP



Honey Oak



Spanish Oak



Old Oak

FF GROUP



Bianco



Sibiu White



Snow Oak



Silver Oak



Cornwall Oak



Halifax Oak



Columbia Walnut



Sonoma Oak



Riviera Oak



Natural Oak Gr




Amber Oak




Catania Oak



Delano Oak



Nussbaum Walnut



Bengali Mango



Anthracite Oak

AVAILABLE DOOR FRAME COLOURS:



aluminum
(standard)



White
RAL 9003



Black
RAL 9005

For detailed technical drawings with dimensions go to technical section, p. 228



BASIC STANDARD 01, CPL Uni White + Uni Black

CONTRAST DOORS /

drzwi na **miarę**
VIVENTO

The effect of the CONTRAST system can be further emphasised with a frame in the colour of the border



The CONTRAST system will, in an original way, give the right character to your room. By using the alternative colour for the door edging to create a contrasting colour combination will add a large amount of expressiveness and modern touch to the interior. The effect can be further accentuated with an edging-coloured door frame.

The system is available for BASIC series doors and entrance doors. It enables the use of edging (facing applied on the thickness of a door) that has a different colour than that of the main door plane. This also makes it possible to mix and match the colours of the frame and door. The CONTRAST system is available for different edge types: standard rebated, SOFT rebated and SIMPLE non-rebated, as well as for sliding doors.

The CONTRAST ABS system, with a coating thickness of 1 mm, is available for non-rebated and sliding doors.

When placing an order for the CONTRAST system, please indicate:

- ☒ the colour of the door leaf
- ☒ the colour of the edge
- ☒ the colour of the door frame.

EDGE FINISH TYPES



SOFT rebated door



Standard rebated door

CONTRAST DOOR EDGES

DOOR EDGE COLOURS AVAILABLE FOR REBATED, NON-REBATED SIMPLE AND SLIDING DOORS


PP GROUP




CPL GROUP



CLPL GROUP



FF GROUP

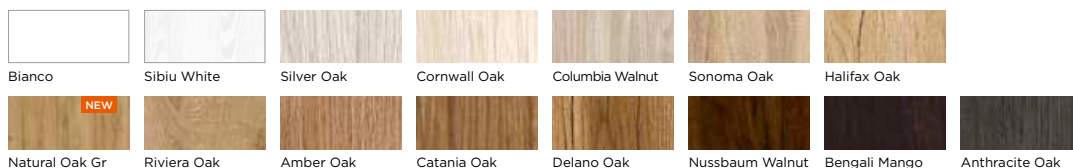

LAK GROUP



Rebated



SIMPLE Non-rebated




Sliding Non-rebated

DOOR EDGE COLOURS AVAILABLE FOR SOFT REBATED DOORS

CPL GROUP



FF GROUP



SOFT rebated

DOOR EDGE COLOURS AVAILABLE FOR NON-REBATED SIMPLE AND SLIDING DOORS



CPL Matt Gold



CPL Matt Silver



SIMPLE Non-rebated



Sliding Non-rebated

CONTRAST ABS DOOR EDGES

DOOR EDGE COLOURS AVAILABLE FOR NON-REBATED SIMPLE AND SLIDING DOORS



SIMPLE Non-rebated



Sliding Non-rebated



ABS Bianco



ABS Natural Grandson Oak



ABS Halifax Oak



ABS Cornwall Oak



ABS Concrete Grey

DUAL COLOUR DOORS /

drzwi na **miarę**
VIVENTO

Dual Colour Doors are an interesting option in interior design. You can create an original colour accent in your home with this door solution which uses two colours to match different decors in the rooms on both sides of a door. Dare original colour combinations and enjoy a unique design for your interior.

Dual Colour Doors feature the construction of the models from the BASIC Collection within one of the Colour Group ranges. They can be made in a non-standard size as per the range of your selected door and door frame model.

AVAILABLE WIDTHS

- rebated system S2 in mm: „60”=644, „70”=744, „80”=844 mm, „90”=944
- SIMPLE non-rebated system S2 in mm: „60”=618, „70”=718, „80”=818, „90”=918

CONSTRUCTION AND COMPONENTS

- As per the range of your selected door and door frame model

AVAILABLE COLOURS

- As per the range of your selected door and door frame model within the same colour group.

DOOR FRAME VARIANTS

- Adjustable: DIN with fixed angle profile in different colour

When placing an order, please specify the colour no. 1:

- ☒ the door leaf on the total width side S2,
- ☒ edging (finishing layer on the door thickness)
- ☒ fixed angle profile in the frame

and color no. 2:

- ☒ the door leaf on the rebate width side S1,
- ☒ the frame board and the adjustable angle in the frame



ANGLED DOORS /

drzwi na **miarę**
VIVENTO

Angled doors are an effective solution to enhance your options when arranging loft rooms. You install such doors closer to a sloping ceiling and use the remaining space in a more functional way.

Angled doors are manufactured in the rebate system in selected models and colours of the PRESTIGE and BASIC collections, depending on the dimensions of the wall opening. We can fit non-standard glazing to suit non-standard angled door sizes, but due to the complexity of the product and the manufacturing process, each order is subject to an individual feasibility assessment.

AVAILABLE WIDTHS

- rebated system S2 in mm: „60”=644, „70”=744, „80”=844 mm, „90”=944

CONSTRUCTION AND COMPONENTS

- As per the range of your selected door and door frame model

AVAILABLE COLOURS

- As per the range of your selected door and door frame model

DOOR FRAME VARIANTS

- Fixed: timber (p. 188) and MDF (p. 189)


DOORS WITH PET DOOR

drzwi na miarę

VIVENTO

We also have a solution to make life easier for our four-legged friends. Doors with pet flaps provide them access to a room despite a closed door. These can be used, for example, in the bathroom or kitchen, where you put a water bowl for your pet.

They feature the construction of the STANDARD 01 model with a solid core infill as standard. Feasibility is assessed on an individual basis. The flap is available in two sizes, the small one for pets up to 7 kg and the large one for pets up to 18 kg, and in two colour versions: White and Bronze.



VALUABLE INFORMATION

Pet flap in a glazed door leaf?
Make an enquiry at info@vivento.pl



TABLE OF DIMENSIONS

Size	Sc [mm]	Sp [mm]	Hc [mm]	Hp [mm]
Small flap for animals up to 7 kg	198	155	236	170
Large flap for animals up to 18 kg	294	230	352	252



Sc total width of door inc. frame

Sp pet flap width

Hc total height of door inc. frame

Hp pet flap height

DOORS WITH PET FLAP

AVAILABLE WIDTHS

- rebated system S2 in mm: „60”=644, „70”=744, „80”=844, „90”=944
- SIMPLE non-rebated system S2 in mm: „60”=618, „70”=718, „80”=818, „90”=918

OPTIONS

Widths “100” and “110”

Up to 5 mm narrower

Narrower by more than 5 mm

Wider

AVAILABLE HEIGHTS

- rebated system H2 in mm: 2030
- SIMPLE non-rebated system H2 in mm: 2017

OPTIONS

Up to 60 mm shorter

More than 60 mm shorter

Up to 10 mm longer

11 mm to 450 mm longer (except for the LAK colour group)

Additional hinge (required for “110” doors, and doors that are 110 mm to 450 mm longer)

Additional hinge for SIMPLE non-rebated system (required for doors that are 110 mm to 450 mm longer)

Change of lock position and bottom hinge (recommended for doors with a non-standard height)

CONSTRUCTION

- MDF frame
- Core: Solid board
- Surface made of 3 mm thick HDF

OPTIONS

Timber frame

Door leaf, Contrast system

Door leaf, Contrast system ABS (for SIMPLE and sliding non-rebated doors)

SOFT rebated edge in: Uni White, Uni Black, Silver Oak, Cornwall Oak, Halifax Oak, Riviera Oak, Bengali Mango, Nussbaum Walnut

Non-rebated door, SIMPLE system

Door leaf, reversed swing system

Reinforcement for surface-mounted door closer

Rebate 20 mm

COMPONENTS

- Swinging pet door made of white or bronze plastic, with magnet to close the flap and with a vertical lock
- A mortise key lock (options include a turn and release lock, a lock with a euro profile cylinder or without the bottom hole)
- Screw hinges, 3 pcs.

OPTIONS

Door restrictor arm (S2 in mm: from 720 to 1110)

Drop down seal

Ventilation undercut

DOOR FRAME VARIANTS

- Fixed: timber (p. 188) and MDF (p. 189)
- Adjustable: DIN (p. 196), DUALE (p. 198), ZOS (p. 192)
- Steel: fixed (p. 202), square – large (p. 202), adjustable (p. 203)
- Options are charged extra, see description of your selected frame.

drzwi na iareę

AVAILABLE COLOURS:

PVC GROUP



White Grain



Natural Grandson Oak

PP GROUP



Supermatt White



White Grain



Light Grey



Beige Cashmere



Navy blue



Natural Grandson Oak

CPL GROUP



Uni White



Luminous Grey



Uni Grey



Uni Anthracite



Walnut



Uni Black

CLPL GROUP



Honey Oak



Spanish Oak



Old Oak

FF GROUP



Bianco



Sibiu White



Snow Oak



Silver Oak



Cornwall Oak



Halifax Oak



Columbia Walnut



Sonoma Oak



Riviera Oak



Natural Oak Gr




Amber Oak




Catania Oak




Delano Oak



Nussbaum Walnut



Bengali Mango



Anthracite Oak

LAK GROUP

Maximum door leaf height 2040 mm



White



Bleached Oak



Silver Oak



Scandinavian Elm


INSET DOORS WITH VIEWING WINDOW /

drzwi na **miarę**

VIVENTO

Functional doors equipped with an access window and protected by a roller shutter, often used at facilities such as pharmacies, courier parcel pick-up points, canteens or post offices where direct contact is necessary but the access must be limited for safety reasons.

INSET doors with an access shutter window are produced as rebated doors. Filled with a solid core panel, the door features an access window and ledge in sizes 200, 300, 400 or 500 mm, covered with a PVC rolling shutter locked with pull latches.

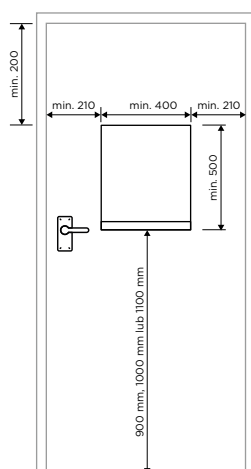

INSET DOORS WITH AN ACCESS SHUTTER WINDOW

AVAILABLE WIDTHS

- rebated system S2 in mm: „60”=644, „70”=744, „80”=844, „90”=944
- SIMPLE non-rebated system S2 in mm: „60”=618, „70”=718, „80”=818, „90”=918

OPTIONS

Widths “100” and “110”

Up to 5 mm narrower

Narrower by more than 5 mm

Wider

AVAILABLE HEIGHTS

- rebated system H2 in mm: 2030
- SIMPLE non-rebated system H2 in mm: 2017

OPTIONS

Up to 60 mm shorter

More than 60 mm shorter

Up to 10 mm longer

11 mm to 450 mm longer (except for the LAK colour group)

Additional hinge (required for “110” doors, and doors that are 110 mm to 450 mm longer)

Additional hinge for SIMPLE non-rebated system (required for doors that are 110 mm to 450 mm longer)

Change of lock position and bottom hinge (recommended for doors with a non-standard height)

CONSTRUCTION

- MDF frame
- Core: Solid board
- Surface made of 3 mm thick HDF

OPTIONS

Timber frame

Door leaf, Contrast system

Door leaf, Contrast system ABS (for SIMPLE and sliding non-rebated doors)

SOFT rebated edge in: Uni White, Uni Black, Silver Oak, Cornwall Oak, Halifax Oak, Riviera Oak, Bengali Mango, Nussbaum Walnut

Non-rebated door, SIMPLE system

Door leaf, reversed swing system

Rebate 20 mm

Reinforcement for surface-mounted door closer

COMPONENTS

- Mortise, euro profile cylinder lock
- Screw hinges, 3 pcs.
- PVC rolling shutter with pull latches
- Ledge (for self assembly)

OPTIONS

Door restrictor arm (S2 in mm: from 720 to 1110)

Drop down seal

Ventilation undercut

Metal, round or square ventilation sleeves in Nickel or Bronze (pcs.)

Plastic, square ventilation sleeves in matt black, White, Gold, Satin Chrome or Chrome (pcs.)

Plastic, round ventilation sleeves - Wide range of colours (package)

Plastic ventilation grille in a colour of your choice: White, silver matt, grey, oak, walnut

Stainless steel air grille in inox or Black

AVAILABLE COLOURS - SHUTTERS

- White, Beige, Silver, Graphite, Walnut, Black

AVAILABLE COLOURS - CASING, GUIDES AND CABLES

- White, Brown

DOOR FRAME VARIANTS

- Fixed: timber (p. 188) and MDF (p. 189)
- Adjustable: DIN (p. 196), DUALE (p. 198)
- Options are charged extra, see description of your selected frame.

drzwi na iarę

AVAILABLE COLOURS:

PVC GROUP



White Grain



Natural Grandson Oak

PP GROUP



Supermatt White



White Grain



Light Grey



Beige Cashmere



Navy blue



Natural Grandson Oak

CPL GROUP



Uni White



Luminous Grey



Uni Grey



Uni Anthracite



Walnut



Uni Black

CLPL GROUP



Honey Oak



Spanish Oak



Old Oak

FF GROUP



Bianco



Sibiu White



Snow Oak



Silver Oak



Cornwall Oak



Halifax Oak



Columbia Walnut



Sonoma Oak



Riviera Oak



Natural Oak Gr



Amber Oak




Catania Oak



Delano Oak



Nussbaum Walnut



Bengali Mango



Anthracite Oak

LAK GROUP

Maximum door leaf height 2040 mm



White



Bleached Oak



Silver Oak



Scandinavian Elm

For detailed technical drawings with dimensions, go to the technical section on p. 232.





BASIC SWING, CPL Uni Black. Optional: Porthole, optional: Horizontal reinforcement panel in SS metal sheet, 2 sets.

SWING DOUBLE-ACTING DOORS /

drzwi na **piarę**
VIVENTO

Double-acting doors swing open in both directions. They are installed where fast and free access is a must, for example when you open a door hands-free, and where a lock or a handle is not needed. They are common in restaurants or public bathrooms, but nowadays are used more and more in homes too.

The SWING double-acting doors are manufactured as rebate-free, one-panel style or with porthole glazing, both as single and double doors.

For our full range of pull handles, go to p. 217.

DUAL ACTING SWING HINGES



Nickel



Black
OPTIONAL



Gold
OPTIONAL

PORTHOLE OPTIONAL



Nickel



Black



Gold

SWING - DOUBLE-ACTING DOORS

AVAILABLE WIDTHS

- system SWING S2 in mm in set with MDF door frame: „60”=591, „70”=691, „80”=791, „90”=891
- system SWING S2 in mm in set with a timber door frame: „60”=589, „70”=689, „80”=789, „90”=889

OPTIONS

Widths “100” and “110”

Up to 5 mm narrower

Narrower by more than 5 mm

Wider

AVAILABLE HEIGHTS

- H2: 2005 mm

OPTIONS

Up to 60 mm shorter

More than 60 mm shorter

Up to 10 mm longer

11 mm to 450 mm longer (except for the LAK colour group)

CONSTRUCTION

- Timber frame
- Core: Solid board
- Surface made of 3 mm thick HDF

OPTIONS

Two colour door leaf within one colour group

Door leaf, Contrast system

Door leaf, Contrast system ABS

SOFT rebated edge in: Uni White, Uni Black, Silver Oak, Cornwall Oak, Halifax Oak, Riviera Oak, Bengali Mango, Nussbaum Walnut

COMPONENTS

- 3 dual acting swing hinges for single doors, nickel
- 4 dual acting swing hinges for “60” - “90” double doors, nickel
- 6 dual acting swing hinges for “100” - “200” double doors, nickel

OPTIONS

Change of the hinge colour from nickel to black or gold

PORTHOLE WITH LACOMAT OR TRANSPARENT GLASS IN NICKEL, BLACK OR GOLD

Outside Ø 240 mm, inside Ø 135 mm (minimum sash width 340 mm)

Outside Ø 320 mm, inside Ø 215 mm (minimum sash width 420 mm)

Outside Ø 400 mm, inside Ø 280 mm (minimum sash width 500 mm)

Glazing with safety glass or one-way glass pane

Double-sided reinforcement with SS sheet metal panel (package), horizontal, with a maximum height of 170 mm

Double-sided reinforcement with SS sheet metal panel (package), horizontal higher than 170 mm or vertical

DOOR PULLS

U01OK Round

U03KW Square

U02OW Oval

U04PR Rectangular

HALF MOON GRIP PULL HANDLES

P05OK Round

P06KW Square

DOOR FRAME VARIANTS

- Fixed: timber (p. 188) and MDF (p. 189)
- Options are charged extra, see description of your selected frame.

drzwi na iare

AVAILABLE COLOURS:

PVC GROUP



White Grain



Natural Grandson Oak

PP GROUP



Supermatt White



White Grain



Light Grey



Beige Cashmere




Navy blue



Natural Grandson Oak

CPL GROUP



Uni White



Luminous Grey



Uni Grey



Uni Anthracite



Walnut



Uni Black

CLPL GROUP



Honey Oak



Spanish Oak



Old Oak

FF GROUP



Bianco




Sibiu White



Snow Oak



Silver Oak



Cornwall Oak



Halifax Oak



Columbia Walnut



Sonoma Oak



Riviera Oak



Natural Oak Gr



Amber Oak




Catania Oak



Delano Oak



Nussbaum Walnut



Bengali Mango



Anthracite Oak

LAK GROUP

Maximum door leaf height 2040 mm



White



Bleached Oak



Silver Oak



Scandinavian Elm

DOOR PULLS

OPTIONAL



U01OK
Round



U03KW
Square



U02OW
Oval



U04PR
Rectangular

HALF MOON GRIP PULL HANDLES

OPTIONAL



P05OK
Round



P06KW
Square

For detailed technical drawings with dimensions go to the technical section on p. 232.



DOUBLE DOORS /

drzwi na miarę

VIVENTO

An impressive, elegant and functional solution often fitted in the representative part of the home. You can use a double door to create a unique space by connecting adjacent rooms, such as a kitchen and dining room or a study and living room. Double doors are also practical as they provide wide passageways, thus facilitating everyday life.

Double doors are manufactured as the rebated version of any of the models and colours in our range, with various width configurations (symmetrical and asymmetrical) and any available sizes, as per the range of the selected door model, and at an extra charge, as per the range of your selected door and door frame model.

The double doors can be manufactured in the SIMPLE system, where both the active and passive door leaves fit snugly in the rebate.

AVAILABLE WIDTHS

- rebated system S2 in mm: „60”+„60”=644+610, „70”+„60”=744+610, „70”+„70”=744+710, „80”+„60”=844+610, „90”+„60”=944+610, „80”+„70”=844+710, „80”+„80”=844+810, „90”+„70”=944+710, „90”+„80”=944+810, „90”+„90”=944+910
- SIMPLE non-rebated system S2 in mm: „60”+„60”=631+631, „70”+„60”=731+631, „70”+„70”=731+731, „80”+„60”=831+631, „90”+„60”=931+631, „80”+„70”=831+731, „80”+„80”=831+831, „90”+„70”=931+731, „90”+„80”=931+831, „90”+„90”=931+931,

OPTIONS - BRILLIANT, ELEGANTE I PRESTIGE

Inactive door leaf for double doors, width S2 in mm: 420-609

Inactive door leaf for double doors, width S2 in mm: 610, 710, 810, 910

Inactive door leaf for double doors, width S2 in mm: 1010

OPTIONS - BASIC STANDARD 01

Inactive door leaf for double doors, width S2 under 610 mm, but not less than 244 mm (Standard 01 only; extra charge applies for timber rails and stiles)

AVAILABLE HEIGHTS

- rebated system H2 in mm: 2030
- SIMPLE non-rebated system H2 in mm: 2017

CONSTRUCTION

- Stile and rail BRILLIANT, ELEGANTE, PRESTIGE and BASIC doors with timber stiles and rails
- Core and surface: as per the range of the selected door model

COMPONENTS

Active door leaf:

- A mortise key lock (options include a turn and release lock, a lock with a euro profile cylinder or without the bottom hole)
- Hinges: for BRILLIANT collection, screw-in, Nickel, 3 pcs., with colour options of Black, White or Gold free of charge; for ELEGANTE and PRESTIGE collections, screw-in, double-bolt, adjustable, Nickel, 3 pcs.; for BASIC collection, screw-in hinges, 2 pcs., 3 pcs. in “90”, “100” and “110” door leaves
- The asymmetric double doors must be provided with the same number of hinges on both doors, with an extra charge per additional hinge, according to the current surcharge price list.

Inactive door leaf:

- Striker
- Shoot bolts
- Hinges: for BRILLIANT collection, screw-in, Nickel, 3 pcs., with colour options of Black, White or Gold free of charge; for ELEGANTE and PRESTIGE collections, screw-in, double-bolt, adjustable, Nickel, 3 pcs.; for BASIC collection, screw-in hinges, 2 pcs., 3 pcs. in “90”, “100” and “110” door leaves
- The asymmetric double doors must be provided with the same number of hinges on both doors, with an extra charge per additional hinge, according to the current surcharge price list.

Door frame:

- Screw hinges, 4 pcs. (6 pcs. in the „90”, „100” and „110” door frame, BRILLIANT, ELEGANTE and PRESTIGE)
- Seal
- Installation kit

OPTIONS - BRILLIANT, ELEGANTE I PRESTIGE

GROOM 200 surface-mounted door closer with sprung arm, silver

GROOM 200 door closer for double doors (2 pcs.) with adjustable action (1 pc.)

OPTIONS - BASIC STANDARD 01

GROOM 200 surface-mounted door closer with sprung arm, silver

GROOM 200 door closer for double doors (2 pcs.) with adjustable action (1 pc.)

AVAILABLE COLOURS

- As per the range of your selected door and door frame model

DOOR FRAME VARIANTS

- Fixed: timber (p. 188) and MDF (p. 189)
- Adjustable: DIN (p. 196), DUALE (p. 198), ZOS (p. 192) (DUALE and ZOS frames are not sold with the BRILLIANT collection)
- Options are charged extra, see description of your selected frame.



Shoot bolt



Strike in the inactive door leaf

For detailed technical drawings with dimensions, go to the technical section on p. 225





PRESTIGE PO-06, CPL Uni Black
optional: Door pull U04PR Black

WALL-MOUNTED SYSTEM SLIDING DOORS /

drzwi na ścianę
VIVENTO

An option for conventionally opened doors, sliding doors are ideal for both small and large rooms, as in the first case, they save space, while in the latter, they divide open interiors into convenient spaces. Another benefit of this design is that the entire mechanism is wall mounted, so it can be installed where you cannot or do not want to integrate a cassette for a pocket door system.

The sliding doors are manufactured as non-rebated doors in all of the offered models and colours, in any size, according to the selected door model range. The standard sliding door leaf is fitted with the U01OK round matt chrome pull, and cut at the bottom to accommodate a stop mounted for the vertical stabilisation of the door.

WALL-MOUNTED SYSTEM SLIDING DOORS PACKAGE COMPONENTS

System elements	Single doors	Double doors
Selected non-rebated sliding door leaf	1 pcs.	2 pcs.
A non-rebated sliding door with the U01OK round matt chrome pull handle (options include the U03KW square matt chrome pull handle free of charge or another pull handle from the range, as per the price list)	1 pcs.	2 pcs.
sliding track with stabilising profile	1 pcs.	2 pcs.
Spacer strip	1 pcs.	2 pcs.
Pelmet cover for the track	1 pcs.	2 pcs.
OPTIONAL Sliding system mechanism track connector	-	1 pcs.
OPTIONAL door stop	1 pcs.	-
OPTIONAL hook bolt lock	1 pcs.	-
OPTIONAL "tunnel" version frame	1 pcs.	1 pcs.

VALUABLE INFORMATION



Przy wyborze zamka hakowego zalecamy wybór uchwytu o podobnym kształcie: okrągłego, kwadratowego, owalnego lub prostokątnego.

WALL-MOUNTED SYSTEM SLIDING DOORS

AVAILABLE WIDTHS

- S2 non-rebated sliding system in mm: „60“=644, „70“=744, „80“=844, „90“=944
Options at an extra charge as per the range of your selected door.

AVAILABLE HEIGHTS

- H2: 2030 mm

OPTIONS

Change of handle position or lock and handle positions (recommended for non-standard door sash heights: taller and shorter)

Other options at an extra charge as per the range of your selected door.

CONSTRUCTION

- As per the range of your selected door model

OPTIONS

door stop **CPL:** 160,00 (196,80) **CLPL:** 140,00 (172,20) **FF I LAK:** 120,00 (147,60)

Door stop higher than standard

Door stop shorter

Sliding system mechanism track connector

A hook key lock or a euro profile cylinder lock with a round, square, oval or rectangular escutcheon

A turn and release hook bolt lock with a round, square, oval or rectangular escutcheon

Closer for sliding system mechanism

Door leaf, Contrast system

Door leaf, Contrast system ABS

Surcharge for changing the position of the Striker for a hook lock in the buffer beam

Other options at an extra charge as per the range of your selected door.

COMPONENTS

- As per the range of your selected door model
- U01OK round pull handle in matt chrome is fitted as standard. You can exchange the U01OK round door pull for the U03KW square pull in matt chrome free of charge. Other door pulls are fitted at an extra charge.

OPTIONS

DOOR PULLS

U01OK Round

U03KW Square

U02OW Oval

U04PR Rectangular

HALF MOON GRIP PULL HANDLES

P05OK Round

P06KW Square

AVAILABLE COLOURS

- As per the range of your selected door and door frame model, excludes the PVC group colours
- Available orders for a set of system components in a different colour to that of a door leaf

DOOR FRAME VARIANTS

- Fixed: timber (p. 188) and MDF in the "Tunnel" version (p. 189)
- Adjustable: DIN (p. 196), ZOS in the "Tunnel" version (p. 192)

drzwi na iare

SLIDING SYSTEM COMPONENTS



Travel track



Stabilising profile




Pelmet cover



door stop

































A hook bolt lock with a round, square, oval or rectangular escutcheon



Spacer strip

HOOK LOCK COLOURS

COLOUR	with key and toilet lock	euro profile cylinder
Matt Chrome	  	 
Glossy Chrome	  	 
Matte Black	  	 
Matt Gold	  	 
Shiny Gold	  	 
Patina	  	 

Escutcheon shapes in hook locks:

○ - round □ - square
 - oval  - rectangular

DOOR PULLS



U01OK
Round



U03KW
Square



U02OW
Oval



U04PR
Rectangular

OPTIONAL

OPTIONAL

HALF MOON GRIP PULL HANDLES



P05OK
Round



P06KW
Square

OPTIONAL

OPTIONAL

For our full range of pull handles, go to p. 217

For detailed technical drawings with dimensions,
go to the technical section on p. 230



BASIC STANDARD OT MAGIC, PVC Natural Grandson Oak
optional: Door pull U04PR Patina

MAGIC WALL-MOUNTED SYSTEM SLIDING DOORS

drzwi na **miarę**
VIVENTO

A brand new version of the sliding door – very minimalist and modern. The sliding door is manufactured as a non-rebated door in any colour and model required from the BASIC door series, in any size, according to the selected door model range. The standard sliding door leaf is fitted with the U01OK round matt chrome pull, and cut at the bottom to accommodate a stop mounted for the vertical stabilisation of the door.

The uniqueness of this product lies in the completely invisible mechanism. This solution requires the use of a much wider door than the size of the opening in the wall, so the minimum width of the MAGIC door is “80”.

A SLIDING DOORSET IN THE MAGIC SYSTEM CONSISTS OF:

System elements

Selected non-rebated sliding door leaf from the BASIC collection	1 pcs.
Door pull U01OK Round Matt Chrome (options include the square door pull U03KW Matt Chrome free of charge or another available door pull, according to the price list)	1 pcs.
Travel track	1 pcs.

MAGIC WALL-MOUNTED SYSTEM SLIDING DOORS

AVAILABLE WIDTHS

- S2 non-rebated sliding system in mm: „80”=844, „90”=944
- minimum width of the door leaf S2 in mm: 844
- maximum width of the door leaf S2 in mm: 1144

AVAILABLE HEIGHTS

- H2: 2030 mm

AVAILABLE COLOURS, CONSTRUCTION AND COMPONENTS

- As per the range of your selected BASIC door model
- U01OK round pull handle in matt chrome is fitted as standard. You can exchange the U01OK round door pull for the U03KW square pull in matt chrome free of charge. Other door pulls are fitted at an extra charge.

OPTIONS

Door leaf, Contrast system

Door leaf, Contrast system ABS

Change of handle position (recommended for non-standard door heights: taller and shorter)

DOOR PULLS

U01OK Round

U03KW Square

U02OW Oval

U04PR Rectangular

HALF MOON GRIP PULL HANDLES

P05OK Round

P06KW Square

Other options at an extra charge as per the range of your selected door.

DOOR PULLS



U01OK
Round



U03KW
Square



U02OW
Oval



U04PR
Rectangular

HALF MOON GRIP PULL HANDLES



P05OK
Round



P06KW
Square

For our full range of pull handles, go to p. 217

drzwi na iareę

AVAILABLE COLOURS:

PVC GROUP



White Grain



Natural Grandson Oak

PP GROUP



Supermatt White



White Grain



Light Grey



Beige Cashmere



Navy blue



Natural Grandson Oak

CPL GROUP



Uni White



Luminous Grey



Uni Grey



Uni Anthracite



Walnut



Uni Black

CLPL GROUP



Honey Oak



Spanish Oak



Old Oak

FF GROUP



Bianco




Sibiu White



Snow Oak



Silver Oak



Cornwall Oak



Halifax Oak



Columbia Walnut



Sonoma Oak



Riviera Oak



Natural Oak Gr



Amber Oak




Catania Oak



Delano Oak



Nussbaum Walnut



Bengali Mango



Anthracite Oak

LAK GROUP

Maximum door leaf height 2040 mm



White



Bleached Oak



Silver Oak



Scandinavian Elm

For detailed technical drawings with dimensions,
go to the technical section on p. 229



BASIC STANDARD 01 LOFT, FF Riviera Oak
Optional: Surface-mounted door pull Black 32x228

LOFT WALL-MOUNTED SYSTEM SLIDING DOORS /

drzwi na iareę
VIVENTO

The stylised version of the sliding door, the LOFT system, gives your interior a unique industrial feel thanks to its exposed works. The door boasts quiet and smooth sliding thanks to roller bearings, is easy to install and the comes with full-range door position adjustment. The varnish coating on the runner and all parts of the system is highly resistant to mechanical wear and dust accumulation.

LOFT SYSTEM SLIDING DOORS PACKAGE COMPONENTS:

System elements	Single doors	Double doors
Selected non-rebated sliding door leaf	1 pcs.	2 pcs.
Pull handle U01OK round matt chrome (options include the U03KW square matt chrome pull handle free of charge or another pull handle from the range, as the per price list)	1 pcs.	2 pcs.
Stabilising profile	1 pcs.	2 pcs.
Travel track	1 pcs.	2 pcs.
Double door track connector	-	1 pcs.

LOFT WALL MOUNTED SYSTEM SLIDING DOORS

AVAILABLE WIDTHS

- S2 non-rebated sliding system in mm: „60”=644, „70”=744, „80”=844, „90”=944
- minimum width of the door leaf S2 in mm: 644
- maximum width of the door leaf S2 in mm: BASIC 1144, BRILLIANT, ELEGANTE i PRESTIGE 1044.

OPTIONS

Change of handle position (recommended for non-standard door sash heights: taller and shorter)

AVAILABLE HEIGHTS

- H2: 2030 mm

OPTIONS

As per the range of your selected door

CONSTRUCTION

- As per the range of your selected door model
- BASIC door leaf in the LOFT system must come with the solid core infill, subject to the surcharge price list.

OPTIONS

Double door track connector

Door leaf, Contrast system

Door leaf, Contrast system ABS

COMPONENTS

- U01OK round pull handle in matt chrome is fitted as standard. You can exchange the U01OK round door pull for the U03KW square pull in matt chrome free of charge. Other door pulls are fitted at an extra charge.

OPTIONS

Closer for sliding system mechanism, 2 pcs.

DOOR PULLS

U01OK Round

U03KW Square

U02OW Oval

U04PR Rectangular

Surface-mounted black (1 pc.)

HALF MOON GRIP PULL HANDLES

P05OK Round

P06KW Square

Other options at an extra charge as per the range of your selected door.

AVAILABLE COLOURS

- As per the range of your selected door model.

drzwi na iare

LOFT SLIDING SYSTEM COMPONENTS



Runner



Door closer



Double door track
connector



Stabilising profile

DOOR PULLS

OPTIONAL



U01OK
Round



U03KW
Square



U02OW
Oval



U04PR
Rectangular

OPTIONAL

OPTIONAL

OPTIONAL



OPTIONAL

Surface-mounted
black (1 pc.)
32×228 (pcs.)

HALF MOON GRIP PULL HANDLES

OPTIONAL



P05OK
Round



P06KW
Square

For our full range of pull handles, go to p. 217

For detailed technical drawings with
dimensions, go to the technical section on p. 230





BASIC STANDARD 01 CPL Uni White

POCKET SYSTEM SLIDING DOORS

drzwi na **miarę**
VIVENTO

Sliding doors that slide neatly into the wall are a unique solution that saves space and makes rooms more liveable, as well as it creates excellent design effects. They are unobtrusive, do not block narrow corridors and allow furniture and other fittings to be positioned freely. They are the perfect solution for both small and large rooms, as well as for commercial premises. You can use them to divide large, open spaces into smaller zones or to create storage spaces such as wardrobes or pantries.

The sliding doors are manufactured as non-rebated doors in all of the offered models (excluding the PRESTON) and colours, in any size, according to the selected door model range. The standard sliding door leaf is fitted with the U01OK round matt chrome pull, and cut at the bottom to accommodate a stop mounted for the vertical stabilisation of the door. The pocket sliding system is suitable for 125 mm thick walls. An option for BRILLIANT, ELEGANTE, PRESTIGE or STANDARD 01 sliding doors, we can supply a doorset for a wall thickness of 100 mm without a surcharge. The cassette structure can be fitted with an 80 mm angle's architrave at no extra charge, or with a 90-degree joint at an extra charge. The size of cassette structure can be modified by ordering an adjustable angle profile for the DIN adjustable frame, thus extending the wall by at least 16 mm on each side; by ordering an adjustable angle with +20 mm adjustment tongue, the structure width is extended by at least 36 mm each side. For the price list of architraves for DIN adjustable frames, go to p. 196.

POCKET SYSTEM SLIDING DOOR PACKAGE COMPONENTS:

System elements	Single doors	Double doors
A selected non-rebated door leaf	1 pcs.	2 pcs.
Door pull U01OK Round Matt Chrome (options include the square door pull U03KW Matt Chrome free of charge or another available door pull, according to the price list)	1 pcs.	2 pcs.
Cassette with stabilising profile for 125 mm thick walls (as an option for 100 mm thick walls, no extra charge)	1 pcs.	2 pcs.
Sealing brush, white, grey or bronze	3 pcs.	6 pcs.
Pocket encasement for 125 mm thick walls (as an option for 100 mm thick walls, no extra charge)	1 pcs.	1 pcs.
OPTIONAL hook bolt lock	1 pcs.	-

POCKET SYSTEM SLIDING DOORS

AVAILABLE WIDTHS

- S2 non-rebated sliding system in mm: „60”=644, „70”=744, „80”=844, „90”=944
Options at an extra charge as per the range of your selected door.

AVAILABLE HEIGHTS

- H2: 2030 mm
Options at an extra charge as per the range of your selected door.

CONSTRUCTION

- As per the range of your selected door model.

OPTIONS

Set of sliding system components for 100 mm thick walls

Set of sliding system components made to fit non-standard widths customised for non-standard door leaf dimensions

Set of sliding system components made to fit non-standard heights customised for non-standard door leaf dimensions

Custom aluminium pockets:

Non-standard pocket width

Non-standard pocket height

COMPONENTS

- As per the range of your selected door model.
- U01OK round pull handle in matt chrome is fitted as standard. You can exchange the U01OK round door pull for the U03KW square pull in matt chrome free of charge. Other door pulls are fitted at an extra charge.

OPTIONS

A hook key lock or a euro profile cylinder lock with a round, square, oval or rectangular escutcheon (Option not available for double doors)

A turn and release hook bolt lock with a round, square, oval or rectangular escutcheon (Option not available for double doors)

Closer for sliding system mechanism

DOOR PULLS

U01OK Round

U03KW Square

U02OW Oval

U04PR Rectangular

HALF MOON GRIP PULL HANDLES

P05OK Round

P06KW Square

AVAILABLE COLOURS

- As per the range of your selected door model
- Set of sliding system components can be ordered in a colour different from that of the door leaf
- Pocket encasement not available in the PVC and PP colour groups

DOOR FRAME VARIANTS

- Fixed: Pocket encasement
- Adjustable: adjustable cassette structure (individual pricing depending on the thickness of the wall adjacent to the cassette).

drzwi na iarę

SLIDING SYSTEM COMPONENTS



Pocket encasement



sealing brushes



Stabilising profile















Door closer



A hook bolt lock with a round, square, oval or rectangular escutcheon

HOOK LOCKS ARE AVAILABLE IN

COLOUR	with key and toilet lock	euro profile cylinder
Matt Chrome		
Glossy Chrome		
Matte Black		
Matt Gold		
Shiny Gold		
Patina		

Escutcheon shapes in hook locks:

○ - round □ - square
 - oval  - rectangular

DOOR PULLS



U01OK Round



U03KW Square



U02OW Oval

OPTIONAL



U04PR Rectangular

OPTIONAL

HALF MOON GRIP PULL HANDLES



P05OK Round

OPTIONAL



P06KW Square

OPTIONAL

For our full range of pull handles, go to p. 217

For detailed technical drawings with dimensions, go to the technical section on p. 230





BASIC FOLD, CLPL Honey Oak, optional: Half-circle pull P06KW Gold

FOLD BIFOLD DOORS /

drzwi na **miarę**
VIVENTO

The “FOLD” bifold doors come with this unique opening method that makes them a perfect solution in limited spaces and using conventional doors or sliding doors would be troublesome. It is thanks to their design that they need much less space to open. They are perfect for wardrobes and pantries, but also for confined attic spaces or narrow corridors.

The “FOLD” bifold doors are manufactured as non-rebated, one-panel style single doors (“60” to “90”) and double doors (“100” to “200”). Both halves are coupled with 2 hinges. The door is linked with the floor using a floor mounted stabiliser. The mechanism is mounted in the top section of the timber frame. The load capacity of the single system is max. 2 × 25 kg. The clearances between the floor and the bottom edge of the door, and between the top edge of the door and the door frame are up to 15 mm.

THE “FOLD” BIFOLD DOOR SET INCLUDES:

System elements	Single doors	Double doors
flush door leaves	2 pcs.	4 pcs.
mortise hinges	2 pcs.	4 pcs.
mechanism	1 pcs.	2 pcs.
timber frame	1 pcs.	1 pcs.

FOLD – BIFOLD DOORS

drzwi na iarę

AVAILABLE WIDTHS

- Single doors S2 in mm::
„60”=309+309, „70”=359+359, „80”=409+409, „90”=459+459, „100”=509+509
- Double doors S2 in mm:
„110”=(277+277)×2, „120”=(302+302)×2, „130”=(327+327)×2, „140”=(352+352)×2,
„150”=(377+377)×2, „160”=(402+402)×2, „170”=(427+427)×2, „180”=(452+452)×2

AVAILABLE HEIGHTS

- H2: 1989 mm

CONSTRUCTION

- MDF frame
- Core: stabilising layer known as “honeycomb”
- Surface made of 3 mm thick HDF

COMPONENTS

- Two mortise hinges in satin nickel (possible change to black or gold at no extra cost)

OPTIONS

Mortise hinges in black or gold

HALF MOON GRIP PULL HANDLES

P05OK Round

P06KW Square

Other surcharges as per the price list for the STANDARD 01 model and the fixed timber door frame.

DOOR FRAME VARIANTS

- Fixed: timber (p. 188)

HALF MOON GRIP PULL HANDLES



P05OK
Round

P06KW
Square

For our full range
of pull handles,
go to p. 217

MORTISE HINGE



Satin Nickel

Black

Gold

OPTIONAL

OPTIONAL

VALUABLE INFORMATION

The “FOLD” bifold doors are available with a timber frame. The doorset can be made in a longer version, up to the dimension of H3 = 2074 mm.



For detailed technical drawings with dimensions, go to the technical section on p. 233.



AVAILABLE COLOURS:

PVC GROUP



White Grain



Natural Grandson Oak

CPL GROUP



Uni White



Luminous Grey



Uni Grey



Uni Anthracite



Walnut



Uni Black

CLPL GROUP



Honey Oak



Spanish Oak



Old Oak

FF GROUP



Blanco



Sibiu White



Snow Oak



Silver Oak



Cornwall Oak



Halifax Oak



Columbia Walnut



Sonoma Oak



Riviera Oak



Natural Oak Gr



Amber Oak



Catania Oak



Delano Oak



Nussbaum Walnut




Bengali Mango



Anthracite Oak

LAK GROUP

Maximum door leaf height 2040 mm



White



Bleached Oak



Silver Oak



Scandinavian
Elm

DIN adjustable frame, DIN PLUS RETRO architrave, CLPL Uni White



FIXED DOOR FRAMES

TIMBER

p. 188



MDF

p. 189



STEEL

p. 202



STEEL ADJUST- ABLE FRAME

p. 202



ADJUSTABLE DOOR FRAMES

STEEL FRAME ZOS CASING

p. 192



DIN

p. 196



“DUALE” DUAL RANGE

p. 198



STEEL

p. 203



DOOR FRAMES AND ACCESSORIES

FIXED TIMBER DOOR FRAME



The fixed timber door frame is made of softwood and with a fixed width of 90 mm (or 100 mm for the SIMPLE door frame). As standard, the frame components are joined at a 45-degree angle. Available finished with a selected decorative layer. The complete frame consists of two side jambs and a head jamb. The frame can be manufactured either as a rebated or “tunnel” version (no extra charge).

AVAILABLE WIDTHS

- W in mm: „60“=601, „70“=701, „80“=801, „90“=901
- Minimum clear opening frame width W in mm: 601

OPTIONS

Widths “100” and “110”
Non-standard width

AVAILABLE HEIGHTS

- H1 in mm: 2017

OPTIONS

Shorter
Up to 10 mm longer
Additional hinge
Additional hinge for SIMPLE non-rebated system
Change of door strike and bottom hinge positions (recommended for door frames with a non-standard height)

CONSTRUCTION AND COMPONENTS


- Screw hinges, 2 pcs. (3 pcs. in frame “90”)
- Striker R1,5 (in door frame for SIMPLE system: Magnetic lock strike Chrome (B), White (B), Black (B))
- Seal
- Installation kit

OPTIONS


Door frame for the SIMPLE non-rebated system, 2 hinges (44 mm x 100 mm)
Door frame for SWING door
Door frame for FOLD door
3D adjustable hinges
Standard top strike
Adjustable top strike
Adjustable lower strike
Multipoint lock strike
Timber threshold with seal, without a decorative layer
Stainless steel sheet threshold with seal
Pre-assembled electric door strike (a surcharge at a price of your selected door strike)
Pre-assembled concealed door closer (a surcharge at a price of your selected door closer)

AVAILABLE COLOURS:


PP GROUP

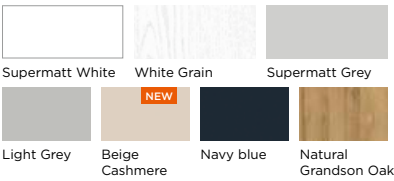


CPL GROUP

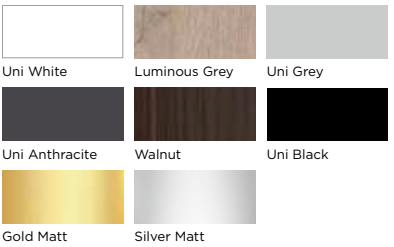

CLPL GROUP

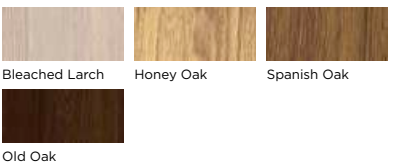


FF GROUP

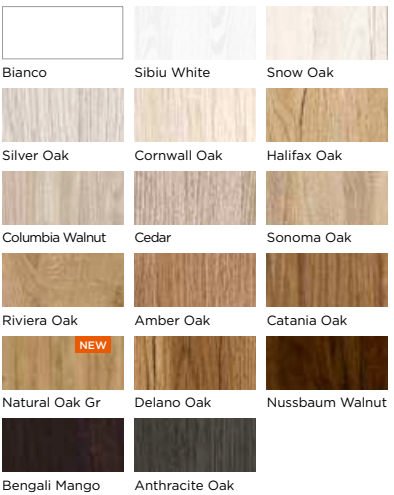

LAK GROUP

Maximum door leaf height 2040 mm

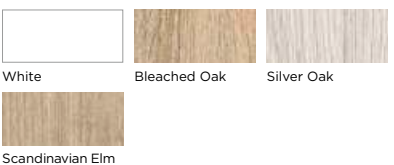

For detailed technical drawings with dimension go to the technical section on p. 235



FIXED **MDF** DOOR FRAME



The door frame is made of MDF with a fixed width of 90 mm (or 100 mm for the SIMPLE door frame). As standard, the frame components are joined at a 45-degree angle. The complete frame consists of two side jambs and a head jamb. The frame can be manufactured either as a rebated or "tunnel" version (no extra charge).

AVAILABLE WIDTHS

- W in mm: „60“=603, „70“=703, „80“=803, „90“=903
- Minimum clear opening frame width W=603 mm

OPTIONS

Widths "100" and "110"
Non-standard width

AVAILABLE HEIGHTS

- H1 in mm: 2019

OPTIONS

Shorter
Up to 10 mm longer
11 mm to 470 mm longer
Additional hinge
Additional hinge for SIMPLE non-rebated system
Change of door strike and bottom hinge positions (recommended for door frames with a non-standard height)

CONSTRUCTION AND COMPONENTS


- Screw hinges, 2 pcs. (3 pcs. in frame "90")
- Striker R1,5 (in door frame for SIMPLE system: Magnetic lock strike Chrome (B), White (B), Black (B))
- Seal
- Installation kit

OPTIONS


door frame for the SIMPLE non-rebated system, 2 hinges (44 mm x 100 mm)
Door frame for SWING door
3D adjustable hinges
Standard top strike
Adjustable top strike
Adjustable lower strike
Multipoint lock strike
Timber threshold with seal, without a decorative layer
Stainless steel sheet threshold with seal
Pre-assembled electric door strike (a surcharge at a price of your selected door strike)
Pre-assembled concealed door closer (a surcharge at a price of your selected door closer)

AVAILABLE COLOURS:


PP GROUP

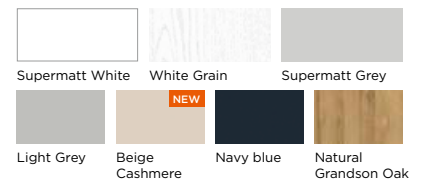


CPL GROUP

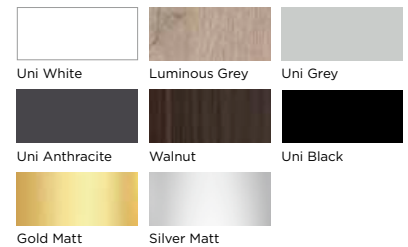

CLPL GROUP

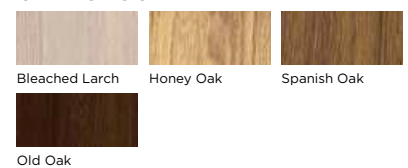


FF GROUP

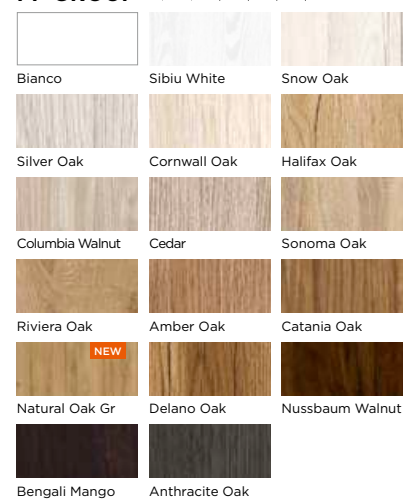

LAK GROUP

Maximum door leaf height 2040 mm

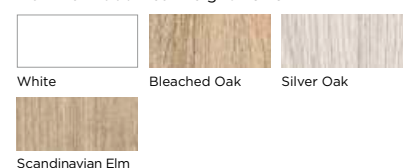

For detailed technical drawings with dimensions, go to the technical section on p. 235




ACCESSORIES FOR FIXED FRAMES

60 MM STANDARD ARCHITRAVE




The standard architrave is manufactured from MDF with a fixed width of 60 mm. The complete architrave consists of three pieces: two vertical and one horizontal.



80 MM STANDARD ARCHITRAVE




The standard architrave is manufactured from MDF with a fixed width of 80 mm. The complete architrave consists of three pieces: two vertical and one horizontal.



QUARTER ROUND



The quarter round is manufactured from MDF with a fixed width of 18 mm. The complete quarter round consists of three pieces: two vertical and one horizontal.




AVAILABLE WIDTHS

- „90“, other sizes available at an extra charge of 100%


For double door assembly, two sets of architrave or quarter round must be ordered.

AVAILABLE COLOURS:


PP GROUP

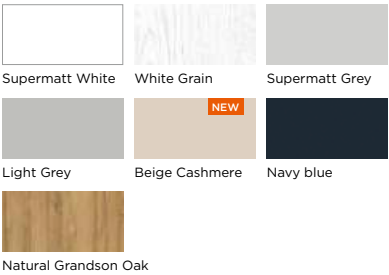


CPL GROUP

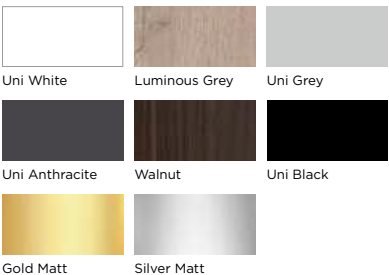

CLPL GROUP

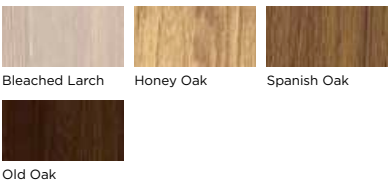


FF GROUP

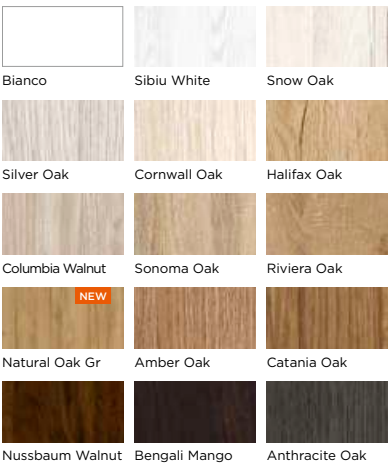

LAK GROUP

Maximum door leaf height 2040 mm

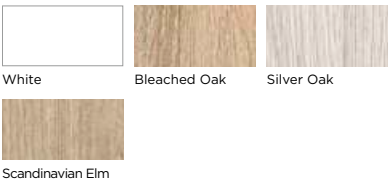

ACCESSORIES FOR FIXED FRAMES

TOP LIGHT AND SIDELIGHT




Top lights and sidelights are the perfect solution for bringing more light in. The sidelight will work particularly well as a built-in feature if you have a wide passageway, while the top light is an elegant solution that allows you to enjoy more light from above while creating a very modern look.


We make the top light and sidelight to bespoke orders and to match the style of a fixed frame. The sidelight is only available with tempered glass or VSG 2.2.1. Extra charges apply for the selected glass on top of the price listed above.

AVAILABLE COLOURS:


PP GROUP

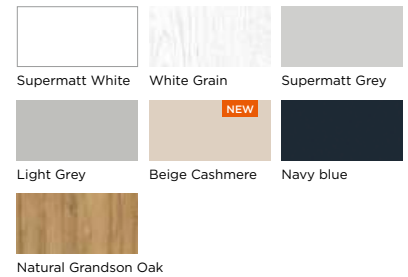


CPL GROUP

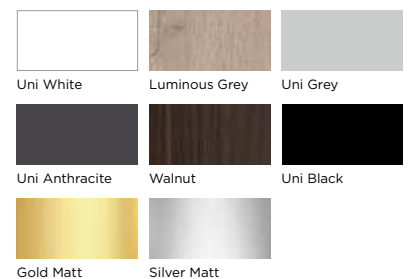

CLPL GROUP

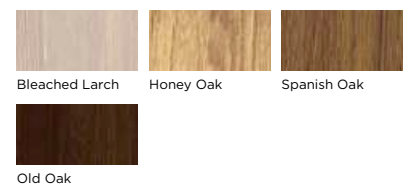


FF GROUP

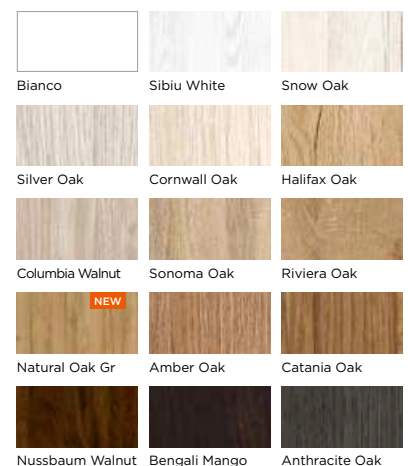


LAK GROUP

Maximum door leaf height 2040 mm

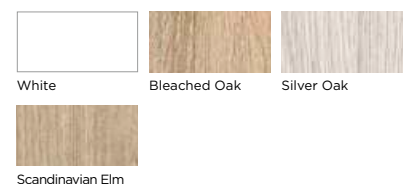

EXAMPLE CONFIGURATIONS

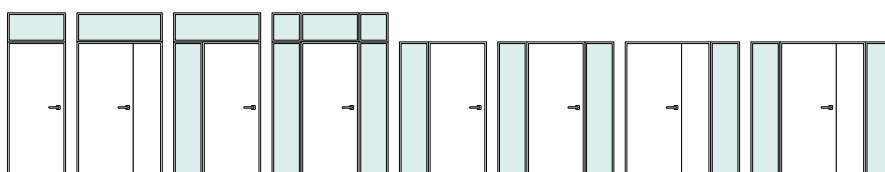

This is not a full list of available configurations for top and side lights. If you have your own idea for your project, please contact us:

ADJUSTABLE DOOR FRAME

STEEL FRAME ZOS CASING

INDUSTRIAL DESIGN NO. 001992199-0001, 001992199-0002



ZOS sectional version



OPTIONAL
ZOS "tunnel" style version

The Steel Frame ZOS Casing is an innovative solution for fully concealing an existing door frame (steel, timber or MDF) without the need to dismantle it, which usually involves damage to walls or tiles, resulting in a major refurbishment of the entire room.



ADJUSTABLE DOOR FRAME

STEEL FRAME ZOS CASING

The ZOS conceals the existing door frame around the entire wall thickness, for example, together with tiles at no risk of damaging them, and you can avoid narrowing the door leaf at the same time. If an "80" door leaf was installed on the existing frame, you will still be able to hang the same "80"-width door after the installation of the Steel Frame Casing.

Each Steel Frame Casing is adjustable up to 20 mm thanks to a movable angle bracket, as long as there are no curves. As standard, the frame components are joined at a 45-degree angle. It is an alternative solution for the 20 mm rebate in the renovation

market. The casing is manufactured in a variety of versions for any wall thickness, starting from 60 mm. Within the adjustment ranges of 240-260, the frame is a sectional version made with a minimum of two parts. The sectional version for the "Tunnel" style frame is available from the 220-240 range.

ZOS reduces the clear opening of your existing frame by only 30 mm!



HOW DO I CALCULATE THE WIDTH OF THE ZOS?

1. mm (clear opening width of existing frame) - **6 mm** (clearance for assembly) = mm (ZOS W2 outer width)
2. mm (ZOS W2 outer width) + 32 mm = mm (ZOS W1 width in frame rebate)
3. mm (ZOS W1 width in rebate) - 56 mm = mm (ZOS W1 width in frame clear opening)

HOW DO I CALCULATE THE WIDTH OF THE DOOR LEAF FOR ZOS?

1. mm (ZOS W1 width in frame rebate) - **8 mm** = mm (Door rebate width S1)
2. mm (Door rebate width S1) + **26 mm** = mm (Total door leaf width S2)

HOW DO I CALCULATE THE HEIGHT OF THE DOOR LEAF FOR ZOS?


1. mm (clear opening height of existing frame) - **3 mm** (clearance for assembly) = mm (ZOS H3 frame outer height)
2. mm (ZOS H3 frame outer height) + **16 mm** = mm (ZOS height in frame rebate)
3. mm (ZOS frame rebate height) - **4 mm** (clearance between door and frame) - **od 7 mm do 15 mm** (clearance between door and floor level) = mm (door leaf rebate height)
4. mm (Door rebate height) + **13 mm** = mm (Total door leaf height H2)

For detailed technical drawings with dimensions, go to the technical section on p. 236.



ADJUSTABLE DOOR FRAME

STEEL FRAME ZOS CASING

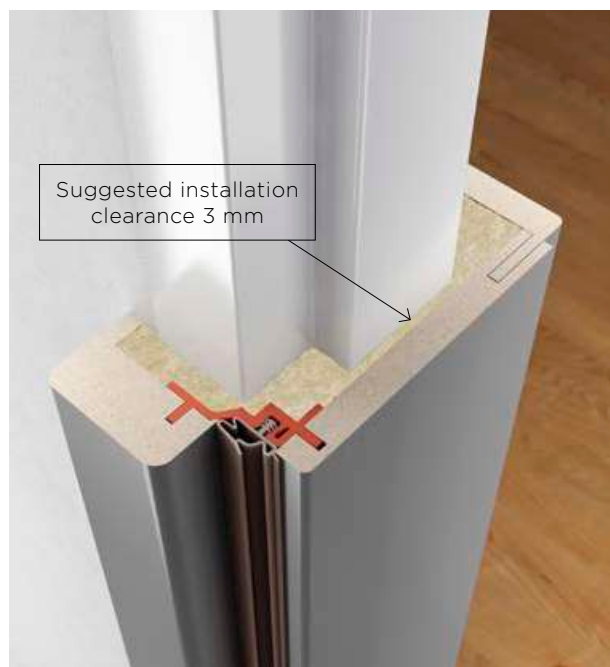


The Steel Frame Casing is a solution which lets you forget about problems related to non-standard hinge spacing in the existing frame, non-standard strike plate positions or sizes, and very common non-standard rebate (lip) dimensions. To complete a quick and hassle-free installation on the existing frame, you only need to remove the existing hinges, but only if they protrude beyond the outline of the lining.

The frame can also be manufactured to any width. As a result, its use is unlimited on those existing door frames that are heavily warped; it allows for correcting up to 6 mm of warping. Unless the existing frame has been warped by over 6 mm during its lifetime, there are no reasons not to install a standard Steel Frame Casing and hang a typical door leaf on it. The standard ZOS "80" can be installed in the door opening of an existing door frame with dimensions ranging from 794 mm to 800 mm.

Curvatures outside 6 mm require you order the ZOS to a custom size. In this case, please note that the door leaf must also be customised to suit the dimensions of the Steel Frame Casing.

Another solution for curvatures exceeding 6 mm would involve removing one vertical piece of the existing frame, which will then enable the installation of a standard ZOS and a standard door leaf.

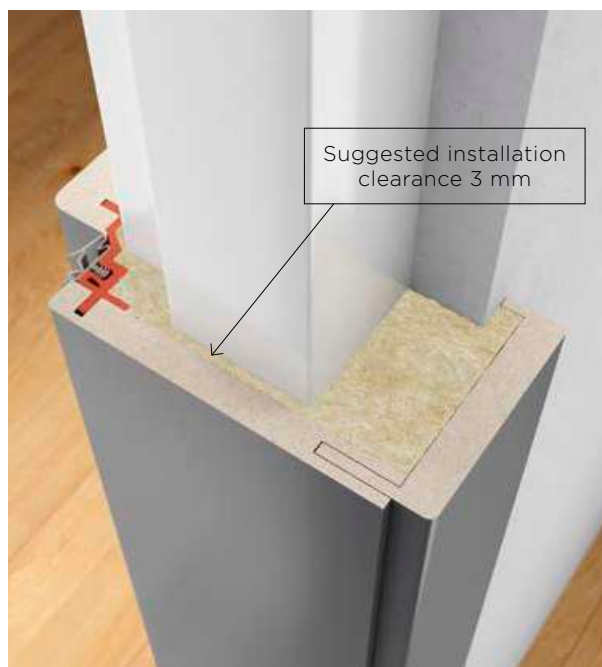

The Steel Frame Casing can also be made in the form of a "tunnel".

The ZOS, just like any other door frame in our range, can be manufactured in non-standard widths, which helps you use this solution regardless of the condition of any of your existing door frames. The 6 mm curvature tolerance mentioned earlier is also the suggested clearance for installation (3 mm on each side).

To check if fitting a standard ZOS is possible, measure the clear width and height of the existing door frame. The width should be measured in four places: at the level of the bottom and top hinges, and at the lock and threshold levels. The clear height should be measured in three places: at the corners and at the centre of the width of the existing frame. Moreover, the top and bottom corners of the existing door frame should be checked for right angles. This measurement is enough to validate or exclude the curvature of the existing frame.

For door leaves hung on the ZOS, the installation of handles on a long, narrow back plate is recommended. This is related to reduction of the clear width of the frame by 30 mm without changing the width of the door leaf.

Each Steel Frame Casing comes with a detailed installation manual with additional descriptions of the components comprising a set.

ADJUSTABLE DOOR FRAME

STEEL FRAME ZOS CASING

AVAILABLE ADJUSTMENT RANGES:

60-80, 80-100, 100-120, 120-140, 140-160, 160-180, 180-200, 200-220, 220-240, 240-260, 260-280, 280-300, 300-320, 320-340, 340-360, 360-380, 380-400, 400-420, 420-440, 440-460, 460-480, 480-500, 500-520, 520-540, 540-560, 560-580, 580-600, over 600 mm

AVAILABLE WIDTHS

- W in mm: „60“=570, „70“=670, „80“=770, „90“=870
- Minimum clear opening frame width W in mm=500

OPTIONS

Widths “100” and “110”

Double door frame 100-200

Non-standard width

AVAILABLE HEIGHTS

- H1 in mm: 2000

OPTIONS

Shorter

Up to 45 mm longer

Additional hinge

Change of door strike and bottom hinge positions (recommended for door frames with a non-standard height)

CONSTRUCTION AND COMPONENTS

- Screw hinges, 2 pcs. (3 pcs. in the “90” frame) in Zinc White
- Striker R1,5
- Seal
- Installation kit

OPTIONS

Timber threshold with seal, without a decorative layer

Stainless steel sheet threshold with seal

AVAILABLE COLOURS:

PP GROUP



Supermatt White



White Grain



Supermatt Grey



Light Grey



Beige Cashmere



Navy blue



Natural Grandson Oak

CPL GROUP



Uni White



Luminous Grey



Uni Grey



Uni Anthracite



Walnut



Uni Black

CLPL GROUP



Bleached Larch



Honey Oak



Spanish Oak



Old Oak

FF GROUP



Bianco



Sibiu White



Snow Oak



Silver Oak



Cornwall Oak



Halifax Oak



Columbia Walnut



Cedar



Sonoma Oak



Riviera Oak



Amber Oak



Catania Oak



Natural Oak Gr



Delano Oak



Nussbaum Walnut



Bengali Mango



Anthracite Oak

LAK GROUP

Maximum door leaf height 2040 mm



White



Bleached Oak



Silver Oak



Scandinavian Elm

ADJUSTABLE **DIN** DOOR FRAME



Basic version, with a 60 mm band at a 45° angle

The DIN adjustable frame is made of MDF to any wall thickness, starting at 60 mm (or 100 mm for the SIMPLE door frame). As standard, the frame components are joined at a 45-degree angle. Two-centimetre adjustment is provided in the form of an adjustable angle bracket.

The frame can also be manufactured to any clear width. The complete frame consists of two side jambs and a head jamb with angles on both sides. The frame can be manufactured either as a rebated or “Tunnel” style at no extra charge. For the adjustment ranges from 320-340, the rebated frames, the SIMPLE non-rebated frames and “Tunnel” frames are available in a sectional version (min. two sections). In reverse-swing system frames, the sectional version is available from the 280-300 range.

TO THE RESCUE

If it turns out that “despite all efforts” you need a door frame with a larger adjustment range, we have two solutions for you.

You can order an adjustable angle profile with the +20 mm adjustment tongue to extend the adjustment range by up to 40 mm, and if that is not enough, you can also order a “Tunnel” style DIN frame and use it as an extension profile to increase the adjustment range by its lower value.



For detailed technical drawings with dimensions, go to the technical section on p. 237



DIN sectional version



OPTIONAL
Door frame for SIMPLE non-rebated system



OPTIONAL
DIN “tunnel” style version



OPTIONAL
DIN with 80 mm architraves



OPTIONAL
DIN with 100 mm architraves



OPTIONAL
DIN with 60 mm architraves joined at 90° angle



OPTIONAL
DIN with 80 mm architraves joined at 90° angle

ADJUSTABLE **DIN** DOOR FRAME

AVAILABLE ADJUSTMENT RANGES

60-75, 80-100, 100-120, 120-140, 140-160, 160-180, 180-200, 200-220, 220-240, 240-260, 260-280, 280-300, 300-320, 320-340, 340-360, 360-380, 380-400, 400-420, 420-440, 440-460, 460-480, 480-500, 500-520, 520-540, 540-560, 560-580, 580-600, over 600 mm

AVAILABLE WIDTHS

- W in mm: „60“=603, „70“=703, „80“=803, „90“=903
- Minimum clear opening frame width W in mm=603

OPTIONS

Widths “100” and “110”

Double door frame 100-200

Non-standard width

AVAILABLE HEIGHTS

- H1 in mm: 2017

OPTIONS

Shorter

Up to 10 mm longer

11 mm to 470 mm longer

Additional hinge

Additional hinge for SIMPLE non-rebated system

Additional hinge in reversed swing system

Change of door strike and bottom hinge positions (recommended for door frames with a non-standard height)

CONSTRUCTION AND COMPONENTS

- Screw hinges, 2 pcs. (3 pcs. in the “90” frame)
- Striker R1,5 (in door frame for SIMPLE system: Magnetic lock strike Chrome (B), White (B), Black (B))
- Seal
- Installation kit

OPTIONS

Standard top strike

Door frame for SIMPLE non-rebated system (adjustment range 100-120)

Reversed swing door frame with 60 mm architraves at 45° angle

Door frame with angle architraves and a height of 80 mm

Door frame with angle architraves and a height of 100 mm

A frame made by joining sections at 90°, (not for the 60-75 adjustment range; not for a frame with 100 mm angle architraves or with + 20 mm adjustment tongue)

Timber threshold with seal, without a decorative layer

Stainless steel sheet threshold with seal

Pre-assembled electric door strike (a surcharge at a price of your selected door strike)

Reinforcement for surface-mounted door closer

Reinforcement for concealed door closer

AVAILABLE COLOURS:

PP GROUP



Supermatt White



White Grain



Supermatt Grey



Light Grey



Beige Cashmere



Navy blue



Natural Grandson Oak

CPL GROUP



Uni White



Luminous Grey




Uni Grey



Uni Anthracite



Walnut



Uni Black

CLPL GROUP



Bleached Larch



Honey Oak



Spanish Oak



Old Oak

FF GROUP



Bianco



Sibiu White



Snow Oak



Silver Oak



Cornwall Oak



Halifax Oak



Columbia Walnut



Cedar



Sonoma Oak



Riviera Oak



Amber Oak



Catania Oak



Natural Oak Gr



Delano Oak



Nussbaum Walnut



Bengali Mango



Anthracite Oak

LAK GROUP

Maximum door leaf height 2040 mm



White



Bleached Oak



Silver Oak



Scandinavian Elm

“DUALE” DUAL RANGE

ADJUSTABLE FRAME



For detailed technical drawings with dimensions, go to the technical section on p. 238



The DALE adjustable frame is made of MDF to any wall thickness, starting at 100 mm. As standard, the frame components are joined at a 45-degree angle and have an angle architrave with an overall height of 60 mm. Four-centimetre adjustment is provided in the form of an adjustable angle bracket. The frame can also be manufactured to any clear width. The complete frame consists of two side jambs and a head jamb with angles on both sides.

AVAILABLE ADJUSTMENT RANGES

100-140, 140-180, 180-220, 220-260, 260-300, 300-340

AVAILABLE WIDTHS

- W in mm: „60“=603, „70“=703, „80“=803, „90“=903
- Minimum clear opening frame width W in mm=603

OPTIONS

Widths “100” and “110”
Double door frame 100-200
Non-standard width

AVAILABLE HEIGHTS

- H1 in mm: 2017

OPTIONS

Shorter
Up to 10 mm longer
11 mm to 470 mm longer
Additional hinge
Change of door strike and bottom hinge positions (recommended for door frames with a non-standard height)

CONSTRUCTION AND COMPONENTS


- Screw hinges, 2 pcs. (3 pcs. in frame “90”)
- Striker R1,5
- Seal
- Installation kit

OPTIONS


Standard top strike
Door frame with angle architraves and an overall height of 80 mm
Door frame with angle architraves and an overall height of 100 mm
Timber threshold with seal, without a decorative layer
Stainless steel sheet threshold with seal

AVAILABLE COLOURS:


PP GROUP

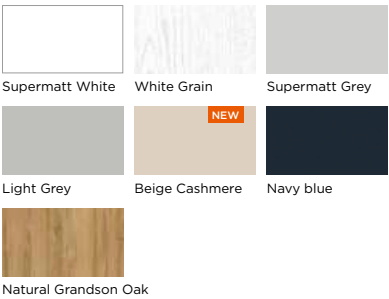


CPL GROUP

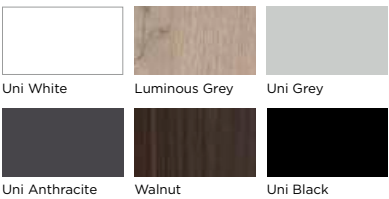

CLPL GROUP

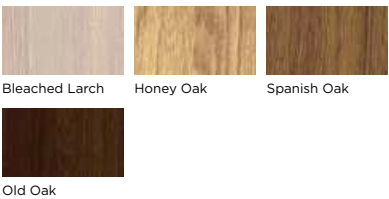


FF GROUP

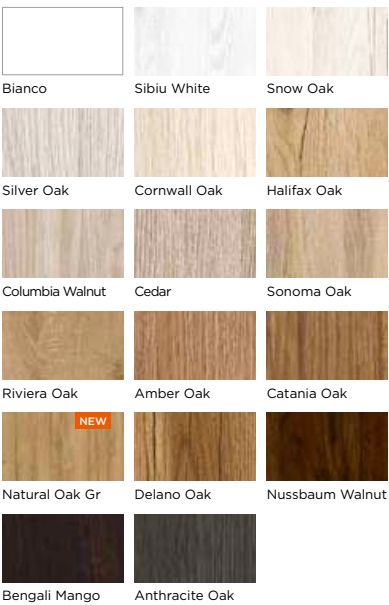

LAK GROUP

Maximum door leaf height 2040 mm

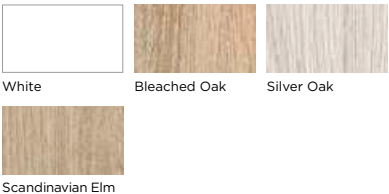

HEAD CASING FOR DIN AND DUALE ADJUSTABLE FRAME

The head casing for the DIN and DUALE adjustable frame is a sophisticated decorative detail that can completely change the look of both the door and the entire room. Its design is reminiscent of antique architecture and fits perfectly into classic, English, vintage or glamour interiors, where it goes well with decorative wall panels (e.g. HERO or RYFLA wall panels, see p. 204-210).

The head casing is manufactured from MDF with a fixed height of 100 mm.

The head casing can be mounted on a DIN adjustable door frame with 60 mm architraves (optionally: DIN with 80 mm and 100 mm architraves) and DUALE (not for frames with 90° architrave joints).

AVAILABLE WIDTHS:

- for DIN and DUALE door frames, W in mm: „60“=603, „70“=703, „80“=803, „90“=903

OPTIONS

Widths “100” and “110”

Head casing for double doors “100”-“200”

The head casing matching the DIN frame with 80 mm or 100 mm architraves

Bespoke head casing for non-standard frame widths



SKIRTING BOARDS

We make MDF skirting boards in 80 mm, 100 mm and 120 mm heights and 2000 mm lengths, with a 45 degree joint as standard. The skirting boards should be glued with mounting glue.

Skirting boards with different heights and widths can be made for an extra charge of 100%.

SOFT 01/080

height h = 80 mm

SOFT 01/100

height h = 100 mm

SOFT 01/120

height h = 120 mm

SOFT 04/080

height h = 80 mm

SOFT 04/100

height h = 100 mm

SOFT 04/120

height h = 120 mm

SLANT 02/080

height h = 80 mm

SLANT 02/100

height h = 100 mm

SLANT 02/120

height h = 120 mm

SLANT 03/080





height h = 80 mm

SLANT 03/100

height h = 100 mm

SLANT 03/120

height h = 120 mm



AVAILABLE IN SELECTED COLORS FROM COLOR GROUPS:

- PP, CPL, CLPL, FF, LAK (p. 8)

AVAILABLE HEIGHTS:

- H in mm: 80, 100, 120

OPTIONS

Skirting board height change: lower

Skirting board height change: higher

Skirting board thickness change

We understand that every interior is unique and requires unique solutions, so we create products tailored to your needs.

Looking for skirting boards in a different size and shape? Leave us a message!
info@vivento.pl



DIN PLUS ARCHITRAVES

FOR DIN AND DUALE ADJUSTABLE FRAMES




The DIN PLUS architraves are a solution for simple and quick interior modification. They come in five different designs, so every user can find the right model for them. DIN PLUS architrave is manufactured from MDF with a fixed height of 80 mm. The complete architrave consists of three pieces: two vertical and one horizontal. The DIN PLUS architrave can be fitted to DIN and DUALE frames with 60 mm architraves (standard), and 80 mm and 100 mm architraves (option with surcharge as per surcharge price list). The DIN PLUS architrave cannot be fitted to the frame with a 90° architrave joint.


DIN PLUS ARCHITRAVES

FOR DIN AND DUALE ADJUSTABLE FRAMES


ARTE

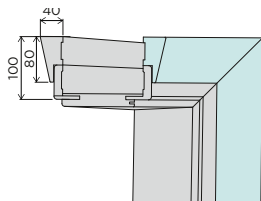


CLASS




RETRO



STYLE I



STYLE II



AVAILABLE WIDTHS

- for DIN door frame, W in mm: „60“=603, „70“=703, „80“=803, „90“=903

OPTIONS

- Widths "100" and "110"
- Architraves for double doors 100-200
- Non-standard width
- DIN PLUS architraves for door frame with 80 mm or 100 mm architraves

AVAILABLE HEIGHTS

- for DIN door frame, H1 in mm: 2017

OPTIONS

- Shorter
- Up to 10 mm longer
- 11 mm to 470 mm longer

AVAILABLE COLOURS:

PP GROUP



Supermatt White White Grain Supermatt Grey



Light Grey Beige Cashmere Navy blue



Natural Grandson Oak

CPL GROUP



Uni White Luminous Grey Uni Grey



Uni Anthracite Walnut Uni Black

CLPL GROUP



Bleached Larch Honey Oak Spanish Oak



Old Oak

FF GROUP



Bianco Sibiu White Snow Oak



Silver Oak Cornwall Oak Halifax Oak



Columbia Walnut Cedar Sonoma Oak



Riviera Oak Amber Oak Catania Oak



Natural Oak Gr Delano Oak Nussbaum Walnut



Bengali Mango Anthracite Oak

LAK GROUP

Maximum door leaf height 2040 mm



White Bleached Oak Silver Oak



Scandinavian Elm

STEEL FIXED FRAME



ANGLE FRAME - LARGE STEEL



Designed for all types of interiors: flats, public buildings, offices, hotels etc., steel door frames rebated can be used for masonry walls and plasterboard partitioning (gypsum board) for installation in rooms with fully finished walls and floors.

AVAILABLE WIDTHS:

- W in mm: „60“=601, „70“=701, „80“=801, „90“=901, „100“=1001, „110“=1101, „120-200“=1201-2001

CONSTRUCTION:

- Steel sheet with a thickness of 1.2 mm

COMPONENTS:

- Seals available in: white, grey, brown and graphite
- 2 hinges as standard, 3 hinges as a free-of-charge option (size 13.5)


OPTIONS

- Door closer reinforcement, standard
- Adaptation for an electric door strike with lock chamber cover and door closer reinforcement
- Galvanised sheet steel frame
- DES 7 fail-safe electric door strike
- Frame coating in other RAL colours (excl. intense, metallic and pearlescent colours)
- Frame coating in other RAL colours: intense, metallic and pearlescent colours
- Additional hinge

COLOURS

- The frame is powder coated in standard RAL colours: 9010, 9016, 9003, 8017, 7047, 1001 and 7024
- Other colours according to RAL palette available at an extra charge

AVAILABLE COLOURS:

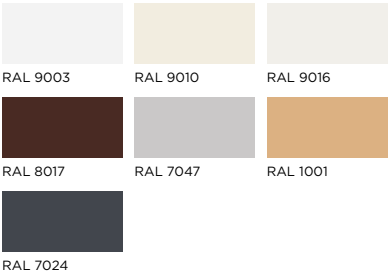

For detailed technical drawings with dimensions, go to the technical section on p. 239

STEEL ADJUSTABLE FRAME



Steel adjustable frames are designed for installation in various types of rooms with finished walls and floors, including flats, public buildings, hotels, etc. The complete frame kit consists of a main section, adjustment part, with a seal, hinges and a set of plugs also included.

AVAILABLE ADJUSTMENT RANGES:

- 95-125, 125-155, 155-185, 185-215, 215-245, 245-275, 275-305, 305-335, 335-365

AVAILABLE WIDTHS:

- W in mm: „60“=601, „70“=701, „80“=801, „90“=901, „100“=1001, „110“=1101, „120-200“=1201-2001

CONSTRUCTION

- Steel sheet with a thickness of 1.5 mm

COMPONENTS:

- Seals available in 3 colours: white, grey and brown
- 2 hinges as standard, 3 hinges as a free-of-charge option (size 13.5)


COLOURS

- The frame is powder coated in standard RAL colours: 9010, 9016, 9003, 8017, 7047, 1001 and 7024
- Other colours according to RAL palette available at an extra charge

OPTIONS

- Door closer reinforcement, standard
- Adaptation for an electric door strike with lock chamber cover and door closer reinforcement
- Galvanised sheet steel frame
- DES 7 fail-safe electric door strike
- Frame coating in other RAL colours (excl. intense, metallic and pearlescent colours)
- Frame coating in other RAL colours: intense, metallic and pearlescent colours
- Additional hinge

AVAILABLE COLOURS:

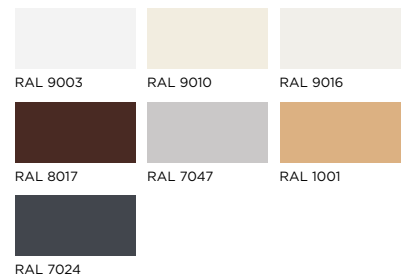

For detailed technical drawings with dimensions, go to the technical section on p. 239



HERO WALL SLAT PANELS /

HERO lamella wall panels are an excellent choice for any room, regardless of the function they are to serve – as a minor accent or the main element of the set design for home life. Choose from eight designs and from a wide range of colours, in mono- or two-colour variations.

AVAILABLE WIDTHS

- launch panel: 242 mm (on the HERO 02 model: 258 mm)
- extension panel: 220 mm

HERO wall slat panels are manufactured to a length of 2750 mm. The starter panel has a width of 242 mm (hero 02: 258 mm), and the extension panel has a width of 220 mm. When ordering the required number of panels, consider the starter panel and multiple extension panels. The delivered slats can be cut to any desired length. HERO slat wall panels must be stored laid flat on a level surface in dry and cool conditions at 40-60% humidity. The MDF products must not be exposed to heat, moisture or direct contact with water. Install with mounting glue and quick-mounting dowels in the slots under the slats.

HERO WALL SLAT PANELS

CONSTRUCTION AND COMPONENTS

HERO wall slat panels are made of MDF. They come in two variants, as a starter panel and an extension panel. Both panels consist of two components: a base panel and slats. Each can be ordered in a different colour scheme. The price depends on the choice of lamella colour.

The base panel is made from 16 mm thick MDF.

Fixed to the base panel, the slats come in different sizes and shapes, depending on the type of the HERO panels selected.

The starter panel is installed as the first section of a decorative wall. It is made up of a base panel and 5 slats, of which the outermost slat is removed to make space for the last extension panel to be fixed as a decorative finish.


One extension panel is used to stretch the decoration length by 22 cm. It is made with a base panel and 4 slats. The panels can be cut to size so that the final slat can be fitted from the starter panel.

The HERO wall slat panels are available in a wide range of colours. They can come in a mono-colour version (same colour for the base panel and the slats) and a dual-colour version (base panel colour different from that of the slats). The price is only influenced by the choice of slat colour, not the colour of the base panel.


The wall slat package includes, free of charge, a finishing layer with glue for a neat finish to be put on the slat panels, e.g. around the cut-out for electrical sockets. Thermofilm may have a different shade from the colour of the decorative slat panels, but once applied under heat, the finishing layer will change to a correct colour.

DESIGNS OF HERO LAMELLA PANELS


HERO 01

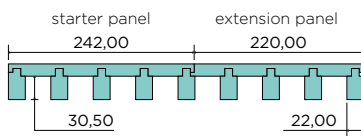


HERO 02

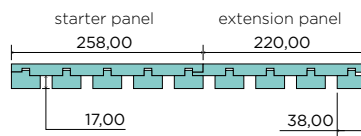


HERO 03




HERO 04




HERO 05




HERO 06



HERO 07




HERO 08

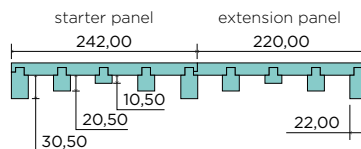


AVAILABLE COLOURS:


PP GROUP

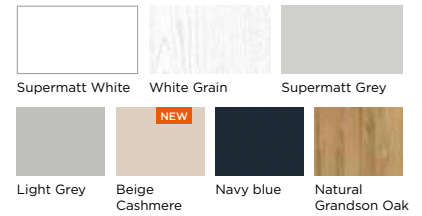


CPL GROUP

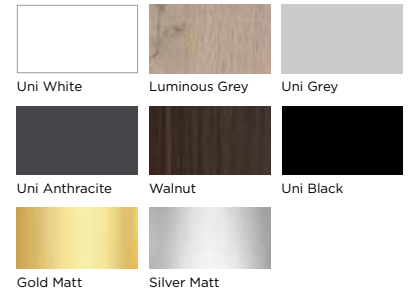


CLPL GROUP

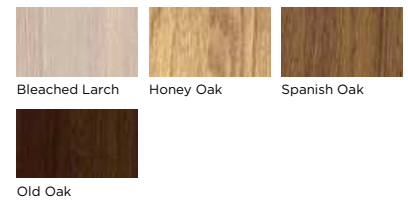

FF GROUP

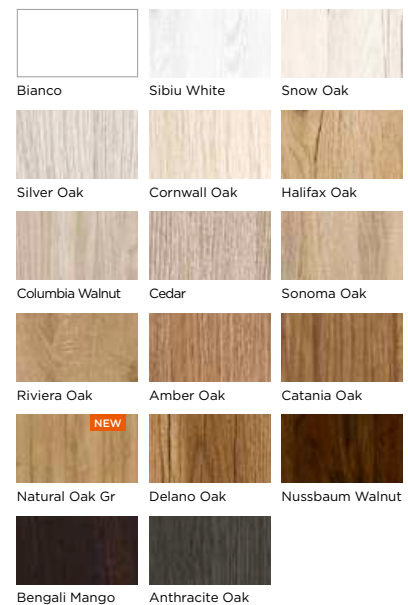

LAK GROUP

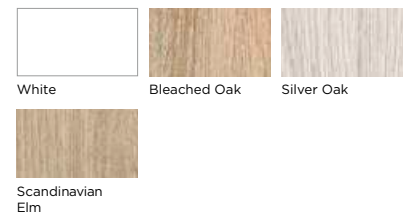


PANEL ASSEMBLY VIDEO TUTORIAL

Watch the video tutorial on our YouTube channel and see how you can easily install the HERO wall slat panels yourself.



HERO 01

EXPRESSIVE

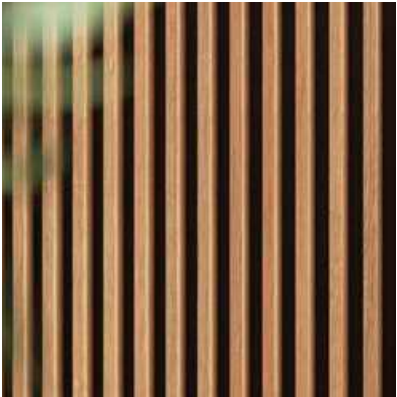

Ideal for larger areas, with the deep slats always creating a beautiful effect of play between light and shade.



HERO 02

CLASSIC



Simple in form, they will create an ideal backdrop for all interior designs.



HERO 03

SOFTENED



The rounded slats soften the stark form while maintaining the full crispness of the finish.



HERO 04

SUBTLE



The fine semi-circular slats blend in perfectly with the clean form of the interior.



HERO 05

INTRIGUING



The unmistakable simplicity is the result of deep slats with softened rounded edges.



HERO 06

FRAGILE




The harmonious arrangement of the mushroom-shaped slats will unobtrusively emphasise the style of any interior.



HERO 07

FUNCTIONAL

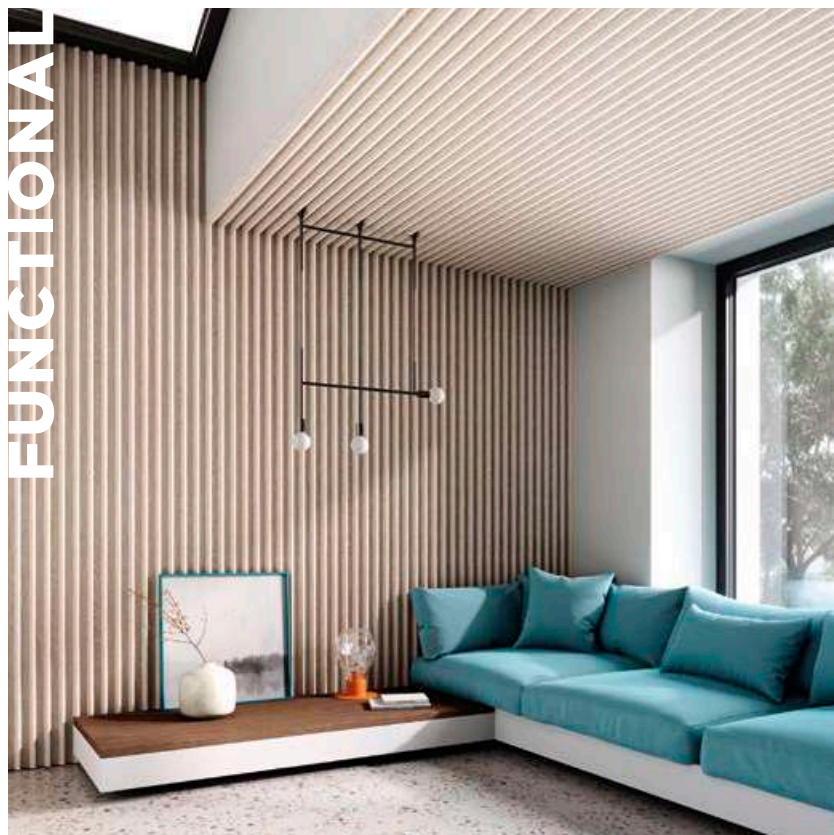

The unique shape of the slats will enliven any surface, while dramatically improving the acoustic characteristics of the room.



HERO 08

EXPRESSIVE




With their irregular depth, the slats produce a dynamic effect for a look that cannot be boring.



RYFLA DECORATIVE PANELS /

RYFLA 01, CPL Uni Grey

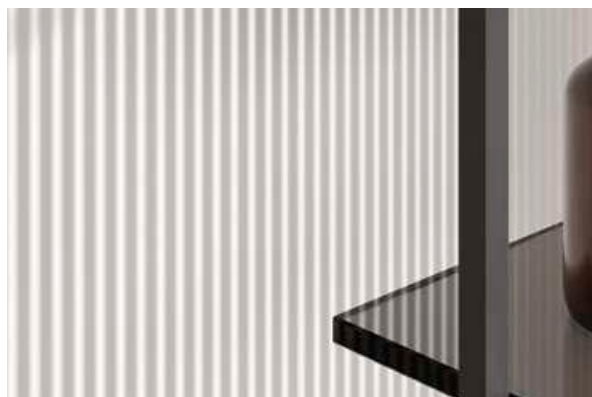

The gentle waves of the surface will beautifully accentuate any room setting.



RYFLA DECORATIVE PANELS

The starter panel is installed as the first section of a decorative wall, followed by multiple 10 cm wide extension panels and a final panel at the end. For the end panel, you can also use an extension panel cut to the required size.

The package includes, free of charge, a finishing layer with glue for a neat finish to be put on the slat panels, e.g. around the cut-out for electrical sockets. Thermofilm may have a different shade from the colour of the decorative slat panels, but once applied under heat, the finishing layer will change to a correct colour.

When ordering the required number of panels, consider the starter panel, the final panel and multiple extension panels. The delivered panels can be cut to any desired length.

They must be stored laid flat on a level surface in dry and cool conditions at 40-60% humidity.

The MDF products must not be exposed to heat, moisture or direct contact with water.

Install with mounting adhesive and quick-mounting dowels by driving screws into the panel tongues through pre-drilled holes.


SIZES AVAILABLE

RYFLA decorative panels are manufactured to a length of 2750 mm. The starter panel has a width of 111 mm, the extension panel has a width of 100 mm and the end panel 110 mm.

CONSTRUCTION


RYFLA decorative panels are made of MDF. They come in three variants, as a starter panel, an extension panel and an end panel.

RYFLA 01

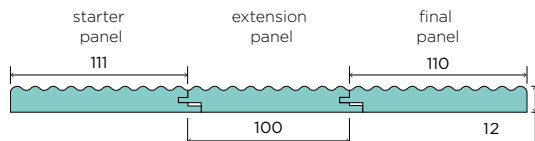


AVAILABLE COLOURS:


CPL GROUP

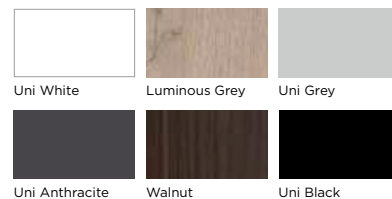


CLPL GROUP

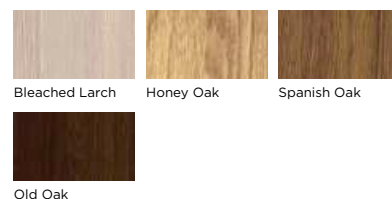

FF GROUP

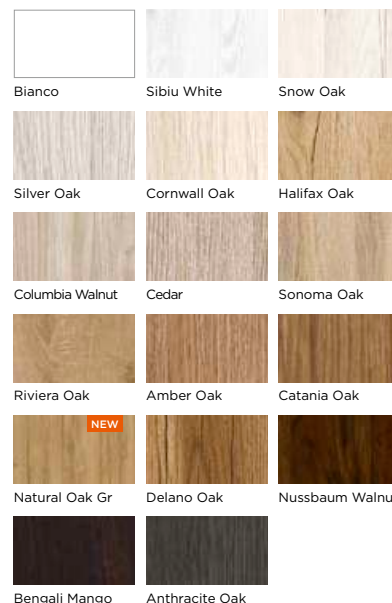

LAK GROUP

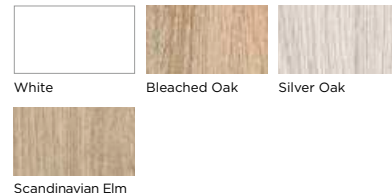

We understand that every interior is unique and requires unique solutions, so we create products tailored to your needs.

If you are looking for non-standard skirting boards to finish off an arrangement, for example so that the entire thickness of a slat/panel sits on the skirting board, or skirting boards to crown the wall panels, we will be happy to make them to your bespoke order.

Write to us! info@vivento.pl



HANDLES

SEPARATE SQUARE ROSETTE

VENA



AVAILABLE COLOURS:



Brass satin Nickel satin Black

CASCADE



AVAILABLE COLOURS:




Brushed nickel Antique brass

ARCO



AVAILABLE COLOURS:



Brushed nickel Antique brass Graphite satin

IRIS



AVAILABLE COLOURS:




Brushed nickel

EXIMUS



AVAILABLE COLOURS:



Glossy Chromee black insert Brushed nickel black insert
Glossy Chromee white insert Brushed nickel white insert

ERGO



AVAILABLE COLOURS:



Black

TOTAL SI



AVAILABLE COLOURS:




Glossy Chromee Matt Chromee Black

SPIGOLA SK



AVAILABLE COLOURS:




Anthracite Glossy gold Matt Gold Copper

ARIANNA PRO



AVAILABLE COLOURS:



Anthracite Copper

SPLASH SK



AVAILABLE COLOURS:




Glossy Chromee Matt Chromee Black

FOSTER BI



AVAILABLE COLOURS:



Chromee gloss Nickel
White Black

NESH Q



AVAILABLE COLOURS:



Black

SEPARATE SQUARE ROSETTE

EUFORIO



AVAILABLE COLOURS:



Black

SEPARATE SQUARE ROSETTE

When ordering the fire rated handles, please specify the door leaf thickness in order for the appropriate fitting set to be fitted.

KVADRAT 1701 FIRE RATED



KVADRAT 1704 FIRE RATED



KVADRAT 1703 FIRE RATED



AVAILABLE COLOURS:



Stainless steel

SQUARE KNOBS

A fixed knob must be ordered when fitting a door knob with an electric strike.

Q FIT



AVAILABLE COLOURS:



Chrome

Satin chrome

Black

KNOBS (ROUND)

A fixed knob must be ordered when fitting a door knob with an electric strike.

FIT



AVAILABLE COLOURS:



Chrome

Satin chrome

Black

SEPARATE ROUND ROSETTE

BRILLO



AVAILABLE COLOURS:



Chromee gloss

Brushed nickel

Antique brass

IMIRA



AVAILABLE COLOURS:



Chromee gloss

Brushed nickel

Black

MIRIAM SI



AVAILABLE COLOURS:



Polished chrome

Gold

TELESTA



AVAILABLE COLOURS:



Chromee gloss

Brushed nickel

Black

Brass

Black +Chrome

Black +Gold satin

Black +Pink Gold

VIOLA SI



AVAILABLE COLOURS:



Glossy Chromee

Matt Chromee

Black

Shiny Gold

SPIGOLA SO



AVAILABLE COLOURS:



Glossy Chromee

Matt Chromee

Black


HANDLES

SEPARATE ROUND ROSETTE

SPLASH



AVAILABLE COLOURS:



CORAL




AVAILABLE COLOURS:



CALI



AVAILABLE COLOURS:



ADULAR




AVAILABLE COLOURS:



ARIANNA SI



AVAILABLE COLOURS:



CLASSICO




AVAILABLE COLOURS:



LIMA




AVAILABLE COLOURS:



TESLA



AVAILABLE COLOURS:



ORGANIC




AVAILABLE COLOURS:



VOLATIS



AVAILABLE COLOURS:




SEPARATE ROUND ROSETTE

When ordering the fire rated handles, please specify the door leaf thickness in order for the appropriate fitting set to be fitted.

OVAL 1701 **FIRE RATED**



AVAILABLE COLOURS:



OVAL 1704 **FIRE RATED**



LONG BACKPLATE

CASCADA DS



AVAILABLE COLOURS:



Brushed nickel

Antique brass

ADULAR DS



AVAILABLE COLOURS:



Brushed nickel

Antique brass

ARCO DS



AVAILABLE COLOURS:



Brushed nickel

Antique brass

IRIS DS




AVAILABLE COLOURS:



Brushed nickel

ERGO DS



AVAILABLE COLOURS:



Black


LONG BACKPLATE - FIRE RATED

OLARIX 72

FIRE RATED



AVAILABLE COLOURS:




Stainless steel

ENTRANCE HANDLES

XEN



AVAILABLE COLOURS:



inox


Black

HAGA PLUS

In versions with lever handles or pull handles



AVAILABLE COLOURS:



inox

Titanium


Black

PRESTIGE FLEX

In versions with lever handles or pull handles



AVAILABLE COLOURS:



inox

Titanium

Black

LOCKS



key lock for rebated doors



lock with insert for rebated doors



lock with locking device for rebated doors



magnetic lock for flush-mounted doors



bottom bolt lock for profile cylinder for SOLID PLUS doors



upper bolt lock for profile cylinder for SOLID PLUS doors



hook lock, round sign for sliding doors



hook lock, square sign for sliding doors



hook lock, round sign for sliding doors for cylinder



hook lock, round sign for sliding doors with toilet lock

ACCESSORIES

EURO PROFILE CYLINDERS

SIZE: 25/25, 28/36, 30/30, 30/40, 30/45, 30/50, 30/60, 35/30, 35/35, 35/40, 35/45, 35/50, 35/55, 40/40, 40/50, 45/45, 45/55

FIRE RATED



HINGE CAPS

COLOR bronze, lacquered chrome, satin chrome, brass, nickel, black, white*)

SIZE: Ø 15 do wszystkich drzwi BRILLIANT, ELEGANTE, PRESTIGE and BASIC; Ø 16 do drzwi SOLID PLUS; Ø 20 do drzwi AKUSTYCZNE and Fire rated



SET OF LOCK CORES IN THE MASTER KEY SYSTEM

SIZE: 26/45+G26/45 Wilka B, 26/45+G45/26 Wilka B, 30/35+G30/35, 30/35+G35/30, 30/40+G30/40, 30/40+G40/30, 30/45+G30/45, 30/45+G45/30, 35/40+G35/40, 35/40+G40/35, 40/40+G40/40 O/35+G30/35, 30/35+G35/30, 30/40+G30/40, 30/40+G40/30, 30/45+G30/45, 30/45+G45/30, 35/40+G35/40, 35/40+G40/35, 40/40+G40/40



DOOR RESTRICTOR ARM



VIVENTO CLEANER



SEALS

For fixed and adjustable frames (excl. ZOS frame), white, beige or brown

For adjustable ZOS frame, white, beige or brown

For door stop, colourless



DOOR CLOSERS AND ELECTRIC STRIKES



GR200



ITS96



DES7



DES7 SLIM



FIRE RATED
447 FIRE

TYPE	Color	Fire rated	Max. door leaf weight	Max. sash width
Groom 200 surface-mounted door closer with sprung arm	silver, white, brown	FIRE RATED	100 kg	1250 mm
Groom 200 surface-mounted door closer with sprung arm with turn and release	silver, white, brown		100 kg	1250 mm
Groom 200 door closer for double doors (2 pcs.) with adjustable action (1 pc.)	silver, white, brown	FIRE RATED	100 kg	1250 mm
ITS96 concealed door closer with rail (left or right)	silver	FIRE RATED	130 kg	1100 mm
Concealed door closer ITS96 for double doors	silver	FIRE RATED	130 kg	1100 mm
ITS96 concealed door closer with rail, for double leaf doors with door co-ordinator	silver	FIRE RATED	130 kg	1100 mm, not less than 700
DES7, 12 V symmetrical fail-safe electric strike, with mounting plate	silver		-	-
DES7 SLIM, 12 V symmetrical fail-safe electric strike for double doors, with mounting plate	silver		-	-
Fire rated electric strike, obverse 447 FIRE, (6-12 V, 12 V or 24 V), with mounting plate	silver	FIRE RATED	-	-

200° PANORAMIC DOOR VIEWER



FREE STANDING DOOR STOPS



DOOR PULLS

U01OK ROUND

COLOR Matt Chromee, Glossy Chromee, Black, patina, Shiny Gold, Matt Gold



U03KW SQUARE

COLOR Matt Chromee, Glossy Chromee, Black, patina, Shiny Gold, Matt Gold



U02OW OVAL

COLOR Matt Chromee, Glossy Chromee, Black, patina, Shiny Gold, Matt Gold



U04PR RECTANGULAR

COLOR Matt Chromee, Glossy Chromee, Black, patina, Shiny Gold, Matt Gold



SURFACE MOUNTED FOR LOFT DOORS, BLACK 32X228

COLOR Black



HALF-CIRCLE PULLS

P05OK ROUND

COLOR Matt Chromee, Glossy Chromee, Black, patina, Shiny Gold, Matt Gold



P06KW SQUARE


COLOR Matt Chromee, Glossy Chromee, Black, patina, Shiny Gold, Matt Gold



made to measure doors

The Power of Personalization

Don't let even your imagination limit you

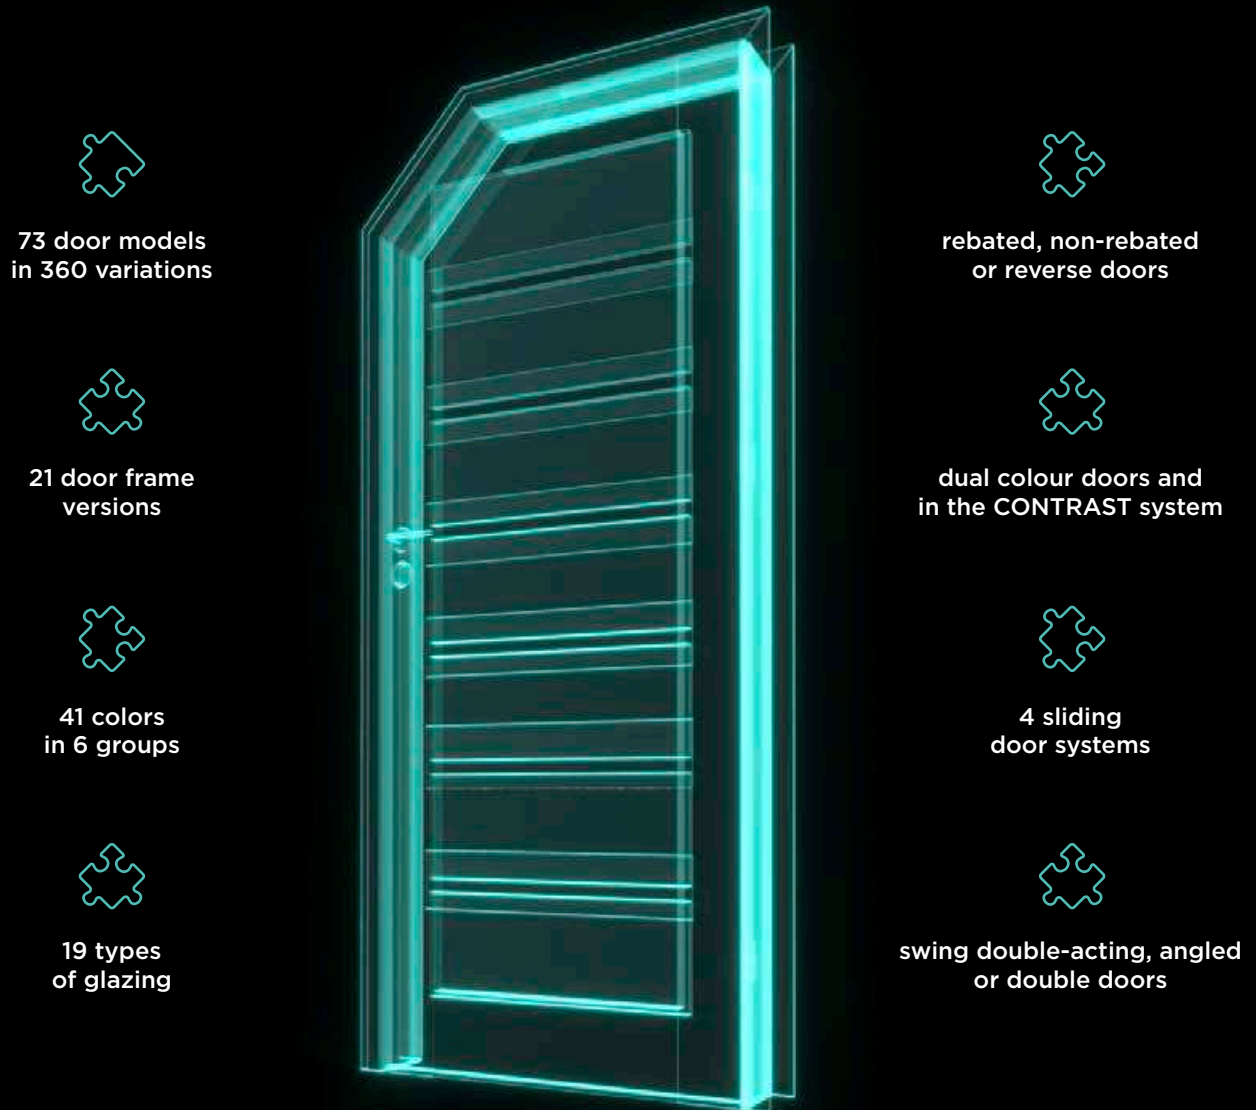

73 door models
in 360 variations

21 door frame
versions

41 colors
in 6 groups

19 types
of glazing

rebated, non-rebated
or reverse doors

dual colour doors and
in the CONTRAST system

4 sliding
door systems

swing double-acting, angled
or double doors



At VIVENTO, we believe that doors are not just an element of interior design but, above all, a reflection of your personality and style. That's why we offer you vast possibilities for door personalization and configuration.

We even have INVISIBLE doors and doors with pet flap,
or as unique as doors with access shutter window!

So, what will you choose for yourself?

P.S. If that's not enough, get in touch with us.
Our Custom Door Department is ready for new challenges: info@viventto.pl

REBATED DOOR LEAF

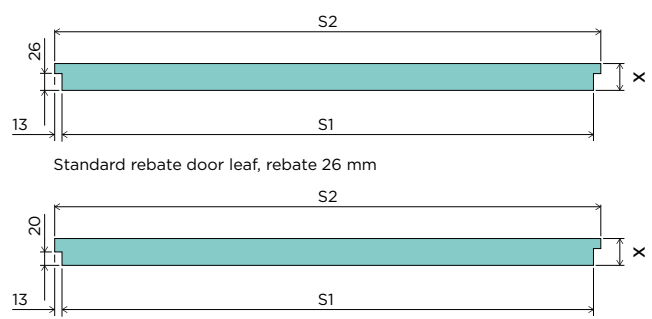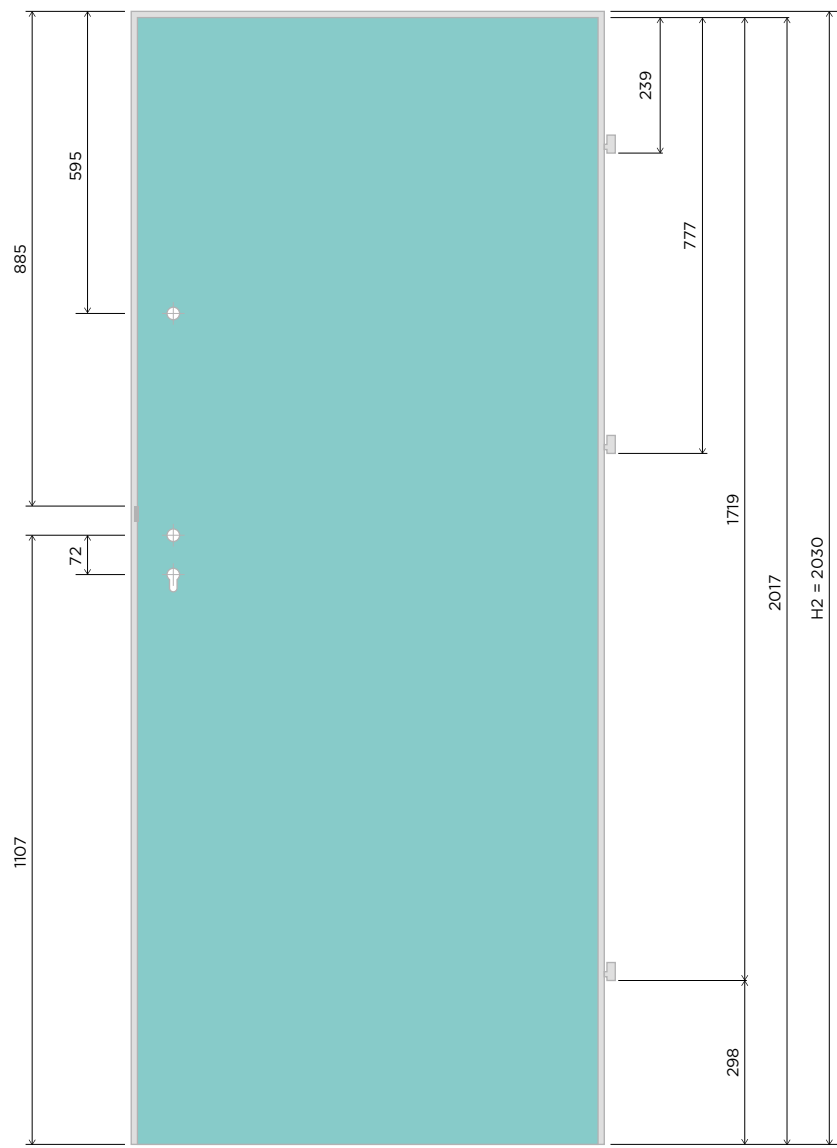


Standard rebate door leaf, rebate 26 mm

20 mm rebate door leaf **OPTIONAL**

- Thickness of the door leaf BRILLIANT X = 40 mm
- Thickness of the door leaf ELEGANTE X = 38 mm
- Thickness of the door leaf PRESTIGE X = 38 mm
- Thickness of the door leaf BASIC X = 40 mm
- Thickness of the door leaf SOLID PLUS X = 46 mm

Width	Door leaf rebate width S1 [mm]	Total width of S2 door leaf [mm]
60	618	644
70	718	744
80	818	844
90	918	944
100	1018	1044

SINGLE DOORS IN REBATED VERSION

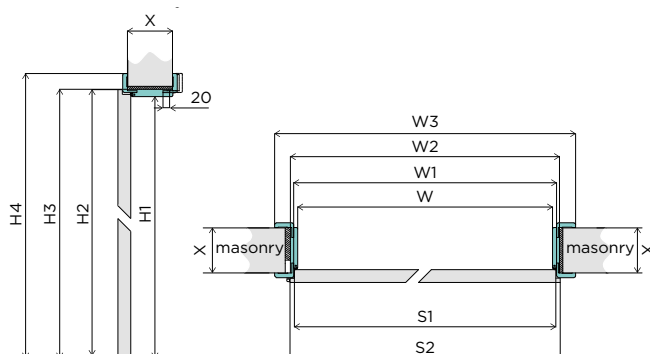

DOORS WITH FIXED FRAMES

	Width	W [mm]	W1 [mm]	W2 [mm]	S1 [mm]	S2 [mm]	H1 [mm]	H2 [mm]	H3 [mm]	W0 [mm]	H0 [mm]
Fixed MDF	60	603	624	691	618	644	2019	2030	2063	710	2075
	70	703	724	791	718	744				810	
	80	803	824	891	818	844				910	
	90	903	924	991	918	944				1010	
	100	1003	1024	1091	1018	1044				1110	
	110	1103	1124	1191	1118	1144				1210	
Fixed timber	60	601	624	689	618	644	2017	2030	2061	710	2075
	70	701	724	789	718	744				810	
	80	801	824	889	818	844				910	
	90	901	924	989	918	944				1010	
	100	1001	1024	1089	1018	1044				1110	
	110	1101	1124	1189	1118	1144				1210	

DOORS WITH ADJUSTABLE FRAMES


	Width	W [mm]	W1 [mm]	W2 [mm]	W3 [mm] 60/80/100*	S1 [mm]	S2 [mm]	H1 [mm]	H2 [mm]	H3 [mm]	H4 [mm] 60/80/100*	W0 [mm]	H0 [mm]
Steel frame ZOS casing	60	570	626	594	736	618	644	2000	2030	2012	2083	594-600	2015
	70	670	726	694	836	718	744					694-700	
	80	770	826	794	936	818	844					794-800	
	90	870	926	894	1036	918	944					894-900	
	100	970	1026	994	1136	1018	1044					994-1000	
	110	1070	1126	1094	1236	1118	1144					1094-1100	
Adjustable door frame DIN, DUALE	60	603	624	647	745/785/825	618	644	2017	2030	2039	2088/2108/2128	675	2055
	70	703	724	747	845/885/925	718	744					775	
	80	803	824	847	945/985/1025	818	844					875	
	90	903	924	947	1045/1085/1125	918	944					975	
	100	1003	1024	1047	1145/1185/1225	1018	1044					1075	
	110	1103	1124	1147	1245/1285/1325	1118	1144					1175	

KEY:

W - Door frame clear width
W1 - Door frame rebate width
W2 - Door frame outer width
W3 - Door frame width with architraves (*for DIN frames, the width with 60 mm, 80 mm and 100 mm architraves)
S1 - Door leaf rebate width
S2 - Overall door leaf width

H1 - Door frame clear height
H2 - Door leaf height
H3 - Door frame outer height
H4 - Door frame height with architraves (*for DIN frames, the height with 60 mm, 80 mm and 100 mm architraves)
W0 - Suggested installation opening width
H0 - Suggested installation opening height

DOUBLE DOORS
IN REBATED VERSION

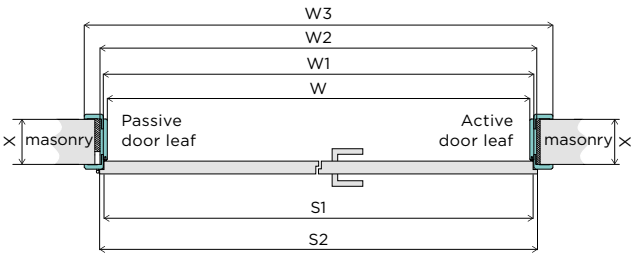

DOUBLE DOORS WITH FIXED DOOR FRAMES

	Width	W [mm]	W1 [mm]	W2 [mm]	S2 [mm]	H1 [mm]	H2 [mm]	H3 [mm]	W0 [mm]	H0 [mm]
Fixed: MDF	60+60	1203	1224	1291	644+610	2019	2030	2063	1310	2075
	70+60	1303	1324	1391	744+610				1410	
	70+70, 80+60	1403	1424	1491	744+710, 844+610				1510	
	90+60, 80+70	1503	1524	1591	944+610, 844+710				1610	
	80+80, 90+70	1603	1624	1691	844+810, 944+710				1710	
	90+80	1703	1724	1791	944+810				1810	
	90+90	1803	1824	1891	944+910				1910	
Fixed: timber	60+60	1201	1224	1289	644+610	2017	2030	2061	1310	2075
	70+60	1301	1324	1389	744+610				1410	
	70+70, 80+60	1401	1424	1489	744+710, 844+610				1510	
	90+60, 80+70	1501	1524	1589	944+610, 844+710				1610	
	80+80, 90+70	1601	1624	1689	844+810, 944+710				1710	
	90+80	1701	1724	1789	944+810				1810	
	90+90	1801	1824	1889	944+910				1910	

DOUBLE DOORS WITH ADJUSTABLE DOOR FRAMES



	Width	W [mm]	W1 [mm]	W2 [mm]	W3 [mm] 60/80/100*	S2 [mm]	H1 [mm]	H2 [mm]	H3 [mm]	H4 [mm] 60/80/100*	W0 [mm]	H0 [mm]
Steel frame ZOS casing	60+60	1170	1226	1194	1336	644+610	2000	2030	2012	2083	1194-1200	2015
	70+60	1270	1326	1294	1436	744+610					1294-1300	
	70+70, 80+60	1370	1426	1394	1536	744+710, 844+610					1394-1400	
	90+60, 80+70	1470	1526	1494	1636	944+610, 844+710					1494-1500	
	80+80, 90+70	1570	1626	1594	1736	844+810, 944+710					1594-1600	
	90+80	1670	1726	1694	1836	944+810					1694-1700	
	90+90	1770	1826	1794	1936	944+910					1794-1800	
Adjustable door frame DIN, DUALE	60+60	1203	1224	1247	1345/1385/1425	644+610	2017	2030	2039	2088/2108/2128	1290	2055
	70+60	1303	1324	1347	1445/1485/1525	744+610					1390	
	70+70, 80+60	1403	1424	1447	1545/1585/1625	744+710, 844+610					1490	
	90+60, 80+70	1503	1524	1547	1645/1685/1725	944+610, 844+710					1590	
	80+80, 90+70	1603	1624	1647	1745/1785/1825	844+810, 944+710					1690	
	90+80	1703	1724	1747	1845/1885/1925	944+810					1790	
	90+90	1803	1824	1847	1945/1985/2025	944+910					1890	

KEY:

W - Door frame clear width
W1 - Door frame rebate width
W2 - Door frame outer width
W3 - Door frame width with architraves (*for DIN frames, the width with 60 mm, 80 mm and 100 mm architraves)
S2 - Overall door leaf width

H1 - Door frame clear height
H2 - Door leaf height
H3 - Door frame outer height
H4 - Door frame height with architraves (*for DIN frames, the height with 60 mm, 80 mm and 100 mm architraves)
W0 - Suggested installation opening width
H0 - Suggested installation opening height


NON-REBATED DOOR
IN SIMPLE SYSTEM

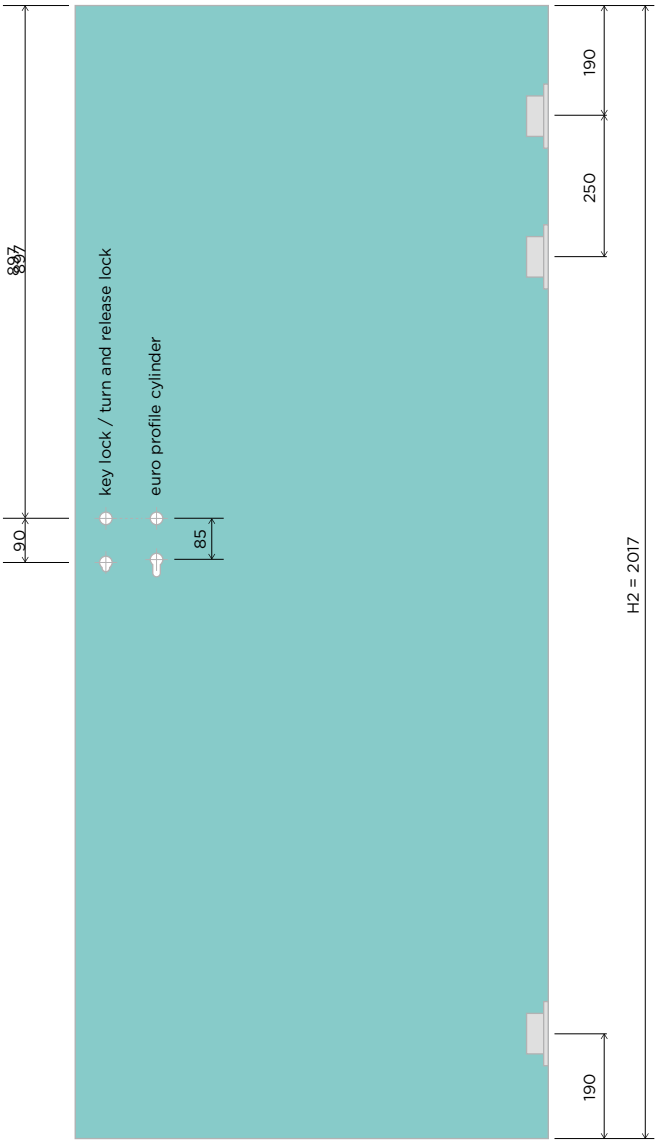

Thickness of the door leaf BRILLIANT	X = 40 mm
Thickness of the door leaf ELEGANTE	X = 38 mm
Thickness of the door leaf PRESTIGE	X = 38 mm
Thickness of the door leaf BASIC	X = 40 mm

Width	Overall door leaf width S2 [mm]
60	618
70	718
80	818
90	918
100	1018

NON-REBATED SINGLE DOORS
IN SIMPLE SYSTEM

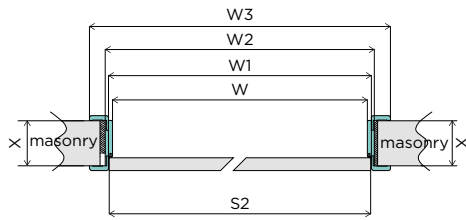

SIMPLE NON-REBATED DOORS WITH FIXED FRAMES

	Width	W [mm]	W1 [mm]	W2 [mm]	S2 [mm]	H1 [mm]	H2 [mm]	H3 [mm]	W0 [mm]	H0 [mm]
Fixed: MDF	60	603	624	691	618	2019	2017	2063	710	2075
	70	703	724	791	718				810	
	80	803	824	891	818				910	
	90	903	924	991	918				1010	
	100	1003	1024	1091	1018				1110	
Fixed: timber	60	601	624	689	618	2017	2017	2061	710	2075
	70	701	724	789	718				810	
	80	801	824	889	818				910	
	90	901	924	989	918				1010	
	100	1001	1024	1089	1018				1110	

SIMPLE NON-REBATED DOORS WITH ADJUSTABLE FRAMES

	Width	W [mm]	W1 [mm]	W2 [mm]	W3 [mm] 60/80/100*	S2 [mm]	H1 [mm]	H2 [mm]	H3 [mm]	H4 [mm] 60/80/100*	W0 [mm]	H0 [mm]
Adjustable: DIN door frame	60	601	624	645	743/783/823	618	2017	2017	2039	2088/2108/2128	690	2055
	70	701	724	745	843/883/923	718					790	
	80	801	824	845	943/983/1023	818					890	
	90	901	924	945	1043/1083/1123	918					990	
	100	1001	1024	1045	1143/1183/1223	1018					1090	

KEY:

- W - Door frame clear width

W1 - Door frame rebate width

W2 - Door frame outer width

W3 - Door frame width with architraves (*for DIN frames, the width with 60 mm, 80 mm and 100 mm architraves)

S2 - Overall door leaf width
- H1 - Door frame clear height

H2 - Door leaf height


H3 - Door frame outer height

H4 - Door frame height with architraves (*for DIN frames, the height with 60 mm, 80 mm and 100 mm architraves)

W0 - Suggested installation opening width

H0 - Suggested installation opening height

NON-REBATED DOUBLE DOORS IN SIMPLE SYSTEM

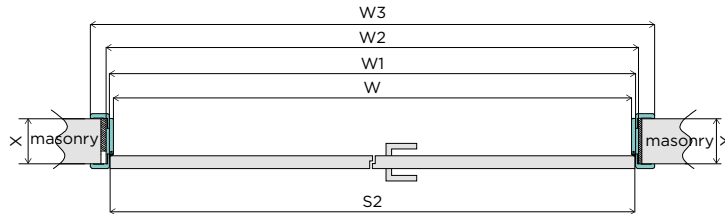

SIMPLE DOUBLE DOORS WITH FIXED FRAMES

	Width	W [mm]	W1 [mm]	W2 [mm]	S2 [mm]	H1 [mm]	H2 [mm]	H3 [mm]	W0 [mm]	H0 [mm]
Fixed: MDF	60+60	1237	1258	1325	631+631	2019	2017	2063	1345	2075
	70+60	1337	1358	1425	731+631				1445	
	70+70, 80+60	1437	1458	1525	731+731, 831+631				1545	
	90+60, 80+70	1537	1558	1625	931+631, 831+731				1645	
	80+80, 90+70	1637	1658	1725	831+831, 931+731				1745	
	90+80	1737	1758	1825	931+831				1845	
	90+90	1837	1858	1925	931+931				1945	
Fixed: timber	60+60	1235	1258	1323	631+631	2017	2017	2061	1345	2075
	70+60	1335	1358	1423	731+631				1445	
	70+70, 80+60	1435	1458	1523	731+731, 831+631				1545	
	90+60, 80+70	1535	1558	1623	931+631, 831+731				1645	
	80+80, 90+70	1635	1658	1723	831+831, 931+731				1745	
	90+80	1735	1758	1823	931+831				1845	
	90+90	1835	1858	1923	931+931				1945	

SIMPLE DOUBLE DOORS WITH ADJUSTABLE FRAMES


	Width	W [mm]	W1 [mm]	W2 [mm]	W3 [mm] 60/80/100*	S2 [mm]	H1 [mm]	H2 [mm]	H3 [mm]	H4 [mm] 60/80/100*	W0 [mm]	H0 [mm]
Adjustable DIN door frame	60+60	1235	1258	1279	1377/1417/1457	631+631	2017	2017	2039	2088/2108/2128	1320	2055
	70+60	1335	1358	1379	1477/1517/1557	731+631					1420	
	70+70, 80+60	1435	1458	1479	1577/1617/1657	731+731, 831+631					1520	
	90+60, 80+70	1535	1558	1579	1677/1717/1757	931+631, 831+731					1620	
	80+80, 90+70	1635	1658	1679	1777/1817/1857	831+831, 931+731					1720	
	90+80	1735	1758	1779	1877/1917/1957	931+831					1820	
	90+90	1835	1858	1879	1977/2017/2057	931+931					1920	

KEY:

W - Door frame clear width
W1 - Door frame rebate width
W2 - Door frame outer width
W3 - Door frame width with architraves (*for DIN frames, the width with 60 mm, 80 mm and 100 mm architraves)
S2 - Overall door leaf width

H1 - Door frame clear height
H2 - Door leaf height
H3 - Door frame outer height
H4 - Door frame height with architraves (*for DIN frames, the height with 60 mm, 80 mm and 100 mm architraves)
W0 - Suggested installation opening width
H0 - Suggested installation opening height

REVERSED SWING DOORS

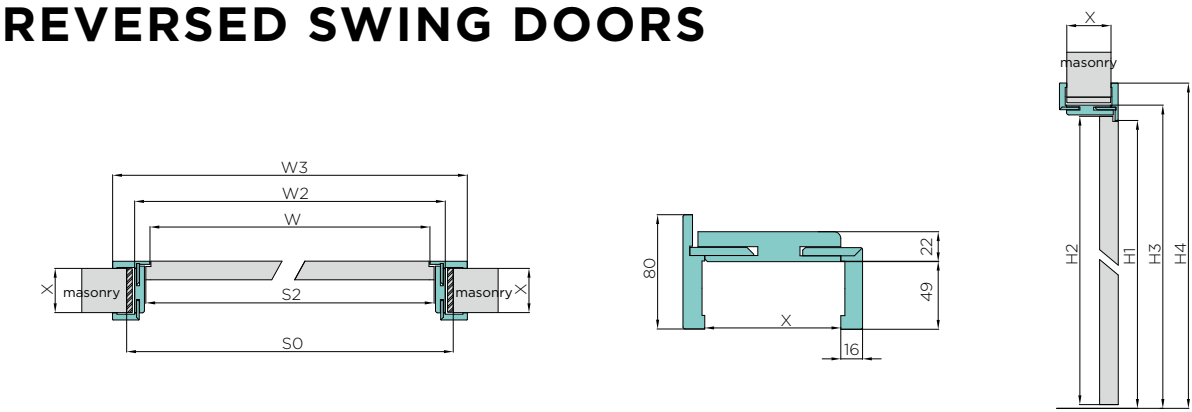

REVERSED SWING DOORS WITH DIN DOOR FRAME


Width	W [mm]	W2 [mm]	W3 [mm]	S2 [mm]	S0 [mm]	H1 [mm]	H2 [mm]	H3 [mm]	H4 [mm]	H0 [mm]
60	628	696	788	644	740	2028	2029	2062	2108	2075
70	728	796	888	744	840					
80	828	896	988	844	940					
90	928	996	1088	944	1040					
100	1028	1096	1188	1044	1140					
110	1128	1196	1288	1144	1240					

Reversed swing doors are produced shorter as standard. As a result, when installed next to a standard door, both door frames have the same outer height with the architraves. Bespoke sizes are also available.

KEY:

- W - Door frame clear width
- W2 - Door frame outer width
- W3 - Door frame width with architraves
- S0 - Suggested installation opening width
- S2 - Overall door leaf width
- H1 - Door frame clear height
- H2 - Overall door leaf height
- H3 - Door frame outer height
- H4 - Door frame height with architraves

INVE VERSATILE DOORS

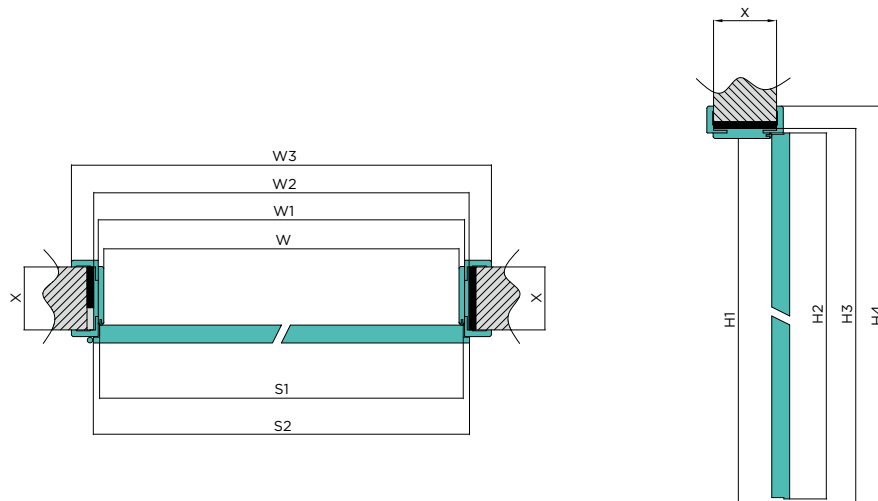

Width	W [mm]	W1 [mm]	W2 [mm]	W3 [mm]	S1 [mm]	S2 [mm]	H1 [mm]	H2 [mm]	H3 [mm]	H4 [mm]	Suggested installation opening [mm]
60	603	626	647	745	618	644	2020	2024	2043	2092	675 x 2055
70	703	726	747	845	718	744					775 x 2055
80	803	826	847	945	818	844					875 x 2055
90	903	926	947	1045	918	944					975 x 2055


Further widths increase dimensions W, W1, W2, W3, S1 and S2 by 100 mm and are charged extra for the double leaf frame.

KEY:


- W - Door frame clear width
- W1 - Door frame rebate width
- W2 - Door frame outer width
- W3 - Door frame width with architraves
- S1 - Door leaf rebate width
- S2 - Overall door leaf width
- H1 - Door frame clear height
- H2 - Overall door leaf height
- H3 - Door frame outer height
- H4 - Door frame height with architraves

INVISIBLE - FLUSH WITH WALL DOORS

OUTSWING DOORS 180° - STANDARD

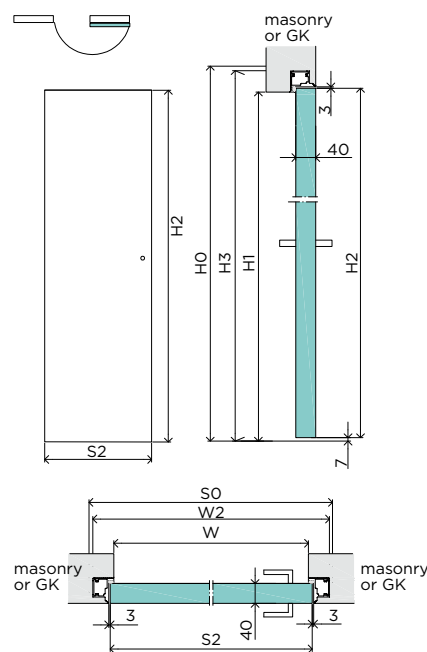

INSWING DOORS 90° - REVERSED-SWING

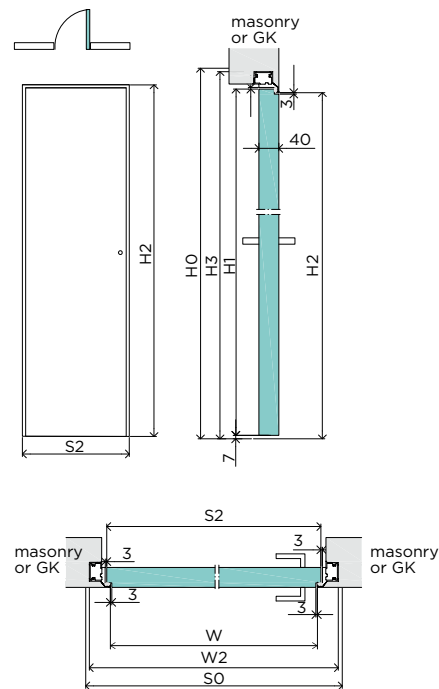

Type	H2 [mm]	H0 [mm]	H3 [mm]	H1 [mm]	Number of hinges
Outswing 180° as standard	2020	2070	2060	2020	2
Inswing 90° - reverse-swing	2030	2080	2070	2030	2

Width	S2 [mm]	W0 [mm]	W2 [mm]	W [mm]	
				int. 90°	ext. 180°
60	644	724	710	596	629
70	744	824	810	696	729
80	844	924	910	796	829
90	944	1024	1010	896	929

KEY:

W - Door frame clear width
W1 - Door frame rebate width
W2 - Door frame outer width
S2 - Overall door leaf width

H1 - Door frame clear height
H2 - Door leaf height
H3 - Door frame outer height
W0 - Suggested installation opening width
H0 - Suggested installation opening height


MAGIC WALL-MOUNTED SYSTEM SLIDING DOORS

Selecting the size of MAGIC doors to fit into the wall opening depends on the installation method. Compare the three variants illustrated below.

VARIANT 1.

When opened, the door leaf covers 120 mm of the clear wall opening.


Width	S2 [mm]	S0 [mm]	Z1 [mm]	H2 [mm]	H0 [mm]
90	944	810-850	120	2030	1970
100	1044	910-950	120		
110	1144	1010-1050	120		

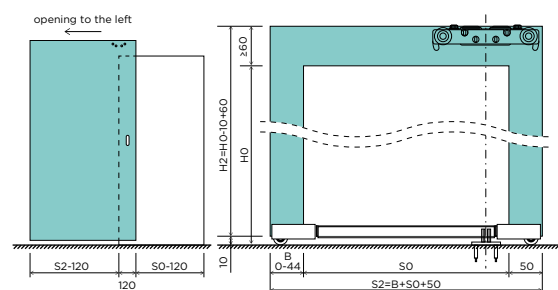

VARIANT 2.

When opened, the door leaf covers 60 mm of the clear wall opening.


Width	S2 [mm]	S0 [mm]	Z1 [mm]	H2 [mm]	H0 [mm]
90	944	790-830	60	2030	1970
100	1044	890-930	60		
110	1144	990-1030	60		

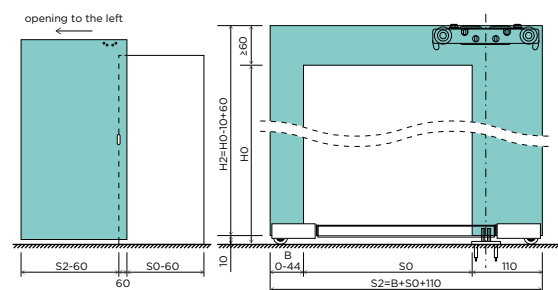

VARIANT 3.

When opened, the door leaf is flush with the edge of the wall opening.

Width	S2 [mm]	S0 [mm]	Z1 [mm]	H2 [mm]	H0 [mm]
90	944	730-770	0	2030	1970
100	1044	830-870	0		
110	1144	930-970	0		

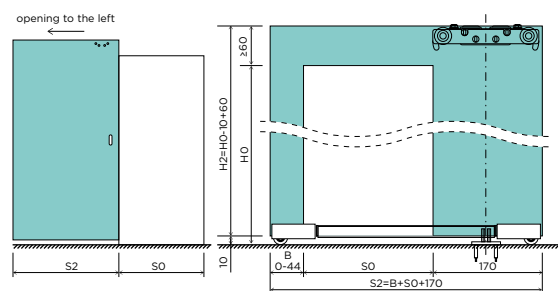

KEY:

- S2 - Overall door leaf width
- S0 - Construction opening width
- Z1 - Clear wall opening covered after opening
- H2 - Overall door leaf height
- H0 - Construction opening height


WALL-MOUNTED SYSTEM
SLIDING DOORS

Width	S2 [mm]	S0 [mm]	H2 [mm]	Hcs [mm]	L [mm]
60	644	600	2030	2098-2103	1300
70	744	700			1500
80	844	800			1800
90	944	900			2000


KEY:

- S2 - Overall door leaf width
- S0 - Construction opening width
- H2 - Overall door leaf height
- Hcs - Whole system size without door hangers (adjustment on carriages)
- L - Travel track length

When installing a sliding door leaf with a tunnel frame (drawing shows the DIN TUNNEL frame), the door frame must be cut down to size from the bottom.

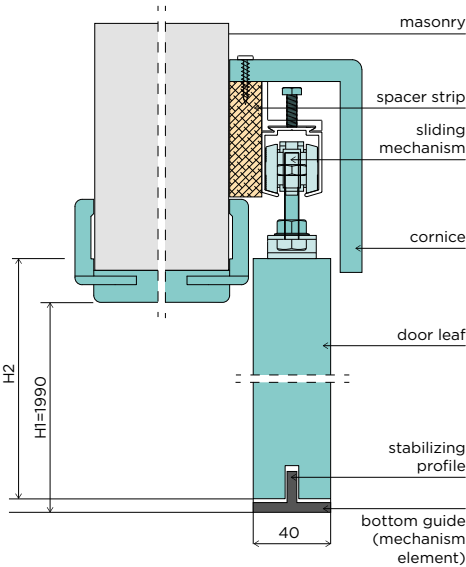

LOFT WALL-MOUNTED SYSTEM
SLIDING DOORS

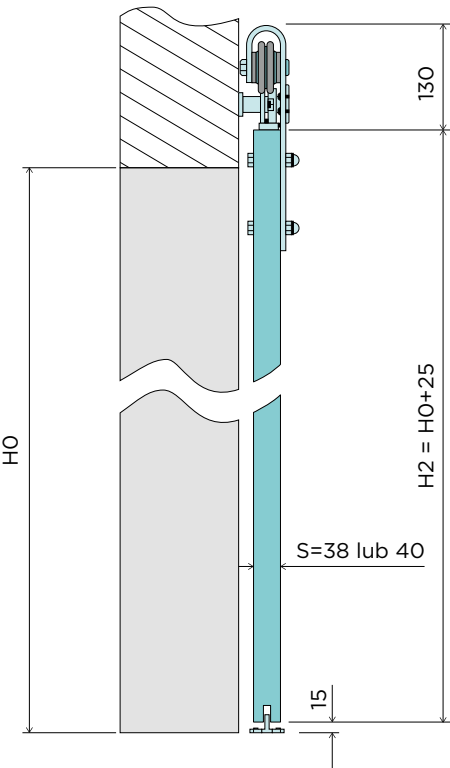


Width	S2 [mm]	S0 [mm]	H2 [mm]	H0 [mm]
60	644	600	2030	2005
70	744	700		
80	844	800		
90	944	900		

KEY:

- S2 - Overall door leaf width
- S0 - Construction opening width
- H2 - Overall door leaf height
- H0 - Construction opening height

POCKET SYSTEM SLIDING DOORS

SINGLE DOOR POCKET

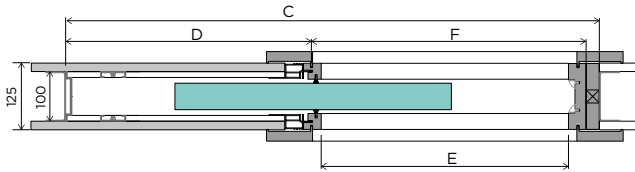

DOUBLE DOOR POCKET

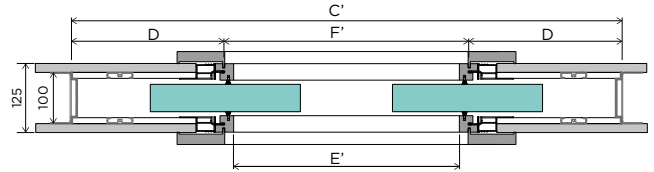



TABLE OF DIMENSIONS FOR A WALL WITH A THICKNESS OF 125 MM

Width	S2 [mm]	H2 [mm]	C [mm]	C' [mm]	D [mm]	E [mm]	E' [mm]	W3 [mm]	W3' [mm]	F [mm]	F' [mm]	Hk [mm]	H1 [mm]	H3 [mm]
60	644	2030	1308	2516	653	603	1168	739	1304	635	1210	2115	2030	2098
70	744		1508	2916	753	703	1368	839	1504	735	1410			
80	844		1708	3316	853	803	1568	939	1704	835	1610			
90	944		1908	3716	953	903	1768	1039	1904	935	1810			

KEY:

- S2 - Total width of door leaf
- H2 - Total height of door leaf
- C - Total width of cassette
- C' - Total width of cassette in double doors
- D - Width of cassette pocket
- E - Clear opening width in cassette structure
- E' - Clear opening width in cassette structure in double doors
- W3 - Cassette structure width including architraves
- W3' - Cassette structure width including architraves in double doors
- F - Clear opening width w/o cassette structure
- F' - Clear opening width w/o cassette structure in double doors
- Hk - Total height of cassette
- H1 - Height of cassette structure in clear opening
- H3 - Outer height of cassette with the band

SWING - DOUBLE-ACTING DOORS

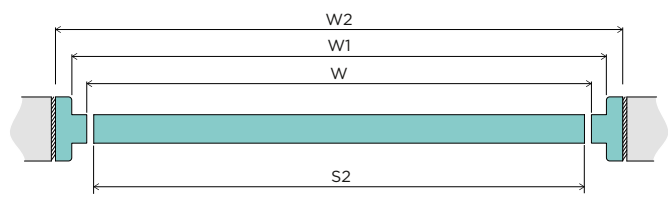

DOUBLE-ACTING SINGLE DOORS

	Width	W [mm]	W1 [mm]	W2 [mm]	S2 [mm]	H1 [mm]	H2 [mm]	H3 [mm]	W0 [mm]	H0 [mm]
Fixed: MDF	60	603	624	691	591	2019	2005	2063	710	2075
	70	703	724	791	691				810	
	80	803	824	891	791				910	
	90	903	924	991	891				1010	
Fixed: timber	60	601	624	689	589	2017	2005	2061	710	2075
	70	701	724	789	689				810	
	80	801	824	889	789				910	
	90	901	924	989	889				1010	


DOUBLE-ACTING DOUBLE DOORS

	Width	W [mm]	W1 [mm]	W2 [mm]	S2 [mm]	H1 [mm]	H2 [mm]	H3 [mm]	W0 [mm]	H0 [mm]
Fixed: MDF	60	603	624	691	584 (292+292)	2019	2005	2063	710	2075
	70	703	724	791	684 (342+342)				810	
	80	803	824	891	784 (392+392)				910	
	90	903	924	991	884 (442+442)				1010	
	100	1003	1024	1091	984 (492+492)				1110	
	110	1103	1124	1191	1084 (542+542)				1210	
	120	1203	1224	1291	1184 (592+592)				1310	
	130	1303	1324	1391	1284 (642+642)				1410	
	140	1403	1424	1491	1384 (692+692)				1510	
	150	1503	1524	1591	1484 (742+742)				1610	
	160	1603	1624	1691	1584 (792+792)				1710	
	170	1703	1724	1791	1684 (842+842)				1810	
Fixed: timber	180	1803	1824	1891	1784 (892+892)	2017	2005	2061	1910	2075
	60	601	624	689	582 (291+291)				710	
	70	701	724	789	682 (341+341)				810	
	80	801	824	889	782 (391+391)				910	
	90	901	924	989	882 (441+441)				1010	
	100	1001	1024	1089	982 (491+491)				1110	
	110	1101	1124	1189	1082 (541+541)				1210	
	120	1201	1224	1289	1182 (591+591)				1310	
	130	1301	1324	1389	1282 (641+641)				1410	
	140	1401	1424	1489	1382 (691+691)				1510	
	150	1501	1524	1589	1482 (741+741)				1610	
	160	1601	1624	1689	1582 (791+791)				1710	
	170	1701	1724	1789	1682 (841+841)				1810	
	180	1801	1824	1889	1782 (891+891)				1910	

KEY:

- W - Door frame clear width
W1 - Door frame rebate width
W2 - Door frame outer width
S2 - Overall door leaf width
H1 - Door frame clear height
- H2 - Door leaf height
H3 - Door frame outer height
W0 - Suggested installation opening width
H0 - Suggested installation opening height

FOLD - BIFOLD DOORS

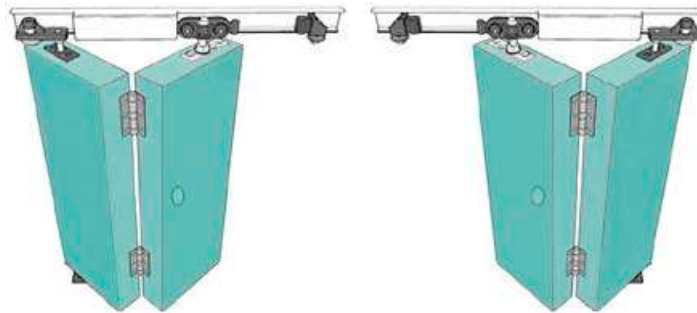

"FOLD" left-handed
bifold doors

"FOLD" right-handed
bifold doors

SINGLE DOORS

	Width	W [mm]	W2 [mm]	S2 [mm]	H1 [mm]	H2 [mm]	H3 [mm]	W0 [mm]	H0 [mm]
Fixed: timber	60	601	689	309+309	2017	1989	2061	710	2075
	70	701	789	359+359				810	
	80	801	889	409+409				910	
	90	901	989	459+459				1010	
	100	1001	1089	509+509				1110	

DOUBLE DOORS


	Width	W [mm]	W2 [mm]	S2 [mm]	H1 [mm]	H2 [mm]	H3 [mm]	W0 [mm]	H0 [mm]
Fixed: timber	110	1101	1189	(277+277)×2	2017	1989	2061	1210	2075
	120	1201	1289	(302+302)×2				1310	
	130	1301	1389	(327+327)×2				1410	
	140	1401	1489	(352+352)×2				1510	
	150	1501	1589	(377+377)×2				1610	
	160	1601	1689	(402+402)×2				1710	
	170	1701	1789	(427+427)×2				1810	
	180	1801	1889	(452+452)×2				1910	

KEY:

W - Door frame clear width
W1 - Door frame rebate width
W2 - Door frame outer width
S2 - Overall door leaf width
H1 - Door frame clear height

H2 - Door leaf height
H3 - Door frame outer height
W0 - Suggested installation opening width
H0 - Suggested installation opening height

ACOUSTIC DOORS AND
ACOUSTIC EI30, EI60 FIRE RATED DOORS
IN REBATED VARIANT

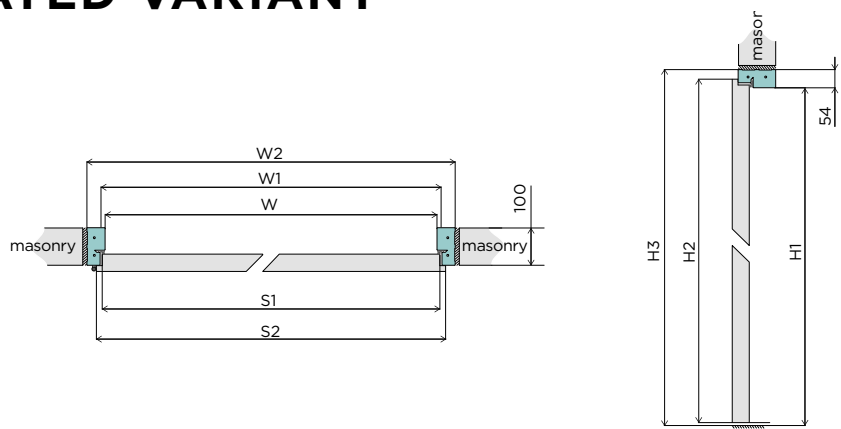


ACOUSTIC DOORS
ACOUSTIC EI30, EI60 FIRE RATED DOORS

Door frame	Width	W [mm]	W1 [mm]	W2 [mm]	S1 [mm]	S2 [mm]	H1 [mm]	H2 [mm]	H3 [mm]	W0 [mm]	H0 [mm]
Fixed: timber	80	801	824	909	818	844	2017	2030	2071	930	2081
	90	901	924	1009	918	944				1030	
	100	1001	1024	1109	1018	1044				1130	
	110	1101	1124	1209	1118	1144				1230	

- KEY:**
- W - Door frame clear width
 - W1 - Door frame rebate width
 - W2 - Door frame outer width
 - S1 - Door leaf rebate width
 - S2 - Overall door leaf width
 - H1 - Door frame clear height
 - H2 - Door leaf height
 - H3 - Door frame outer height
 - W0 - Suggested installation opening width
 - H0 - Suggested installation opening height


TIMBER FIXED DOOR FRAME

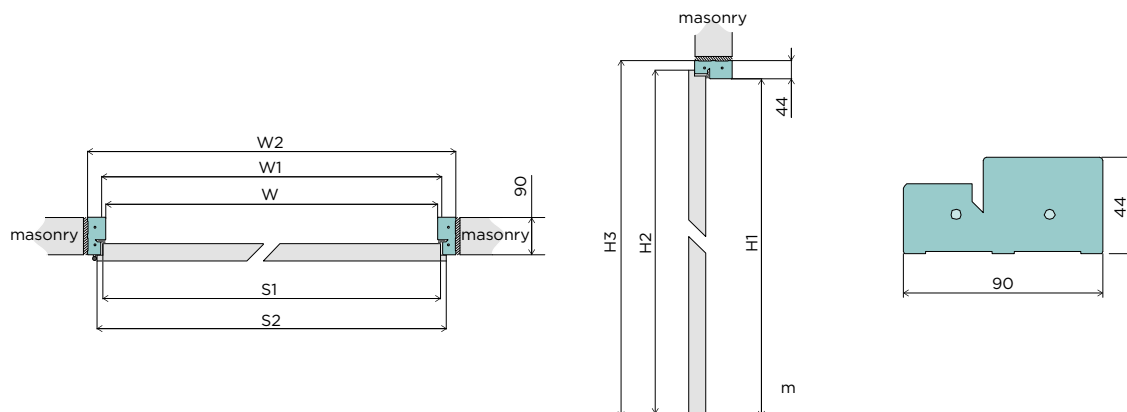

Width	W [mm]	W1 [mm]	W2 [mm]	S1 [mm]	S2 [mm]	H1 [mm]	H2 [mm]	H3 [mm]	Suggested installation opening [mm]
60	601	624	689	618	644	2017	2030	2061	710 × 2075
70	701	724	789	718	744				810 × 2075
80	801	824	889	818	844				910 × 2075
90	901	924	989	918	944				1010 × 2075

Further widths increase dimensions W, W1, W2, S1 and S2 by 100 mm and are charged extra for the double leaf frame.

FIXED MDF DOOR FRAME

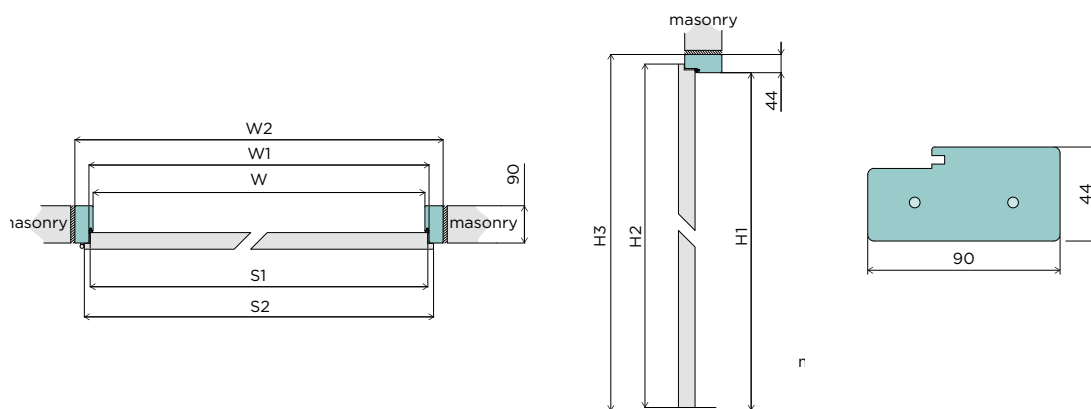

Width	W [mm]	W1 [mm]	W2 [mm]	S1 [mm]	S2 [mm]	H1 [mm]	H2 [mm]	H3 [mm]	Suggested installation opening [mm]
60	603	624	691	618	644	2019	2030	2063	710 × 2075
70	703	724	791	718	744				810 × 2075
80	803	824	891	818	844				910 × 2075
90	903	924	991	918	944				1010 × 2075


Further widths increase dimensions W, W1, W2, S1 and S2 by 100 mm and are charged extra for the double leaf frame.

KEY:


W - Door frame clear width
W1 - Door frame rebate width
W2 - Door frame outer width
S1 - Door leaf rebate width

S2 - Overall door leaf width
H1 - Door frame clear height
H2 - Overall door leaf height
H3 - Door frame outer height

ADJUSTABLE DOOR FRAME
STEEL FRAME ZOS CASING

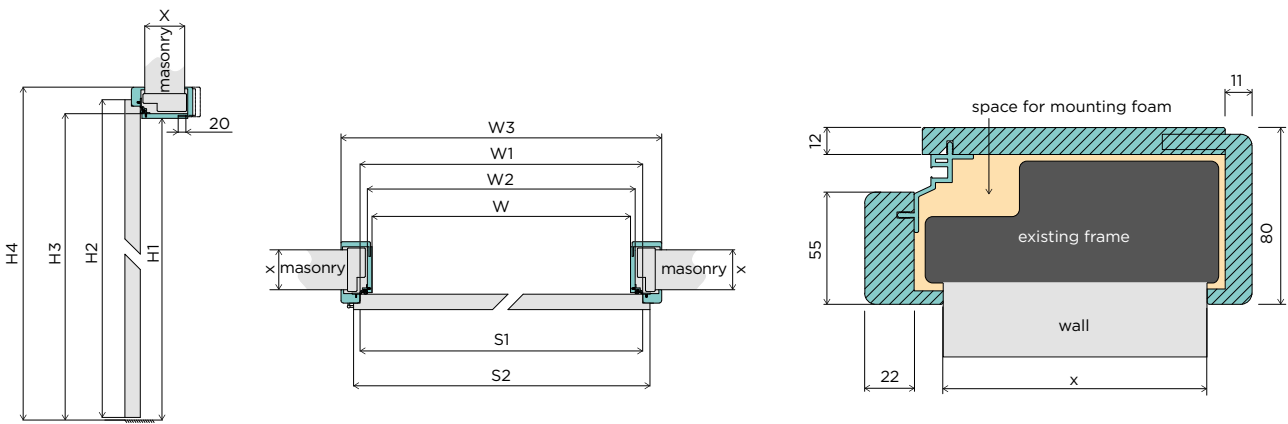

ZOS CONSTRUCTION

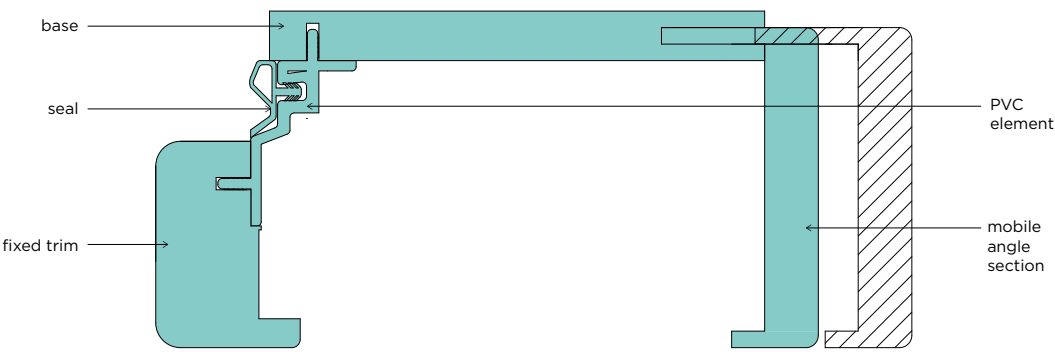


Width	W [mm]	W1 [mm]	W2 [mm]	W3 [mm]	S1 [mm]	S2 [mm]	H1 [mm]	H2 [mm]	H3 [mm]	H4 [mm]	Suggested installation opening width [mm]
60	570	626	594	736	618	644	2000	2030	2012	2083	594-600 × 2015
70	670	726	694	836	718	744					694-700 × 2015
80	770	826	794	936	818	844					794-800 × 2015
90	870	926	894	1036	918	944					894-900 × 2015

Further widths increase dimensions W, W1, W2, W3, S1 and S2 by 100 mm and are charged extra for the double leaf frame.

Adjustment range	X [mm]
60-80	60
80-100	80
100-120	100
120-140	120
X - (X+20)	X


- KEY:**
- W - Door frame clear width
 - W1 - Door frame rebate width
 - W2 - Door frame outer width
 - W3 - Door frame width with architraves
 - S1 - Door leaf rebate width
 - S2 - Overall door leaf width
 - H1 - Door frame clear height
 - H2 - Overall door leaf height
 - H3 - Door frame outer height
 - H4 - Door frame height with architraves

ADJUSTABLE DIN DOOR FRAME

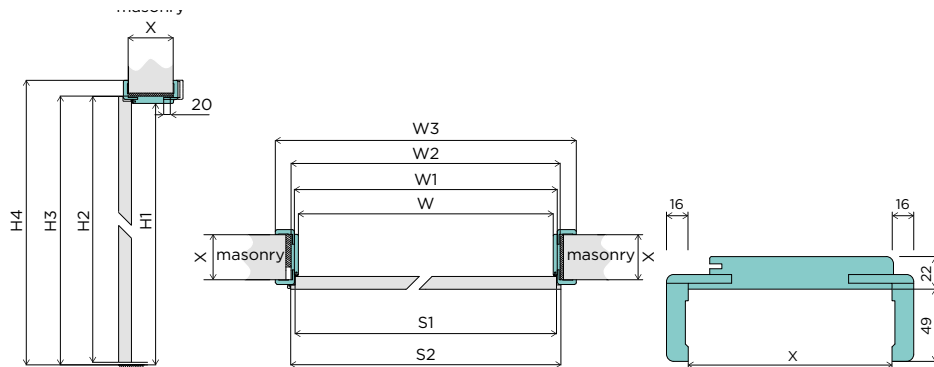

Width	W [mm]	W1 [mm]	W2 [mm]	W3 [mm] 60/80/100*	S1 [mm]	S2 [mm]	H1 [mm]	H2 [mm]	H3 [mm]	H4 [mm] 60/80/100*	Suggested installation opening [mm]	Adjustment range	X [mm]
60	603	624	647	745/785/825	618	644	2017	2030	2039	2088/2108/2128	675 × 2055	60-75	60
70	703	724	747	845/885/925	718	744					775 × 2055	80-100	80
80	803	824	847	945/985/1025	818	844					875 × 2055	100-120	100
90	903	924	947	1045/1085/1125	918	944					975 × 2055	120-140	120
Further widths increase dimensions W, W1, W2, W3, S1 and S2 by 100 mm and are charged extra for the double leaf frame.												X - (X+20)	X

“DUALE” DUAL-RANGE
ADJUSTABLE FRAME

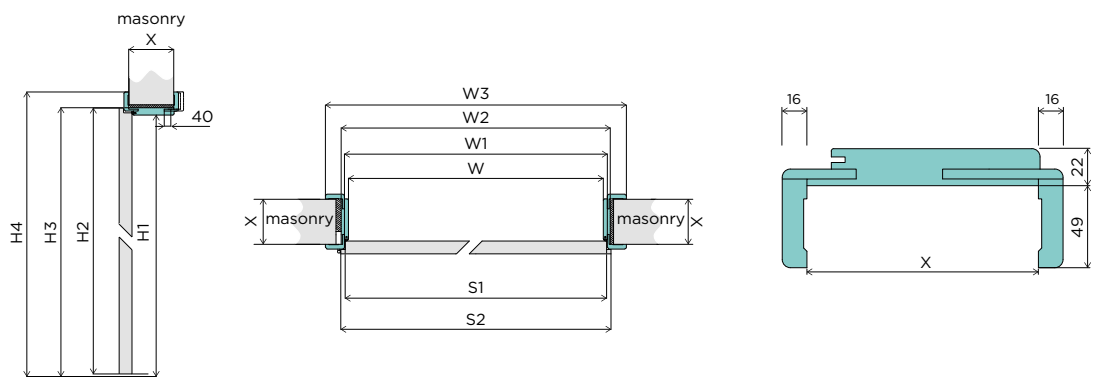


Width	W [mm]	W1 [mm]	W2 [mm]	W3 [mm] 60/80/100*	S1 [mm]	S2 [mm]	H1 [mm]	H2 [mm]	H3 [mm]	H4 [mm] 60/80/100*	Suggested installation opening [mm]	Adjustment range	X [mm]
60	603	624	647	745/785/825	618	644	2017	2030	2039	2088/2108/2128	675 × 2055	100-140	100
70	703	724	747	845/885/925	718	744					775 × 2055	140-180	140
80	803	824	847	945/985/1025	818	844					875 × 2055	180-220	180
90	903	924	947	1045/1085/1125	918	944					975 × 2055	220-260	220
Further widths increase dimensions W, W1, W2, W3, S1 and S2 by 100 mm and are charged extra for the double leaf frame.												260-300	260
												300-340	300

KEY:


- W - Door frame clear width
- W1 - Door frame rebate width
- W2 - Door frame outer width
- W3 - Door frame width with architraves (*for DIN frames, the width with 60 mm, 80 mm and 100 mm architraves)
- S1 - Door leaf rebate width
- S2 - Overall door leaf width
- H1 - Door frame clear height
- H2 - Overall door leaf height
- H3 - Door frame outer height
- H4 - Door frame height with architraves (*for DIN frames, the height with 60 mm, 80 mm and 100 mm architraves)

STEEL FIXED FRAME

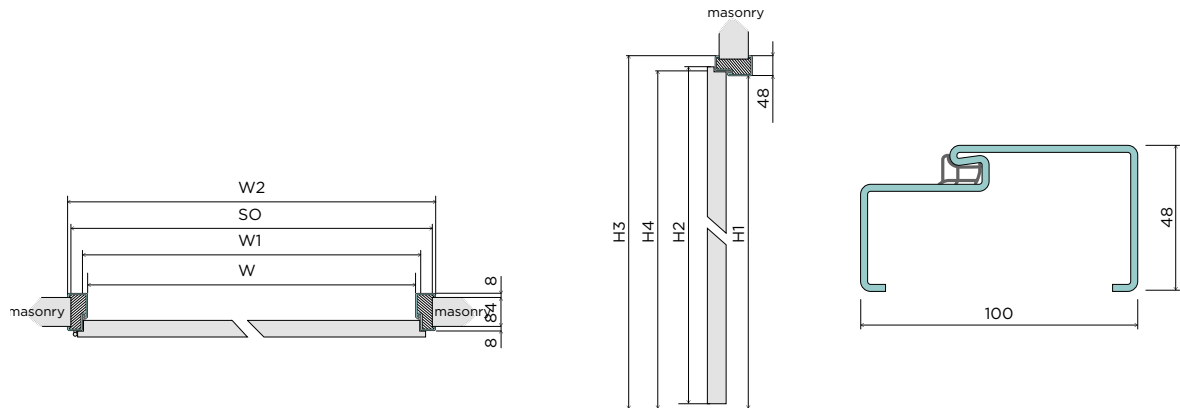

Width	W2 [mm]	H3 [mm]	W1 [mm]	H2 i H4 [mm]	W [mm]	H1 [mm]	Suggested installation opening [mm]	
							SO (min)	HO (min)
60	697	2065	627	2030	601	2017	697	2065
70	797		727		701		797	
80	897		827		801		897	
90	997		927		901		997	
100	1097		1027		1001		1097	
110	1197		1127		1101		1197	
120-200	1297-2097		1227-2027		1201-2001		1297-2097	

ANGLE FRAME - LARGE STEEL

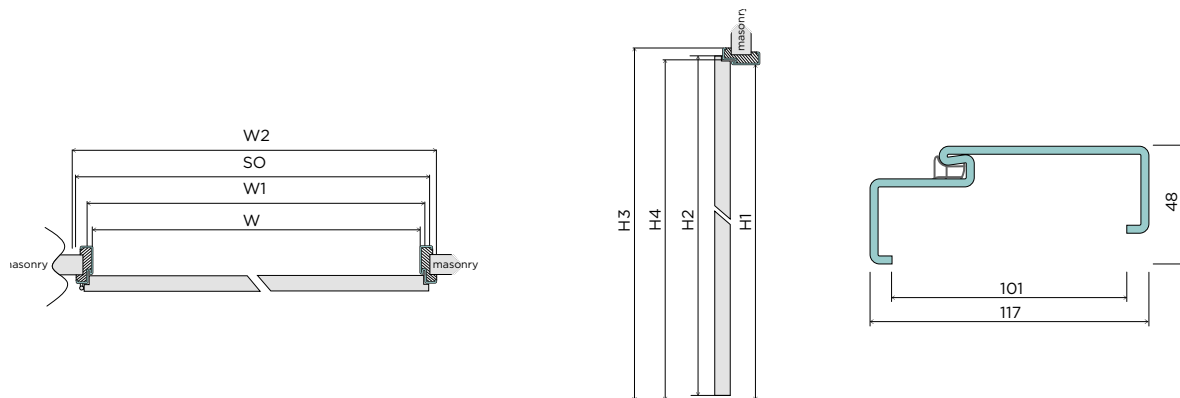


Width	W2 [mm]	H3 [mm]	W1 [mm]	H2 i H4 [mm]	W [mm]	H1 [mm]	Suggested installation opening [mm]	
							SO (min)	HO (min)
60	697	2065	627	2030	601	2017	671	2052
70	797		727		701		771	
80	897		827		801		871	
90	997		927		901		971	
100	1097		1027		1001		1071	
110	1197		1127		1101		1171	
120-200	1297-2097		1227-2027		1201-2001		1271-2071	

KEY:

W2 - Door frame outer width
W1 - Door frame rebate width
W - Door frame clear width
SO - Wall opening width (+10 mm/-0 mm)

H4 - Door frame rebate height
H3 - Door frame outer height
H2 - Door leaf height
H1 - Door frame clear height
HO - Wall opening height (+5 mm/-0 mm)

STEEL ADJUSTABLE FRAME

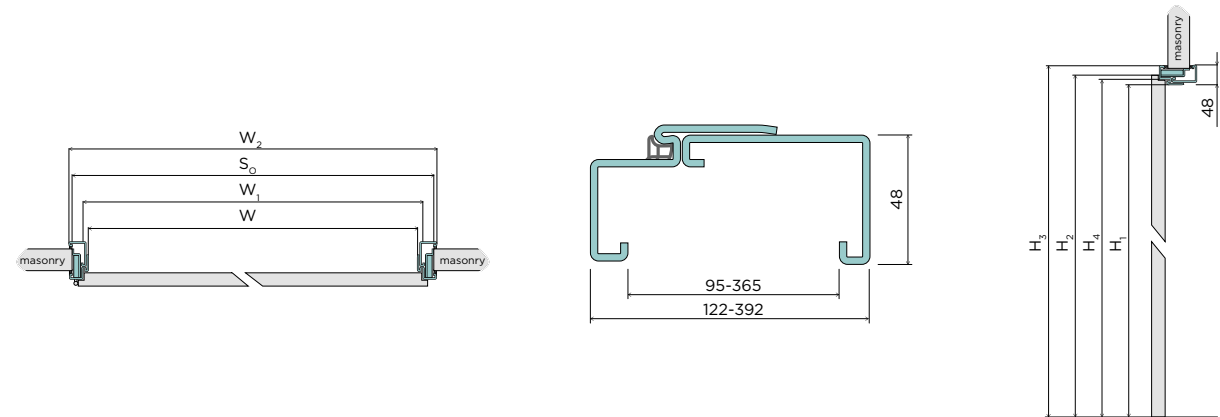


Width	W2 [mm]	H3 [mm]	W1 [mm]	H4 [mm]	H2 [mm]	W [mm]	H1 [mm]	Suggested installation opening [mm]	
								SO (min)	H0 (min)
60	717	2075	627	2030	2030	601	2017	684	2033
70	817		727			701		784	
80	917		827			801		884	
90	1017		927			901		984	
100	1117		1027			1001		1084	
110	1217	2075	1127	2030	2030	1101	2017	1184	2033
120-200	1317-2117		1227-2027			1201-2001		1284-2084	

KEY:

- W2 - Door frame outer width
- W1 - Door frame rebate width
- W - Door frame clear width
- S0 - Wall opening width (+10 mm/-0 mm)
- H4 - Door frame rebate height
- H3 - Door frame outer height
- H2 - Door leaf height
- H1 - Door frame clear height
- H0 - Wall opening height (+5 mm/-0 mm)


HEAD CASING FOR
DIN ADJUSTABLE FRAME

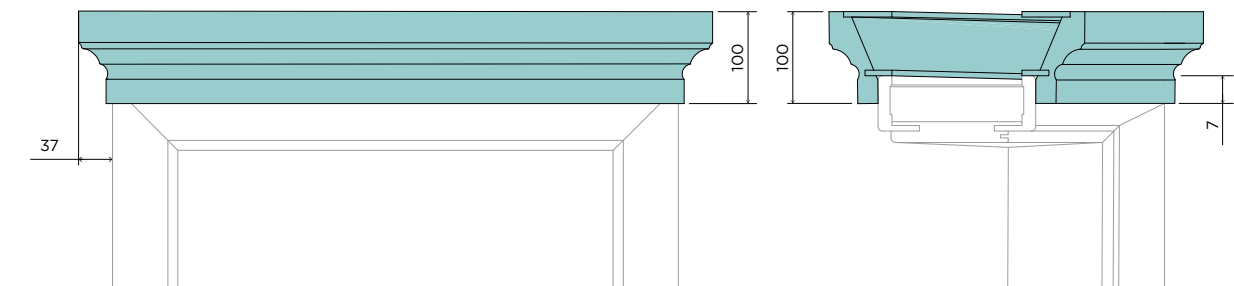

B2B panel for VIVENTO partners

Order products at any time of day and from every location.

Use the product configuration tool, check the status of orders and manage payments.

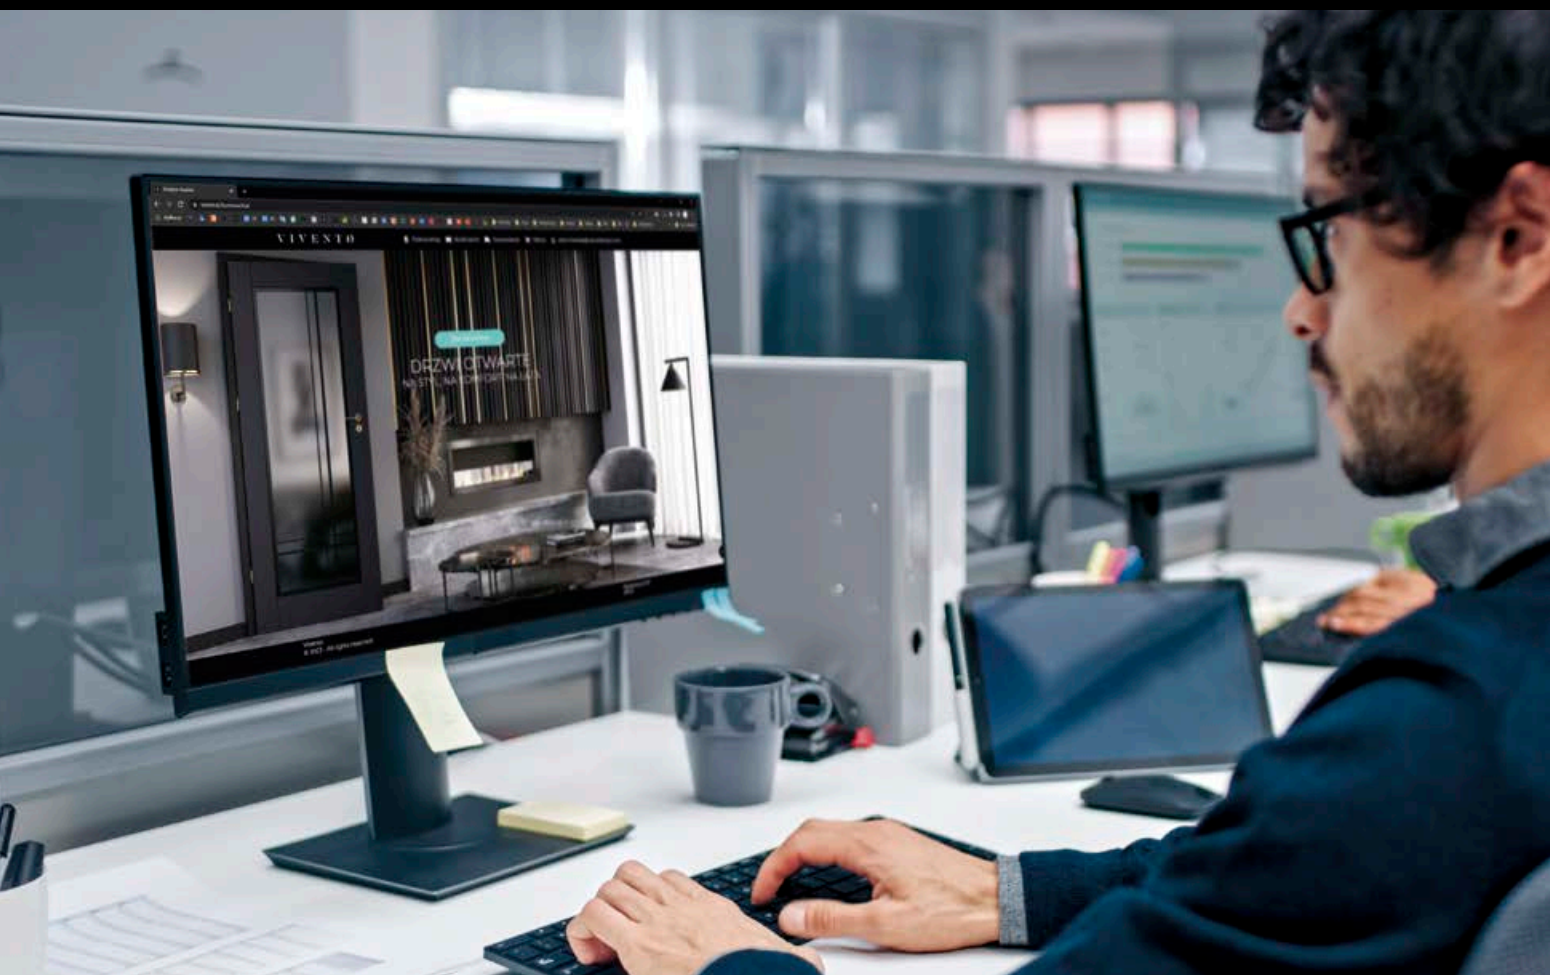

We are pleased to provide you with a modern VIVENTO ordering system to make our cooperation even more efficient.

The benefits in store for you in the VIVENTO B2B Panel:



orders 24/7



quick access to
news



offer
preparation



order status



payment
control



order
and invoice
history

Activate your account: b2b@viventopl



VIVENTO

33-260 Gręboszów 160, Poland

tel.: +48 146 416 088

+48 146 416 083

e-mail: info@vivento.pl

VAT ID: PL8711763676

www.vivento.pl



The catalogue is valid as of 2.04.2024 r.

DISTRIBUTOR: /

The catalogue is not an offer in legal terms and is published for reference. The information contained in the catalogue is current at the time of publication. The manufacturer reserves the right to make changes and improvements to the products in the range without prior notice. The product designs shown are as per the Polish standard width "80". Other sizes alter product appearance (glazing size and arrangement, lock and hinge positions). Please make your colour choice using colour fan decks available at our points of sale. Our products comply with all standards arising from mandatory regulations. Door package includes a door leaf only, while a door frame, handle or architraves are separate products that make a complete door set together with the door leaf.