

\$1.50 CAN.



## Factory-Direct Catalog



**Free Shipping** on Orders of \$130 or More. See page 3 for details.

**TO ORDER:** 1-800-777-7094 MONDAY – FRIDAY 7 A.M. – 7 P.M. CT | [AMSOIL.ca](https://www.amsoil.ca)



## Product Index

Motor Oil	4
European Motor Oil	8
Classic/Collector Car Motor Oil	9
Racing Oil	10
Diesel Oil	11
Briggs & Stratton Synthetic 4T Racing Oil/Oil Analysis	13
ATV/UTV Oil/Snowmobile Oil	14
Dirt Bike Oil	16
Suspension Fluid	17
Motorcycle Oil	18
Marine Oil	20
2-Stroke Oil	22
Chaincase & Gear Oil	23
Small-Engine Oil	24
Transmission Fluid	25
Gear Lube	29
Filters	31
Grease	33
Bar and Chain Oil/Compressor Oil	34
Car-Care Products	35
Fuel Additives	36
Coolant	41
Metal Protector	42
Engine and Transmission Flush/Firearm Lubricant/Power Steering Fluid	43
Aftermarket Partners	44

\*All trademarked names and images are the property of their respective owners and may be registered marks in some countries. No affiliation or endorsement claim, express or implied, is made by their use.



All AMSOIL lubricants and filters are covered by the AMSOIL Limited Warranty. For details visit [AMSOIL.com/warranty.aspx](https://www.amsoil.com/warranty.aspx).

# Power Big Savings with Preferred Customer Membership

## Preferred Customers Enjoy



### Reduced Pricing

Up to 25% off every order



### Free Shipping

On orders over \$130



### 5% Back

Get 5% off your next order when you spend \$100 (up to \$5 value)



### Free Membership

When you spend \$500 in a year



### Birthday Gift

Celebrate with 5% off your next order up to \$100 (up to \$5 value)



### Exclusive Promotions

Throughout the year

Plus, you will receive the quarterly *AMSOIL Magazine* with the latest product details, technical information and more.

**Six-month trial membership just \$15.**  
**Full year of membership for just \$30.**

Sign up at [AMSOIL.ca/pc](http://AMSOIL.ca/pc) today and use this referral number. ▼

Referral # \_\_\_\_\_

## TECHNICAL QUESTIONS

(715) 399-8324 (TECH) or  
[tech@AMSOIL.com](mailto:tech@AMSOIL.com)

## SHIPPING AND HANDLING

Free shipping on orders of \$130 or more. Orders below that threshold pay a flat shipping rate of \$12.99. Exclusions apply. See the shipping & handling policy at [AMSOIL.ca/storefront/shippinginformation.aspx](http://AMSOIL.ca/storefront/shippinginformation.aspx).

## PRODUCT DAMAGED DURING SHIPPING

If there is visible damage to your order upon delivery, refuse the order. It will be returned to AMSOIL INC. for inspection and a new order will be sent at no extra charge to you. If you discover hidden damage after accepting delivery of your order, call 1-800-777-7094 for instructions.

## SALES TAX INFORMATION

AMSOIL INC. has an established sales tax rate for each province.

## NOTE:

A General Sales Tax (GST) of 5% will be charged on all Canadian purchases. Only provincial governments are exempt. GST will be charged on the purchase price and the freight costs. In the provinces of Quebec, Prince Edward Island and New Brunswick the provincial sales tax will be charged on the GST. Freight charges are subject to sales tax on all orders.



*Prices subject to change without notice.*

# WHY BUY SIGNATURE SERIES?

## Signature Series Delivers Powerful Protection

AMSOIL delivers powerful protection. How good is it? An independent lab compared AMSOIL synthetic motor oil head-to-head against a leading competitor in a 100,000-mile test<sup>F</sup>. AMSOIL provided far superior wear protection and kept bearings looking like new.

<sup>F</sup>Testing conducted in an independent lab using AMSOIL Signature Series 5W-30 Synthetic Motor Oil and a leading synthetic-blend 5W-30 motor oil in Ford F-150 trucks with 3.5L twin-turbo engines.

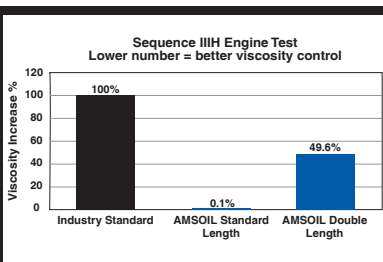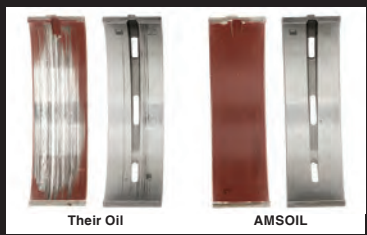

## AMSOIL Resists Viscosity Increase

AMSOIL is barely challenged by the industry-standard testing, demonstrating only a 0.1% viscosity increase. Even when the test length is doubled, AMSOIL delivered **twice the viscosity control** required by the standard.<sup>GG</sup>

<sup>GG</sup>Based on independent testing of AMSOIL Signature Series 5W-30 in the Sequence IIH Engine Test (ASTM D8111), required by the ILSAC GF-6 and API SP specifications.



## AMSOIL Keeps Pistons Cleaner

Even after doubling the length of the industry-standard test, AMSOIL delivered **40% cleaner pistons** than required by the standard.<sup>FF</sup>

<sup>FF</sup>Based on independent testing of AMSOIL Signature Series 5W-30 in the Sequence IIH Engine Test (ASTM D8111), required by the ILSAC GF-6 and API SP specifications.

## Signature Series Protects Against LSPI

AMSOIL Synthetic Motor Oils achieved **100% protection** against LSPI.<sup>B</sup>

<sup>B</sup>Based on zero LSPI events in five consecutive tests of AMSOIL Signature Series, XL and OE 5W-30 Motor Oil in the LSPI engine test required by the GM dexos1 Gen 2 specification.

## Signature Series Guards Turbos

Protects turbochargers **72% better** than required<sup>C</sup> by the GM dexos1<sup>®</sup> Gen 2 specification.

<sup>C</sup>Based on independent testing of AMSOIL Signature Series 5W-30 in the GM turbo coking test.

## Signature Series Cleans

AMSOIL Signature Series Synthetic Motor Oil has **50% more** detergents<sup>D</sup> to help keep oil passages clean and promote oil circulation. It provides **90% better protection** against sludge.<sup>DD</sup>

<sup>D</sup>vs. AMSOIL OE Motor Oil <sup>DD</sup>Based on independent testing of AMSOIL Signature Series 5W-30 in the ASTM D6593 engine test for oil screen plugging as required by the API SN specification.

## Signature Series Fights Wear

75% more engine protection against horsepower loss and wear.<sup>^</sup>

<sup>^</sup>Based on independent testing of AMSOIL Signature Series 0W-20 using the ASTM D6891 standard test.

## SIGNATURE SERIES SYNTHETIC MOTOR OIL

Engineered for enthusiasts seeking maximum protection and performance. Precision-formulated with cutting-edge technology and a longstanding devotion to making the world's best motor oil. The result: engine protection that blows the doors off the highest industry standards. Guaranteed protection for up to 40,200 kilometers or 1 year, whichever comes first.



Package sizes:



946-ml.



3.78-L

## Extended-Life 100% Synthetic Motor Oil

Overbuilt for road warriors so you can confidently drive up to 32,000 km or 1 year, whichever comes first, between oil changes. A proprietary combination of advanced synthetic base oils and a boosted additive package promotes cleanliness and prolonged engine life. AMSOIL Extended-Life protection delivers peace of mind and convenience. Provides **37% more cleaning power** to help keep your engine running smoother, longer.<sup>11</sup>



"Put this in my light duty, full size pickup. Noticeable difference right away. Engine quieter and clean."

– Jim P  
Northern VA

Package sizes:



## OE 100% Synthetic Motor Oil

Delivers 100% synthetic engine protection for advanced automotive technology, including turbos and direct injection. **Provides 47 percent more wear protection.**<sup>12</sup> Specifically formulated for the longer drain intervals recommended by original equipment (OE) manufacturers.



Package sizes:



<sup>11</sup>Compared to AMSOIL OE Synthetic Motor Oil.

<sup>12</sup>Based on independent testing of OE 0W-20 in the Peugeot TU3M Wear Test as required by the dexos1 Gen 2 specification.



## 100% Synthetic Hybrid Motor Oil

Custom formulation designed to combat the unique challenges posed by hybrid electric vehicles (HEV) and plug-in hybrid electric vehicles (PHEV), like frequent starts and stops and fuel dilution. It flows quickly to reach critical components when the engine engages. AMSOIL Hybrid Motor Oil features a robust viscosity that protects against the harmful effects of fuel dilution. Protects for up to 24,000 km or 1 year, whichever comes first.<sup>1</sup>



946-ml

<sup>1</sup>AMSOIL 0W-8 Hybrid Motor Oil is recommended for OEM-recommended drain intervals.

## 100% Synthetic High-Mileage Motor Oil

Designed specifically for the unique demands of high-mileage engines, helping extend the life of vehicles. It features a unique formulation that delivers extra detergency and a robust viscosity to clean and protect high-mileage engines with 120,000+ km. It delivers purpose-built protection at a time in a vehicle's life where it could benefit from more-robust maintenance. AMSOIL High-Mileage Motor Oil cleans and protects engines with boosted detergency and an additive package that fights oil breakdown and oil leaks. Protects for up to 19,000 km or 1 year, whichever comes first.



946-ml



## Synthetic European Motor Oil

Features precisely balanced formulations that consider the needs of modern exhaust treatment devices. It is important to use an oil that meets the proper specification to ensure optimum engine protection and performance.

### 0W-20 LS-VW Synthetic European Motor Oil • EZT

API SN PLUS, SN... • ACEA C5 • VW 508.00/509.00, TL52577 • Porsche C20

### 0W-20 LS Synthetic European Motor Oil • AFE

API SN PLUS (Resource Conserving), SN, SM... • ILSAC GF-5 • ACEA C5, A1/B1 • BMW LL-17FE • MB 229.71 • Ford WSS-M2C947-B1 • Opel/Vauxhall OV0401547 • Fiat 9.55535-GSX • Chrysler MS-12145 • Volvo VCC RBS0-2AE

### 0W-30 MS Synthetic European Motor Oil • EOT

Use in vehicles that require API SP, SN Plus, SN • ACEA C2/ C3 • BMW LL-01FE • MB 229.31, 229.51, 229.52 • VW/Audi 504.00/507.00 • Porsche C30

### 5W-30 LS Synthetic European Motor Oil • AEL

Use in vehicles that require API SN, SM... • ACEA C3 • GM dexos2 • Chrysler MS-11106 • MB 229.51 • BMW LL-04 • Porsche C30 • VW 504.00/507.00

### 0W-40 FS Synthetic European Motor Oil • EFO

Use in vehicles that require ACEA A3/B3, A3/B4 • API SN, SM... • BMW LL-01 • MB 229.1, 229.3, 229.5 • Porsche A40 • Renault 0710, 0700 • VW/Audi 502.00/505.00

### 5W-40 MS Synthetic European Motor Oil • AFL

Use in vehicles that require ACEA C3 • API SN, SM, CF... • BMW Longlife-04 • Chrysler MS-10850 (supersedes MS-10896) • Ford WSS-M2C917-A • GM dexos2 (supersedes LL-A-025 and LL-B-025) • Renault 0710, 0700 • VW/Audi 502.00/505.01 • MB-Approval 229.51 • Porsche A40

### 5W-40 FS Synthetic European Motor Oil • EFM

Use in vehicles that require ACEA A3/B3, A3/B4 • API SN, SM... • BMW LL-01 • Renault 0710, 0700 • MB-Approval 229.5 • Porsche A40 • GM LL-B-025 • VW/Audi 502.00/505.00

Package sizes:



# BUILD IT.

# CRUISE IT.

BRK



946-ml.

ZRT



ZRD



ZRF



946-ml.

## Break-In Oil (BRK)

Allows for quick and efficient piston ring seating in new and rebuilt high-performance and racing engines.


## Z-ROD® Synthetic Motor Oil

High-zinc, high-phosphorus formulation engineered specifically for classic cars and performance vehicles.



## AMSOIL Delivers Superior Rust Protection

Competing Brand

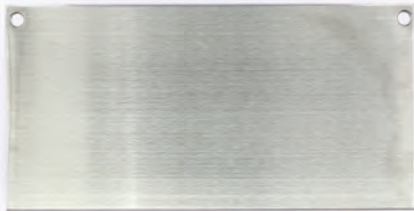

In industry-standard testing, AMSOIL Z-ROD® completely prevented rust formation while a leading competitor did not.<sup>11</sup>

<sup>11</sup>Based upon in-house testing of AMSOIL Z-ROD 10W-40 and a leading competitor obtained on 7/25/2019 in ASTM D1748-10.

**PRODUCTS  
THE  
PROS USE**



**RACE IT.**

RD30

RD50



*"AMSOIL products are the best on the market and definitely give us an added performance factor."*

**Bryce Menzies**  
Professional Off-Road Driver

## **DOMINATOR® Synthetic Racing Oil**

Superior performance and maximum protection in high-performance and racing applications.



946-ml.



# Signature Series Max-Duty Synthetic Diesel Oil

Use in vehicles that require API CK-4, CJ-4 or CI-4+

Engineered for maximum protection and performance for diesel engines. **Provides 6X more engine protection.<sup>1</sup>** Delivers up to 60% better turbo cleanliness<sup>1</sup> and withstands the extra demands you place on the turbo when pulling heavy loads or updating the tune for maximum horsepower. Provides up to 76% less oil consumption than required by the API CK-4 standard in the Caterpillar-1N oil consumption test. Provides up to 2X better rust protection.<sup>K</sup>



**DELIVERS 4X BETTER  
COLD-TEMPERATURE  
PERFORMANCE<sup>EE</sup>**



Package sizes:



<sup>1</sup>Based on specification standards of CAT C13 2nd Ring Top Land Carbon testing. <sup>2</sup>Based on industry standard testing using the NMMA FC-W Rust Test. <sup>3</sup>As required by the Detroit Diesel DD13 Scuffing Test for Specification DFS 93K222 using 5W-30 as worst-case representation.

<sup>EE</sup>When compared to SAE 15W-40 in ASTM D5293 Cold Cranking Viscosity Test.

Competing Brand



Severely Scuffed Liner

**AMSOIL**



Non-Scuffed Liner

## AMSOIL Fights Wear

AMSOIL delivers **powerful engine protection**. How good is it? In third-party testing compared to a leading brand, AMSOIL provided long-lasting wear protection, **keeping cylinder liners looking like new.**<sup>DD</sup>

<sup>DD</sup>Based on third-party testing of AMSOIL 5W-30 Signature Series Max-Duty Synthetic Diesel Oil and a leading conventional 15W-40 diesel oil using the Detroit Diesel<sup>®</sup> DD13 Scuffing test for specification DFS 93K222. <sup>®</sup>All trademarked names and images are the property of their respective owners and may be registered marks in some countries. No affiliation or endorsement claim, express or implied, is made by their use.



**FLEECE**  
PERFORMANCE ENGINEERING



**banks**

**DIESEL**  
MOTORSPORTS  
www.DIESELMOTORSPORTS.US



## Heavy-Duty Synthetic Diesel Oil

Use in vehicles that require API CK-4, CJ-4 or CI-4+

Outstanding protection and performance for customers seeking an upgrade over conventional and other synthetic diesel oils. **Provides 4X more engine protection.<sup>1</sup>** Provides up to 66% less oil consumption than required by the API CK-4 standard in the Caterpillar-1N oil consumption test.



Package sizes:



946-ml



3.78-L



9.46-L

<sup>1</sup>than required by the Detroit Diesel DD13 Scuffing Test for Specification DFS 93K222 using 10W-30 as worst-case representation.



## 100% Synthetic Diesel Oil

Engineered specifically for smaller American diesel pickups, vans, cars and SUVs, providing outstanding protection, performance and fuel economy. Delivers up to 6X better wear protection than required by a leading industry standard.<sup>1</sup>

### 0W-20 • DP020

Use in vehicles that require GM dexosD

### 5W-30 • DP530

Use in vehicles that require GM dexosD, dexos2 • Chrysler MS-11106 • Ford WSS-M2C214-B1 • ACEA C3



946-ml.



AME

## 15W-40 Synthetic Heavy Duty Diesel and Marine Oil (AME)

Engineered for pre-2007 on- and off-road diesel applications not equipped with diesel particulate filters (DPFs).

Use in vehicles that require API CI-4+

Package sizes:



946-ml.



3.78-L



9.46-L

### Like Heavy Duty Diesel and Marine Oil?

Try Signature Series Max-Duty 15W-40 for a serious upgrade. See page 11.



AMO

ARO

## Premium Protection Synthetic Motor Oil

Ideal for older gasoline engines and pre-2007 diesel applications not equipped with diesel particulate filters (DPFs), where the extra protection of a high-zinc formula is desired.



946-ml.



GBS2960



## Briggs & Stratton Synthetic 4T Racing Oil (GBS2960)

Formulated by AMSOIL specifically for stock and modified small-displacement air-cooled racing engines and recommended for any four-stroke air-cooled competition engine.



946-ml.

<sup>1</sup>Based on third-party testing in the OM646LA cam wear test using 0W-20 as worst-case representation.

## Oil Analysis

AMSOIL offers oil analysis service options from Oil Analyzers Inc. By analyzing used engine oil, a qualified lab can detect mechanical problems your equipment may have developed. For more information, visit [www.oaitesting.com](http://www.oaitesting.com).

Sample Kit (UPS Paid) (KIT401)

Sample Kit (KIT402)

All-In-One Sample Kit (KIT418)

Oil Suction Pump w/10-ft. hose (G1206)

Replacement Hose 25-ft. (G1571)

**Oil Analyzers**  
INC.



### SYNTHETIC ATV/UTV MOTOR OIL

Formulated to provide upgraded performance and protection for hard-working and performance ATVs and UTVs.

AUV54



AUV50



AUV40



AFF



946-ml

### Formula 4-Stroke® Powersports Synthetic Motor Oil (AFF)

Specially formulated for four-stroke recreational motors, including ATVs and snowmobiles.



946-ml



### Synthetic ATV/UTV Transmission & Differential Fluid (AUDT)

Protects heavily loaded, high-torque ATV and UTV gears and bearings against wear in the most severe operating conditions. Convenient easy-pack helps access tough-to-reach fill holes, making the job faster and cleaner.


Package sizes:



946-ml



946-ml

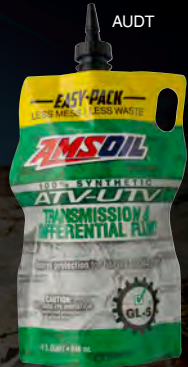

AUDT

### Synthetic ATV/UTV Powertrain Fluid (AUPT)

Purpose-built for transmission/differentials and front drives in Polaris\* ATVs and UTVs, offering the perfect combination of protection and convenience.



946-ml



AUPT

### ATV/UTV Oil Change Kits (PK1/PK2/PK3/PK4C/CK4C/CK5/CK6)

Contains everything needed to perform an oil change on most Polaris\* and Can-Am\* UTVs and ATVs. Call (715) 399-8324 (TECH) (Monday-Friday, 8 a.m. - 5 p.m. Central Time) or contact the AMSOIL Dealer listed on the back of your catalog (if one is listed) to determine the appropriate kit for your application.

PK4C




CK5



## AMSOIL delivers confident clutch feel.

AMSOIL provides excellent clutch protection<sup>7</sup>. How good is it? In extreme simulated-start testing, AMSOIL provided superior wear protection and kept clutch plates looking new.

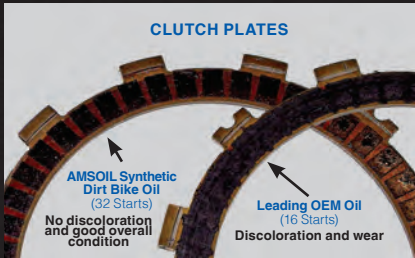

<sup>7</sup>Based on dyno testing of a Honda CRF450 dirt bike using AMSOIL 10W-40 Synthetic Dirt Bike Oil and a leading original equipment manufacturer 10W-40 conventional dirt bike oil.



## SYNTHETIC DIRT BIKE OIL

Delivers confidence in clutch feel, maximum horsepower and superior wear protection in all types of four-stroke dirt bikes.



AMATEUR NATIONAL MOTOCROSS

# CHAMPIONSHIP

AT LORETTA LYNN'S

PRESENTED BY



# SWAP MOTO

RACE SERIES

DBTF



## Synthetic Dirt Bike Transmission Fluid (DBTF)



946-ml.

## SHOCK THERAPY® SUSPENSION FLUID

Controls friction, heat, wear, foaming and scuffing in suspension components.

### Lightweight #5 • STL

Use in applications that demand quick rebounds under extreme temperatures.

### Medium #10 • STM

Use in applications that require more dampening and slower rebounds.

STL


STM



946-ml.

## AMSOIL Resists Viscosity Breakdown

AMSOIL resists viscosity breakdown **6X better** than Harley-Davidson\* SYN3\* for **improved protection** against compensator and transmission gear wear.<sup>9B</sup>

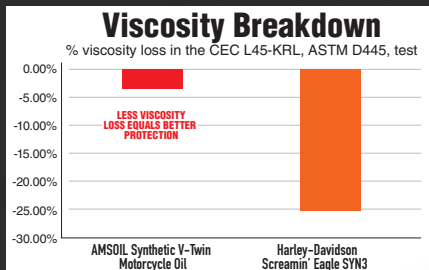

<sup>9B</sup>Based on testing of AMSOIL 20W-50 Synthetic V-Twin Motorcycle Oil purchased on 3/19/19 and Harley-Davidson Screamin' Eagle SYN3 purchased on 3/19/19 in the CEC L45-KRL, ASTM D445 test. \*All trademarked names and images are the property of their respective owners and may be registered marks in some countries. No affiliation or endorsement claim, express or implied, is made by their use.



## OFFICIAL OIL



## SYNTHETIC V-TWIN MOTORCYCLE OIL

### 20W-40 • MVI

Superior synthetic formulation provides long service life and maximum protection against engine wear in Indian\* and Victory\* motorcycles.

### 20W-50 • MCV

Superior synthetic formulation provides long service life and maximum protection against engine wear in Harley-Davidson,\* Buell\* and other motorcycle engines, primaries and transmissions.

### 15W-60 • MSV

Superior synthetic formulation provides long service life and maximum protection against engine wear in Indian and Victory motorcycles.

Package sizes:



946-ml.



3.78-L





MVT

### Synthetic V-Twin Transmission Fluid (MVT)

Helps quiet V-twin transmission noise and enable smooth shifts.



MVP

### Synthetic V-Twin Primary Fluid (MVP)

Delivers consistent clutch feel and helps riders easily find neutral.

Package sizes:



946-ml.



3.78-L

## SYNTHETIC METRIC MOTORCYCLE OIL

### 10W-30 • MCT

Superior synthetic formulation provides long service life, smooth shifts and maximum protection against engine wear in Honda,\* Yamaha,\* Suzuki\* and Kawasaki\* motorcycles.

### 10W-40 • MCF

Superior synthetic formulation provides long service life, smooth shifts and maximum protection against engine wear in Can-Am,\* Honda, Yamaha, Kawasaki, Triumph,\* Suzuki, BMW\* and other motorcycle engines.

### 15W-50 • MFF

Superior synthetic formulation provides long service life, smooth shifts and maximum protection against engine wear in Ducati,\* BMW, KTM,\* Yamaha, Triumph and Royal Enfield\* motorcycles.

Package sizes:



946-ml.



3.78-L



MCT

MCF

MFF

HDCK



### V-Twin Oil Change Kits (HDCK/HDBK/HDMC/HDMB)

Contains everything needed to perform an oil change on most Harley-Davidson\* motorcycles, including 20W-50 Synthetic V-Twin Motorcycle Oil, AMSOIL Motorcycle Oil Filter and O-ring.

#### FITMENT INFO:

**HDCK, HDBK:** most 1999-2016 Harley-Davidson motorcycles (HDCK includes chrome filter; HDBK includes black filter)

**HDMC, HDMB:** most 2017-present Harley-Davidson motorcycles (HDMC includes chrome filter; HDMB includes black filter)



## Synthetic Marine Engine Oil

Formulated specifically for use in four-stroke gasoline-fueled engines used in marine applications. Certified to meet NMMA FC-W Catalyst Compatible performance specifications.

**10W-30 • WCT**

**10W-40 • WCF**

**25W-40 (Synthetic Blend) • WCM**



946-ml.



- Outboard • Inboard
- Inboard/Outboard (I/O) • Watercraft



**Pete Maina**  
Pro Fisherman



## HP Marine™ Synthetic 2-Stroke Oil (HPM)

Prevents piston skirt scuffing, cylinder bore scuffing and ring sticking in all two-stroke outboard motors, personal watercraft and anywhere NMMA TC-W3 and API-TC oils are specified.

Package sizes:



946-ml.



3.78L

## Universal Synthetic Marine Gear Lube (AGM)

Resists foam and retains extreme-pressure qualities in outboard lower units, stern drives, V-drives, bow and tunnel thrusters and marine transmissions. Delivers advanced outboard protection against power loss and gear wear, even with up to 15 percent water contamination.<sup>†</sup> Choose the easy-pack for fast, easy installation.

**OUTSTANDING  
PROTECTION  
FOR LOWER UNITS**



### RUNS ON FREEDOM

Don't let powersports manufacturers bully you into buying their brand of oil. You have the freedom to choose your brand of oil and keep your warranty intact. Find out more at [AMSOIL.ca/freedom](http://AMSOIL.ca/freedom).



<sup>†</sup>Based upon AMSOIL testing of AMSOIL Synthetic Marine Gear Lube 75W-90 in ASTM 3233 and ASTM D892.



AIO



## Runs On Freedom™ Limited Snowmobile Warranty

Use AMSOIL INTERCEPTOR® Synthetic 2-Stroke Oil exclusively in your current-model-year or newer sled and we'll cover engine repairs in the unlikely event of any engine breakdown for up to two years/8,000 km.\*

\*To get details and register, visit [AMSOIL.ca/rof/warranty](http://AMSOIL.ca/rof/warranty).

## Synthetic 2-Stroke Injector Oil (AIO)

High-quality, cost-effective oil for the severe operating conditions of two-stroke snowmobiles and outboard motors.

Package sizes:



946-ml.



3.78-L

MAXIMUM  
RELIABILITY



AIT

## INTERCEPTOR® Synthetic 2-Stroke Oil (AIT)

Prevents piston skirt scuffing, ring sticking and exhaust power valve sticking in two-stroke snowmobiles.

Package sizes:



946-ml.



3.78-L

Meets the performance requirements of Polaris®, Arctic Cat® and Ski-Doo® two-stroke snowmobiles.

## AMSOIL Fights Wear

AMSOIL INTERCEPTOR® Synthetic 2-Stroke Oil delivered **outstanding wear protection and cleanliness** in a rental sled throughout 1,617 miles (2,602 km) of abuse.<sup>CC</sup>

AMSOIL kept pistons virtually free of carbon with nearly all coating intact.



AMSOIL fought the formation of carbon deposits, allowing power valves to move freely.



<sup>CC</sup>Based upon use of a new 2019 Polaris® RMK® 850 as a rental sled at Grizzly Lodge December 2018 - February 2019. \*All trademarked names and images are the property of their respective owners and may be registered marks in some countries. No affiliation or endorsement claim, express or implied, is made by their use.

TDR



**MAXIMUM  
PERFORMANCE**

**Anson Scheele**  
Team AMSOIL  
Scheuring Speed Sports



## DOMINATOR® Synthetic 2-Stroke Racing Oil (TDR)

Delivers outstanding wear protection in high-horsepower and modified racing or trail motors, including snowmobiles, motorcycles, ATVs, personal watercraft, go-carts and outboard motors.

Package sizes:



946-ml.



3.78-L

TCC



## Synthetic Chaincase & Gear Oil (TCC)

Superior protection for enclosed chains and gears found in snowmobiles, ATVs, UTVs and general equipment.



BOTTLE

ATP



## SABER® Professional Synthetic 2-Stroke Oil (ATP)

Provides superior protection for handheld two-stroke equipment at any mix ratio up to 100:1, offering the ultimate in convenience.

Package sizes:



BOTTLE



BOTTLE



946-ml.

**SABER® Ratio™**  
100:1... 10ml.... 1L

## SABER Professional Fights Carbon

Equipment using SABER Professional was **96% carbon-free<sup>N</sup>**.



AMSOIL SABER Professional  
300 Hours  
3.8% Screen Blockage

VS.



Leading Oil Brand  
45 Hours  
98% Screen Blockage

<sup>N</sup>Based on spark-arrestor testing.

## Synthetic Small-Engine Oil

Helps preserve engine power, reduce oil consumption and reduce maintenance in small engines used in severe service.

**Riding and Push Lawnmowers • Snowblowers • Generators • Pumps • Welders • Skid-Steers • Compressors • and more**



946-ml.



## 20W-50 Zero-Turn Synthetic Hydrostatic Transmission Fluid (AHF)

Fights wear to deliver smooth control and responsive power in zero-turn hydrostatic mowers.



946-ml.





## Signature Series Synthetic Automatic Transmission Fluid

Resists wear and provides smooth shifts in passenger-car/light-truck transmissions. Provides reserve protection in fleet vehicles, work trucks and other severe-service applications that quickly break down other lubricants.

## Handle More Heat With Confidence

Standard Severe Service

**AMSOIL Severe Service**

RESERVE PROTECTION

Change Interval—Miles



**Ultra-Low-Viscosity • ULV**

**Fuel-Efficient • ATL**

Engineered to exceed the requirements of original equipment manufacturers (OEMs) specifying low-viscosity oil.

**Multi-Vehicle • ATF**

Package sizes:



946-ml.



946-ml.



9.46-L



OTL



## OE Synthetic Automatic Transmission Fluid

Resists wear and provides smooth shifts in passenger-car/light-truck transmissions.

### Fuel-Efficient • OTL

Engineered to exceed the requirements of original equipment manufacturers (OEMs) specifying low-viscosity oil.

### Multi-Vehicle • OTF

Package sizes:



946-ml.



9.46-L

OTF



CVT



## Synthetic CVT Fluid (CVT)

Provides outstanding protection and performance for continuously variable transmissions (CVT) throughout original equipment manufacturer (OEM)-recommended drain intervals.



946-ml.

DCT



## 100% Synthetic DCT Fluid (DCT)

Designed to protect high-tech dual-clutch transmissions during the most intense, high-heat operating conditions.



946-ml.

MTG



## Synthetic Manual Transmission and Transaxle Gear Lube (MTG)

Provides improved internal component protection. Formulated with extreme-pressure additives and advanced frictional qualities that provide smooth shifts while protecting gears, bearings and seals. Non-corrosive to yellow metals.

Package sizes:



946-ml.



946-ml.

MTF



## Synthetic Synchronesh Transmission Fluid (MTF)

Specifically designed to deliver smooth shifts and superior wear protection in manual transmissions and transaxles with synchronizers.



946-ml.

ATD



## Torque-Drive® Synthetic Heavy-Duty Automatic Transmission Fluid (ATD)

Premium fluid designed for use in both on- and off-highway heavy-duty equipment.



ATH



## Synthetic Tractor/Hydraulic Transmission Oil (ATH)

Formulated for combinations of transmissions, hydraulic systems, final drives, power take-off systems and wet brakes in heavy-duty farm and industrial equipment as well as commercial and residential lawn tractors.





## SEVERE GEAR® Synthetic EP Gear Lube

Specifically engineered for high-demand applications, including trailer towing, heavy hauling, 4x4 off-road driving, commercial use and racing.

**75W-85 • SVL**

Top fuel efficiency and cold-temperature performance

**75W-90 • SVG**

Outstanding fuel efficiency and cold-temperature performance

**80W-90 • AGL**

Excellent extreme-pressure performance and wear protection

**75W-110 • SVT**

Extra viscosity protection without sacrificing fuel efficiency

**75W-140 • SVO**

Maximum viscosity protection for severe-duty applications



Package sizes:



946-ml.



946-ml.



Whoever invented the easy-pack concept is a genius. Especially for servicing transfer cases and differentials. It lives up to its name. Not only an innovative oil, but innovative packaging as well.

– Joey  
Calif.

FGR



## 75W-90 Long Life Synthetic Gear Lube (FGR)

Specifically engineered for extended drain intervals up to 805,000 kilometers as set by equipment manufacturers for over-the-road trucks and heavy equipment.



946-ml.

ADA



118  
ML

TUBE

## Slip Lock® Differential Additive (ADA)

Designed to eliminate gear-housing chatter in cars, trucks and SUVs equipped with limited-slip differentials.

**Note:** AMSOIL synthetic gear lubes do not require the use of this additive. However, not all differentials respond the same and if chatter is noticed, the addition of AMSOIL Slip Lock will eliminate it.

G2039




## Easy Installation

Hand Pump (G2039)



## 99% Efficiency at 20 Microns

Filtering particles >20 microns fights engine wear.<sup>AA</sup>

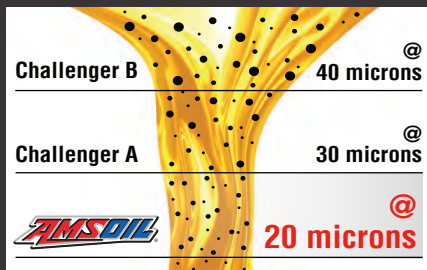

<sup>AA</sup>In accordance with industry-standard ISO SO 4548-12.



## Oil Filters (EAO/EA15K)

AMSOIL Oil Filters rank among the highest efficiency filters available to the auto/light-truck and powersports markets, providing a filtering efficiency of 99 percent at 20 microns. Featuring advanced full-synthetic technology, AMSOIL Oil Filters provide greater efficiency, capacity and durability than cellulose filters, extending engine and filter life and reducing engine wear.

- Oil Filters designated with product code EA15K are recommended for 24,000 kilometers/one year, whichever comes first, in normal or severe service. NOTE: Change oil filter at every oil change.
- Oil Filters designated with product code EAO are recommended for 40,000 kilometers/one year, whichever comes first, in normal service or 24,000 kilometers/one year, whichever comes first, in severe service. NOTE: Change oil filter at every oil change.

## Which filter do I need?

Check the product guides at [AMSOIL.ca](http://AMSOIL.ca), call 1-800-777-7094 (Monday-Friday, 7 a.m. - 7 p.m. Central Time) or contact the AMSOIL Dealer listed on the back of your catalog (if one is listed) to determine the appropriate filter for each application. When AMSOIL Oil Filters are used with a motor oil other than AMSOIL motor oil the filter should be changed according to the vehicle manufacturer recommendation.

Fill in your vehicle information. Then call 1-800-777-7094 (Monday - Friday, 7 a.m. - 7 p.m. Central Time). You may also contact the AMSOIL Dealer listed on the back of your catalog (if one is listed) to determine your appropriate oil and air filters.

Make \_\_\_\_\_ Year \_\_\_\_\_ Model \_\_\_\_\_ Engine \_\_\_\_\_

VIN \_\_\_\_\_

Your Oil Filter is \_\_\_\_\_

Your Air Filter is \_\_\_\_\_



PROTECTION | PERFORMANCE  
you demand. | you deserve.™

## More Premium Filters

AMSOIL offers a variety of specialty oil filters constructed with premium synthetic technology. Check the Product Guides at [AMSOIL.ca](http://AMSOIL.ca) or call (715) 399-8324 (TECH) (Monday-Friday, 8 a.m. - 5 p.m. Central Time) for application information.



### Bypass Filtration

High-efficiency bypass filters effectively remove minute dirt particles and soot by working in conjunction with the engine's full-flow oil filter.

#### BYPASS OIL FILTRATION SYSTEMS • BMK

- Single-Remote Bypass Kit (BMK21)
- DUAL-GARD Bypass Kit (BMK22)
- Universal Dual-Remote Bypass System (BMK23)
- Ford 7.3L Dual-Remote Bypass System (BMK26)
- 2001-2019 GM 6.6L Dual-Remote Bypass System (BMK27)
- Ford 6.7L Dual-Remote Bypass System (BMK28)
- Heavy-Duty Bypass Kit (BMK30)
- Ford 6.0/6.4L Single-Remote Bypass System (BMK31)
- 2001-2016 GM 6.6L Single-Remote Bypass System (BMK32)
- Ford 6.7L Single-Remote Bypass System (BMK33)
- 2004-current Cummins 5.0L/5.9L/6.7L Single-Remote Bypass System (BMK34)



#### BYPASS OIL FILTERS • EABP

- 6" Filter (EABP90)
- 7.5" Filter (EABP100)
- 10.5" Filter (EABP110)
- Heavy-Duty Filter for BMK30 (EABP120)



### Powersports Oil Filters (EAOM)

High-efficiency filters available for the motorcycle and powersports market. Provide excellent 99 percent filtering efficiency at 20 microns. Available in black or chrome (as available).

GRG



## DOMINATOR® Synthetic Racing Grease (GRG)

High-performance bearing and chassis lubrication for all race applications on snow, dirt, water and track. Designed for bearings that operate under high-speed, high-heat or low-temperature conditions.

*Use in applications that require NLGI No. 2*



CARTRIDGE

GPOR1



GPOR2



## Synthetic Polymeric Off-Road Grease

Extreme-pressure, moly-fortified grease that provides outstanding protection for heavy-load-bearing applications, including steering knuckles, spring shackles, heavy equipment pivot joints and other components operating in high-load, low-speed conditions.

### Synthetic Polymeric Off-Road Grease • GPOR1

*Use in applications that require NLGI No. 1, 5% Moly*

### Synthetic Polymeric Off-Road Grease • GPOR2

*Use in applications that require NLGI No. 2, 5% Moly*



CARTRIDGE

GPTR1



GPTR2



## Synthetic Polymeric Truck, Chassis and Equipment Grease

Delivers excellent wear protection and performance in severe-service, extreme-pressure environments such as axle assemblies, U-joints, pivot pins, fifth-wheel plates, steering linkages, kingpins, water pump bearings, ball joints and other greasable bearings and chassis components.

### Synthetic Polymeric Truck, Chassis and Equipment Grease • GPTR1

*Use in applications that require NLGI No. 1*

### Synthetic Polymeric Truck, Chassis and Equipment Grease • GPTR2

*Use in applications that require NLGI No. 2*



CARTRIDGE



## Synthetic Multi-Purpose Grease (GLC)

Delivers premium wear protection for bearings, bushings, chassis lubrication and other applications.

*Use in applications that require NLGI No. 2*



CARTRIDGE

## Synthetic Water-Resistant Grease (GWR)

Provides outstanding water-washout and spray-off resistance for applications frequently exposed to water, mud, snow or ice.

*Use in applications that require NLGI No. 2*



CARTRIDGE

## X-Treme Synthetic Food Grade Grease (GXC)

Designed for high levels of protection in food and pharmaceutical industry equipment. NSF-approved formula (formerly USDA H-1) for incidental contact with food.

*Use in applications that require NLGI No. 2*



CARTRIDGE

ABC



## Semi-Synthetic Bar and Chain Oil (ABC)

Delivers excellent lubrication and protection, helping extend the life of bar and chain applications.



946-ml.

PCI



## Synthetic Compressor Oil

Superior protection for rotary screw, rotary vane, reciprocating and other compressor applications.

**ISO 46, SAE 20 • PCI**

**ISO 100, SAE 30/40 • PCK**



946-ml.



## High-Foam Car Shampoo (HFB)

Powerful pH-neutral formulation delivers exceptional cleaning action without harming coatings and finishes.

473

ML  
BOTTLE

## Ceramic Spray (CSF)

Advanced SiO<sub>2</sub> ceramic technology enhances gloss and protects painted and plastic surfaces for up to 12 months with a simple spray-on, wipe-off application.

473

ML  
BOTTLE



## Interior Detailer

Cleans plastic, trim, dashes and displays without streaks or greasy residue.

**Interior Detailer - Lemon** • IDL 

**Interior Detailer - Unscented** • IDN

473

ML  
BOTTLE

## Quick Detailer (QDS)

A specially blended formula of surfactants lifts light dust and debris from painted and plastic surfaces with a quick spray-on, wipe-off application for easy detailing between washes.

473

ML  
BOTTLE



## Wheel + Tire Cleaner (WTC)

pH-balanced 2-in-1 formula removes brake dust, road grime and tire blooming without harming wheels or tires.

473

ML  
BOTTLE

## Tire + Trim Protectant (TTP)

Advanced, non-greasy formula conditions rubber and exterior plastic trim for a long-lasting satin or gloss finish, with quick-drying, low-sling properties and UV protection.



TTPCNC


473  
ML  
BOTTLE

## Accessories

- Foam Cannon (G3911)
- Detailing Towel 2-Pack (G3912)
- Drying Towel (G3913)
- Microfiber Wash Mitt (G3914)

## Preserves Horsepower and Performance

AMSOIL delivers 18 percent more lubricity than Lucas\* and 20 percent more than Sea Foam\* for better retention of horsepower and fuel economy.<sup>3</sup>

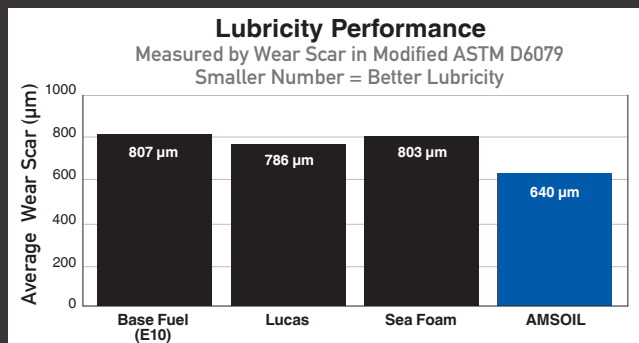

<sup>3</sup>Based on independent testing of AMSOIL Upper Cylinder Lubricant, Lucas Upper Cylinder Lubricant and Sea Foam Motor Treatment obtained on 02/13/2019 using the ASTM D6079 modified for use with gasoline. \*All trademarked names and images are the property of their respective owners and may be registered marks in some countries. No affiliation or endorsement claim, express or implied, is made by their use.



UCL

177  
ML  
BOTTLE

## Upper Cylinder Lubricant Gasoline Additive (UCL)

Lubricates fuel system and upper cylinders. Fights ethanol-related corrosion. Helps keep injectors clean. Bottle compatible with capless fuel systems. Use entire bottle at every fill-up.

**INDUSTRY'S MOST  
ADVANCED**  
FORMULATION




## P.i.<sup>®</sup> (CPI)

Restores up to 14 percent horsepower.<sup>NN</sup> Bottle compatible with capless fuel systems. Add entire bottle to tank at fill-up.


355  
ML  
BOTTLE

## AMSOIL Restores Horsepower

AMSOIL P.i.<sup>®</sup> restores up to 14% horsepower.<sup>NN</sup>

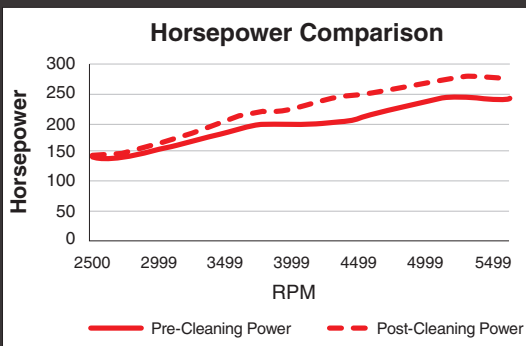

<sup>NN</sup>Based on third-party testing in a 2016 Chevrolet® Silverado® 1500, 5.3L V-8 GDI with 100,616 miles, using one tank treated with AMSOIL P.i. Actual results may vary. \*All trademarked names and images are the property of their respective owners and may be registered marks in some countries. No affiliation or endorsement claim, express or implied, is made by their use.



Injector **before**  
P.i. treatment.



Injector **after one**  
P.i. treatment.



Cylinder head  
**before** P.i.  
treatment.



Cylinder head  
**after one** P.i.  
treatment.




### Addresses Ethanol-Related Performance issues

**DIRECTIONS:** One bottle treats up to 23 litres for cleanup and up to 45 litres for continued protection. For best results use with every tank.

## Quickshot® (AQS)

Effectively addresses performance issues related to ethanol, water and dirty pump gas in two- and four-stroke gasoline-powered engines and powersports equipment fuel systems, restoring peak performance.

**Motorcycles • Snowmobiles • Boats • ATVs • Edgers • Tillers  
• Mowers • Snowblowers • Chainsaws • Generators • Farm & Construction Equipment • and more**

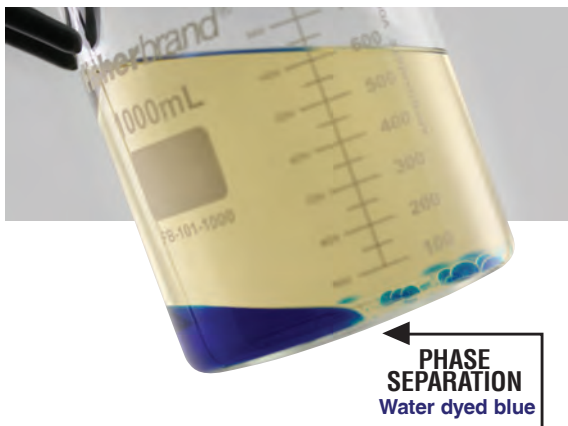

**Phase separation is when ethanol/water mixtures fall to the bottom of fuel tanks and containers, leading to lean-burn conditions.**

**Quickshot helps keep water molecules dispersed to prevent phase separation.**

Degraded fuel can present a major maintenance issue in motorcycle engines, forming varnish, gum and insoluble debris that clog carburetors, fuel injectors and fuel filters. Carbon buildup can form on the tops of pistons resulting in pre-ignition, rough idling and poor throttle response. Fuel-related problems are only expected to intensify in the coming years as the ethanol content in pump gasoline continues to increase.

AMSOIL Quickshot® (AQS) is a premium fuel additive formulated to thoroughly clean and restore peak performance in motorcycle and powersports equipment fuel systems. It also stabilizes fuel between uses and during short-term storage periods.

## Gasoline Stabilizer (AST)

Helps prevent the formation of varnish and sludge in stored seasonal equipment such as snowmobiles, lawnmowers, motorcycles and boats. 60 ml treats 19 litres of fuel.

473  
ML

BOTTLE



### AMSOIL Fights Corrosion

AMSOIL provides corrosion protection Sea Foam® Motor Treatment can't match, helping maintain power and performance and keeping metal corrosion free, even when subjected to salt water.\*

AMSOIL



Sea Foam



*\*Based on independent third-party testing of AMSOIL Gasoline Stabilizer obtained July 1, 2022, and Sea Foam Motor Treatment purchased June 30, 2022, in a modified NACE TM0172 using synthetic sea water per ASTM D665B.*

## DOMINATOR® Octane Boost (COB)

Improves the performance of all two- and four-stroke gasoline-fueled engines. Treats up to 57 litres of gasoline.

355  
ML

BOTTLE



MOB



## Motorcycle Octane Boost (MOB)

Increases octane up to three numbers for maximum power and efficiency in motorcycles. Treats 15-23 litres of gasoline.

118  
ML

BOTTLE



ADB



### Diesel 4-IN-1 (ADB)

Combines the superior deposit-removing properties of Diesel Injector Clean, the excellent anti-gelling properties of Diesel Cold Flow and the cetane-boosting benefits of Diesel Cetane Boost in one convenient package. 30 ml treats up to 9.46 L of fuel.

473  
ML

BOTTLE

ADS



### Diesel Injector Clean + Cetane Boost (ADS)

Combines the superior deposit-removing properties of Diesel Injector Clean with the cetane-boosting benefits of Diesel Cetane Boost in one convenient package. 30 ml treats up to 18.93 L of fuel.

473  
ML

BOTTLE

ADF



### Diesel Injector Clean (ADF)

Targets traditional nozzle deposits, combustion chamber deposits and internal diesel injector deposits found in HPCR injectors. Lubricates to reduce fuel pump and injector wear. Concentrated for rapid results, maximum horsepower and up to 8 percent increased fuel economy in engines with accumulated deposits. 30 ml treats up to 18.93 L of fuel.

473  
ML

BOTTLE

UP TO 8%  
FUEL ECONOMY IMPROVEMENT



CCB

DRC

## Diesel Cetane Boost (CCB)

Raises the cetane number of diesel fuel up to eight points for maximum horsepower, increased fuel economy and easier starts in all diesel engines. Diesel engines operate best on fuel with cetane values of 50 or higher. Most diesel fuel sold in North America has a cetane value of 40-45. 30 ml treats up to 37.85 L of fuel.



## Diesel Recovery (DRC)

Emergency diesel fuel treatment that liquefies gelled diesel fuel and thaws frozen fuel filters. Keep a bottle on hand for emergencies. 30 ml treats up to 3.79 L of fuel.



ANTPC



## Passenger Car/Light Truck Antifreeze & Coolant (ANTPC)

Engineered to exceed original equipment manufacturer (OEM) requirements for up to 241,000 kilometers or 5 years, whichever comes first, in passenger cars and light trucks. Pre-mixed formula.



ANTHD



## Heavy-Duty Antifreeze & Coolant (ANTHD)

Provides superior heat transfer and excellent protection against corrosion, cylinder-liner cavitation, freezing and boilover. Protection up to 1,609,344 kilometers, 20,000 hours or 8 years, whichever comes first. Pre-mixed formula.



### AMSOIL Resists Corrosion

In third-party, industry-standard testing, cast-iron and copper plates protected by AMSOIL showed virtually **no signs of corrosion**.<sup>HH</sup>



ANT



## Propylene Glycol Antifreeze & Coolant (ANT)

All-weather protection for up to 241,000 kilometers or 5 years, whichever comes first, in passenger cars and light trucks. Protection up to 1,609,344 kilometers, 20,000 hours or 8 years, whichever comes first, in heavy-duty applications. Concentrated formula.



### Antifreeze Test Strips (G1164)

To test freeze protection and additive concentration, order antifreeze test strips:



### AMSOIL Resists Cavitation

In third-party, industry-standard testing, cylinder liners protected by AMSOIL showed virtually **no signs of cavitation**.<sup>†</sup>

<sup>†</sup>Based on results of the ASTM D7583 cavitation test.

PSAF



## Powersports Antifreeze & Coolant (PSAF)

Advanced design helps control operating temperature in hot-running, high-revving powersports applications. Extended-life formula provides all-season protection for up to five years.



CMP



## Metal Protector (CMP)

Displaces water, penetrates and protects metal surfaces from corrosion, including hinges, squeaky mechanical objects, electrical systems and more.



FLSH



## Engine and Transmission Flush (FLSH)

Helps restore operating efficiency, increase fuel economy and reduce emissions in gasoline and diesel engines and automatic transmissions.

473  
ML

BOTTLE

FLP



## Synthetic Firearm Lubricant and Protectant (FLP)

Effectively lubricates and protects firearms, helping extend life and prevent blockage, jams and wear. Outstanding protection and performance in both hot and cold climates. Specifically formulated for firearms, offering superior performance over multi-purpose products.

118  
ML

BOTTLE

"It's a great product to keep your firearms/shotguns in great working order & protect from our harsh weather elements."

– Steve  
Pratts Fork, Ohio

PSF



## Multi-Vehicle Synthetic Power Steering Fluid (PSF)

Provides excellent wear protection, long component life and quiet operation in most passenger cars and light trucks.

473  
ML

BOTTLE



## Fluid Extraction Pump (G2576)

Aids in the removal of power steering fluid, motor oil, drivetrain lubricants and engine coolant. Can also be used to install fresh lubricants in hard-to-reach areas.

## Aftermarket Partners

AMSOIL also offers premium filtration products from its aftermarket partners, including Donaldson, WIX and MANN FILTER.

For product and pricing information, call 1-800-777-7094 (Monday - Friday, 7 a.m. - 7 p.m. Central Time) or contact the AMSOIL Dealer listed on the back of your catalog (if one is listed).



## The Company of **FIRSTS**

**More than 45 Years of Innovation and Leadership**

**FIRST** API-qualified 100 percent synthetic motor oil.

**FIRST** to introduce the concept of "extended drain intervals" with a recommended 25,000-mile/12-month drain interval.

**FIRST** synthetic gear lube for automotive use.

**FIRST** synthetic motor oil for diesel engines.

**FIRST** synthetic motor oil for racing engines.

**FIRST** synthetic motor oil for turbocharged engines.

**FIRST** synthetic motor oil for marine engines.

**FIRST** 100:1 pre-mix synthetic 2-cycle oil.

**FIRST** synthetic automatic transmission fluid for automotive use.





**PROTECTION | PERFORMANCE**  
*you demand. | you deserve.™*

**AMSOIL INC.**  
1 AMSOIL Center  
Superior, WI 54880

WE HONOR



(Discover in U.S. only)

### **Your Servicing AMSOIL Dealer**

Refer to this referral number to save time and make ordering easier. Call toll-free at 1-800-777-7094. Credit card orders only. ▼

**Referral #** \_\_\_\_\_