
ArmorSeat (GG) Series

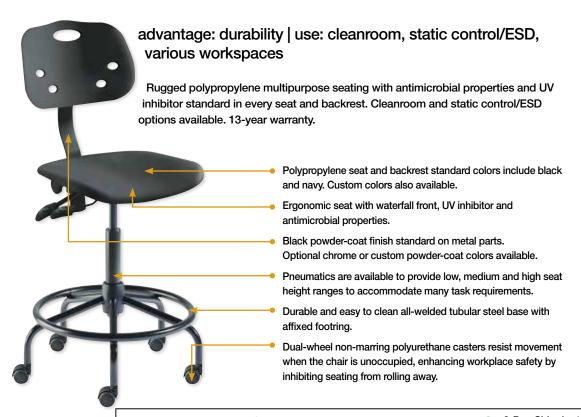

Shown here:
ArmorSeat Series
with S base
featuring affixed
footring, medium
seat height range

ordering information | january 2025

= 2-Day Shipping*

ArmorSeat (GG) Series | Standard Components

17.5"W x 15.5"D x 1.5"T seat, 16"W x 10.75"H backrest with integral lumbar support, soft touch pneumatic seat height adjustment, fixed rearward 6° seat tilt, backrest tilt and backrest height adjustment

Models with tubular steel base

Model#	Seat-Hgt.	Compatibility
GGS-L-RC-T-XF-XA-06	Low, 17"-21"	Desk
● GGS-M-RC-T-XF-XA-06	Medium, 20"-27"	Standard Bench
● GGS-H-RC-T-XF-XA-06	High, 24"-31"	High Bench

Models with cast aluminum base

Model#	Seat-Hgt.	Compatibility	
● GGA-L-RC-T-XF-XA-06	Low, 16"-21"	Desk	
● GGA-M-RC-T-XF-XA-06	Medium, 18"-25"	Standard Bench	
● GGA-H-RC-T-XF-XA-06	High, 21.5"-31"	High Bench	

Models with reinforced composite base

Model#	Seat-Hgt.	Compatibility
■ GGR-L-RC-T-XF-XA-06	Low, 15.5"-20.5"	Desk
● GGR-M-RC-T-XF-XA-06	Medium, 17.5"-24.5"	Standard Bench
● GGR-H-RC-T-XF-XA-06	High, 21"-30.5"	High Bench

Models with wide aluminum base

Model#	Seat-Hgt.	Compatibility	
GGW-L-RC-T-XF-XA-06	Low, 15.5"-20.5"	Desk	
GGW-M-RC-T-XF-XA-06	Medium, 17"-24"	Standard Bench	
● GGW-H-RC-T-XF-XA-06	High, 20.5"-30"	High Bench	

Ask about special and custom orders. *2DS only includes Black. Does not include Navy.

BIOFIT®



 23" diameter tubular steel (S style) base with 21" diameter affixed footring.



 25.6" diameter, highprofile cast aluminum (A style) base.



 25.6" diameter, high-profile reinforced composite (R style) base.



 28.7" diameter, highprofile wide aluminum (W style) base.

optional comp	onents	= 2-Day Shipping
Component	MFG Code	Description
Seat Controls	● FFAC	Free float articulating control: pneumatic seat- and backrest-height adjustment; seat and backrest tilt independently via separate levers, and can free float or lock into place, seat can tilt forward ISO 4 & ISO 5 performance package configurations
Footring	● AFP	Adjustable height, 22" diameter, oval tube construction on solid polished cast aluminum spoke (recommended for medium and high height models with A, W or R bases, adjusts easily without knobs or levers; not available with low height models or units with S style base)
	• ATF	Adjustable height, 20" diameter, cast aluminum (recommended for medium and high height models with A, W or R bases, not available with low height models or units with S style base)
Glides	●HG	2" high polyamide glides
Casters	LRO	Dual-wheel, soft tread, with weight-activated self-braking capability; resists movement when seat is occupied
	R	Single-wheel, thermoplastic rubber, non-marring, ball-bearing construction; for hard floors including concrete
	• RC	Hooded dual-wheel, non-marring resistance casters, resist movement when seat is unoccupied – standard on most models
	● RK	Hooded dual-wheel, non-marring resistance casters for ESD applications; resist movement when seat is unoccupied (standard with ESD performance packages)
Miscellaneous	SW	Skid wrapping, net cost per pallet

Category	Class	MFG Code	
ESD	_*	• K	
Cleanroom	ISO 8**	ISO8	
	ISO 7**	ISO7	
	ISO 6	ISO6	
	ISO 5	ISO5	
	ISO 4*	ISO4	
Cleanroom/ESD	ISO 8/ESD*	ISO8K	
	ISO 7/ESD*	ISO7K	
	ISO 6/ESD*	ISO6K	
Chrome-plated metal parts, chairs w/A, W, R base	_	• C	
Chrome-plated metal parts, chairs w/S base	_	• C	

^{**}Comes standard with black powder coat metal finish.

MARNING: This product can expose you to chemicals including wood dust, which is known to the State of California to cause cancer. For more information go to www.p65warnings.ca.gov.

We Now Offer Custom Metal Finishes for Custom Applications and More!

BioFit makes it easy to identify seating used by different departments or learning spaces, promote esprit de corps and



