



REYA POWER

ACCESSORIES



HAT
COLLECTIVE™
HUMAN ACTIVE TECHNOLOGY


SMART. BEAUTIFUL. POWERFUL.

Meet Reya – our new power family. Reya's design-forward architecture with soft, curved lines offers a full spectrum of mountable power options for your workstation. Whatever your power needs, big or small, Reya provides power conveniently at your fingertips.



LOW PROFILE USB HUB

Finishes



Features

1 USB-A charger port
1 USB-C charger port
Can charge laptop up to 65 Watts (requires 5A-Rated USB-C cable)
Mount: Desk edge/surface mount, under mount, edge mount (desk edge/surface mount: 0.5" – 1.75")

Specifications

Input: DC, 65W max from HAT Base Control Box
Output:
Single Port In Use:
USB-C: QC2.0, QC3.0, PD3.0, PPS, 65W max
USB-A: 5V/2A, 10W max
Both Ports In Use:
USB-C: 20V2.25A max
USB-A: 5V2A max

Dimensions

Product: 2.4" x 2.2" x 1.2"
Cord Length, PWR-AC: 5'
Cord Length, PWR-AC-PS: 39"
AC Adapter Cable, 71" Power Cable


Part Numbers

PWR-AC-__ USB Hub, Requires HAT Base
PWR-AC-PS-__ USB Hub, Includes AC Adapter



STANDARD SURFACE POWER MODULE

Finishes



Features

2 power receptacles
1 USB-A charger port
2 USB-C charger ports
Can charge laptop up to 65 Watts (requires 5A-Rated USB-C cable)
Mount: Desk edge, 0.75" – 1.75"
Conforms and tested to UL 962A and UL 1310 standards
Tamper-resistant (TR) AC outlets
Integrated circuit breaker

Specifications

Input: 125VAC, 60Hz, 15A max
Output:
AC Outlets (2): 120VAC, 60HZ, 15A max
Single port use:
USB-A: 5V3A, 9V2.A, 12V1.5, 18W max
USB-C1: 5V/3A, 9V3A, 12V3A, 15V3A, 20V3.25A; PPS (3.3-11V4.05A, 3.3-16V3A, 65W max); PD3.0, APPLE2.4A, DCP1.5A, QC2.0/3.0, AFC
USB-C2: 5V3A, 9V2.22A, 12V1.67A, 20W max
Multi port use:
USB-C1 + USB-C2: USB-C1 max 45W (5V3A, 9V3A, 12V3A, 15V2.67A, 20V2.25A); USB-C2 max 20W (5V3A, 9V2.22A, 12V1.67A)
USB-C1 + USB-A: USB-C1 max 45W (5V3A, 9V3A, 12V3A, 15V2.67A, 20V2.25A); USB-A max 18W (5V3A, 9V2.A, 12V1.5, 18W max)
USB-C2 + USB-A: Both share 15W
USB-C1 + USB-C2 + USB-A: USB-C1 max 45W (5V3A, 9V3A, 12V3A, 15V2.67A, 20V2.25A); USB-C2 & USB-A share 15W

Dimensions

Product: 7.1" x 3.3" x 2.3"
Cord Length: 6'

Part Numbers

PWR-ACC-__ Standard Surface Power Module


Accessory

PWR-UM-CK Under Mount Kit



WIRELESS SURFACE POWER MODULE

Finishes



Features

2 power receptacles
1 USB-A charger port
2 USB-C charger ports
Can charge laptop up to 65 Watts (requires 5A-Rated USB-C cable)
Fast wireless charging
Mount: Desk edge, 0.75" – 1.75"
Conforms and tested to UL 962A and UL 1310 standards
Tamper-resistant (TR) AC outlets
Integrated circuit breaker

Specifications

Input: 125VAC, 60Hz, 15A max
Output:
AC Outlets (2): 120VAC, 60HZ, 15A max
Single port use:
USB-A: 5V3A, 9V2.A, 12V1.5, 18W max
USB-C1: 5V/3A, 9V3A, 12V3A, 15V3A, 20V3.25A; PPS (3.3-11V4.05A, 3.3-16V3A, 65W max), PD3.0, APPLE2.4A, DCP1.5A, QC2.0/3.0, AFC
USB-C2: 5V3A, 9V2.22A, 12V1.67A, 20W max
Multi port use:
USB-C1 + USB-C2: USB-C1 max 45W (5V3A, 9V3A, 12V3A, 15V2.67A, 20V2.25A); USB-C2 max 20W (5V3A, 9V2.22A, 12V1.67A);
USB-C1 + USB-A : USB-C1 max 45W (5V3A, 9V3A, 12V3A, 15V2.67A, 20V2.25A); USB-A max 18W (5V3A, 9V2.A, 12V1.5, 18W max)
USB-C2 + USB-A : Both share 15W
USB-C1 + USB-C2 + USB-A : USB-C1 max 45W (5V3A, 9V3A, 12V3A, 15V2.67A, 20V2.25A); USB-C2 & USB-A share 15W;
Wireless Charging: 5W, 7.5W, 10W, 15W (auto detection)

Dimensions

Product: 7.1" x 3.3" x 2.4"
Cord Length: 6'

Part Numbers

PWR-ACC-WRLS-__ Wireless Surface Power Module



POWER STRIP

Finishes

- White
WH
- Black
BK

Features

6 power receptacles
Conforms and tested to
UL 962A and UL 498 standards
Tamper-resistant (TR) AC outlets
Integrated circuit breaker

Specifications

Input: 125VAC, 60Hz, 15A max
Output:
AC Outlets (6): 120VAC, 60HZ, 15A max

Dimensions

Product: 14.6" x 2.4" x 1.5"
Cord Length: 9'

Part Numbers

PWR-STRP-__ Power Strip



POWER STRIP WITH HARDWIRED STANDARD
SURFACE POWER MODULE

Finishes

- White
WH
- Black
BK

Features

Power Strip: 6 power receptacles
Power Module: 2 power receptacles
1 USB-A charger port
2 USB-C charger ports
Can charge laptop up to 65 Watts
(requires 5A-Rated USB-C cable)

Conforms and tested to
UL 962A, UL 1310, and UL 498 standards
Tamper-resistant (TR) AC outlets
Integrated circuit breaker

Specifications

Input: 125VAC, 60Hz, 15A max
Output, Power Strip:
AC Outlets (6): 120VAC, 60HZ, 12A max
Output, Surface Mounted Power Module:
AC Outlets (2): 120VAC, 60HZ, 15A max
USB:
Single Port Use
USB-A: 5V3A, 9V2.A, 12V1.5, 18W max
USB-C1: 5V/3A, 9V3A, 12V3A, 15V3A, 20V3.25A;
PPS (3.3-11V4.05A, 3.3-16V3A, 65W max),
PD3.0, APPLE2.4A, DCP1.5A, QC2.0/3.0, AFC
USB-C2: 5V3A, 9V2.22A, 12V1.67A, 20W max
Multi Port Use
USB-C1 + USB-C2: USB-C1 max 45W (5V3A, 9V3A,
12V3A, 15V2.67A, 20V2.25A); USB-C2 max 20W
(5V3A, 9V2.22A, 12V1.67A)
USB-C1 + USB-A: USB-C1 max 45W (5V3A, 9V3A,
12V3A, 15V2.67A, 20V2.25A); USB-A max 18W
(5V3A, 9V2.A, 12V1.5, 18W max)
USB-C2 + USB-A: Both share 15W
USB-C1 + USB-C2 + USB-A : USB-C1 max 45W
(5V3A, 9V3A, 9V3A, 12V3A, 15V2.67A, 20V2.25A);
USB-C2 & USB-A share 15W


Dimensions

Surface Unit: 7.1" x 3.3" x 2.4"
Power Strip: 14.6" x 2.4" x 1.5"
Cord Length:
Input: 9'
Between Units: 3'


Part Numbers

PWR-ACC-STRP-__ Power Strip w/Standard Module
PWR-ACC-WRLS-STRP-__ Power Strip w/Wireless Module


PWR-AC

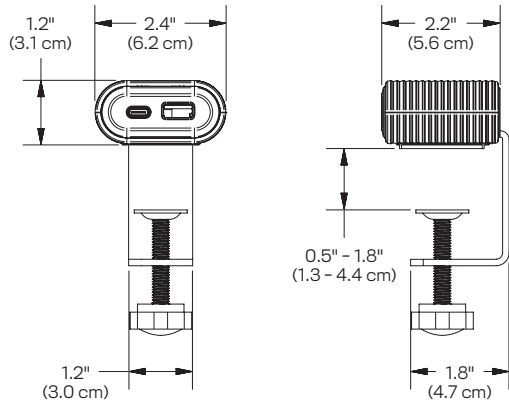


PWR-ACC

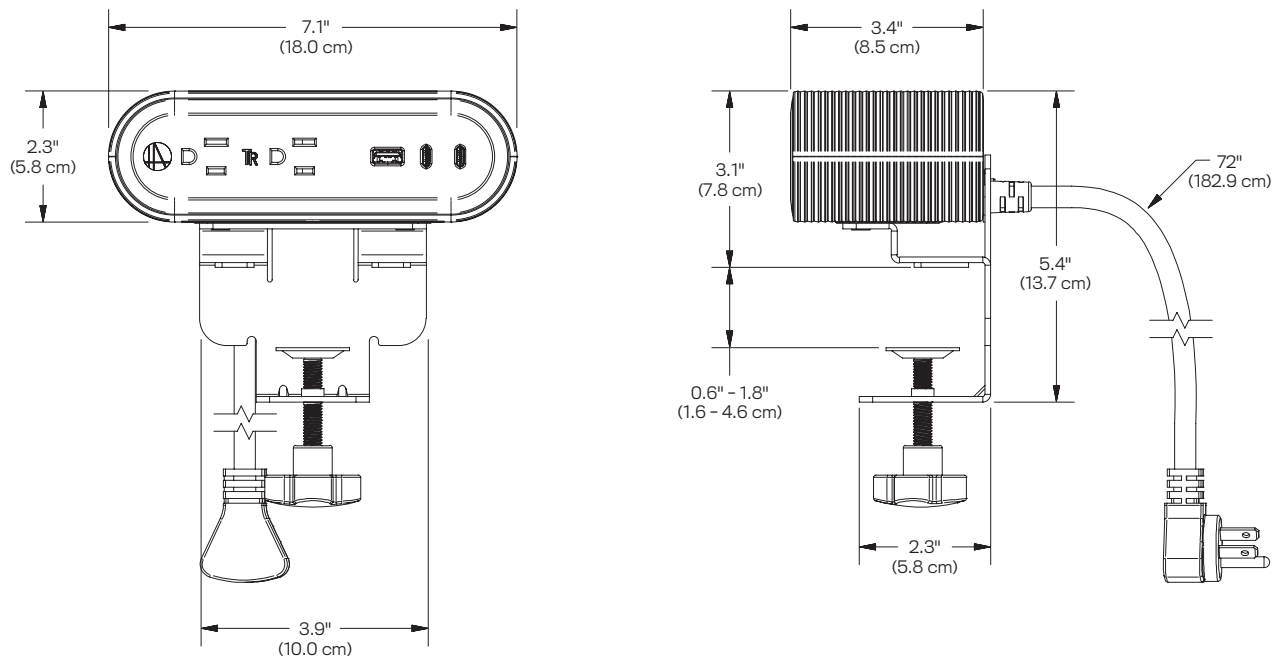

PWR-ACC-WRLS

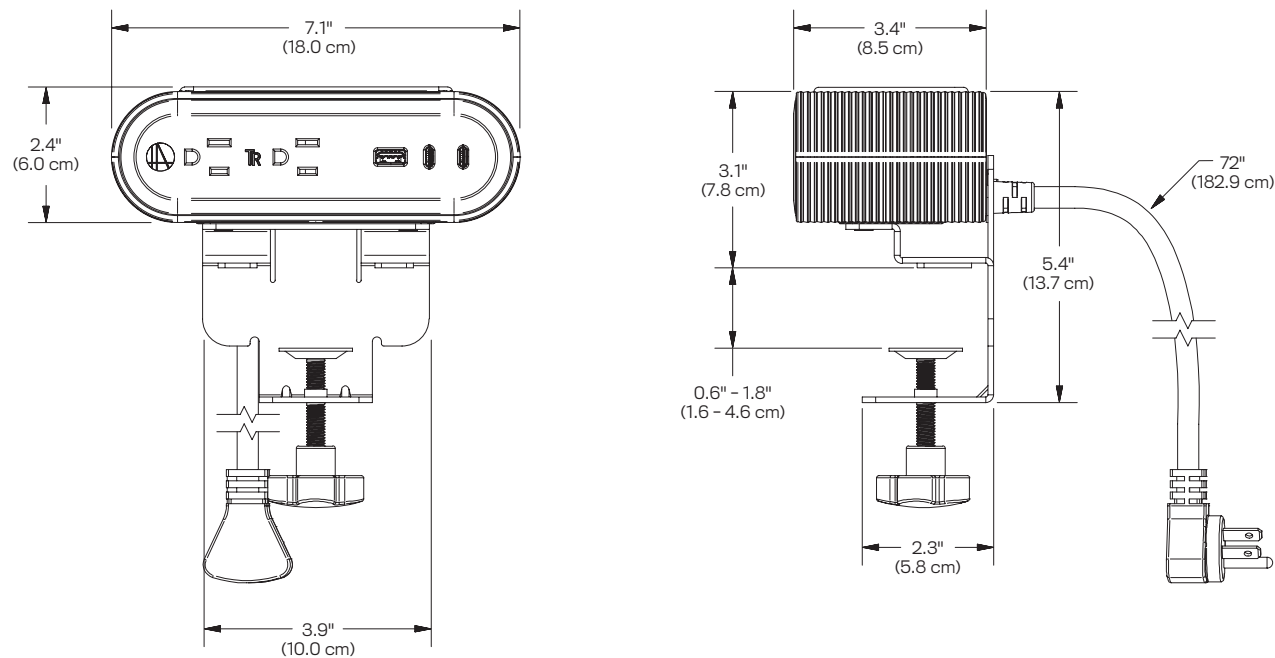

PWR-STRP

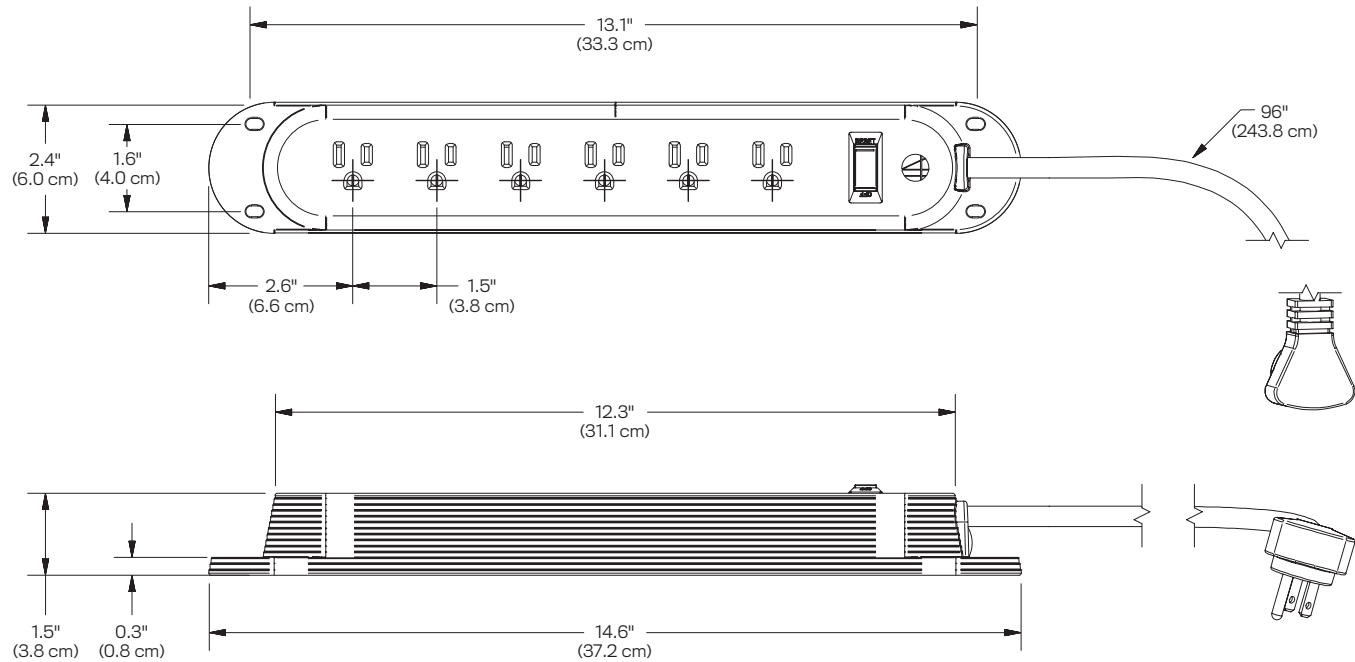

PWR-ACC-STRP

