


Delta Series - HONEYCOMB

Delta Series doors are designed and constructed with the highest quality features and offer the most complete package of standard options available in the industry. All standard Delta Series doors are manufactured to meet or exceed SDI and HMMA/NAAMM specifications.

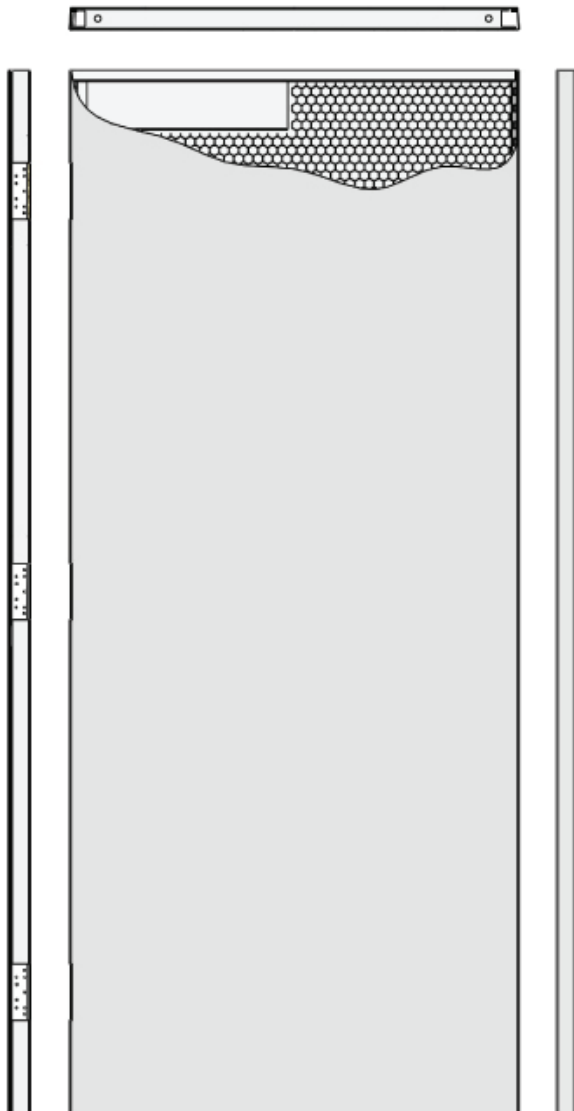

R-Value: 2.5

U-Value: .40

STC (est): 32

Construction Features

- $\frac{3}{4}$ " honeycomb core suitable for interior and exterior use where high thermal insulation is not required
- 1 $\frac{3}{4}$ " standard thickness
- 18, 16, and 14 gauge door skins
- A60 galvanized steel standard; G90 galvanized optional
- Rust-inhibitive primer
- Inverted end channels standard, top and bottom caps available
- Beveled edge construction standard; square edge optional
- Fire-rated up to 3-hours

Standard hardware reinforcing

- Mortised hinges: 7 gauge hinge
- 161/86 lock/panic reinforcing: 14 gauge
- Closer reinforcement: 14 gauge

Edge seam options

- Visible seam (standard)
- Tack-welded seam
- Tack-welded and filled seamless
- Fully-welded seamless

Lite options

- Cutout only
- Integral lites
- Aftermarket lite and louver kits