


## Delta Series - STEEL-STIFFENED

Delta Series doors are designed and constructed with the highest quality features and offer the most complete package of standard options available in the industry. All standard Delta Series doors are manufactured to meet or exceed SDI and HMMA/NAAMM specifications.

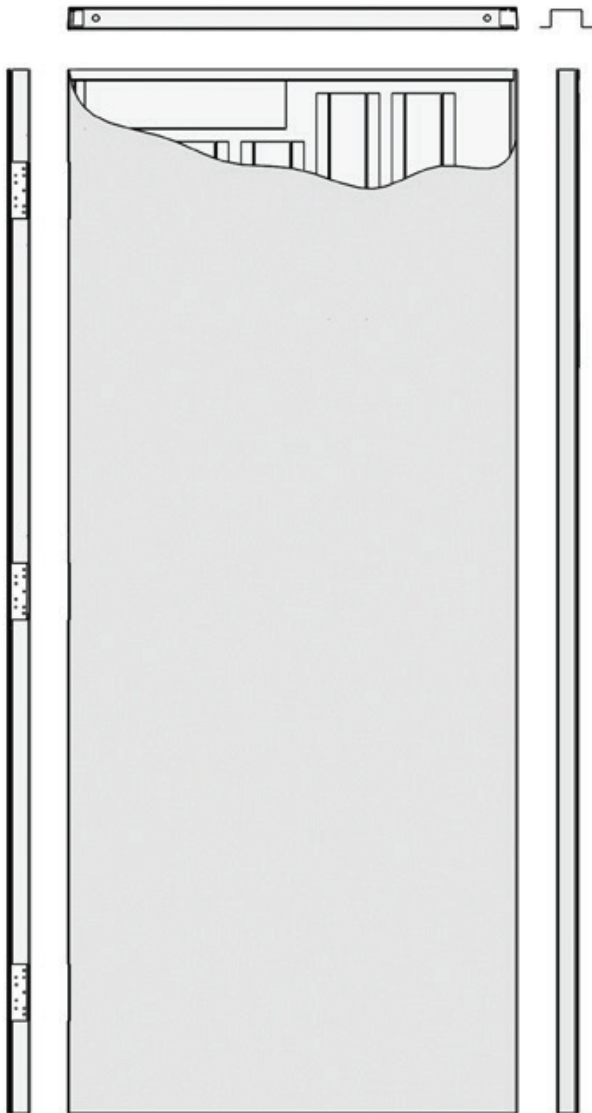

R-Value: 1.2

U-Value: .85

STC (est): 24

### Construction Features

- Vertical 18 gauge steel ribs for applications that require added strength
- Voids filled with 2.5 p.c.f. mineral wool insulation standard; other filler materials are available
- 1 3/4" standard thickness; other thicknesses available
- 18, 16, and 14 gauge door skins
- A60 galvanized steel standard; G90 galvanized optional
- Rust-inhibitive primer
- Inverted end channels standard, top and bottom caps available
- Beveled edge construction standard; square edge optional
- Fire-rated up to 3-hours

### Standard hardware reinforcing

- Mortised hinges: 7 gauge hinge
- 161/86 lock/panic reinforcing: 14 gauge
- Closer reinforcement: 14 gauge

### Edge seam options

- Visible seam (standard)
- Tack-welded seam
- Tack-welded and filled seamless
- Fully-welded seamless

### Lite options

- Cutout only
- Integral lites
- Aftermarket lite and louver kits