



**GULF WESTERN OIL**

**THE TOUGH AUSTRALIAN**



CELEBRATING 30 YEARS IN 2018

**PRODUCT CATALOGUE**

# COMPANY PROFILE

Gulf Western Oil is Australia's largest family owned manufacturer of lubricants and 2019 marks its 31st year of operation. With two million litres of base oil and blended oil storage capacity and four 30,000 litre blending tanks, Gulf Western's self-contained facility in Sydney's West was designed in consultation with, and successfully licensed by the New South Wales Environmental Protection Authority (EPA). Gulf Western Oil is dedicated to ensure that manufacturing at our facility functions at a high standard that takes into consideration the environment, their staff, the local community, their neighbours and the local wildlife.

Gulf Western Oil has the capacity to manufacture 60,000,000 litres per annum in a single shift and this is made possible by the use of state of the art equipment and the support of a highly experienced team who work amongst the technical, management and production areas of the business. Currently distributing throughout all states and territories of Australia, along with New Zealand, Fiji, New Caledonia, Tahiti, Vietnam, Tonga, Samoa, Kiribati, Christmas islands PNG and the Pacific Rim with our distribution network constantly growing.




• Gulf Western Oil Blending Facility in NSW

# MISSION STATEMENT

We are a market-focused organisation that develops and delivers innovative solutions to our customers needs, consistently working to outperform our opposition, deliver outstanding customer service and provide a dynamic and challenging workplace environment for our employees.

## DOWNLOAD OUR FREE NETLUBE APP FROM ITUNES

For further information on our range of products, simply download our free app from iTunes and Google Play, visit our website - [www.gulfwestern.com.au](http://www.gulfwestern.com.au) or call our free hotline number - 1800 248 919 between 8am-5pm Monday-Friday.

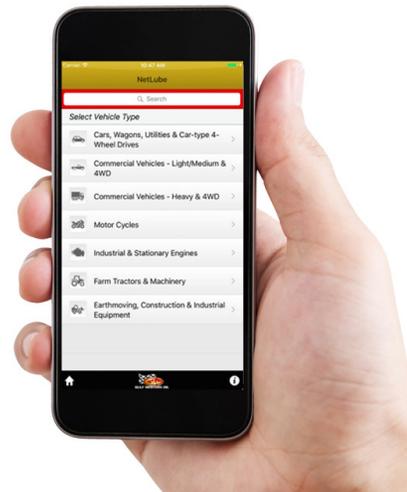

*\*Disclaimer: Icons are shown throughout this catalogue for illustrative/display purposes to assist customers with identifying what products best suit their applications. Please note: Many Gulf Western products can be used for various purposes and amongst different applications, so if you are unsure, please contact us on our free hotline 1800 248 919 for technical advice.*

# CONTENTS

<b>HEAVY DUTY DIESEL</b>		<b>4</b>
<b>PASSENGER CARS</b>		<b>14</b>
<b>TWO STROKE, FOUR STROKE &amp; MARINE</b>		<b>28</b>
<b>HYDRAULIC OILS</b>		<b>30</b>
<b>COMPRESSOR OILS</b>		<b>36</b>
<b>GEAR OILS</b>		<b>39</b>
<b>TRANSMISSION FLUIDS</b>		<b>44</b>
<b>INDUSTRIAL</b>		<b>52</b>
<b>GREASES</b>		<b>57</b>
<b>COOLANTS</b>		<b>64</b>
<b>AEROSOLS</b>		<b>66</b>
<b>WORKSHOP MAINTENANCE</b>		<b>67</b>
<b>SPECIALISED PRODUCTS</b>		<b>72</b>

# ABBREVIATIONS

**ACEA** - Association des Constructeurs Europeens d'Automobiles

**OEM** - Original Equipment Manufacturer

**API** - American Petroleum Institute

**NMMA** - National Marine Manufacturers Association

**ILSAC** - International Lubricant Standardization and Approval Committee

**SAPS** - Sulphate Ash, Phosphorous Sulphur

**SAE** - Society of Automotive Engineers

**ISO** - International Standards Organization

**HVI** - High Viscosity Index

**LPG** - Liquid Petroleum Gas

**HDDO** - Heavy Duty Diesel Oil

**SHPD** - Super High Performance Diesel

**STOU** - Super Tractor Oil Universal

**JASO** - Japanese Automotive Standards Organization

**EP** - Extreme Pressure

**CVT** - Continuously Variable Transmission

**DPF** - Diesel Particulate Filter

**SCR** - Selective Catalyst Reduction

**UTTF** - Universal Tractor Transmission Fluid

**TC-W3** - Two Cycle Water-Cooled

**FC-W** - Four-Stroke Cycle Water-Cooled

**VPI** - Vapour Phase Inhibitor

**PAO** - Polyalphaolefin

**EPA** - Environmental Protection Authority

**NLGI** - National Lubricating Grease Institute

**OAT** - Organic Acid (Additive) Technology

**VG** - Viscosity Grade

# HEAVY DUTY DIESEL

## TOP DOG® INDESTRUCTIBLE 15W-40 SEMI-SYNTHETIC



### SPECIFICATIONS

API CK-4, CJ-4, CI-4 Plus, CI-4, Cummins CES20086, 20081, Detroit Diesel DFS 93K222, 93K218, Mack EOS 4.5, EO-O Premium Plus, Volvo VDS 4.5, VDS 4, ACEA E9, E7, MB 228.31, MAN 3575, Deutz DQC III-10 LA, Ford WSS-M2C171-F1, JASO DH-2.

### DESCRIPTION

TOP DOG® INDESTRUCTIBLE 15W-40 is an uncompromising, next generation Heavy Duty Diesel Engine Oil containing Indestructible Additive Technology specifically designed to protect high powered, turbo charged Heavy Duty Diesel Engines.

### SUMMARY OF BENEFITS

- Formulation contains performance enhancing and superior wear protection technology that far exceeds the requirements of the new API CK-4 lubricant specification and previous specifications including API CJ-4.
- Fully backwards compatible with all current high HTHS Heavy Duty Diesel Engine Classification and meets the majority of modern engine manufacturer's specifications.
- Developed to meet the low ash requirements of today's heavy duty diesel engines to ensure compatibility with exhaust after-treatment systems including DPFs and AdBlue.
- Designed to significantly exceed the requirements of API CK-4, which is the latest Heavy Duty Diesel Engine Oil classification released in December 2016 by the American Petroleum Institute with significant improvement in wear protection.
- Wear metals for key engine components in extended service field trials and API approval testing show an average wear reduction of 52% compared to some commercially available CK-4 engine oils.
- API licensed and listed against Cummins CES 20086 meaning that it can be used in Cummins engine whilst maintaining full warranty protection for engines protected by the Cummins' Warranty Plus extended engine warranty protection plan.

PRODUCT CODE	PACK SIZE
300021B	IBC (1000L)
300021	205L
320021	20L

# HEAVY DUTY DIESEL

## TOP DOG® CK-4 15W-40 MINERAL



### SPECIFICATIONS

API CK-4, CJ-4, CI-4 Plus, API SN, Caterpillar ECF-3, Cummins 20086, Mack EOS 4.5, Mercedes-Benz sheet 228.31, Volvo VDS 4.5, MTU Type 2.1, JASO DH-2.

### DESCRIPTION

TOP DOG® CK-4 SAE 15W-40 is a premium, high performance, mineral oil based heavy duty diesel engine oils meeting the latest API CK-4 Heavy Duty Diesel performance specification making it suitable for use in the latest engines produced by major OEMs including Cummins, Caterpillar, Detroit Diesel and Volvo/Mack.

### SUMMARY OF BENEFITS

- Backwards compatible with other API Heavy Duty Diesel performance categories such as CJ-4, CI-4 Plus, CI-4 and CH-4.
- Provides protection for exhaust after-treatment systems including Diesel Particulate Filters (DPF) as well engines using AdBlue (SCR) technologies.
- Excellent mixed fleet oil as meets European ACEA E9 as well as JASO DH-2 performance levels
- Passing all the engine performance parameters of API SN, TOP DOG CK-4 SAE 15W-40 can also be used in petrol powered vehicles.
- Enhanced viscosity retention through use of highly shear stable viscosity modifiers.
- Greatly reduced engine wear giving extended engine life.
- Reduced oil consumption.

PRODUCT CODE	PACK SIZE
300058B	IBC (1000L)
300058	205L
320058	20L

# HEAVY DUTY DIESEL

## TOP DOG GLOBAL® MINERAL 15W-40 LOW SAPS



### SPECIFICATIONS

CJ4/CI4+/CI4/CH4/SN, ACEA E9/E7-16, Cummins 20081, Mack EO-N Premium Plus, Detroit Diesel DDC 93K218, CAT ECF3, 2, 1-a, MB 228.31, MAN 3575, MAN 3275, MTU Type 2.1, Volvo VDS-4, VDS-3, Renault RLD-3, Deutz DCQ III-05, JASO DH-2, Allison C4.

### DESCRIPTION

TOP DOG GLOBAL® MINERAL 15W-40 is a premium, OEM approved, heavy duty high performance diesel engine oil meeting the latest in API additive technology and US HDDO EOM requirements from Mack, Volvo, Cummins, Detroit Diesel and Caterpillar.

### SUMMARY OF BENEFITS

- Low SAPS formulation makes it suitable for use in engines fitted with Diesel Particulate Filters.
- Ideal for extended drain intervals and is an excellent multi fleet oil.
- Recommended for US, European and Japanese four stroke heavy duty diesel engines including the latest generation of highly tuned emission controlled engines including those with exhaust gas recirculation systems, SCR treatment systems and Diesel Particulate Filters.
- Suitable where extended drain intervals are required (supported by routine oil analysis) and for equipment operating under the most extreme conditions.
- Also suitable for stationary engines, petrol engines and 4WD's making it an ideal mixed fleet oil.
- Suitable for use as a hydraulic oil where a 10W-40 or 15W-40 is called for and as a transmission oil where the Allison C3/C4 specification is required.
- Suitable for use in vehicles meeting the most recent exhaust emission standards including US EPA 2010 TIER 4, Euro V and Australian ADR 80/01 standards.

PRODUCT CODE	PACK SIZE
30018B	IBC (1000L)
30018	205L
32018	20L

# HEAVY DUTY DIESEL

## TOP DOG GLOBAL® PLUS 10W-40 SEMI-SYNTHETIC



### SPECIFICATIONS

CJ4/CI4+/CI4/CH4/SN, ACEA E9/E7-16, Cummins 20081, Mack EO-N Premium Plus, Detroit Diesel DDC 93K218, CAT ECF3, 2, 1-a, MB 228.31, MAN 3575, MAN 3275, MTU Type 2.1, Volvo VDS-4, VDS-3, Renault RLD-3, Deutz DCQ III-05, Global DDH-1, JASO DH-2, Allison C4.

### DESCRIPTION

TOP DOG GLOBAL® PLUS 10W-40 Semi-Synthetic is a premium, OEM approved, Semi-Synthetic heavy duty high performance diesel engine oil meeting the latest in API additive technology and US HDDO OEM requirements from Mack, Volvo, Cummins, Detroit Diesel and Caterpillar.

### SUMMARY OF BENEFITS

- Low SAPS formulation making it suitable for use in engines fitted with Diesel Particulate Filters.
- Ideal for extended drain intervals and is an excellent multi fleet oil.
- Recommended for US, European and Japanese four stroke heavy duty diesel engines including the latest generation of highly tuned emission controlled engines including those with exhaust gas recirculation systems, SCR treatment systems and Diesel Particulate Filters.
- Suitable where extended drain intervals are required (supported by routine oil analysis) and for equipment operating under the most extreme conditions.
- Also suitable for stationary engines, petrol engines and 4WD's making it an ideal mixed fleet oil.
- Suitable for use as a hydraulic oil where a 10W-40 or 15W-40 is called for and as a transmission oil where the Allison C3/C4 specification is required.
- Suitable for use in vehicles meeting the most recent exhaust emission standards including US EPA 2010 TIER 4, Euro V and Australian ADR 80/01 standards.

PRODUCT CODE	PACK SIZE
30013B	IBC (1000L)
30013	205L
32013	20L
31013	10L

# HEAVY DUTY DIESEL

## TOP DOG® XDO 15W-40 MINERAL



\*NOT RECOMMENDED FOR ENGINES FITTED WITH DIESEL PARTICULATE FILTERS.

### SPECIFICATIONS

API CI-4/SL, ACEA E7-16, Volvo VDS-3, MACK EO-N, Cummins CES 20078/77/76, Caterpillar ECF-2, ZF TE-ML-02C/03A+04B/04C/07C, MAN 3275, Mercedes Benz 228.3, Type 2, Allison C4, RVI RLD-2, Global DHD-1, Deutz DRC 111-10, Detroit Diesel DDC 93K215.

### DESCRIPTION

TOP DOG® XDO 15W-40 is a heavy duty high performance, OEM approved diesel engine oil meeting the latest in lubrication technology formulated for Australia's harsh environment meeting OEM requirements from Mack, Volvo, Detroit and Cummins.

### SUMMARY OF BENEFITS

- Provides superior protection against engine wear and sludge build up ensuring a cleaner engine.
- Offers extended drain intervals, reduced oil consumption and excellent low temperature viscometrics for reduced wear on start up.
- Recommended for US, European and Japanese four stroke heavy duty diesel engines including the latest generation of highly tuned emission controlled engines including those with exhaust gas recirculation systems and SCR treatment systems.
- Suitable where extended drain intervals are required (supported by routine oil analysis) and for equipment operating under the most extreme conditions.
- Suitable for stationary engines, petrol engines and 4WD's making it an ideal mixed fleet oil.
- API licensed and listed against Cummins CES 20078 meaning that it can be used in Cummins engine whilst maintaining full warranty protection for engines protected by the Cummins' Warranty Plus extended engine warranty protection plan.
- Suitable for use as a hydraulic oil where a 15W-40 is called for and as a transmission oil where the Allison C3/C4 specification is required.

PRODUCT CODE	PACK SIZE
30012B	IBC (1000L)
30012	205L
32012	20L
31012	10L
30612	6L
30512	5L
30112	1L

# HEAVY DUTY DIESEL

## SYNFLEET MX 10W-40 FULL SYNTHETIC LOW SAPS



### SPECIFICATIONS

CJ4/CI4+/CI4/CH4/SN, ACEA E9-16, Cummins 20081, Mack EO-N Premium Plus, Detroit Diesel DDC 93K218, CAT ECF3, 2, 1-a, MB 228.31, MAN 3575, MAN 3275, MTU Type 2.1, Volvo VDS-4, VDS-3, Renault RLD-3, Deutz DCQ III-05, JASO DH-2, Allison C4.

### DESCRIPTION

**SYNFLEET MX 10W-40** Full Synthetic is an ultra-premium, OEM approved, heavy duty high performance diesel engine oil meeting the latest in API additive technology and US HDDO OEM requirements from Mack, Volvo, Cummins, Detroit Diesel and Caterpillar.

### SUMMARY OF BENEFITS

- Low SAPS formulation making it suitable for use in engines fitted with Diesel Particulate Filters and is ideal for extended drain intervals and is an excellent multi fleet oil.
- Recommended for US, European and Japanese four stroke heavy duty diesel engines including the latest generation of highly tuned emission controlled engines including those with exhaust gas recirculation systems, SCR treatment systems and Diesel Particulate Filters.
- Suitable where extended drain intervals are required (supported by routine oil analysis) and for equipment operating under the most extreme conditions.
- Also suitable for stationary engines, petrol engines and 4WD's making it an ideal mixed fleet oil.
- Suitable for use as a hydraulic oil where a 10W-40 or 15W-40 is called for and as a transmission oil where the Allison C3/C4 specification is required.
- Can be used in vehicles meeting the most recent exhaust emission standards including US EPA 2010 TIER 4, Euro V and Australian ADR 80/01 standards.

PRODUCT CODE	PACK SIZE
30014B	IBC (1000L)
30014	205L
32014	20L

# HEAVY DUTY DIESEL

## EURO SYN 10W-40 FULL SYNTHETIC LOW SAPS



### SPECIFICATIONS

ACEA E4/E6/E7/E9 (2012), JASO DH-2, Cummins CES 20081, API CJ-4, CAT ECF-1-a, MAN 3277 (low ash for CRT), MAN 3477, MB 228.5, 228.51, MTU Type 3.1, Renault Truck RXD, Deutz DQC IV-10 LA, Volvo VDS-3, Scania Long Drain, DAF 100,000km drain specification.

### DESCRIPTION

EURO-SYN 10W-40 is a fully synthetic, extra high performance low ash European engine oil formulated for the most severe performance, low emission European engines fitted with 'after treatment systems' including centrifuges, Diesel Particulate Filters and additional filtration.

### SUMMARY OF BENEFITS

- A fully synthetic formulation that can extend drain intervals up to 100,000kms (supported by routine oil analysis within OEM guidelines).
- Is suitable for use with NOx reduction systems and particulate filters and is designed for use in combination with low sulfur diesel fuel (maximum 50ppm).
- Recommended for low emission engines. It is suggested for DAF, Deutz, Iveco, MAN, Mercedes-Benz, Renault, Scania and Volvo Euro 4 or Euro 5 engines calling for the above specifications and other European engines calling for SHPD (Super High Performance Diesel) rated engine oil such as EURO 1 - EURO VI.
- Also suitable for Japanese and American diesel engines and mixed fleets calling for a CJ-4 rated oil.

PRODUCT CODE	PACK SIZE
30009	IBC (1000L)
30009	205L
32009	20L

# HEAVY DUTY DIESEL

## TURBO DIESEL LA 15W-40 MINERAL



### SPECIFICATIONS

CG4/CF4/CF2/CD/SJ, ACEA E2/A3/B2-99, ACEA E2/A2/B3-02, MAN 271, MTU Type 1, Mercedes Benz 228.1, Mercedes Benz 229.1, Mack EOM (pending), EOK-2, EOL Plus, Volvo VDS, Allison C4, Caterpillar TO-2.

### DESCRIPTION

**TURBO DIESEL LA 15W-40** is a heavy duty diesel engine oil suitable for use in pre 2000 diesel and petrol engines or modern engines calling for API CG4/SJ specifications.

### SUMMARY OF BENEFITS

- Formulated for Australia's harsh conditions hence will provide protection against engine wear, reduce oil consumption and offer good soot control to reduce oil thickening.
- Suitable for a wide range of heavy duty diesel engines, petrol engines, 4WD's, stationary engines and mobile hydraulic units calling for the specifications listed above.
- Ideally suited to older, pre-2000 fleets.

PRODUCT CODE	PACK SIZE
30002B	IBC (1000L)
30002	205L
32002	20L

# HEAVY DUTY DIESEL

## TURBOIL SAE 30 & SAE 40 MINERAL



### SPECIFICATIONS

CF4/CF2/CF/SG, Detroit Diesel 7SE2709505, Mil-I-2104D&E, Allison C4, Caterpillar TO-2 and MTU oil category 2.

### DESCRIPTION

The **TURBOIL** range is available in both SAE 30 and SAE 40 viscosities. It is a low detergent, mono grade engine oil that helps reduce oil consumption, protect against oil oxidation and maintains engine cleanliness.

### SUMMARY OF BENEFITS

- It is ideally suited for two stroke Detroit Diesel engines that must not use a multi grade engine oil, and with an ash content of less than 0.8%.
- Also suitable for pre-1991 earthmoving, agricultural and transport equipment calling for a mono grade oil in four stroke applications.

#### SAE 30 -

PRODUCT CODE	PACK SIZE
30004B	IBC (1000L)
30004	205L
32004	20L

#### SAE 40 -

PRODUCT CODE	PACK SIZE
30005B	IBC (1000L)
30005	205L
32005	20L

# HEAVY DUTY DIESEL

## MONOIL SAE 30 MINERAL



### SPECIFICATIONS

API SJ/CF, Caterpillar TO-2, Allison C3.

### DESCRIPTION

MONOIL SAE 30 is suitable for diesel engines calling for an API CF grade or lower and is also suitable for petrol powered engines requiring an API SJ performance level or lower.

### SUMMARY OF BENEFITS

- Ideal for stationary petrol or diesel engines from manufacturers including Briggs and Stratton.
- Also meets the requirements for many older engines such as Leyland, International Harvester, Gardner, Fiat and Bedford.

PRODUCT CODE	PACK SIZE
30006B	IBC (1000L)
30006	205L

## FARMOIL STOU 15W-40 MINERAL



### SPECIFICATIONS

CF4, Ford 134-D, STOU, API GL-4.

### DESCRIPTION

FARMOIL STOU 15W-40 is a STOU (Super Tractor Oil Universal) formulated to meet all the requirements of most modern tractor manufacturers calling for a STOU type oil. It provides protection against brake chatter and squeak.

PRODUCT CODE	PACK SIZE
30008B	IBC (1000L)
30008	205L
32008	20L

# PASSENGER CARS

## SYN-X 3000® 10W-40 SEMI-SYNTHETIC



### SPECIFICATIONS

API SN PLUS/SN/CF, Ford WSS-M2C-945A/946A, Chrysler MS6395.

### DESCRIPTION

SYN-X 3000® 10W-40 is a high performance, high quality, semi-synthetic premium grade passenger car/light diesel engine oil meeting the latest in API additive technology and fuel efficiency.

### SUMMARY OF BENEFITS

- Formulated with synthetic base stock ensuring cleaner engines, reduced engine wear and reduced oil oxidation.
- Offers rapid start up flow that reduces cold start wear and has excellent thermal stability.
- Recommended for most 4, 6 and 8 cylinder passenger cars manufactured from 1980 onward.
- Recommended for Petrol, LPG and lightly loaded diesel engines.
- It is suitable for turbo charged and super charged engines.
- Protects against Low Speed Pre Ignition (LSPI).

PRODUCT CODE	PACK SIZE
30037B	IBC (1000L)
30037	205L
32037	20L
30537	5L
30137	1L

# PASSENGER CARS

## SYN-X 4000 5W-30 FULL SYNTHETIC



\*NOT SUITABLE FOR MOTORCYCLES FITTED WITH WET CLUTCHES.

### SPECIFICATIONS

SN/ILSAC GF-5, GM Dexos 1 Gen 2, Ford WSS-M2C-945A/946A, Chrysler MS6395.

### DESCRIPTION

SYN-X 4000 5W-30 is a high performance, high quality, premium grade passenger car/light diesel engine oil is recommended for most 4, 6 and 8 cylinder passenger cars manufactured from 1980 onward.

### SUMMARY OF BENEFITS

- Suitable for turbo charged and super charged engines.
- Recommended for Petrol, LPG and lightly loaded diesel engines.

PRODUCT CODE	PACK SIZE
60001	205L
62001	20L

## SYN-X 7000 5W-30 FULL SYNTHETIC



### SPECIFICATIONS

Ford WSS-M2C-913D (913C, 913B, 913A) ACEA A1/B1-12, ACEA A5/B5-12, API SL/CF, Renault 0700.

### DESCRIPTION

SYN-X 7000 5W-30 is a energy conserving, fully synthetic engine oil specially engineered for late model Ford passenger cars. Formulated to meet Ford requirement WSS-M2C-913D and can also be used where 913C, 913B and 913A specs are called for. Can reduce consumption by up to 3%.

PRODUCT CODE	PACK SIZE
60020B	IBC (1000L)
60020	205L
62020	20L
60520	5L

# PASSENGER CARS

## SYN-X 5000 10W-40 FULL SYNTHETIC



### SPECIFICATIONS

SN/CF, ACEA A3, B3, B4, MB 229.3, RN 700/710, VW 502, 505, PSA B71-2300.

### DESCRIPTION

SYN-X 5000 10W-40 is a full synthetic high performance engine oil providing ultimate protection for modern high performance engines.

### SUMMARY OF BENEFITS

- Advanced additive technology providing superior engine cleanliness and high temperature protection in high output turbo charged or naturally aspirated engines including diesel vehicles.
- Super oxidation stability compared to a mineral oil based lubricant.
- Outstanding low temperature viscometrics for reduced wear at start up.
- Excellent mixed fleet oil.
- Reduces fuel consumption due to superior technology.
- Suitable for a wide range of vehicle manufacturers from Europe, Japan and America.

PRODUCT CODE	PACK SIZE
60037B	IBC (1000L)
60037	205L
62037	20L
60537	5L
60137	1L

# PASSENGER CARS

## SYN-X 6000 5W-40 FULL SYNTHETIC



### SPECIFICATIONS

API SN/SM/CF, ACEA C3/C2-16, MB 229.51, VW 502, 505, 501, BMW Long Life 04, Porsche A40, GM Dexos 2, PSA Peugeot Citroën B71-2296.

### DESCRIPTION

SYN-X 6000 5W-40 is an ultra-premium engine oil designed for late model cars fitted with the latest clean emission low saps diesel technology.

### SUMMARY OF BENEFITS

- Suitable for vehicles fitted with Diesel Particulate Filters.
- Recommended for cars calling for GM Dexos 2 approved formulations, Japanese and American vehicles calling for API SN or earlier grades, super charged and turbo charged engines, lightly loaded diesel engines and LPG vehicles.

- Although it has not been formally tested, we are fully confident of the performance of SYN-X 6000 in applications calling for VW 504/VW 507 specifications.

PRODUCT CODE	PACK SIZE
30017B	IBC (1000L)
30017	205L
36017	60L
32017	20L
30517	5L

# PASSENGER CARS

## SYN-STAR LV 0W-20 FULL SYNTHETIC



### SPECIFICATIONS

API SN PLUS/SN, ILSAC GF-5, Chrysler MS-6395, Ford M2C947-A.

### DESCRIPTION

SYN-STAR LV 0W-20 is a fully synthetic specially engineered low viscosity, high performance passenger car engine oil suitable for late model passenger motor vehicles including low emission engine vehicles and hybrid vehicles.

PRODUCT CODE	PACK SIZE
60028B	IBC (1000L)
60028	205L
62028	20L
60528	5L

## SYN-STAR 0W-30 FULL SYNTHETIC LOW SAPS



### SPECIFICATIONS

API SN/SM/CF, Low SAPS and ACEA C2/C3-16, Ford M2C950-A.

### DESCRIPTION

SYN-STAR 0W-30 is a fully synthetic specially engineered low viscosity, high performance passenger car engine oil suitable for late model diesel and petrol powered motor vehicles including those fitted with Diesel Particulate Filters.

PRODUCT CODE	PACK SIZE
60023B	IBC (1000L)
60023	205L
62023	20L
60523	5L

# PASSENGER CARS

## EURO ENERGY 5W-30 FULL SYNTHETIC LOW SAPS



### SPECIFICATIONS

API SN/SM/CF, ACEA C3/C2-16, MB 229.51, VW 502, 505, 501, BMW Long Life 04, Porsche, GM Dexos 2, PSA Peugeot Citroën B712290.

### DESCRIPTION

**EURO ENERGY 5W-30** is an ultra-premium, full synthetic passenger car engine oil designed for late model petrol and diesel powered vehicles including those with advanced exhaust treatments such as DPF or AdBlue.

### SUMMARY OF BENEFITS

- Offers superior engine cleanliness, increased horse power, reduced wear and the ability to increase drain intervals within manufacturer guidelines.
- Recommended for most modern European petrol or diesel powered vehicles calling for ACEA C3, modern diesel engines calling for a GM Dexos 2 approved formulation (Dexos 2 is suitable for both Petrol and Diesel powered GM engines), American and Asian petrol powered or hybrid vehicles calling for API SN or earlier API performance grades.
- Also suitable for super charged and turbo charged engines, lightly loaded diesel engines and engines running on LPG fuel.

- Although it has not been formally tested against VW 504/VW 507, we are fully confident of the performance of EURO ENERGY in applications calling for VW 504/VW 507 specifications.

PRODUCT CODE	PACK SIZE
60002B	IBC (1000L)
60002	205L
62002	20L
60502	5L

# PASSENGER CARS

## ENERGY PLUS 5W-30 FULL SYNTHETIC LOW SAPS



### SPECIFICATIONS

VW 504/507, ACEA C2/C3-16, MB 229.51, BMW LL-04.

### DESCRIPTION

**ENERGY PLUS 5W-30** is a specially engineered fully synthetic Low SAPS passenger car engine oil manufactured for VW's latest top tier engine specification for long drain intervals.

PRODUCT CODE	PACK SIZE
60013B	IBC (1000L)
60013	205L
62013	20L
60513	5L

## EURO ULTRA 5W-30 FULL SYNTHETIC LOW SAPS



*\*NOT SUITABLE FOR USE WHERE AN ACEA C3 OR C4 SPECIFICATION IS RECOMMENDED.*

### SPECIFICATIONS

ACEA C1-16, Jaguar Land Rover STJR.03.5005.

### DESCRIPTION

**EURO ULTRA 5W-30** is a fully synthetic high performance, ultra-low SAPS passenger car engine oil for use in diesel and some petrol fuelled cars that specifically call for an ACEA C1 or DL-1 rated oil such as some Mazda, Ford, Mitsubishi and Citroen diesels fitted with Diesel Particulate Filters (DPF's).

PRODUCT CODE	PACK SIZE
60008B	IBC (1000L)
60008	205L
62008	20L
60508	5L

# PASSENGER CARS

## EURO FORCE 5W-30 FULL SYNTHETIC LOW SAPS



### SPECIFICATIONS

ACEA C4-16, Renault RN0720, MB 229.51-226.51, Ford M2C934-B.

### DESCRIPTION

**EURO FORCE 5W-30** is a fully synthetic ultra Low SAPS Diesel passenger car engine oil. It is recommended for vehicles calling for a ACEA C4 rated oil. Ideal for extended drain intervals.

PRODUCT CODE	PACK SIZE
60007B	IBC (1000L)
60007	205L
62007	20L
60507	5L

## GULF 1 10W-60 FULL SYNTHETIC



### SPECIFICATIONS

SN/SM/CF, ACEA A2/B2.

### DESCRIPTION

**GULF 1 10W-60** is a fully synthetic highly advanced, ultra high performance engine oil formulated with poly alpha olefin synthetic base oil technology. It is formulated to provide superior engine performance, reduced wear, increase oil drain intervals and reduced oil consumption. Suitable for most modern and older engines calling for API SL/CF4 specification or earlier. It is suitable for turbo charged, super charged engines and four stroke motorcycles fitted with wet clutches. It is recommended for Petrol, LPG and diesel engines.

PRODUCT CODE	PACK SIZE
30034B	IBC (1000L)
30034	205L
32034	20L
30534	5L

# PASSENGER CARS

## PREMIUM ENERGY® 10W-30 SEMI-SYNTHETIC



### SPECIFICATIONS

API SN PLUS/SN/CF, ILSAC GF-5, Ford WSS-M2C-945A/946A, Chrysler MS6395.

### DESCRIPTION

PREMIUM ENERGY® 10W-30 is a semi-synthetic low viscosity, energy conserving premium grade passenger car engine oil offering the latest in API additive technology and fuel efficiency standards.

### SUMMARY OF BENEFITS

- Provides superior engine protection and offers advanced protection against cold start wear, oxidation while providing excellent thermal stability.
- Suitable for use in modern engine vehicles where a 7.5W or 10W-30 engine oil is called for or when superior fuel efficiency is desired.
- It meets the demanding ILSAC GF-5 energy conserving specification and is suitable for turbo charged and super charged engines.
- Recommended for Petrol, LPG and lightly loaded diesel engines.

PRODUCT CODE	PACK SIZE
30032B	IBC (1000L)
30032	205L
32032	20L
30632	6L
30532	5L
30132	1L

# PASSENGER CARS

## PROTECTA MULTI VALVE 15W-50 MINERAL



### SPECIFICATIONS

SL/CF-4, ACEA A2/B2.

### DESCRIPTION

**PROTECTA MULTI VALVE 15W-50** is a high quality passenger car/light diesel engine oil that offers a wide viscosity range hence giving engines good flow on start up while maintaining an SAE 50 viscosity at operating temperature. Suitable for most 4, 6 and 8 cylinder engines manufactured from 1980 onward calling for an SL/CF or earlier specification. Suitable for motorcycle applications calling for JASO MA wet clutch compatible oils.

PRODUCT CODE	PACK SIZE
30028B	IBC (1000L)
30028	205L
32028	20L
30528	5L

## PROTECTA ULTRA 15W-50 SEMI-SYNTHETIC



### SPECIFICATIONS

SL/CF-4, ACEA A2/B2.

### DESCRIPTION

**PROTECTA ULTRA 15W-50** boasts similar performance characteristics as Protecta Multi Valve however it is formulated with 30% synthetic base oil. Suitable for motorcycle applications calling for JASO MA wet clutch compatible oils.

PRODUCT CODE	PACK SIZE
30033B	IBC (1000L)
30033	205L
32033	20L
30533	5L

# PASSENGER CARS

## HI TECH PREMIUM 20W-50 MINERAL



### SPECIFICATIONS

API SN/SM/CF.

### DESCRIPTION

**HI TECH PREMIUM 20W-50** is a premium grade engine oil. It provides superior engine protection, reduces oil consumption, excellent anti-oxidation capabilities and offers excellent thermal stability.

PRODUCT CODE	PACK SIZE
30027B	IBC (1000L)
30027	205L
32027	20L
30627	6L
30527	5L
30127	1L

## PREMIUM GOLD 15W-40 MINERAL



### SPECIFICATIONS

API SN/SM/CF.

### DESCRIPTION

**PREMIUM GOLD 15W-40** is a mid viscosity range premium grade engine oil. It provides superior protection against cold start wear, reduces oil consumption, excellent anti-oxidation capabilities and offers excellent thermal stability.

PRODUCT CODE	PACK SIZE
30021B	IBC (1000L)
30021	205L
32021	20L
30521	5L
30121	1L

# PASSENGER CARS

## XMP ENGINE OIL 20W-50 MINERAL



### SPECIFICATIONS

SH/CD.

### DESCRIPTION

**XMP ENGINE OIL 20W-50** is a multi-grade engine oil formulated with shear stable additives for use in a wide range of passenger cars and lightly loaded diesel engines. Ideally suited for vehicles manufactured before 1994. Also suitable for use in turbo charged engines.

PRODUCT CODE	PACK SIZE
30022B	IBC (1000L)
30022	205L
32022	20L
30422	4L

## COMP 50 PLUS 25W-70 MINERAL



### SPECIFICATIONS

SN/CF.

### DESCRIPTION

**COMP 50 PLUS 25W-70** is a high viscosity engine oil formulated for both high revving, hard working race engines and it is also formulated for older, worn engines with oil consumption or fuming problems. It is a proven performance oil in heavily worked engines including those using methanol and nitro methane fuels. Recommended for turbo and supercharged engines, petrol, LPG and diesel powered engines and also suitable for motorcycles fitted with wet clutches such as V twin engines.

PRODUCT CODE	PACK SIZE
30024B	IBC (1000L)
30024	205L
32024	20L
30524	5L

# PASSENGER CARS

## COMP-R 30, 40, 50 & 70 5W-30, 10W-40, 25W-50 & 25W-70



### SPECIFICATIONS

SN/CF.

### DESCRIPTION

The COMP-R range is made up of high performance engine oils developed to protect high output engines during on-road as well as track usage. Compatible with all road fuels as well as common racing fuels including Avgas, Nitro methane and methanol. Exceptional engine protection from enhanced levels of zinc and moly containing anti-wear additives.

A viscosity grade offering the same exceptional engine protection is available regardless of whether you drive a "fast four" or a top fuel dragster.

### SUMMARY OF BENEFITS

- Semi-synthetic and Full Synthetic formulations available to offer enhanced viscosity control at operating temperature.
- Race oil suitable for daily drive application offering outstanding wear protection without the need of reduced oil drain intervals.
- Outstanding wear protection due to high levels of zinc and organic molybdenum additives.
- Highly shear stable viscosity modifiers in COMP-R 30 and COMP-R 40 resist viscosity loss under load.
- COMP-R 70 and COMP-R 50 have shear-less formulations to ensure no viscosity loss due to temporary or permanent polymer shearing in the highest horsepower applications such as Top Fuel, Door Slammer and Funny Cars.
- Unlike some race only oil, an appropriate level of detergency means that the COMP-R range can also be used in high performance road cars without the need to reduce oil drain intervals.

#### COMP-R 30 (5W-30) -

PRODUCT CODE	PACK SIZE
320018	20L
305018	5L

#### COMP-R 40 (10W-40) -

PRODUCT CODE	PACK SIZE
320017	20L
305017	5L

# PASSENGER CARS

**COMP-R 30, 40, 50 & 70  
5W-30, 10W-40, 25W-50 & 25W-70**



CONTINUED..

**COMP-R 50 (25W-50) -**

PRODUCT CODE	PACK SIZE
320011	20L
305011	5L

**COMP-R 70 (25W-70) -**

PRODUCT CODE	PACK SIZE
320016	20L
305016	5L

**THE COMP-R RANGE IS PROUDLY USED AND RECOMMENDED BY VICTOR AND BEN BRAY OF TEAM BRAY RACING. ALL 5 BELOW DRAG CARS ARE PROTECTED BY GULF WESTERN OIL.**



## TWO STROKE, FOUR STROKE & MARINE

### OUTBOARD TC-W3 TWO STROKE SEMI-SYNTHETIC



#### SPECIFICATIONS

NMMA TC-W3, TC-W2.

#### DESCRIPTION

**OUTBOARD TC-W3** is an ash less, high performance semi-synthetic two stroke engine oil designed for use in water cooled outboard engines including oil injected engines. **OUTBOARD TC-W3** will minimise spark plug fouling and is a low smoke formulation. Suitable for everyday boating and for high performance outboard engines. Dyed blue for identification.

PRODUCT CODE	PACK SIZE
30082B	IBC (1000L)
30082	205L
32082	20L
30482	4L
30182	1L

### OUTBOARD FC-W FOUR STROKE 10W-40 SEMI-SYNTHETIC



#### SPECIFICATIONS

NMMA FC-W, SAE 10W-40, JASO MA.

#### DESCRIPTION

**OUTBOARD FC-W** is a premium Grade, semi-synthetic four stroke engine oil meeting the latest maritime specification FC-W. Suitable for use in four stroke outboard motors calling for FC-W including Honda, Yamaha, Suzuki, Daihatsu, Evinrude, Sea Doo, Volvo Penta, Mercruiser, Marina, Yanmar and Tohatsu.

PRODUCT CODE	PACK SIZE
60082B	IBC (1000L)
60082	205L
60482	4L

## TWO STROKE, FOUR STROKE & MARINE



### LAWN MOWER OIL SAE 30 MINERAL



#### SPECIFICATIONS

SAE 30, API SJ/CF.

#### DESCRIPTION

**LAWN MOWER OIL SAE 30** is monograde oil designed for the engines of four stroke lawn mowers and stationary engines including Honda, Briggs and Stratton. Dyed red for identification.

PRODUCT CODE	PACK SIZE
30084B	IBC (1000L)
30084	205L
32084	20L
30184	1L

### AIR COOLED TWO STROKE SEMI-SYNTHETIC



*\*NOT SUITABLE FOR WATER COOLED ENGINES OR OUTBOARD ENGINES.*

#### SPECIFICATIONS

API TC, TB, TA, JASO FC.

#### DESCRIPTION

**AIR COOLED TWO STROKE** is premium two stroke oil suitable for use in air cooled two stroke engines such as lawn mowers, brush cutters, chain saws and other air cooled two stroke applications. Dyed green for identification.

PRODUCT CODE	PACK SIZE
30083B	IBC (1000L)
30083	205L
32083	20L
30483	4L
30183	1L

# HYDRAULIC OILS

## SUPERDRAULIC® MINERAL ISO 22, 32, 46, 68, 100, 150 & 220



### DESCRIPTION

The SUPERDRAULIC® range of anti-wear hydraulic fluid is available in ISO Viscosity Grades 22, 32, 46, 68, 100, 150 and 220. It is formulated using advanced Zinc Dithiophosphate additive technology providing superior protection against pump wear, excellent filterability, good thermal stability, low fluid/water interaction, excellent air release, foaming and demulsibility properties and good protection against corrosion.

### SUMMARY OF BENEFITS

- Formulated with premium quality additive packages delivering a ultra-high quality fluid meeting the requirements of the following pump manufacturers/OEM's: Rexroth (Bosch), Denison, Vickers, David Brown, Hagglund, Danfoss, Commercial Hydraulics, Racine, Sunstrand, Oilgear, Linde, Cincinnati Milacron, US Steel, General Motors AGMA, US Military, Eaton & AFNOR.
- Suitable for most hydraulic applications including transport, injection moulding, presses, machinery, agriculture, mining, earthmoving, cranes, industrial and most general hydraulic applications.
- Product is passed through an ultra-fine filtration process, this combined with only new virgin packaging offered by Gulf Western ensures excellent ISO Cleanliness levels.
- Offers good seal and paint compatibility.
- SUPERDRAULIC® meets many industry standards and OEM approvals that are not listed above, for a full listing please contact us.

### ISO 22 -

PRODUCT CODE	PACK SIZE
30078B	IBC (1000L)
30078	205L
32078	20L

### ISO 32 -

PRODUCT CODE	PACK SIZE
30061B	IBC (1000L)
30061	205L
32061	20L

# HYDRAULIC OILS

## SUPERDRAULIC® MINERAL ISO 22, 32, 46, 68, 100, 150 & 220



CONTINUED..

### ISO 46 -

PRODUCT CODE	PACK SIZE
30062B	IBC (1000L)
30062	205L
32062	20L

### ISO 68 -

PRODUCT CODE	PACK SIZE
30063B	IBC (1000L)
30063	205L
32063	20L

### ISO 100 -

PRODUCT CODE	PACK SIZE
30064B	IBC (1000L)
30064	205L
32064	20L

### ISO 150 -

PRODUCT CODE	PACK SIZE
30070B	IBC (1000L)
30070	205L
32070	20L

### ISO 220 -

PRODUCT CODE	PACK SIZE
30071B	IBC (1000L)
30071	205L
32071	20L

# HYDRAULIC OILS

## SUPERDRAULIC® HVI HI TEMP ISO 46, 68, 100



### DESCRIPTION

The **SUPERDRAULIC® HVI HI TEMP** range of high viscosity index, high temperature anti-wear hydraulic fluids is available in Viscosity Grades 46, 68 and 100.

### SUMMARY OF BENEFITS

- Formulated using the same chemistry as the Superdraulic® range however is formulated with shear stable polymers making it suitable for use in applications where extra harsh conditions and heat are common.
- Offers excellent thermal stability and will suffer minimal viscosity loss over a wide range of temperatures.
- Dyed green for identification.

#### ISO 46 -

PRODUCT CODE	PACK SIZE
30081B	IBC (1000L)
30081	205L
32081	20L
30581	5L

#### ISO 68 -

PRODUCT CODE	PACK SIZE
30065B	IBC (1000L)
30065	205L
32065	20L
30565	5L

#### ISO 100 -

PRODUCT CODE	PACK SIZE
30091B	IBC (1000L)
30091	205L
32091	20L

# HYDRAULIC OILS

## GULF HARVESTER FLUID VG 46 & 68 MINERAL



### DESCRIPTION

**GULF HARVESTER HYDRAULIC FLUID** is an ultra high temperature, super shear stable hydraulic oil designed for use in extreme applications where very high temperatures are common, such as those experienced in Austoft and Cameco sugar cane harvesters.

### SUMMARY OF BENEFITS

- Formulated with extremely shear stable additives offering minimal viscosity loss, minimal oxidation and offers excellent thermal stability.
- Dyed green for identification.

### ISO 46 -

PRODUCT CODE	PACK SIZE
30076B	IBC (1000L)
30076	205L
32076	20L

### ISO 68 -

PRODUCT CODE	PACK SIZE
30072B	IBC (1000L)
30072	205L
32072	20L

# HYDRAULIC OILS

## C4 HYDRAULIC FLUID 10W MINERAL



### DESCRIPTION

**C4 HYDRAULIC FLUID 10W** is a high temperature, API CD/SF 10W hydraulic fluid meeting Caterpillar TO-2 and Allison C4. This is ideally suited for use in mobile hydraulic applications where high temperatures can be experienced and equipment calling for a SAE 10W hydraulic fluid. Dyed red for identification.

PRODUCT CODE	PACK SIZE
30060B	IBC (1000L)
30060	205L
32060	20L

## SUPERDRAULIC® ZINC FREE HYDRAULIC 46 & 68 MINERAL



### DESCRIPTION

**ZINC FREE HYDRAULIC 46 & 68** are premium grade Zinc free formulations suitable for use in systems where silver plated bearings are common, such as Lucas PM – 500 series hydraulic pumps.

#### ISO 46 -

PRODUCT CODE	PACK SIZE
60006B	IBC (1000L)
60006	205L
62006	20L

#### ISO 68 -

PRODUCT CODE	PACK SIZE
30087B	IBC (1000L)
30087	205L

# HYDRAULIC OILS

## BIODRAULIC FR VG 46 & 68 FULL SYNTHETIC



### DESCRIPTION

**BIODRAULIC SYNTHETIC FR** is a biodegradable, fire resistant ester based synthetic hydraulic fluid available in viscosity grades ISO 46 & 68. It has independent Factory Mutual certification for fire resistance. It is more than 95% biodegradable making it ideal for use in equipment working in environmentally sensitive environments.

#### ISO 46 -

PRODUCT CODE	PACK SIZE
40002B	IBC (1000L)
40002	205L
42002	20L

#### ISO 68 -

PRODUCT CODE	PACK SIZE
40009B	IBC (1000L)
40009	205L
42009	20L



## LHM MINERAL OIL MINERAL HYDRAULIC FLUID



### DESCRIPTION

**LHM MINERAL OIL** is a low viscosity hydraulic fluid for use in hydraulic systems including power steering, suspension and brake systems requiring a mineral fluid meeting ISO 7308.

PRODUCT CODE	PACK SIZE
300040	205L
301040	1L

# COMPRESSOR OILS

## MINERAL COMPRESSOR VG 46 & 68 MINERAL



### SPECIFICATIONS

ISO/DP 6521 DAA, DAB, DAG, DAH; DIN 51506 VBL, VCL, VDL. Ashless, mineral oil based compressor lubricant suitable for use in Atlas Copco, Jaeger Machine Company rotary screw and vane, LeRoi Division, Dresser Industries.

### DESCRIPTION

**MINERAL COMPRESSOR** is a universal high performance ashless air compressor oil designed to meet the requirements of a broad range of compressor types from all of the major compressor manufacturers.

### SUMMARY OF BENEFITS

- Can be used in mobile or stationary compressors including reciprocating, centrifugal, rotary screw, piston and sliding vane type compressors.

#### ISO 46 -

PRODUCT CODE	PACK SIZE
30085B	IBC (1000L)
30085	205L
32085	20L

#### ISO 68 -

PRODUCT CODE	PACK SIZE
30075B	IBC (1000L)
30075	205L
32075	20L
31075	1L

# COMPRESSOR OILS

## ULTRA CLEAR COMPRESSOR VG 46 & 68 FULL SYNTHETIC



\*NOT SUITABLE FOR USE IN COMPRESSORS PRODUCING AIR FOR BREATHING.

### SPECIFICATIONS

ISO/DP 6521 DAA, DAB, DAG, DAH; DIN 51506 VBL, VCL, VDL. Ashless, full synthetic compressor lubricants based upon PAO base oil.

### DESCRIPTION

**ULTRA CLEAR COMPRESSOR** oils are a universal high performance, shear stable full synthetic compressor oil based upon PAO base oil technology and advanced ashless additives.

### SUMMARY OF BENEFITS

- These advanced technology lubricants offer the ability to work across a wider temperature and pressure range as well as working for extended periods without need for oil change (up to 5,000 hours with oil analysis) due to the superior oxidation control of these lubricants.
- Superior wear protection, excellent filterability and air release make this range of lubricants a very versatile fluid for use in reciprocating, centrifugal, rotary screw, piston and sliding vane type compressors from most leading manufacturers.

#### ISO 46 -

PRODUCT CODE	PACK SIZE
30079B	IBC (1000L)
30079	205L
32079	20L

#### ISO 68 -

PRODUCT CODE	PACK SIZE
30095B	IBC (1000L)
30095	205L
32095	20L

# COMPRESSOR OILS

## VACUUM PUMP OIL VG 46 & 68 MINERAL



### DESCRIPTION

**VACUUM PUMP OIL** is a VG 68 grade lubricant designed for use in a wide variety of Vacuum pumps including dairies and the refrigeration trade.

### SUMMARY OF BENEFITS

- Blended with high quality anti-foam additives, it will resist foaming in the most arduous conditions.

### ISO 46 -

PRODUCT CODE	PACK SIZE
300010	205L
320010	20L

### ISO 68 -

PRODUCT CODE	PACK SIZE
30090B	IBC (1000L)
30090	205L
32090	20L

# GEAR OILS

## GEAR LUBE 80W-90 & 85W-140 MINERAL



\*NOT SUITABLE FOR LIMITED SLIP DIFFERENTIALS.

### SPECIFICATIONS

SAE 80W-90, SAE 85W-140, API GL-5, GL-4, MIL-L-2105D, Borg Warner 5M-42, Mack GO-H, Rockwell, Eton, 2FTE-ML07A, 08, USS 224.

### DESCRIPTION

GEAR LUBE 80W-90 & 85W-140 are multi-purpose, shear stable high performance gear oils based on sulfur phosphorus extreme pressure technology.

### SUMMARY OF BENEFITS

- This range will provide excellent extreme pressure protection, minimise welding, scuffing and provide superior protection in high load applications.
- Are suitable for use in gear boxes, manual transmissions, final drives, hubs and transfer cases in a wide variety of mining earthmoving, automotive, transport and agricultural applications.

#### 80W-90 -

PRODUCT CODE	PACK SIZE
30051B	IBC (1000L)
30051	205L
36051	60L
32051	20L
30551	5L
30151	1L

#### 85W-140 -

PRODUCT CODE	PACK SIZE
30052B	IBC (1000L)
30052	205L
36052	60L
32052	20L
30552	5L
30152	1L

# GEAR OILS

## LOW VIS GEAR LUBE GL-5 75W-90 MINERAL

\*NOT SUITABLE FOR USE IN COMPRESSORS PRODUCING AIR FOR BREATHING.

### SPECIFICATIONS

SAE 75W-90 API GL-5, GL-4, MIL-L-2105D, Borg Warner 5M-42, Ford ESP-M2C83-C, Mitsubishi ES-X-64021, 2FTE-ML08.

### DESCRIPTION

LOW VIS 75W-90 is an extreme pressure gear lubricant formulated to provide superior extreme pressure properties ensuring smooth gear shift. Suitable for use in manual transmissions, transfer cases, steering boxes and other industrial transmission calling for a 75W-90 gear oil.

PRODUCT CODE	PACK SIZE
30050B	IBC (1000L)
30050	205L
36050	60L
32050	20L
30450	4L
30150	1L



## GEAR LUBE LS 90 MINERAL

### SPECIFICATIONS

Exceeds API GL-5, GL-4 (meets obsolete API GL-6), MIL-L-2105D, Borg Warner 5M-42, Mack GO-J, Rockwell, Eaton, Meritor 076A.

### DESCRIPTION

GEAR LUBE LS 90 is a highly fortified extreme pressure friction modified Gear Oil specially formulated for final drives in vehicles fitted with limited slip differentials.

PRODUCT CODE	PACK SIZE
30053B	IBC (1000L)
30053	205L
36053	60L
32053	20L
30153	1L



# GEAR OILS

## ULTRA CLEAR GEAR LUBE LS 75W-85 FULL SYNTHETIC

\*SUITABLE FOR USE IN LIMITED SLIP DIFFERENTIALS.

### SPECIFICATIONS

SAE 75W-85 API GL-5, GL-4, MIL-L-2105D, Borg Warner 5M-42, Ford ESP-M2C83-C, Mitsubishi ES-X-64021.

### DESCRIPTION

ULTRA CLEAR GEAR OIL® 75W-85 is fully synthetic friction modified, extreme pressure Gear Oils formulated with poly alpha olefin base oil technology. It will provide superior protection, thermal stability and superior EP properties to that of a mineral oil.

PRODUCT CODE	PACK SIZE
60050B	IBC (1000L)
60050	205L
66050	60L
62050	20L



## ULTRA CLEAR GEAR OIL® LS 75W-90 FULL SYNTHETIC

\*SUITABLE FOR USE IN LIMITED SLIP DIFFERENTIALS CALLING FOR 80W-90 OR 75W-90 VISCOSITY GRADE GEAR OIL.

### SPECIFICATIONS

SAE 75W-90, API GL-5, GL-4, MIL-L-2105D, Borg Warner 5M-42, Ford ESP-M2C83-C, Mitsubishi ES-X-64021

### DESCRIPTION

ULTRA CLEAR GEAR OIL® LS 75W-90 is a fully synthetic extreme pressure, friction modified Gear Oil formulated with poly alpha olefin base oil technology. It will provide superior protection, thermal stability and superior EP properties to that of a mineral oil.

PRODUCT CODE	PACK SIZE
30056B	IBC (1000L)
30056	205L
36056	60L
32056	20L
30456	4L



# GEAR OILS

## ULTRA CLEAR GEAR OIL® LS 80W-90 & 80W-140 FULL SYNTHETIC



\*SUITABLE FOR USE IN LIMITED SLIP DIFFERENTIALS.

### SPECIFICATIONS

SAE 80W-90, SAE 80W-140, API GL-5, GL-4, MIL-L-2105D, Borg Warner 5M-42, Mack GO-J, Rockwell, Eton.

### DESCRIPTION

ULTRA CLEAR GEAR OIL® 80W-90 & 80W-140 are fully synthetic friction modified, extreme pressure Gear Oils formulated with poly alpha olefin base oil technology. They will provide superior protection, thermal stability and superior EP properties to that of a mineral oil. It is suitable for a wide range of manual transmission, gear boxes and final drives calling for 80W-90 and 80W-140 gear oils.

#### 80W-90 -

PRODUCT CODE	PACK SIZE
30059B	IBC (1000L)
30059	205L
36059	60L
32059	20L
30459	4L

#### 80W-140 -

PRODUCT CODE	PACK SIZE
30055B	IBC (1000L)
30055	205L
36055	60L
32055	20L
30455	4L

# GEAR OILS

## ULTRA DRIVE 90 SEMI-SYNTHETIC

\*SUITABLE FOR USE IN LIMITED SLIP DIFFERENTIALS.



### SPECIFICATIONS

SAE 90, SAE 90 GL-5, GL-4, ZF TE-ML 05A, 07A, 16B/C/D, 17B, 19B, MAN 342 M-2, DAF (where GL-5 axle lubricants are recommended for use), Mack GO-J, Renault (where GL-5 or MIL-PRF-2105E axle lubricants are recommended for use, MIL-PRF-2105E, Scania STO 1:0, Arvin Meritor 0-76-A/B/D, IVECO.

### DESCRIPTION

**ULTRA DRIVE 90** is a semi-synthetic fortified ultra high performance, friction modified gear oil designed for applications operating in the most extreme conditions where high load, high temperatures and long hauls are common.

### SUMMARY OF BENEFITS

- Formulated and tested with various Road Train operators throughout Australia's Northern Territory.
- Suitable for use where both 80W-90 and 85W-140 viscosity grades are called for.
- It will provide ultimate film strength protection due to its high molecular strength and will offer excellent thermal stability.
- It will not gel when contaminated with water. Ideal for extended drain intervals.

PRODUCT CODE	PACK SIZE
30057B	IBC (1000L)
30057	205L
32057	20L

# TRANSMISSION FLUIDS



## ATF DEX-III MINERAL



\*SUITABLE FOR USE IN LIMITED SLIP DIFFERENTIALS.

### SPECIFICATIONS

Dex-III, Dex IID, Allison C4, ZF, Mercon, Sunstrand 22, Vickers 35 VQ25A, Cat TO-2.

### DESCRIPTION

ATF DEX-III is an automatic transmission fluid designed for all transmissions and gear boxes calling for a Dex III, IIE, Type A Suffix or IID specification. Recommended for use in Automotive, Transport, Industrial, Mining and Earthmoving applications. Dyed red for identification.

PRODUCT CODE	PACK SIZE
30041B	IBC (1000L)
30041	205L
36041	60L
32041	20L
30441	4L
30141	1L

## TRANSYN-MF SEMI-SYNTHETIC



\*NOT SUITABLE FOR ZF 6 SPEED TRANSMISSION.

### SPECIFICATIONS

Dexron III, Alison C4/TES 295/389, JWS 3309, Chrysler +3, +4, SP111, Mercedes Benz 236.1, 236.11, 236.12, 236.14, 236.15, 236.3, 236.41, 236.5, 236.6, 236.7, 236.8, 236.9, 236.91, ATF VI, Honda Z1, DW1, Hyundai SP-IV, Mazda T-IV, Nissan Matic D, J, K, S, W, Saab 3309 and Toyota IV, WS.

### DESCRIPTION

TRANSYN-MF is a premium quality multi functional synthetic Automatic Transmission Fluid suitable for a wide range of Automatic Transmissions in both modern and older vehicles.

PRODUCT CODE	PACK SIZE
60058B	IBC (1000L)
60058	205L
66058	60L
62058	20L

# TRANSMISSION FLUIDS



## SYN-TS® ATF FULL SYNTHETIC



\*NOT SUITABLE FOR CVT TRANSMISSIONS.

### SPECIFICATIONS

Dex III, Dex IID, Dex VI, Allison: C4, TES 295, Audi, BMW, Ford: 95LE, Mercon, Mercon V, Honda ATF Z1/DW1, Hyundai SPiI/III, JASO 1a, MAN, Mazda ATF MIII/MV, MB 236.1, 236.2, 236.3, 236.5, 236.6, 236.7, 236.9, 236.10, 236.11, Mitsubishi SPiI/III/IV/J2, Nissan 402, Matic D, J,K,S, Saab 93 165 147, Subaru ATF, ATF-HP, Suzuki 3314, 317, Toyota TIII/IV/WS, JWS3324, Voith 55.6335.XX (607,1363), Volvo 97340/41, ZF TE-ML 03D, 04D, 05L, 09, 11B, 14A, 16L, 17C, 14B.

### DESCRIPTION

SYN-TS® is a fully synthetic multi-functional Automatic Transmission Fluid formulated for automatic transmissions. Dyed red for identification.

### SUMMARY OF BENEFITS

- Formulated for transmissions working in extreme environments that are exposed to excessive temperatures, heavy loads or high performance applications.
- Will offer superior heat and frictional properties to a mineral oil while allowing for extended drain intervals.
- Meets the requirements of nearly all modern and older automatic transmissions thus is an excellent mixed fleet oil.
- SYN-TS® is the prime recommendation for Allison transmissions used in multi trailer applications.
- Meets many industry standards and OEM approvals that are not listed above, for a full listing please contact us.

PRODUCT CODE	PACK SIZE
30058B	IBC (1000L)
30058	205L
36058	60L
32058	20L
30458	4L
30158	1L

# TRANSMISSION FLUIDS



## SYN-TS® DCT FULL SYNTHETIC

### SPECIFICATIONS

Audi VW TL 052 182, VM TL 052 529, BMW 83 22 2 148 578, 83 22 2 148 579, 83 22 0 440 214 & 83 22 2 147 477, Citroen/Peugeot 9734.S2, Ford/Nissan M2C936A, Mercedes-Benz MB 236.21, Mitsubishi MZ320065 Dia-Queen SSTF-1, Porsche 999.917.080.00, Renault BOT 450, Volkswagen/Skoda/Seat VW TL 052 182, Volvo 1161838, 1161839.

### DESCRIPTION

SYN-TS® DCT is a full Synthetic Premium Multi-vehicle transmission fluid for use in Wet Dual Clutch Transmission (DCT/DSG) providing excellent anti-shudder protection and consistent power transmission and gear change. Suitable for use in Volkswagen Group 6 speed DSG, Ford (Getrag), Volvo, Mitsubishi, Peugeot and Citroen 6 speed dual clutch transmissions.

PRODUCT CODE	PACK SIZE
320012	20L



## SYN-TS® CVT FLUID FULL SYNTHETIC

### SPECIFICATIONS

Audi/VW (TL 52180, G 052 180, G 052 516), Dodge/Jeep (NS-2, CVTF+4), Ford (CVT30, Mercon C, CVT23), GM/Saturn (DEX-CVT), Honda (HMMF, HCF-2), Hyundai/Kia (SP-CVT 1), Mazda (CVTF, CVT3320), Mercedes Benz (236.20), Mini Cooper (EZL 799A), Mitsubishi (CVTF-J1, CVTF-J4), Nissan (NS-1, NS-2, NS-3), Subaru (NS-2/Lineartronic CVTF, K0425Y0710, CV-30, High Torque CVT Fluid), Suzuki (TC, NS-2, CVT Green 1, CVT Green 2), Toyota/Lexus (TC, FE).

### DESCRIPTION

SYN-TS® CVT is a synthetic multi-functional transmission fluid suitable for use in most Continuously Variable Transmissions including those that are chain and belt driven. Is comparable in quality to genuine CVT fluids but works across multiple vehicle makes and models making it a universal fluid.

PRODUCT CODE	PACK SIZE
60041B	IBC (1000L)
60041	205L
62041	20L
60441	4L

# TRANSMISSION FLUIDS



## SYN-TS® ZFV FULL SYNTHETIC

\*NOT SUITABLE FOR CVT TRANSMISSIONS.

### SPECIFICATIONS

ZF TE-ML 14C, ZF TE-ML 20C (ZF Ecolife), Voith H55.6335, MAN 339 Z3. Also suitable for use in automotive applications as an ultra premium multi-vehicle transmission fluid where SYN-TS® ATF is recommended.

### DESCRIPTION

SYN-TS® ZFV is a specialised high performance, full PAO synthetic transmission fluid suitable for a wide range of on and off-highway applications. The exceptional cold performance characteristics of the fluid ensures a more responsive and smoother gear shift. Advanced additive technology and highly shear stable viscosity modifiers allow smooth gear shifts across a wide temperature and load range resulting in less shudder, noise and vibration.

PRODUCT CODE	PACK SIZE
300041	205L
360041	60L
320041	20L

## SYN-TORQUE-TO4 50 FULL SYNTHETIC

\*NOT SUITABLE FOR CVT TRANSMISSIONS.



### DESCRIPTION

SYN-TORQUE 50 is a fully synthetic poly alpha olefin based heavy duty transmission/drive train fluid. It is suitable for Fuller Road Ranger transmissions including those fitted with air shift systems. Designed for transmission applications both on and off-highway operating under extreme conditions including irregular servicing and high temperatures. It is suitable for extended drain intervals, usually at least double that of mineral oils.

PRODUCT CODE	PACK SIZE
30054B	IBC (1000L)
30054	205L
32054	20L

# TRANSMISSION FLUIDS

## TORQUE OIL-TO4 10W, 30, 50 & 60 MINERAL



### DESCRIPTION

The **TORQUE OIL** range is available in SAE viscosities 10W, 30, 50 & 60. It is a multi functional heavy duty power-shift transmission fluid/drive train/clutch and hydraulic fluid suitable for use in off-highway equipment manufactured by Caterpillar, Case, Komatsu, Fiat, John Deere, Liebherr and many other global manufacturers.

It is formulated to meet Caterpillar TO-4, Allison TES 439 and C4 (obsolete), Komatsu KES 07.868.1 as well as ZF TE-ML 03C, 07D and 07F enabling the fluid to be used in mixed fleet applications. It is the ideal recommendation for use in Fuller Road Ranger and Volvo transmissions requiring a non-EP gear oil.

### 10W -

PRODUCT CODE	PACK SIZE
30047B	IBC (1000L)
30047	205L
32047	20L

### 30 -

PRODUCT CODE	PACK SIZE
30045B	IBC (1000L)
30045	205L
32045	20L

### 50 -

PRODUCT CODE	PACK SIZE
30046B	IBC (1000L)
30046	205L
32046	20L

### 60 -

PRODUCT CODE	PACK SIZE
60045B	IBC (1000L)
60045	205L
62045	20L

# TRANSMISSION FLUIDS



## POWER TRAIN FLUID 60 MINERAL

### DESCRIPTION

**POWER TRAIN FLUID 60** is a super high performance, premium drive line fluid designed for use in mining and other off road equipment working under the most arduous of conditions that require a fluid meeting Caterpillar FD-1. Suitable for use in Caterpillar final drives and Axles that currently specify the use of Caterpillar TO-4 (Torque) oils and do not contain friction material. If used in a Caterpillar TO-4 final drive application, using Power Train Fluid 60 can double the service drain interval.

PRODUCT CODE	PACK SIZE
60005B	IBC (1000L)
60005	205L
62005	20L



## FORD TRANS 85/95LE MINERAL

### SPECIFICATIONS

BTR approved formulation meeting the requirements for 85/95LE.

### DESCRIPTION

**FORD TRANS 85/95LE** is a BTR approved formulation suitable for use in BTR M95LE transmissions fitted to 6 & 8 cylinder Ford passenger cars. FORD TRANS 85LE/95LE also meets the requirement for Mitsubishi Automatic Transmission fluids calling for a Type M fluid (Magna, Verada, Nimbus, Lancer and other models). Dyed red for identification.

PRODUCT CODE	PACK SIZE
30042B	IBC (1000L)
30042	205L
36042	60L
32042	20L
30542	5L
30142	1L

# TRANSMISSION FLUIDS



## AGRIBLUE UTTF 10W-30 SEMI-SYNTHETIC

\*FORMULATED WITH VAPOUR PHASE INHIBITOR.

### SPECIFICATIONS

John Deere: JDM J20A, J20B, J20C, J20D, J14B, J14C, JD21A, JDT303, Quatrol, New Holland: ESN-M2C134-D, FNHA-2-C-200.00, FNHA-2-C-201.00 Case International: MS 1206, 1204, 1207, 1210, JIC 145, 143, 144, 185, International Harvester B5-B6, White Q1826,1705,1802, 1826, 1766, 1722, 1766B, Type 55, AGCO 821XL, Steiger, Versatile, Deutz-Allis, Fiat, Kubota UDT, Massey Ferguson: M-1110, 1127A/B, 1129A, 1135, 1141, 1143, 1145, ZF: TE-ML 03E, 03F, 05F, 06K, Cat TO-2, Allis-Chalmers Power Fluid 821, Deutz-Allis: 272843, 257541, 246634, Allison: C2, C3, C4.

### DESCRIPTION

**AGRIBLUE UTTF 10W-30** is a semi-synthetic fortified ultra high performance Universal Tractor Transmission Fluid (UTTF) formulated with a Vapour Phase Inhibitor (VPI).

### SUMMARY OF BENEFITS

- VPI's slowly release an anti-corrosive film protecting gear teeth and engine parts exposed to the atmosphere during long idle periods.
- Designed for use in transmissions, final drives, hydraulics, wet clutches and wet brakes of modern tractors including those calling for a common oil and is recommended for use in 10W-20 or 20W-30 applications.
- Significantly increased gear wear protection.
- Proven field performance and good anti-foam characteristics.
- Excellent shear stability performance is maintained and very high thermal/oxidation stability provide long fluid life.
- Good water tolerance ensures hydraulic performance is maintained.
- Low Copper activity and good filterability.

PRODUCT CODE	PACK SIZE
30048B	IBC (1000L)
30048	205L
32048	20L

# TRANSMISSION FLUIDS

## AGRITRANS UTTF 10W-20 MINERAL



### SPECIFICATIONS

John Deere: JDM J20A, J20B, J20C, J20D, J14B, J14C, JD21A, JDT303, Quatrol, New Holland: ESN-M2C134-D, FNHA-2-C-200.00, FNHA-2-C-201.00 Case International: MS 1206, 1204, 1207, 1210, JIC 145, 143, 144, 185, International Harvester B5-B6, White Q1826,1705,1802, 1826, 1766, 1722, 1766B, Type 55, AGCO 821XL, Steiger, Versatile, Deutz-Allis, Fiat, Kubota UDT, Massey Ferguson: M-1110, 1127A/B, 1129A, 1135, 1141, 1143, 1145, ZF: TEMPL 03E, 03F, 05F, 06K, Cat TO-2, Allis-Chalmers Power Fluid 821, Deutz-Allis: 272843, 257541, 246634, Allison: C2, C3, C4.

### DESCRIPTION

**AGRITRANS UTTF 10W-20** is a high quality, premium grade OEM approved Universal Tractor Transmission Fluid (UTTF) meeting the requirement of modern and older tractor manufacturers.

### SUMMARY OF BENEFITS

- This product has millions of hours in field testing in the demanding Australian environment.
- It is a high zinc formulation designed for use in transmissions, final drives, hydraulics, wet clutches and wet brakes of modern tractors including those calling for common oil and is recommended for use in 10W-30 or 20W-30 applications.
- Meets many industry standards and OEM approvals that are not listed above. For a full listing - please contact us.

PRODUCT CODE	PACK SIZE
30044B	IBC (1000L)
30044	205L
36044	60L
32044	20L
30544	5L

# INDUSTRIAL PRODUCTS

## INDUSTRIAL GEAR OIL RANGE MINERAL



### SPECIFICATIONS

ISO 68, 100, 150, 220, 320, 460, 680 & 800 , General EP. AGMA, 9005-ED2. DIN 51 517 Part 3. David Brown, S1.53.101(E) Table E. USS 224, ISO 12925-1 CKC/CKD, FIVES CINCINNATI MACHINE GEAR.

### DESCRIPTION

INDUSTRIAL GEAR OIL is available in viscosity grades ISO 68, 100, 150, 220, 320, 460, 680 & 800. It is extreme pressure, high load carrying gear oil formulated with Sulfur Phosphorus additive technology. It is suitable for a wide range of Industrial, Agricultural and Commercial applications calling for an EP Gear Oil.

#### ISO 68 -

PRODUCT CODE	PACK SIZE
30098B	IBC (1000L)
30098	205L
32098	20L

#### ISO 100 -

PRODUCT CODE	PACK SIZE
60000B	IBC (1000L)
60000	205L
62000	20L

#### ISO 150 -

PRODUCT CODE	PACK SIZE
30066B	IBC (1000L)
30066	205L
32066	20L

#### ISO 220 -

PRODUCT CODE	PACK SIZE
30067B	IBC (1000L)
30067	205L
32067	20L

# INDUSTRIAL PRODUCTS

## INDUSTRIAL GEAR OIL RANGE MINERAL



CONTINUED..

### ISO 320 -

PRODUCT CODE	PACK SIZE
30068B	IBC (1000L)
30068	205L
32068	20L

### ISO 460 -

PRODUCT CODE	PACK SIZE
30069B	IBC (1000L)
30069	205L
32069	20L

### ISO 680 -

PRODUCT CODE	PACK SIZE
30077B	IBC (1000L)
30077	205L
32077	20L

### ISO 800 -

PRODUCT CODE	PACK SIZE
30035B	IBC (1000L)
30035	205L

# INDUSTRIAL PRODUCTS

## HEAT TRANSFER OIL 32, 46, 68 & 100 MINERAL



### SPECIFICATIONS

ISO 32, 46, 68, 100.

### DESCRIPTION

HEAT TRANSFER OIL range is for indirect totally enclosed heat transfer systems (sealed with cold oil or inert gas). May be used at bulk oil operating temperatures of up to 290°C. For open systems, where the heat transfer medium in the expansion vessel is in direct contact with air it may be used at bulk oil temperatures of 220°C. The system must have forced circulation of the heat transfer fluid.

#### ISO 32 -

PRODUCT CODE	PACK SIZE
60062	205L

#### ISO 46 -

PRODUCT CODE	PACK SIZE
60022	205L

#### ISO 68 -

PRODUCT CODE	PACK SIZE
30016	205L
32016	20L

#### ISO 100 -

PRODUCT CODE	PACK SIZE
60017B	IBC (1000L)
60017	20L

# INDUSTRIAL PRODUCTS

## SYN-GEAR INDUSTRIAL GEAR OIL RANGE MINERAL



### SPECIFICATIONS

ISO 100, 150, 220, 320, 460, General EP, AGMA, 9005-E02, DIN 51 517 Part 3, David Brown, S1.53.101(E) Table E, USS 224, ISO 12925-1 CKC/CKD, FIVES CINCINNATI MACHINE GEAR.

### DESCRIPTION

SYN-GEAR INDUSTRIAL GEAR OIL is a full synthetic, PAO based industrial gear oil. It is formulated with high performance base oil and additive packages and is a lead free formulation.

#### ISO 100 -

PRODUCT CODE	PACK SIZE
30038B	IBC (1000L)
30038	205L
32038	20L

#### ISO 150 -

PRODUCT CODE	PACK SIZE
30039B	IBC (1000L)
30039	205L
31039	20L

#### ISO 220 -

PRODUCT CODE	PACK SIZE
30089B	IBC (1000L)
30089	205L
32089	20L

#### ISO 320 -

PRODUCT CODE	PACK SIZE
30003B	IBC (1000L)
30003	205L
32003	20L

#### ISO 460 -

PRODUCT CODE	PACK SIZE
30031B	IBC (1000L)
30031	205L
32031	20L

# INDUSTRIAL PRODUCTS

## SOLCUT EP MINERAL



### DESCRIPTION

SOLCUT EP is a general purpose water soluble cutting fluid designed for a wide variety of applications such as milling and turning.

PRODUCT CODE	PACK SIZE
30088B	IBC (1000L)
30088	205L
32088	20L

## TACWAY 68 & 220 MINERAL



### SPECIFICATIONS

ISO 68 & 220. General EP. DIN 51524 Part II, US Steel 224.

### DESCRIPTION

TACWAY 68 & 220 are General Purpose Slideway machine oils. They are formulated with anti-wear additives and tackifiers to reduce sling off. Suitable for use in slideways, lathes, machine tools and other types of equipment calling for a tacky, non-corrosive lubricant.

#### ISO 68 -

PRODUCT CODE	PACK SIZE
30073B	IBC (1000L)
30073	205L
32073	20L

#### ISO 220 -

PRODUCT CODE	PACK SIZE
30074B	IBC (1000L)
30074	205L
32074	20L

# GREASES



## RED LITH TAK GREASE LITHIUM EXTREME PRESSURE



### DESCRIPTION

RED LITH TAK GREASE is a lithium based NLGI 2 high performance grease formulated with an extra tacky additive package, reducing sling off and water washout.

PRODUCT CODE	PACK SIZE
40050	180KG
45550	55KG
42050	20KG
40450	450GM



## SUPER BLUE GREASE LITHIUM COMPLEX



### DESCRIPTION

SUPER BLUE GREASE is a lithium complex grease suitable for all types of wheel bearings including slow and high speed, high temperature applications (including disc brakes), high load and those operating in extreme environments.

PRODUCT CODE	PACK SIZE
40051	180KG
45551	55KG
42051	20KG
42562	2.5KG
40451	450GM

# GREASES



## BLACK TAK MOLYPLEX GREASE LITHIUM COMPLEX



### DESCRIPTION

**BLACK TAK** is a severe duty 5% molybdenum disulfide mixed metal complex mine and quarry grease. Specifically formulated for a wide range of quarry and mining equipment operating under heavy loads in the most difficult environments. The extreme pressure and anti-wear properties enable the grease to give long service life and outstanding boundary lubrication under high load and shock loading conditions from low temperature to very high temperature environments.

PRODUCT CODE	PACK SIZE
40052	180KG
45552	55KG
42052	20KG
40452	450GM



## TRUCK AND FARM GREASE LITHIUM COMPLEX



### DESCRIPTION

**TRUCK AND FARM GREASE** is an ultra tacky, heavy duty extremely high quality lithium complex grease suitable for a wide range of applications for transport, earthmoving and farming applications. Suitable for general greasing, bearings, hammers and shock load applications.

PRODUCT CODE	PACK SIZE
60054	180KG
65554	55KG
62054	20KG
60454	450GM

# GREASES



## MULTI-LITH EP2 LITHIUM SOAP EXTREME PRESSURE

*\*NOT SUITABLE FOR AUTOMOTIVE WHEEL BEARINGS WHERE A HIGH TEMPERATURE GREASE LIKE SUPER BLUE GREASE SHOULD BE USED.*

### DESCRIPTION

**MULTI-LITH EP2** is a high performing lithium soap extreme pressure grease for general lubrication. Excellent load carrying characteristics and good corrosion protection make this grease an excellent choice for general lubrication of industrial equipment such as plain and roller bearings and other general greasing applications.

May also be used in automotive application such as general chassis lubrication and including turntables on trucks.

PRODUCT CODE	PACK SIZE
42035	20KG
40435	450GM



## MARINE & PREMIUM WHEEL BEARING MIXED METAL COMPLEX EXTREME PRESSURE

### DESCRIPTION

**MARINE AND PREMIUM WHEEL BEARING GREASE** is a high performance mixed metal complex grease specifically formulated for the harsh marine environment. A highly water resistant grease with a special mixed metal complex soap and selected corrosion inhibitors protects the lubricated components against corrosion even in salt water environments.

The very high load carrying capability, high temperature performance, low oil bleed and enhanced corrosion protection characteristics of the grease make it an excellent choice for all wheel bearing applications including those on boat trailers which are repeatedly immersed in salt water.

PRODUCT CODE	PACK SIZE
40541	500GM
40441	450GM

# GREASES



## RED RUBBER GREASE INORGANIC THICKENER

### DESCRIPTION

**RED RUBBER GREASE** is an inorganically thickened, bio-degradable grease for use on rubber components used in hydraulic and braking systems where compatibility with natural, SBR, NBR and other rubber tubes, hoses or seals is required. Due to the vegetable oil base contained within the lubricant, it is highly resistant to attack by hydrocarbon solvents including petrol and diesel.

PRODUCT CODE	PACK SIZE
40539	500GM



## HAMMER GREASE INORGANIC THICKENED EXTREME PRESSURE

### DESCRIPTION

**HAMMER GREASE** is a special blend of semi-synthetic base oils, a high level of lubricating solids to help protect against shock loading and thickened with a high temperature inorganic thickener. Designed for use in the high shock load environment of hydraulic and pneumatic hammers as well as the lubrication of pins and bushes of large earthmoving and off-road, heavy plant machinery.

PRODUCT CODE	PACK SIZE
42033	20KG
40433	450GM



## POLYUREA GREASE ASHLESS NON-SOAP THICKENER

### DESCRIPTION

**POLYUREA GREASE** is a high temperature grease suited to demanding, long life and fill for life applications. High mechanical stability and inherent oxidation stability make **POLYUREA GREASE** an excellent recommendation for electric motors

PRODUCT CODE	PACK SIZE
300425	450GM

# GREASES



## COPPER ANTI-SEIZE INORGANIC THICKENER

### DESCRIPTION

**COPPER ANTI-SEIZE** is a lead free compound for threaded connection of pipes, flanges and threaded fasteners subject to high temperatures and/or corrosive environments. The product overcomes galling on assembly and greatly reduces the effort in dismantling previously assembled equipment.

As an anti-seize agent the product is suitable for use at elevated temperatures, up to 1,100°C. **COPPER ANTI-SEIZE** also protects against seizure in pipe fittings and valves in highly corrosive environments and those subject to chemical attack such as found in petrochemical plants, gas refining and oil exploration.

PRODUCT CODE	PACK SIZE
40540	500GM



## WIRE ROPE GREASE NLGI 00 LITHIUM SOAP EXTREME PRESSURE

### DESCRIPTION

**WIRE ROPE GREASE** is a semi-fluid, lubricating solids containing grease that offers lubrication and corrosion prevention of wire ropes operating under all conditions. The semi-fluid nature of the grease allows penetration between the rope strands to provide internal and external protection against corrosion.

The molybdenum disulphide lubricating solids and other extreme pressure and anti-wear additives reduce wear between the wire rope strands and on pulleys. Typical application areas include drag lines, hoists and mobile cranes as well as dockside and ship's cranes where enhanced corrosion protection against salt water attack is required.

PRODUCT CODE	PACK SIZE
42037	20KG

# GREASES



## BOOM GREASE LITHIUM COMPLEX EXTREME PRESSURE

### DESCRIPTION

**BOOM GREASE** is a premium, lithium complex grease reinforced with extreme pressure additive, PTFE (Teflon) and special anti-corrosion agents designed for the lubrication of sliding surfaces encountered on telescopic hoists and handlers as well as cranes where the metal to metal interface is subjected to high loads and where water washout is a problem.

PRODUCT CODE	PACK SIZE
42036	20KG



## EASY FLOW GREASE LITHIUM EXTREME PRESSURE

### DESCRIPTION

**EASY FLOW GREASE** is a range of semi fluid extreme pressure grease available in the below grades and are available in Lithium soaps. Recommended for systems calling for a fluid or semi fluid grease and are recommended for use in most auto greasing systems in earthmoving, road transport and construction.

#### NLGI-00 -

PRODUCT CODE	PACK SIZE
42063	20KG

#### NLGI-1 -

PRODUCT CODE	PACK SIZE
42064	20KG

#### NLGI-0 -

PRODUCT CODE	PACK SIZE
42065	20KG

# GREASES



## DRILL ROD GREASE LITHIUM COMPLEX ANTI-SEIZE

### DESCRIPTION

**DRILL ROD GREASE** is a multi-purpose grease for high temperature and anti-seize applications which has a smooth and tacky texture. Manufactured with Lithium complex base thickener, selected paranic Base Oils combined with Rust, Oxidation and Corrosion Inhibitors, tackiness adhesive additives, copper, graphite, zinc oxide, molybdenum disulphide and Extreme Pressure additives.

PRODUCT CODE	PACK SIZE
62051	20KG

## GREASE GUN



### DESCRIPTION

**HD PISTOL GRIP GREASE GUN** with aluminium pump head that provides grease pressure up to 8000PSI. Suitable for our 450gram grease cartridges.

PRODUCT CODE	PACK SIZE
20124	SUITS 450GM CARTRIDGES

# COOLANTS

## AUTO COOL LL-33 PRE-MIXED



### DESCRIPTION

AUTO COOL LL-33 is a ready to use coolant suitable for a wide range of Australian passenger car vehicles. Contains long life inhibitor technology for improved protection of the cooling system.

PRODUCT CODE	PACK SIZE
40005	205L
42005	20L

## ALL FLEET HDD COOLANT PRE-MIXED & CONCENTRATE



### DESCRIPTION

ALL FLEET HDD COOLANT is a high quality long life heavy duty diesel engine coolant based on hybrid technology which offers conventional technology coupled with Organic Acid Technology (OAT). It is a 3 in 1, offering anti-freeze (-37c), anti-rust and anti-boil. Suitable for use in most cooling systems including those containing aluminium. It has a service life of six years, 12,000 hours or 1,000,000km - whichever comes first. For brand requirements, please contact us.

### PRE-MIXED -

PRODUCT CODE	PACK SIZE
40055B	IBC (1000L)
40055	205LT
42055	20LT
40555	5LT

### CONCENTRATE -

PRODUCT CODE	PACK SIZE
40054B	IBC (1000L)
40054	205LT
42054	20LT
40554	5LT

# COOLANTS

## LONG LIFE COOLANT RED ORGANIC PRE-MIXED & CONCENTRATED



### DESCRIPTION

**LONG LIFE COOLANT RED** is a premium quality, organic, long life anti-boil/anti-freeze coolant pre-mix and concentrate, based on carboxylate technology and contains no silicates, borates, phosphates, nitrites, nitrates or amines. Suitable for both automotive and heavy duty diesel engines. It is available in both concentrate and pre-mixed.

### PRE-MIXED -

PRODUCT CODE	PACK SIZE
40046B	IBC (1000L)
40046	205L
42046	20L

### CONCENTRATE -

PRODUCT CODE	PACK SIZE
40056B	IBC (1000L)
40056	205L
42056	20L
40556	5L

## ANTI-FREEZE GULF 90 PLUS CONCENTRATE



### DESCRIPTION

**ANTI-FREEZE GULF 90 PLUS** is a concentrated anti-freeze, anti-boil and anti-rust coolant designed for passenger cars and light commercial diesels. It is compatible with aluminium. Coloured Green.

PRODUCT CODE	PACK SIZE
40003B	IBC (1000L)
40003	205L
42003	20L

# AEROSOLS



## FULL RANGE OF AEROSOLS FOR ALL YOUR AUTOMOTIVE NEEDS

### HEAVY DUTY DEGREASER DESCRIPTION:

HEAVY DUTY DEGREASER is a powerful multi-purpose degreaser designed to remove grease and grime from numerous surfaces.

PRODUCT CODE	PACK SIZE
64099	400GM



### CARBY AND THROTTLE BODY CLEANER DESCRIPTION:

CARBY AND THROTTLE BODY CLEANER rapidly removes carbon deposits, oil, sludge, gum and varnish from interior or carburetor and throttle body, shaft and plate.

PRODUCT CODE	PACK SIZE
64095	400GM



### MULTI PURPOSE DWF SPRAY DESCRIPTION:

MULTI PURPOSE DWF SPRAY is a heavy duty water dispersant designed to displace moisture and lubricate, protect and start wet motors.

PRODUCT CODE	PACK SIZE
64096	400GM



### BRAKE CLEANER DESCRIPTION:

BRAKE CLEANER is a dynamic non chlorinated, non toxic cleaner designed to rapidly remove brake fluids, oils, dust, dirt, grease and other contaminants from brake linings, disc pads, drums, clutch plates, rotors, cylinders and springs. Also available in a 20L drum - #42213.

PRODUCT CODE	PACK SIZE
64098	400GM



### TYRE SHINE DESCRIPTION:

TYRE SHINE gives your tyres, louvres, bumpers, mud flaps and side mouldings a 'new' appearance and aids in the prevention of dirt forming on your tyres. Also available in a 20L drum - #62097.

PRODUCT CODE	PACK SIZE
64097	400GM



# WORKSHOP MAINTENANCE

## ORGANIC SPILL FIX OIL ABSORBENT KIT



### DESCRIPTION

SPILL FIX OIL ABSORBENT is made from organic products and can be used on all petroleum products and coolant. Easy to spread and can absorb up to ten times its own weight. This absorbent is biodegradable and meets EPA standards.

### SPILLFIX EMERGENCY KIT -

PRODUCT CODE	PACK SIZE
40010	N/A
60026B	205L

### SPILLFIX FLOOR SWEEP -

PRODUCT CODE	PACK SIZE
40012	50LT
40011	15LT



## PREMIUM FLOOR SWEEP

### DESCRIPTION

PREMIUM FLOOR SWEEP is a powerful absorbent for clean up of liquids on all surfaces. Leaves no residue. Low dust formula which will reduce clean up time. Made from recycled, treated organic by-products.

PRODUCT CODE	PACK SIZE
42020	20LT

# WORKSHOP MAINTENANCE



## AIR TOOL OIL ISO 32



### DESCRIPTION

AIR TOOL OIL ISO 32 is a mineral based lubricant designed for lubricating the internal parts of pneumatic air tools.

PRODUCT CODE	PACK SIZE
30193	1LT
30192	250ML



## HYDRAULIC JACK OIL ISO 32



### DESCRIPTION

HYDRAULIC JACK OIL ISO 32 is a mineral based oil suitable for use in hydraulic trolley and bottle type jacks as well as electric car hoists.

PRODUCT CODE	PACK SIZE
30194	1LT



## 20LT DRUM PUMP

### DESCRIPTION

20LT DRUM PUMP with a 1.5 metre dispensing hose suitable for most 20lt oil containers.

PRODUCT CODE	PACK SIZE
20086	SUITABLE FOR 20LT DRUMS

# WORKSHOP MAINTENANCE

## DOT 3 & DOT 4 BRAKE FLUID



### DESCRIPTION

DOT 3 & 4 BRAKE FLUID are high performance, high temperature moisture resistant brake and clutch fluids suitable for use in modern hydraulic systems.

#### DOT 3 -

PRODUCT CODE	PACK SIZE
42015	20LT

#### DOT 4 -

PRODUCT CODE	PACK SIZE
40001B	IBC (1000L)
40001	205L
42001	20L
40501	5L
40101	500ML

## SOLVENT BASED DEGREASER



### DESCRIPTION

SOLVENT BASED DEGREASER is a powerful, water soluble solvent based degreaser that will remove grease, oil, grime, dirt and scum. It is suitable for cleaning engines, parts and all other types of road equipment.

PRODUCT CODE	PACK SIZE
40008	200LT
42008	20LT

# WORKSHOP MAINTENANCE

## WATER BASED DEGREASER



### DESCRIPTION

**WATER BASED DEGREASER** is a heavy duty, powerful cleaner specially designed for industrial and home applications. Easily removes oil and grease. Suitable for cleaning of driveways, vehicles, trailers, tools and garden equipment.

PRODUCT CODE	PACK SIZE
40018	200LT
42018	20LT



## SUPER BLUE TRUCK WASH

### DESCRIPTION

**SUPER BLUE TRUCK WASH** is a water based wash containing no caustic and is PH neutral hence it is friendly to paint and will not dull aluminium or plastic. It is a biodegradable, quick break concentrated solution suitable for cars, trucks, boats and off road equipment.

PRODUCT CODE	PACK SIZE
40007B	IBC (1000L)
40007	205LT
42007	20LT



## BAGS OF RAGS

### DESCRIPTION

**BAGS OF RAGS** are assorted mixed cotton rags perfect for workshops and general use.

PRODUCT CODE	PACK SIZE
40017	10KG
40016	5KG

# WORKSHOP MAINTENANCE

## GREEN KLEEN HAND CLEANER



### DESCRIPTION

GREEN KLEEN HAND CLEANER is a high quality petroleum based hand cleaner. Removes dirt, grease, ink, oil and general grime from the skin.

PRODUCT CODE	PACK SIZE
42019	20LT

## CITRA GRIT HAND CLEANER



### DESCRIPTION

CITRA GRIT HAND CLEANER is a heavy duty, water based, citrus hand cleaner made from organic ingredients that removes grease, oil, dirt and grime.

PRODUCT CODE	PACK SIZE
620230	20LT
60423	4LT

## FLEET TEST SAMPLE KITS



### DESCRIPTION

FLEET TEST KITS are an early warning system developed to diagnose problems before they lead to failure. These kits can be used for all types of systems including engines, gear boxes, hydraulics, differentials in mechanical, mining, earthmoving, agriculture, transport, generators, marine and manufacturing.

PRODUCT CODE	PACK SIZE
990	1 BOX

# SPECIALISED PRODUCTS

## TOP GAS 600 SAE 40 MINERAL



### SPECIFICATIONS

WAUKESHA 7044/7042, Caterpillar 3500, 3600 & C280 (self certified), Jenbacher, Waukesha, API CF.

### DESCRIPTION

**TOP GAS 600 SAE 40** is a premium stationary engine oil developed for the most severe applications in a CO-GEN engine with and without ebullient cooling.

PRODUCT CODE	PACK SIZE
60026B	IBC (1000L)
60026B	205L

## TOP GAS LFG 40 SAE 40 MINERAL



### SPECIFICATIONS

API CF, meeting the requirements of most gas engine manufacturers including Waukesha, Caterpillar and GE Jenbacher.

### DESCRIPTION

**TOP GAS LFG 40** is a premium gas engine oil for use in high output engines running on corrosive gases such as landfill gas including those where high levels of chlorofluorocarbons and halogens are present. TOP GAS LFG has excellent corrosion control, a key factor when operating on high sulfur fuels or those which contain halogenated gaseous components. An optimised anti-wear package allows for exceptional wear protection without compromising catalyst life in systems using NSCR catalysts (3-way catalysts).

PRODUCT CODE	PACK SIZE
300032B	IBC (1000L)
300032	205L

# SPECIALISED PRODUCTS

## CLEARONOX (ADBLUE)



### DESCRIPTION

**CLEARONOX** is a 32.5% solution of high purity urea in demineralised water, also known as AdBlue. It reduces exhaust emission levels of nitrogen oxide products (NOx) from diesel engines. It is Australian manufactured and meets or exceeds the ISO 22241 international standard. Gulf Western Diesel Clearonox can be used in all SCR engines.

- 205lt AdBlue Rotary hand pump is now in stock under product code: 20171.

PRODUCT CODE	PACK SIZE
40078B	IBC (1000L)
40078	210L
42078	20L

## SUPERTAK CHAIN BAR OIL ISO 150



### SPECIFICATIONS

ISO 150, EP.

### DESCRIPTION

**SUPERTAK CHAIN BAR OIL** is an extremely tacky, viscous chain saw/bar lubricant formulated from high quality base oils to provide superior chain and bar protection, condition seals and reduce sling off. Popular amongst logging contractors and professionals due to its strong EP performance and extra tacky formulation.

PRODUCT CODE	PACK SIZE
30080B	IBC (1000L)
30080	205L
32080	20L
30480	4L
30180	1L

# SPECIALISED PRODUCTS

## LOCO OIL 13



### SPECIFICATIONS

Exceeds LMOA Generation V requirements, API CF-2, SAE 20W-40.

### DESCRIPTION

**LOCO OIL 13** is a non-chlorinated, zinc free heavy duty diesel engine oil suitable for locomotive and stationary engine applications offering unsurpassed engine cleanliness, soot handling, and oil filter life in late model EMD and GE engines.

PRODUCT CODE	PACK SIZE
60055B	IBC (1000L)
60055	205L



## LOCO OIL 9

### SPECIFICATIONS

LMOA Generation VI (compatible with LMOA Generation V and GE GEN 4LL), SAE 40.

### DESCRIPTION

**LOCO OIL 9** is a non-chlorinated, zinc free and low ash heavy duty diesel engine oil suitable for late model GE and EMD engines used in locomotive and stationary engine applications operating on low/ultra low sulfur fuels.

PRODUCT CODE	PACK SIZE
60056B	IBC (1000L)
60056	205L

# SPECIALISED PRODUCTS

## ROCK DRILL 100, 150, 320 & 460



### SPECIFICATIONS

ISO 100, 150, 320 & 460. General EP.

### DESCRIPTION

**ROCK DRILL 150 & 320** is specialised pneumatic air tool oil suitable for jack hammers, rock drills, centralised lubricators and rammers. It is formulated with anti-corrosive additives, tackifiers, EP additives and an oil soluble molybdenum compound offering excellent lubrication properties in the most extreme environments.

#### ISO 100 -

PRODUCT CODE	PACK SIZE
60049B	IBC (1000L)

#### ISO 150 -

PRODUCT CODE	PACK SIZE
30049	205LT
32049	20LT

#### ISO 320 -

PRODUCT CODE	PACK SIZE
30096	205LT
32096	20LT

#### ISO 460 -

PRODUCT CODE	PACK SIZE
60014	205LT



## POWER STEERING FLUID



### DESCRIPTION

**POWER STEERING FLUID** is a high quality oil manufactured for use in power steering systems of modern vehicles calling for Dexron IID, III type fluid. Dyed Red.

PRODUCT CODE	PACK SIZE
30111	1LT



# GULF WESTERN OIL

## THE TOUGH AUSTRALIAN



**GULF WESTERN PREMIUM QUALITY LUBRICATING OILS (AUSTRALIA) PTY LTD**  
**WEBSITE: [WWW.GULFWESTERN.COM.AU](http://WWW.GULFWESTERN.COM.AU) - TOLL FREE NUMBER: 1800 248 919**

**NSW HEAD OFFICE:** 92 Links Rd, St Marys, NSW 2760  
Phone Number: 02 9673 9600 - Fax Number: 02 9623 6466

**QLD WAREHOUSE:** 6 Commerce Court, Clontarf, QLD 4019  
Phone Number: 07 3283 7239 - Fax Number: 07 3284 1813

**VICTORIA WAREHOUSE:** 11 Lacey Street, Croydon, VIC 3136  
Phone Number: 03 9725 0679 - Fax Number: 03 9725 9009

**SHEPPARTON WAREHOUSE:** 68 Mitchell Street, Shepparton, VIC 3630  
Phone Number: 03 5831 3121 - Fax Number: 03 5821 3899

Version 9. 2019 | Part Number: #50155

