

THERMOPLASTIC AFO

Date Mailed: _____
Date Needed: _____
(Standard fab time 10 days in house)
3 Day Rush Order: \$75.00

PO #: _____ Acct#: _____

Clinic Information

Clinic Name: _____ Clinician Name: _____
Address: _____ City: _____ State: _____ Zip: _____
Phone: _____ Fax: _____ Email: _____

Patient Information

Patient Name: _____ Ht _____ Wt _____ M F

Dx: _____ L R BIL

Standard Design AFOs

- ARTICULATED SOLID ANKLE
 SEMI-SOLID ANKLE PLS
 GROUND REACTION PTB



- INOVA I-Active**
 FREE MOTION
 RESTRICTED
Color: BLACK



- INOVA Dynamic**
 TAMARACK 75 85
 OKLAHOMA
 OVERLAP
 POSTERIOR BRIDGED
 SPLIT UPRIGHT

Clearly mark options & instructions below

Cast Corrections

- LEAVE AS CASTED
 ANKLE TO 90°
 HEEL TO NEUTRAL
 FOREFOOT TO NEUTRAL
 OTHER _____

Plantar Stop

- SOLID W/BUMPER
 ADJUST SKREW STOP
 TC STOP
 ELITE W/SPRING
 OTHER _____

Foot Plate

- FULL
 SULCUS
 MTHs

Traditional SMO

- DORSAL WRAP

Friddle's Transfer Pattern

<https://friddles.com/collections/friddles-coloring-paper>
Pattern # _____

Plastic

- POLYPRO 1/8" 5/32" 3/16" 1/4"
 COPOLY 1/8" 5/32" 3/16" 1/4"
 PROCOMP (CARBON PLASTIC) \$40

Strapping


- C-FOLD (STANDARD)
on both I-Active & Dynamic
 REG VELCRO
 DACRON

Joints

- TAMARACK DORSI 75 85
 TAMARACK NEUTRAL
 OKLAHOMA
 OVERLAP
 DOUBLE ACTION
 MODEL _____
 CUSTOM MOLDED INSERT FOR FOOTPLATE

Additions

- MOLDED INNER BOOT
 CARBON INSERT
 OTHER _____

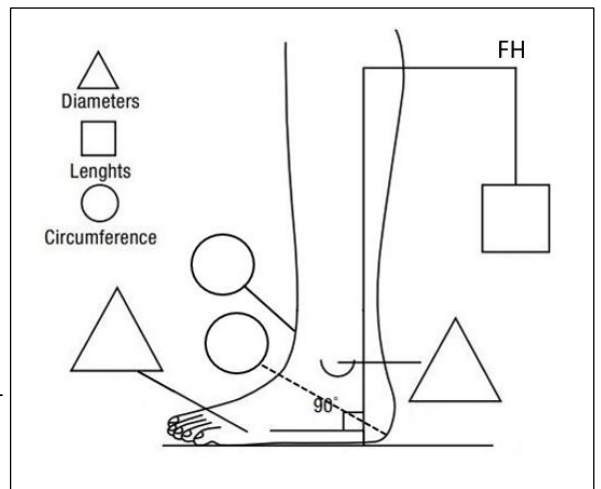

Remarks/Instructions: _____