


Model # **SA-25WB-HPE**

Specification Sheet

Components

Mesh Screen




- Constructed specifically for the Sun Driven
- 1/4" mesh screen keeps animals and rodents out while allowing maximum air exhaust
- Stainless Steel

Fan Blade




- Specifically designed for the Sun Driven solar powered ventilation system
- 12" - 5 blade aluminum fan, aerodynamically optimized blade to improve airflow
- Operates whisper quiet throughout the day

Housing & Flashing System




- Aircraft grade, spun-formed aluminum for the utmost quality protection
- Inner housing system is aerodynamically designed to produce the highest possible radial air exhaust
- Powder coated outer shell

Brushless DC Motor



Brushless Electronic Motor with Maximum Yield Technology. This new motor technology was developed by our engineers leveraged lessons learned from our original brushless electronic motor that we used for over 12 years. This new motor technology offers about 30% better efficiency and air moving performance, with an amazing 100,000 hours average motor run time!

Solar Panel



- 25 watt, 1.25 amp proprietary, high purity, mono-crystalline cell solar panel
- Weather proof in the most severe conditions
- High transparent, low iron tempered glass
- Built for maximum performance and safety

Motor & Fan Mount



- The Brushless DC Motor is mounted under the aluminum air deflector
- Keeping it out of the air stream

Sun Driven Embedded Solar Powered Attic Fan

Ideal for applications where additional clearance is needed between the bottom of the fan and the roof. Perfect for snowy areas, flat or "S" tile roofs where less clearance could cause airflow problems. This provides an additional 2" of height from the roof deck. Only product certified through Dade County and approved for high winds. (160 mph)

Technical Information

Weight

Fan Weight: 19 lbs
/ 8.61 kg
Fan Packaged: 27 lbs.
/ 12.24 kg

Performance

- Air Flow Rate: 900 to 1200 CFM
Depending on solar exposure
- Ventilation: Up to 1250 sq.ft.
Attic must support intake air for best performance


Electrical

- Solar Panel: 25 watt, 17 to 22 DC, 1.25 amp, 36 mono-crystalline cell, solar cells with black back sheet
- Motor: Max Aire Brushless DC Motor, 10-22VDC

Material

- Housing System: Spun Formed, Aircraft Grade Aluminum
- Fan Blade: 12" Aluminum, Factory Balanced
- Mesh Screen: Stainless Steel, 1/4" Mesh, Rodent Control
- Wiring: 18 Gauge Copper Conductors with PVC Insulation

Dimensions & Weight

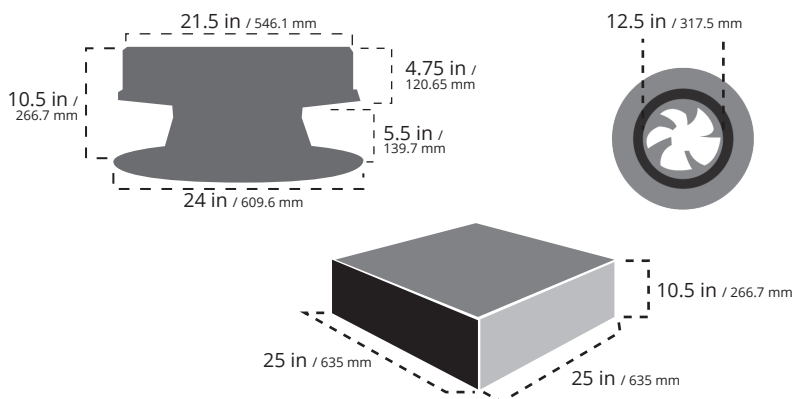

Sun Driven
Ventilation & Insulation Systems
sundriven.solar
888-355-5786
22955 McAuliffe Drive • Suite A
Robertsdale, AL 65767

Important Note: The Sun Driven Attic Fan Ventilation System is 100% fire proof and all electrical components are hidden under the air diverting cowling creating an extremely safe and efficient ventilation system