



BGC

LED SUPER TELEVISION



BGC  
CONTENT

01 Enterprise culture paper

06 LED the luminous TV

17 Emitting super master LED TV

26 LED advertising machine

36 Classic case

# LED Super Television Introduction




05/06  
BGC

# INTRODUCTION

LED主发光电视 产品简介 >>  
LED Super Television

BGC independent research and development of LED the luminous TV USES the international most advanced LED hd display technology, is designed to replace the traditional large screen splicing display system products, this product is a blend of high-density LED integration technology, screen screen splicing technology, image processing technology, network technology and so on, the system has high stability, high brightness, high resolution, high definition, Gao Zhihua control technical characteristics, and monitoring system, such as scheduling command system, network communication system and other subsystem integration, formed a set of perfect functions. According to the advanced technology and management control platform. The system hardware, software design, has fully consider the system security, reliability, maintainability and extensibility, storage and processing power can meet the requirements of long-term extension.


BGC - STV Lord shine television, makes up for the LCD TV, projector in brightness, size, energy saving, the lack of protection, in the most intuitive picture, and eliminating the spell seams and black box, greatly improved the viewing area and the look and feel. Its big space, big screen, deep, high level is the feature of other display devices are unable to achieve.

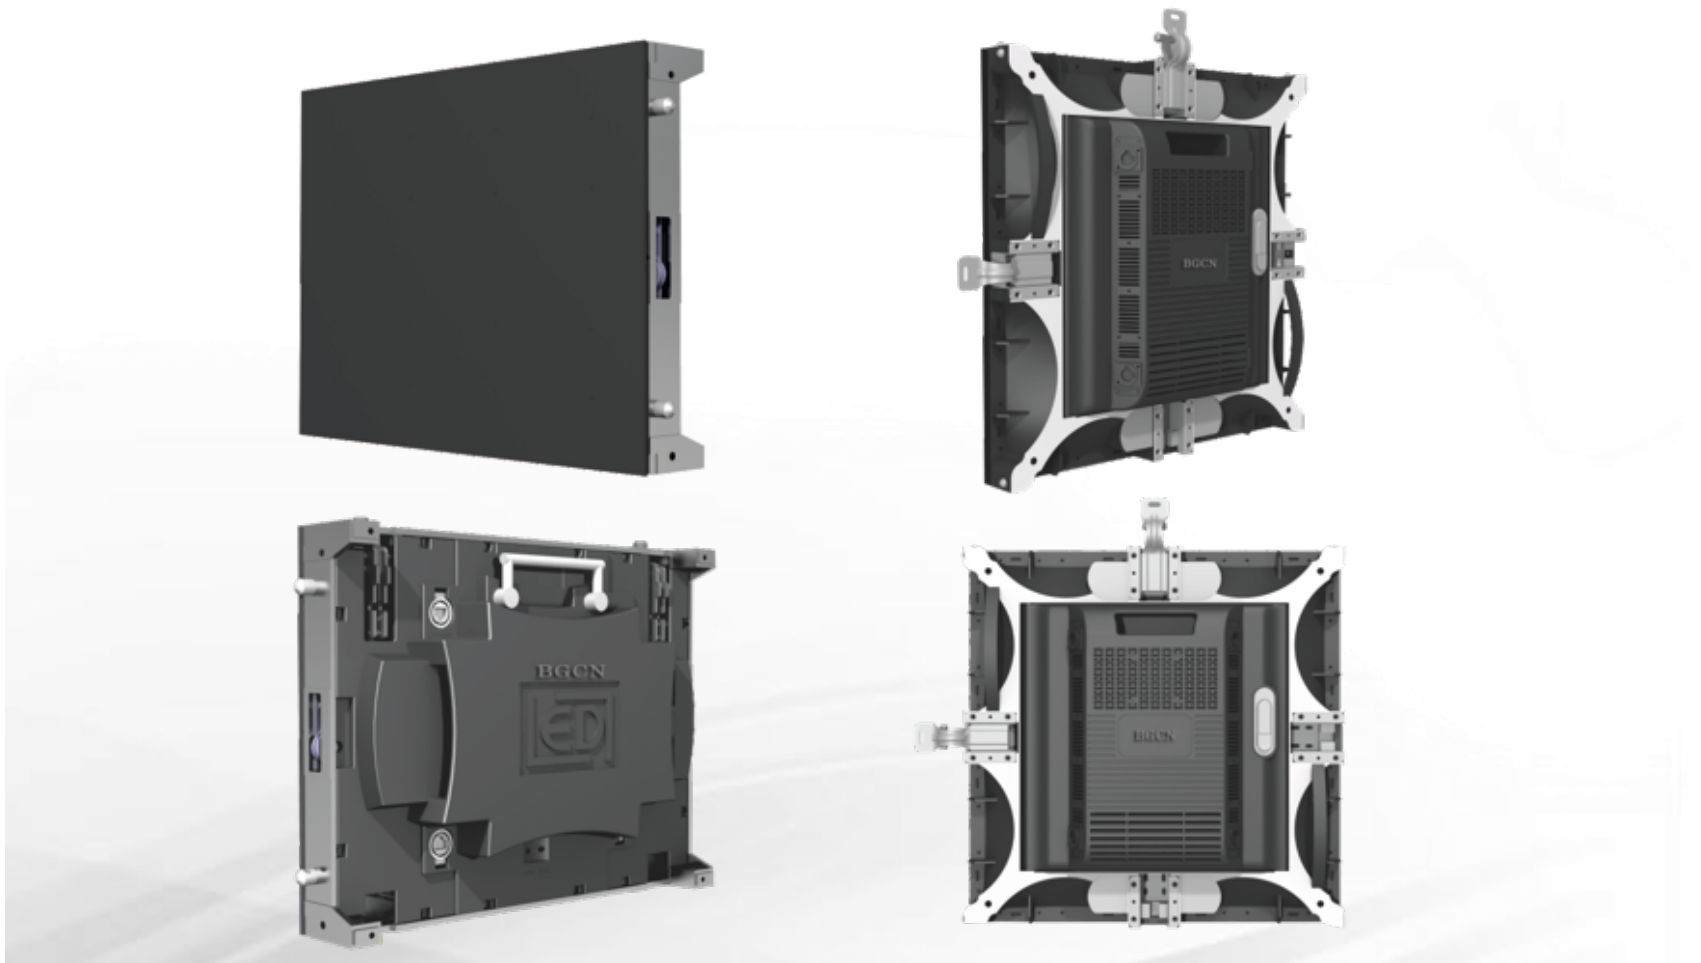

# CHARACTERISTIC

LED主发光电视  
LED Super Television

## 应用特点 >>

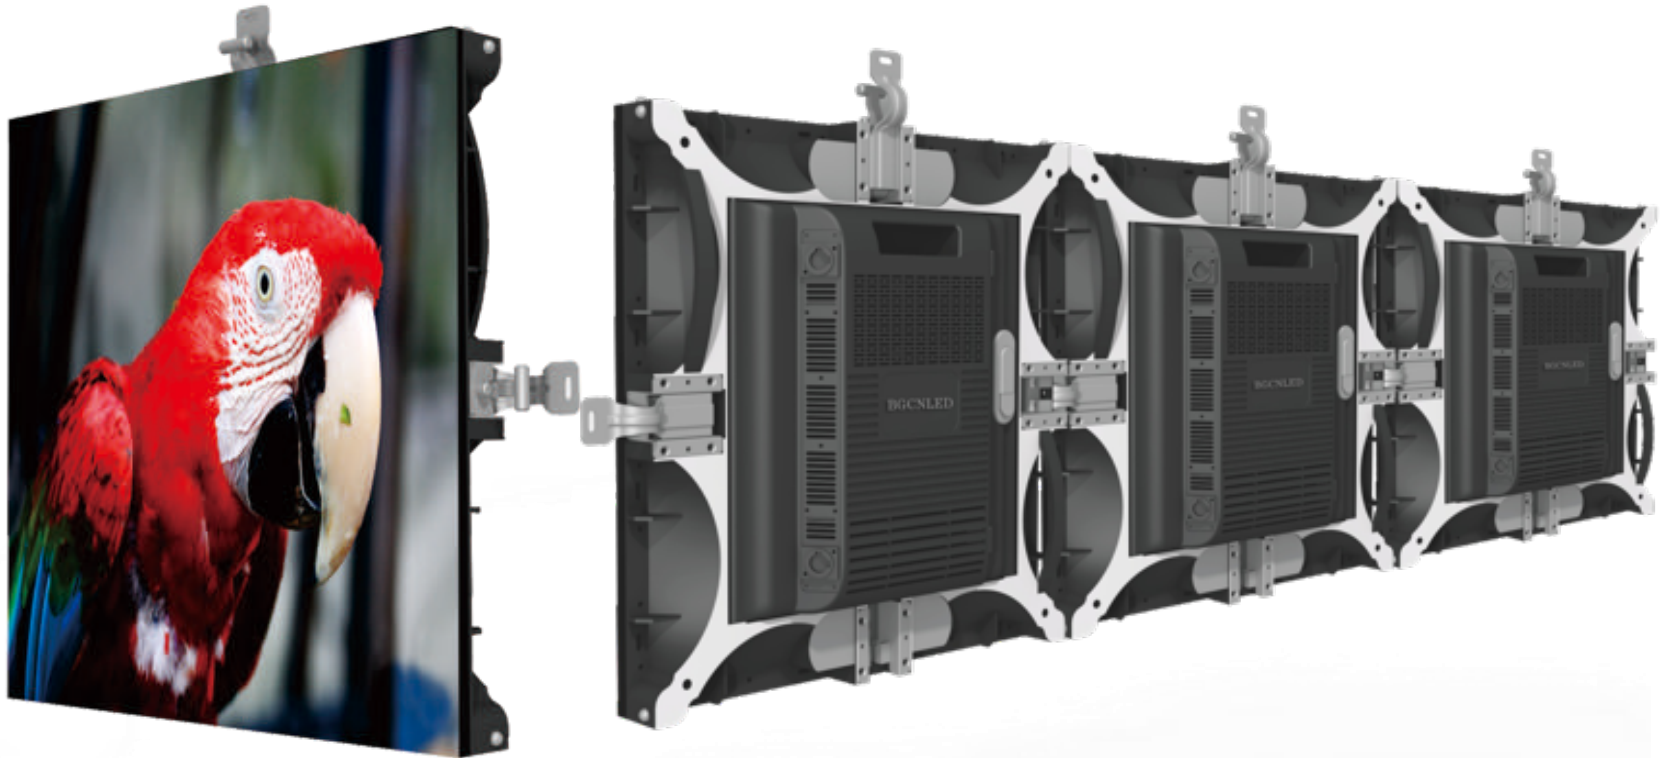

**Super light thin**  
Super cabinet is only 5.8 kg, Thickness is 91 mm.




**Acme hd**  
Super small spacing, Gao Qingsu density Proportion of high fill factor, low dark area, Large display surface luminosity, reduce shows that grain feeling, Resolution from 4 k - 8 k display can be complemented.



### Broad perspective

The horizontal and vertical perspective All can reach more than 160 °, In the industry leading level.



### Brightness conditions

The ambient light adaptive brightness adjustment, Without sacrificing image grayscale and signal quality.



### Seamless splicing

Military technology on casing, Die-casting aluminum form at a time, Stable structure, is not easy to deformation, Precision up to 0.1 mm, Truly seamless splicing.



### Long life

LED lamp life 8 to 10 years, 100000 hours, and other display equipment 5-6 years, 50000 hours.



### Intelligent correction

Using unique HTV BGC intelligent correction technology, To ensure that the display uniformity, consistency.



### Energy conservation and environmental protection

Low voltage circuit, efficient IC, PFC power supply, no production process, Low energy consumption, energy saving more environmentally friendly.

# TECHNICAL SPECIFICATIONS

LED主发光电视  
LED Super Television

## LED主发光电视参数 >>

Product specification	STV0.8	STV1.2	STV1.6	STV1.9	STV2.5
The LED type	SMD060	SMD0808	SMD1010	SMD1010	SMD2121
Pixel pitch	0.87mm	1.25mm	1.667mm	1.923mm	2.5mm
Case resolution	459point(W)x345point ( H)	320point(W)x240point(H)	240point(W)x180point(H)	208point(W)x156point(H)	192point(W)x192point(H)
Body size	400mm(W)x300mm(H)x83mm(D)				400mm(W)x300mm(H)x83mm(D)
Weight	4.5kg/enclosure				10kg/enclosure
Pixel density	1320200point/m <sup>2</sup>	640000point/m <sup>2</sup>	360000point/m <sup>2</sup>	270400point/m <sup>2</sup>	160000point/m <sup>2</sup>
Contrast	≥3000:1	≥3000:1	≥3200:1	≥4000:1	≥5800:1
Enclosure flatness	<0.1mm				
Single point correction	Yes				
Brightness	800cd/m <sup>2</sup>				
Color	281 trillion species				
Color temperature	2600 k to 10000 k (adjustable)				
Horizontal Angle of view	H:160° ; V:160°				
The input signal	RF,S-VIDEO,RGBHV,YUV,YC&COMPOSITION,etc				
Screen TiGong consumption	Peak:890W/m <sup>2</sup> Average:290W/m <sup>2</sup>				
power supply requirements	220V				
Drive way	Constant current drive				
Change the screen frequency	50&60Hz				
Refresh rate	3840Hz				
Service life	100000 hours				
Installation	Aviation quick plug-in installation, lifting loading can be mounted.				

# APPLICATIONS

LED主发光电视  
LED Super Television

## 应用范围 >>



- **Combat command center**  
The drilling and monitoring project monit, guide the hall, etc
- **Spatching command center**  
Electric power dispatching, railway dispatching, water conservancy, etc
- **Control command center**  
The public security, traffic control command, government propaganda and so on
- **Monitor the security center**  
Communication service monitoring, the monitoring of airport, highway, etc
- **Conference video center**  
Conference rooms, meeting center, network video conference center, etc
- **Information center**  
Weather information, medical information release, etc
- **Demo center**  
Showroom, education demonstration center, etc
- **Studio center**  
The cinema, TV studio, etc

09/10  
BGC

# SUPERIORITY

LED主发光电视  
LED Super Television

产品优势 >>

## 01 High reliability guarantee


- 1, double redundant power supply: the double redundant power supply method, in the case of a power supply failure all the way, still can ensure the normal operation of box body, so as to guarantee the safety of housing supply.
- 2, dual hot backup signal: each unit body control module can automatically detect two road input signal integrity, in the main input signal integrity good cases, system will default to the main input source, when the input signal is incomplete or signal failure, the system automatically switch to the case of the input signal, switch time < 5 milliseconds.

## 02 High refresh, high utilization rate of gray-scale, high brightness, no ghosting effect, low power consumption and low EMI

800 nits brightness (adjustable), 65536 grayscale, 3200 hz refresh rate, high low light mode of gray-scale refresh.  
When the brightness of the 30% achieve the effect of high gray-scale refresh (pictured)



1/4000 of a second shutter speed under real results contrast (pictured)

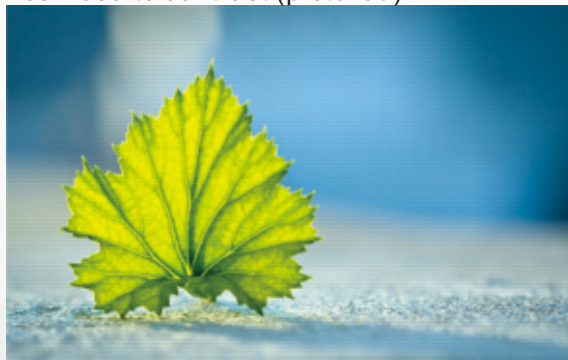

BGC super TV products



Industry level



### 03 real seamless splicing, the picture is more perfect

LED the luminous TV wall can be arbitrary direction, any size, any shape, uniform, a broader audience, truly seamless splicing screen. Especially with strong background in monitoring or performance under the condition of the stage background screen, seamless screen more apparent, the advantages of arbitrary image segmentation, can receive multiple input signals, displayed on the screen at the same time, and the picture no separation, no black line, there is no missing information.



LED the luminous super TV wall

Splicing gap: less than 0.1 mm



DLP splicing screen

Splicing gap: 0.5 to 1 mm



LED splicing screen

Splicing gap: 5.5 mm


# SUPERIORITY

LED主发光电视 产品优势 >>  
LED Super Television

## 04 ultra wide Angle of view

Assume that the brightness of the display normal direction for LF, from normal left and right sides of the test the brightness of the display screen center, when the brightness values of left and right sides of the drop to the LF / 2, constitute the Angle between two survey line (theta.  $\Theta_{SS} < 180^\circ$ ) called displays a horizontal perspective. From the normal fluctuation on both sides of the test the brightness of the display screen display center, when the brightness values of upper and lower sides down to LF / 2, constitute the Angle between two survey line (theta.  $\Theta_{CC} < 180^\circ$ ) referred to as the display at the point of view of the vertical direction.

The greater the Angle of the screen, the screen left and right sides of the screen image and the up and down direction received the clearer, more uniform, the following is a vote on the screen and LED screen in all directions of contrast in:

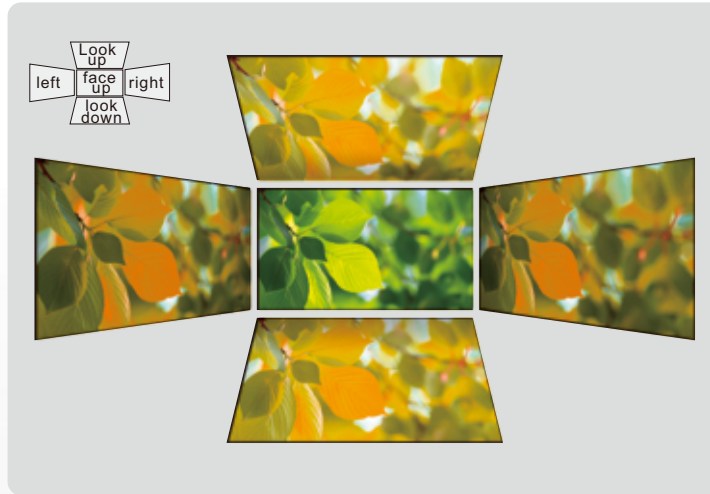

Five perspective of projection screen images



Emitting TV wall of five main LED to view images

## 04 Smart point correction technology

1, every point acquisition technology

The technology greatly increase the surface area of the camera's a correction, can be a calibration 2 k, 3 k and 4 k display.

2, high precision color correction technology

The fifth generation of chromaticity correction technology, makes the camera off color recognition accuracy reached the spectral type light meter standards, further improve chromaticity correction precision, more bin mix better correction effect.

3, light dark lines to eliminate

For small spacing bright dark lines, because of the splicing process can automatically detect and modify based on human visual properties, even though the screen bright dark lines, length is differ, also can be perfect.

4, imaging automatic analysis and adjustment

The camera position is determined, correction system can automatically adjust the iris of the camera, exposure time and screen brightness, until the image of the calibration analysis conditions.

5, automatic correction technology

Start after correction, image acquisition, processing, coefficient of generating, sending, upload, save the six steps, without human intervention, entity.

6, coefficient of rapid upload technology

No matter how big the screen technology, how many correction factor, can be in more than ten seconds all uploaded to the hardware.

7, lightweight data storage technology

Less space occupied, faster speed, the correction coefficient of 256 x 256 pixels, saved over 3 to 4 seconds.




Before correction



After correction



Before correction

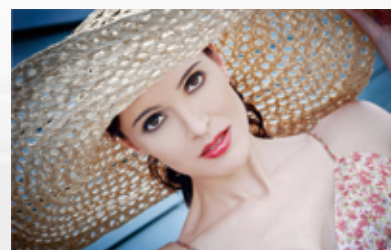

After correction


# SUPERIORITY

LED主发光电视 产品优势 >>>  
LED Super Television

## 06 Wide color gamut coverage

In 1931, the international commission on illumination CIE developed CIE1931RGB system, regulation 546.1 nm to 700 nm red, green and 435.8 nm blue as the primary colors, later CIE1931 - y chromaticity diagram to describe the chart color range is the most commonly used. Color gamut is on this map covered area, and the range is composed of R, G, B, three kinds of pure color coordinates of the area of the triangle or polygon (inc rease complementary).

Color gamut coverage is used to represent a display of color reduction ability of the triangle area, composed of the three primary colors of relative to the percentage of the NTSC color gamut range area. A display of colorful color gamut range, is the most fundamental determinants of only high purity of red, green and blue light can complete coverage of the natural world is the visible light range.

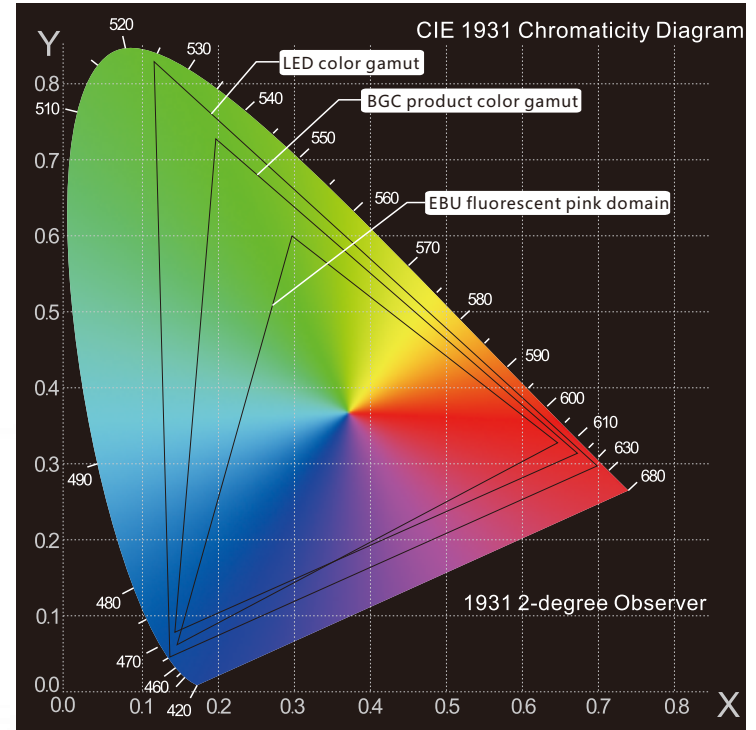

Obvious color phenomenon



Color reproduction is normal

## 07 Good consistency

As the eye perception problem, colorful images, detect light-leaking or the possibility of a large spot is very small, but after professional cameras record, DLP, LCD, MPDP various uniformity problem such as traditional display device is enlarged. Especially in play compare the dim video, this phenomenon will be more obvious, as shown in the figure below:



Compared with traditional splicing display BGLED main TV to display unit seamless forming the overall picture, brightness uniformity shows excellent, after the single point correction, the entire screen of the lamp brightness, color temperature, color saturation and color gamut coverage can control in a range, the entire screen without flowerscreen, without partial Mosaic, without bright (dark) edge phenomenon, to ensure the consistency of the screen, as shown:



# BGC-LED Super Television Intorduction



# INTRODUCTION

BGCLED超级电视  
BGC-LED Super Television 产品简介 >>

## Lead time pace Private custom exclusive

By independent research and development of BGC BGC - STV tianjiao series of LED TV, subverts the traditional TV industry new product, the product positioning high-end residential market and special business area, has three major breakthrough innovation:

One, using LED light technology, support 2 k, 4 k, 8 k, according to global cutting-edge glasses free 3 d technology, more than 280 trillion kinds of colour display, have a strong sense of vertical force, can present super realistic visual enjoyment;

Second, based on 300 \* 400 mm size of the display unit can be arbitrary seamless splicing, whether to build a super TV, in the field of business show or DIY new LED home theater, KSTV tianjiao series products can be easily;

Three, private custom exclusive sound effects. On sound BGC teamed up with international advanced audio equipment, to provide you with personal customized audio combination.

Listed as BGCSTV tianjiao series of LED TV, will increase the size of main light-emitting LED TV MinYongHua process, can not only raise the high-end residential market "private custom LED home theater" revolution of the sitting room, also for big size pattern of commercial display area have a profound impact.



17/18  
BGC

# PRODUCT FEATURES

BGCLED超级电视  
BGC-LED Super Television

产品特点 >>

STV tianjiao series M class



### Super light thin

Super light box is only 5.8 kg, thickness of 9.1 mm.



### Acme hd

Super small spacing, Gao Qingsu density, high fill factor, low dark area ratio, large display surface luminosity, reduce shows that particle, resolution from 4 k, 8 k display can be implemented.



### Broad perspective

The horizontal and vertical perspective can reach more than 160°, is in the leading level.



### Double sided maintenance

Module, power supply, the card can completely both before and after the maintenance, the screen body free disassembly, satisfy various installation space requirements.




### Seamless splicing

Military technology on casing, a forming die casting aluminum, firm structure, not changeful form, precision as high as 0.1 mm, truly seamless splicing.



## STV tianjiao series s-class



### Brightness control

Ambient light adaptive brightness control, without sacrificing image grayscale and signal quality.




### Long service life

LED lamp life 8 to 10 years, 100000 hours, other display device 5 to 6 years, 50000 hours



### Energy conservation and environmental protection

Low voltage circuit, efficient IC, PFC power supply, all lead-free production process, low energy consumption, energy saving more environmentally friendly.



### Free joining together

Based on the fixed cell size, can be any size.



### Intelligent correction

Using BGC HTV unique intelligent correction technology, to ensure the uniformity of the screen, and consistency.

19/20  
BGC

# TECHNICAL SPECIFICATIONS

BGCLED超级电视  
BGC-LED SuperTelevision

## STV天骄系列LED超级电视参数 >>

Product specification (inches)	STV12-110"	STV12-114"	STV12-110"	STV16-144"
Aspect ratio	5:3	7:4	5:3	7:4
Pixel distance (mm)	1.25	1.25	1.667	1.667
Resolution	1920×1152	2688×1536	1440×864	2016×1152
Brightness (nits)	800			
Horizontal/vertical Angle of view (°)	160			
The best stadia ( m )	5			
Contrast	≥3000: 1			
Refresh rate (Hz)	≥2000			
Grey scale	16			
The speaker (channel)	2. 1			
The biggest/average power consumption (W)	2700/900	4800/1600	2700/900	4800/1600
Input signal	CVBS,RGB,VGA,DVI,HDMI,HDSDI,S-VIDEO,RGBHV,COMPOSITION,ECT			
Service life( H )	2. 1			
Weight(Kg)	250	400	250	400
Peripheral size(mm)	2510 ( W ) ×2010 ( H ) ×500 ( D )	2510 ( W ) ×2010 ( H ) ×500 ( D )	2510 ( W ) ×2010 ( H ) ×500 ( D )	2510 ( W ) ×2010 ( H ) ×500 ( D )


Note: the LED the luminous super standard size 110 TV screens, "124," 144 ", 216," 288",300 ", according to the actual need to customize any other size.

# APPLICATIONS

BGCLED超级电视  
BGC-LED SuperTelevision

## 应用范围 >>

- Private custom home theater
- Science and technology exhibition hall, city of sarft
- Games, anime virtual reality location
- Airports, high-speed rail, railway station and hotel
- Communications service hall
- Science and education, tourism, advertising field
- Studio center

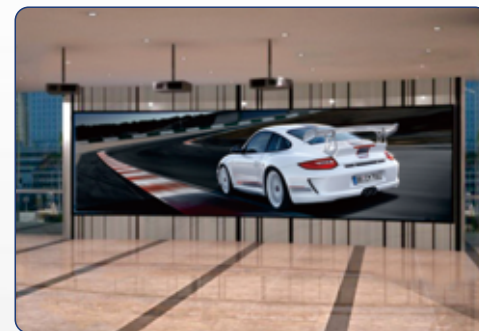

21/22  
BGC

# PRODUCT FEATURES

BGCLED超级电视  
BGC-LED SuperTelevision 产品优势 >>

## 01 Any stitching

Based on the 1200 \* 675 mm size of the display unit can be arbitrary seamless splicing, whether to build a super TV, in the field of business show or DIY new home theater, STV tianjiao series products all can easily implement



The back of the unit body

The cell body side



Any multiple unit cell together

## 02 Perfect in sound and picture quality



LED  
main  
light-emitting  
display

Support  
glasses-free  
3D technology

Super HD  
control  
system

Adaptive  
brightness  
according  
to ambient  
light  
(or manual)

Nanosecond  
response time

Support 2 k,  
4 k, 8 k,  
display

A single point  
of color,  
brightness  
adjustment

16 bit  
grayscale  
processing,  
frame by  
frame scan

3000 hz  
refresh  
rate, high  
imagewithout  
shaking

From 2500 k  
to 10000 k  
color  
WenKuan  
domain

International  
top brand  
service  
customization  
sound

Ultra wide  
Angleof view,  
the pictures is  
much more  
powerful

# PRODUCT FEATURES

BGCLED超级电视  
BGC-LED SuperTelevision 产品优势 >>

## 03 Intelligent core TV



### Screen more interactive

Through a smartphone or tablet computer remote control TV of all kinds of content

### Photo sharing

No need for network environment and application, also can share in the smartphone photos of its original size

### TV QQ

Built-in camera, through the pre-loaded function can be realized easily on a big screen TV QQ video chat

### Interface is rich

Support radio frequency RF, composite, S - video, DVI, VGA, HDMI, IEEE1394 video interface, etc

# INTRODUCTION

LED电视广告一体机  
LED Post Television Product

产品简介 >>

## Shock visual feast New media exclusive

BGC SAM LED for new media advertising machine series product, the product will bring you to the birth of the ground-breaking visual feast, and redefine commercial advertising machine bonus.





# LED Poster Television Introduction

25/26  
BGC



# STRUCTURE

LED电视广告一体机  
LED Post Television Product

## 完美结构 >>

### Noble and elegant

Large size integrated forming, aluminum alloy edge article delicate and beautiful, smooth surface, metal fuselage of the lacquer that bake, luster bright beautiful, natural and elegant.



### Security firm

Show positive use of integration of toughened glass encapsulation, the picture appear a safe, reserve base of multifunctional roller can parallel moving, bring their own lock body fixed safe and reliable.


27/28

BGC

# POWERFUL FUNCTION

LED电视广告一体机 强大功能 >>  
LED Post Television Product

- Can realize signal loop hot backup and double backup power supply, guarantee stable use under any circumstances
- Built-in video set up monitoring system
- 4 g/WIFI, and a variety of cable network access Settings, can be stand-alone built-in player can control through the network again, more human
- Built-in video set up monitoring system
- Can go to the lavatory built-in electric meter readings.
- Multichannel audio set up powerful sound field effect

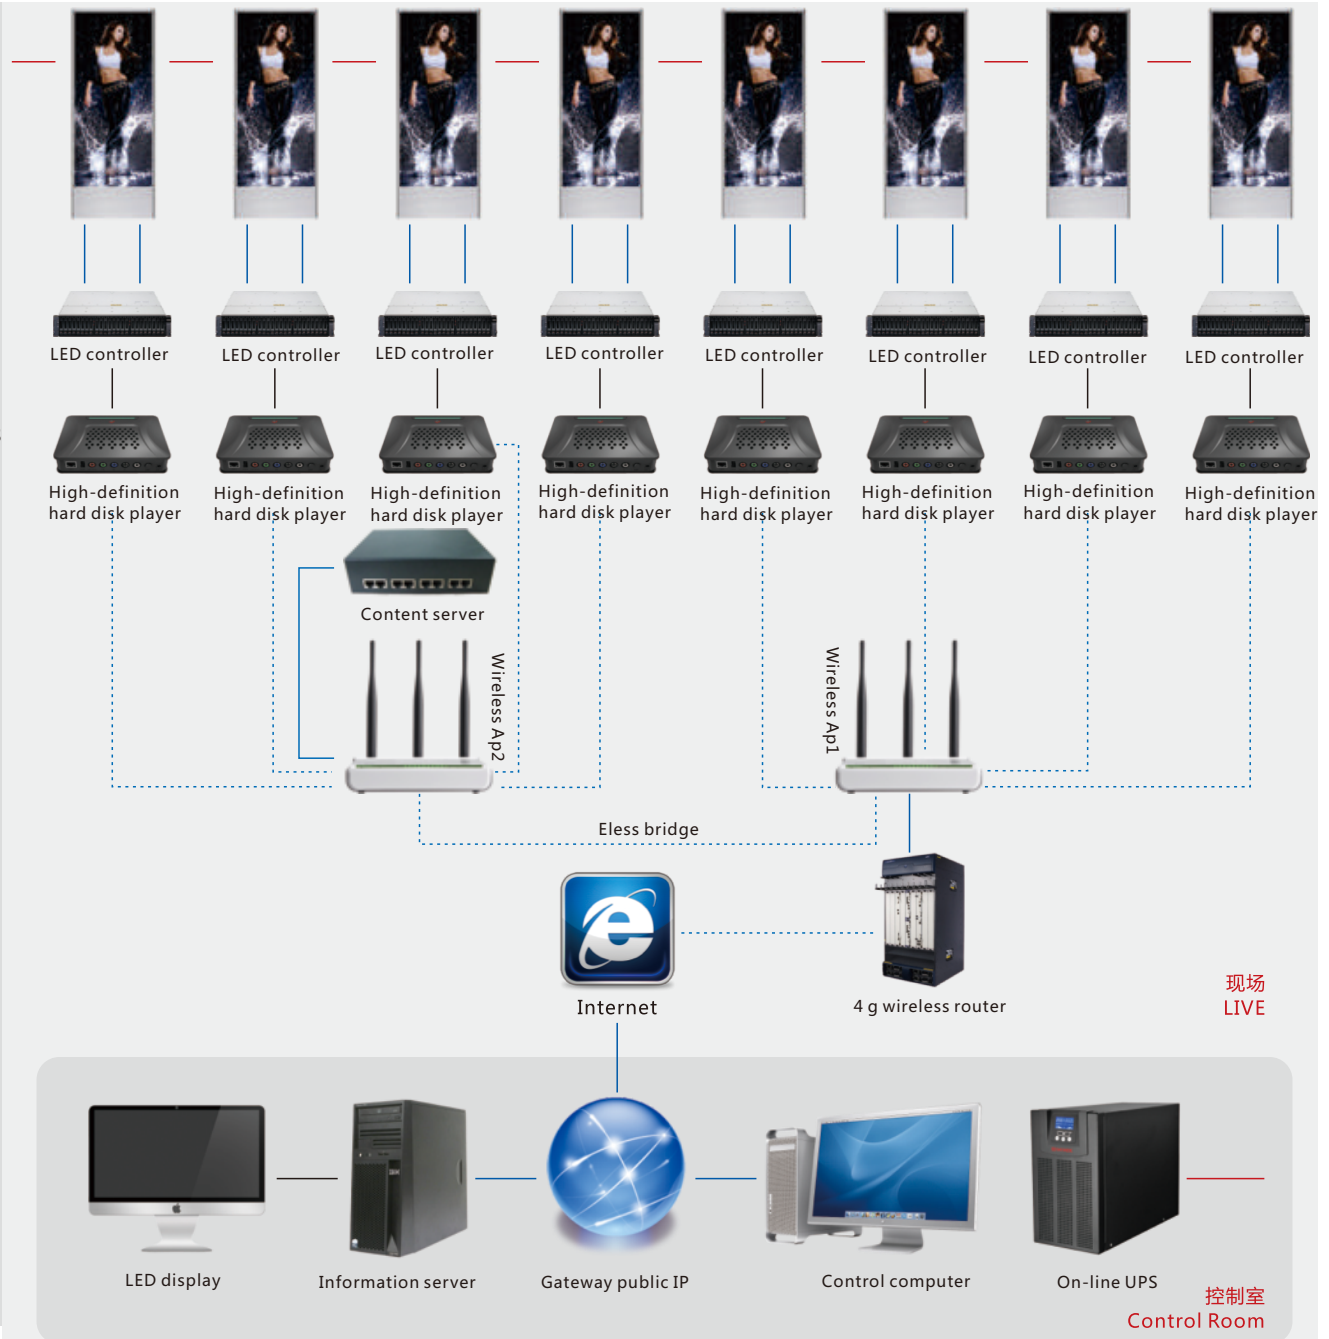

# STUNNING VISUAL

LED电视广告一体机 **震撼视觉**》  
LED Post Television Product

Pixel distance minimum of 1.6 mm, 1.166 million pixels, exquisite, color bright picture




Up to 3840 hz refresh rate, show flicker-free



160 ° ultra wide Angle, can meet the needs of all-round to watch



Longitudinal proportion, according to the picture perfect slender, the overall display effect, split screen use function, flexible in any pictures or video to high quality rendering

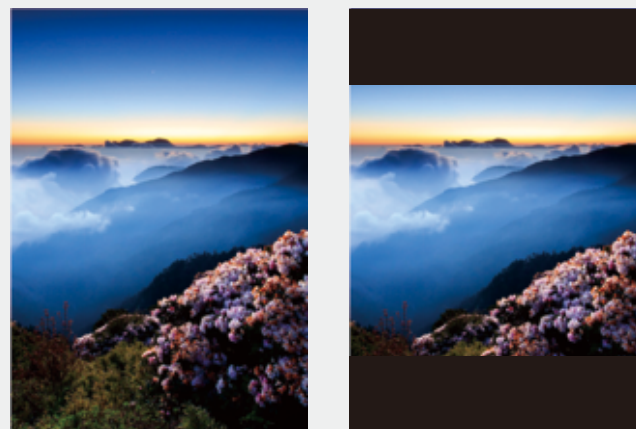

29/30  
BGC

# SUITABLE OCCASION

LED电视广告一体机  
LED Post Television Product

应用范围 >>

- Airports, railway stations, subway waiting hall
- Exhibition hall, gymnasium, conference center, cinema, library, star hotel and other places
- Stores, temporary promotion, temporary exhibition and other emergency use



# TECHNICAL PARAMETER

LED电视广告一体机  
LED Post Television Product

**技术参数** >>

31/32  
BGC

95"		S95-25G	S95-19G	S95-16G
Units	Pixel structure	Triad LED table	Triad LED table	Triad LED table
	Pixel pitch( mm )	2.5	1.923	1.667
	Units(WxH)	3×7	3×7	3×7
	Resolution(WxH)	480×848	624×1092	720×1260
	Display area( m <sup>2</sup> )	2.52	2.52	2.52
	Pixel density( point/m <sup>2</sup> )	160000	270400	360000
	Flatness( mm )	≤0.2	≤0.2	≤0.2
Optical parameters	Single point of brightness correction	Yse	Yse	Yse
	Single point of color correction	Yse	Yse	Yse
	White balance brightness( nits )	≥1200 ( Color temperature 6500 k, after correction )	≥1200 ( Color temperature 6500 k, after correction )	≥1200 ( Color temperature 6500 k, after correction )
	Color temperature( k )	3200-9300 Adjustable	3200-9300 Adjustable	3200-9300 Adjustable
	Horizontal Angle of view( ° )	160	160	160
	Vertical Angle of view( ° )	160	160	160
	Markers centerdistance deviation	≤3%	≤3%	≤3%
	Brightness uniformity	≥97%	≥97%	≥97%
	Color uniformity	±0.003Cx , CyWithin	±0.003Cx , CyWithin	±0.003Cx , CyWithin
	Contrast	3000:1	3000:1	3000:1
Electrical	Power consumption( W )	820W	820W	820W
Parameter	Fixed current( A )	15A	15A	15A
	Power supply requirements	AC175~264V ( 50-60Hz )	AC175~264V ( 50-60Hz )	AC175~264V ( 50-60Hz )
Manage	Grey scale( bit )	10	10	10
Performance	In the frame frequency( Hz )	50&60	50&60	50&60
	Refresh rate( Hz )	1200	1200	1200
Using parameter	LED net size( mm )	1200 ( W ) ×2100 ( H )	1200 ( W ) ×2100 ( H )	1200 ( W ) ×2100 ( H )
	Weight( kg )	220	220	220
	Video input interface	VGA×1 ; HDMI×2	VGA×1 ; HDMI×2	VGA×1 ; HDMI×2
	Control mode	WIFI	WIFI	WIFI
	Typical values life( hrs )	50,000	50,000	50,000
	Working temperature range( °C )	-10—40	-10—40	-10—40
	Storage temperature range( °C )	-20—60	-20—60	-20—60
	Working humidity range( RH )	10—80% No condensation	10—80% No condensation	10—80% No condensation
	Store humidity range( RH )	10—80% No condensation	10—80% No condensation	10—80% No condensation

● The specific size in kind prevail

116"		S95-25G	S95-19G	S95-16G
Units	Pixel structure	Triad LED table	Triad LED table	Triad LED table
	Pixel pitch( mm )	2.5	1.923	1.667
	Units(WxH)	3×9	3×9	3×9
	Resolution(WxH)	480×1080	624×1404	720×1620
	Display area( m <sup>2</sup> )	3.24	3.24	3.24
	Pixel density( point/m <sup>2</sup> )	160000	270400	360000
	Flatness( mm )	≤0.2	≤0.2	≤0.2
Optical parameters	Single point of brightness correction	Yse	Yse	Yse
	Single point of color correction	Yse	Yse	Yse
	White balance brightness( nits )	≥1200 ( Color temperature 6500 k, ) after correction	≥1200 ( Color temperature 6500 k, ) after correction	≥1200 ( Color temperature 6500 k, ) after correction
	Color temperature( k )	3200-9300 Adjustable	3200-9300 Adjustable	3200-9300 Adjustable
	Horizontal Angle of view( ° )	160	160	160
	Vertical Angle of view( ° )	160	160	160
	Markers centerdistance deviation	≤3%	≤3%	≤3%
	Brightness uniformity	≥97%	≥97%	≥97%
	Color uniformity	±0.003Cx , CyWithin	±0.003Cx , CyWithin	±0.003Cx , CyWithin
	Contrast	3000:1	3000:1	3000:1
Electrical	Power consumption( W )	810W	810W	810W
Parameter	Fixed current( A )	15A	15A	15A
	Power supply requirements	AC175~264V ( 50-60Hz )	AC175~264V ( 50-60Hz )	AC175~264V ( 50-60Hz )
Manage	Grey scale( bit )	10	10	10
Performance	In the frame frequency( Hz )	50&60	50&60	50&60
	Refresh rate( Hz )	3840	3840	3840
Using parameter	LED net size( mm )	1200 ( W ) ×2700 ( H )	1200 ( W ) ×2700 ( H )	1200 ( W ) ×2700 ( H )
	Weight( kg )	245	245	245
	Video input interface	VGA×1 ; HDMI×2	VGA×1 ; HDMI×2	VGA×1 ; HDMI×2
	Control mode	WIFI	WIFI	WIFI
	Typical values life( hrs )	50,000	50,000	50,000
	Working temperature range( °C )	-10—40	-10—40	-10—40
	Storage temperature range( °C )	-20—60	-20—60	-20—60
	Working humidity range( RH )	10—80% No condensation	10—80% No condensation	10—80% No condensation
	Store humidity range( RH )	10—80% No condensation	10—80% No condensation	10—80% No condensation

● The specific size in kind prevail

105"		S95-25G	S95-19G	S95-16G
Units	Pixel structure	Triad LED table	Triad LED table	Triad LED table
	Pixel pitch( mm )	2.5	1.923	1.667
	Units( WxH )	3×8	3×8	3×8
	Resolution( WxH )	480×960	624×1248	720×1440
	Display area( m <sup>2</sup> )	2.88	2.88	2.88
	Pixel density( point/m <sup>2</sup> )	160000	270400	360000
	Flatness( mm )	≤0.2	≤0.2	≤0.2
Optical parameters	Single point of brightness correction	Yse	Yse	Yse
	Single point of color correction	Yse	Yse	Yse
	White balance brightness( nits )	≥1200 ( Color temperature 6500 k, ) after correction	≥1200 ( Color temperature 6500 k, ) after correction	≥1200 ( Color temperature 6500 k, ) after correction
	Color temperature( k )	3200-9300Adjustable	3200-9300Adjustable	3200-9300Adjustable
	Horizontal Angle of view( ° )	160	160	160
	Vertical Angle of view( ° )	160	160	160
	Markers centerdistance deviation	≤3%	≤3%	≤3%
	Brightness uniformity	≥97%	≥97%	≥97%
	Color uniformity	±0.003Cx , CyWithin	±0.003Cx , CyWithin	±0.003Cx , CyWithin
	Contrast	3000:1	3000:1	3000:1
Electrical	Power consumption( W )	720W	720W	720W
Parameter	Fixed current( A )	15A	15A	15A
	Power supply requirements	AC175~264V ( 50-60Hz )	AC175~264V ( 50-60Hz )	AC175~264V ( 50-60Hz )
Manage	Grey scale( bit )	10	10	10
Performance	In the frame frequency( Hz )	50&60	50&60	50&60
	Refresh rate( Hz )	3840	3840	3840
Using parameter	LED net size( mm )	1200 ( W ) ×2400 ( H )	1200 ( W ) ×2400 ( H )	1200 ( W ) ×2400 ( H )
	Weight( kg )	245	245	245
	Video input interface	VGA×1 ; HDMI×2	VGA×1 ; HDMI×2	VGA×1 ; HDMI×2
	Control mode	WIFI	WIFI	WIFI
	Typical values life( hrs )	50,000	50,000	50,000
	Working temperature range( °C )	-10—40	-10—40	-10—40
	Storage temperature range( °C )	-20—60	-20—60	-20—60
	Working humidity range( RH )	10—80% No condensation	10—80% No condensation	10—80% No condensation
	Store humidity range( RH )	10—80% No condensation	10—80% No condensation	10—80% No condensation

●The specific size in kind prevail



# Classic Case

35/36  
BGC

## China aerospace information co



Specifications: PH2.5 Area: 25 m<sup>2</sup>

National center for big data research



Specifications:PH\PH4triad Total area:95m<sup>2</sup>

37/38  
BGC

## All-china federation of trade unions



Specifications : PH1.6 Area : 15m<sup>2</sup>

# China energy conservation and environmental protection group



Specifications : PH2.5 Area : 23m<sup>2</sup>



39/40  
BGC

## Portion of the Tibet military area command the war room

Specifications : PH1.9 Area : 45m<sup>2</sup>



## Portion of the lanzhou military region command the war room

Specifications : PH1.9 Area : 39m<sup>2</sup>



Specifications : PH2.5 Area : 46m<sup>2</sup>

Luliang defense mobilization  
command center



Specifications : PH1.9 Area : 39m<sup>2</sup>

Portion of the jinan military region  
command the war room



41/42  
BGC

## Mongolia a military training base command center

Specifications : PH2.5 Area : 36m<sup>2</sup>



## Mongolia a military training base command center

Specifications : PH1.6 Area : 29m<sup>2</sup>





Specifications : PH1.9 Area : 22m<sup>2</sup>

## The College of Defense Studies, NDU, PLA



Specifications : PH1.6 Area : 16m<sup>2</sup>

## Hebei province education department



43/44  
BGC

## Hebei publishing media group, beidaihe pavilion

Specifications : PH2.5 Area : 25m<sup>2</sup>



## Yunnan province MeiTanTing

Specifications : PH3 Area : 15m<sup>2</sup>



Specifications : PH3/5 Area : 175m<sup>2</sup>

Chinese people's armed  
policecorps unit 8750



Specifications : PH3/PH6 Area : 56m<sup>2</sup>

China's first tobacco  
plantation (yuxi)



45/46  
BGC

Hohhot white tower international airport



Specifications : PH1.9 advertising machine 144 inches

Beijing international conference center



Specifications : PH1.9 advertising machine 122 inches

Specifications : PH3 Area : 12m<sup>2</sup>

## Dianchi international conference center



Specifications : Ph3 triad Area : 46m<sup>2</sup>

## Xi 'an xianyang international airport



47/48  
BGC

# LED DISPLAY SYSTEMS SPECIALIST

## DISPLAY THE FUTURE

Address: changping district of Beijing huilongguan industrial park

Telephone: + 86 (010)58400033

Fax: + 86 (010)53109291

Official website: [www.bgc-china.com](http://www.bgc-china.com)

E-mail: [fbg125@163.com](mailto:fbg125@163.com)