

Why Frameport Shaker Doors?


The Case for Frameport Shaker vs Molded Shaker Doors

	Frameport Shaker Door	Molded Shaker Door
Factory sealed top and bottom rail	Yes 2 coats	No
Four (4) coat prime process	4 coats	1 coat
Crisp white primer finish	Yes	No
Trim-able 2 inches off bottom	Yes	No
True 90° shaker sticking?	Yes	No, angled
Poly-wrapped with color label (keeps door clean and fingerprint free)	Yes	No
High performance – no quality issues	Yes	No

Frameport Shaker Door Features:

- Allows the distributor to eliminate both hollow core and solid core molded inventory
 - One SKU meets both needs
 - Free's up warehouse space
- A complete line of flat panel doors in a broad range of configurations
- Available in 1-3/8" and 1-3/4" thicknesses
- 1-3/8" doors also available with Ovolo sticking
- Available in 6/8, 7/0 and 8/0 heights
- Environmentally friendly, FSC Certified
- All doors are TSCA compliant
- 5-year limited warranty

Panel edges are kerfed and squeezed during panel insertion, allowing them to expand and grip the inside door frame, eliminating rattling.

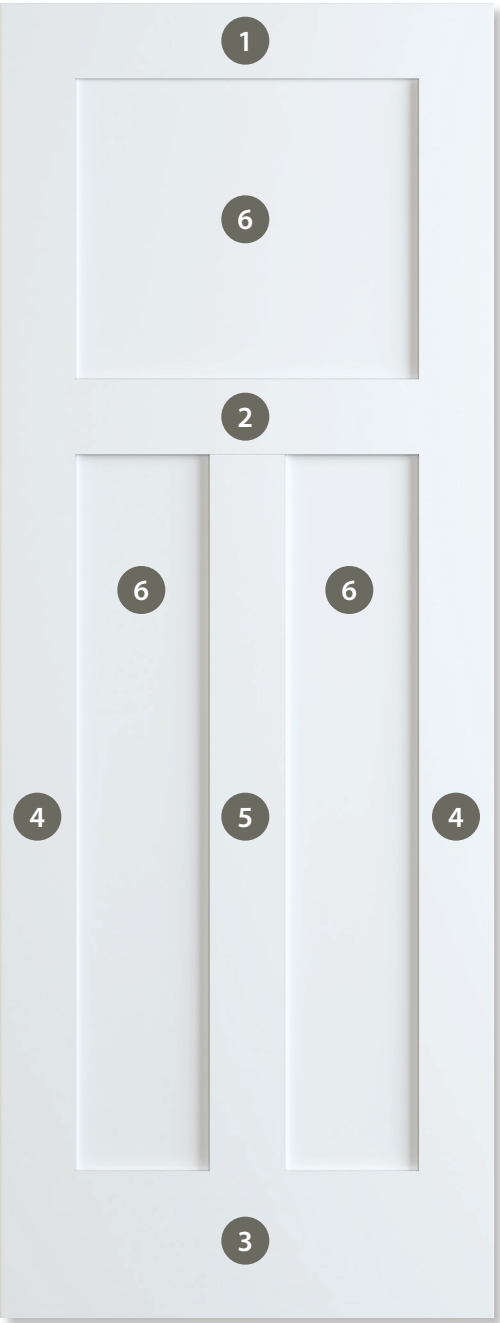

- 1 Top Rail
- 2 Cross Rail
- 3 Bottom Rail
- 4 Stile
- 5 Mullion
- 6 MDF Panel

Why Frameport Doors?




Why Frameport Doors?


The Superior Case for Frameport Doors

Features	Benefits
Tops and bottoms are factory sealed to prevent moisture absorption	Eliminates the top reason for product claims
Vertical grain	Uniform finish, no visible veneer splices
Superior panel thickness	Full 3/4" vs 1/2" - 9/16". Deep rich appearance, improves noise reduction
Frameport's panels are contoured fitted to prevent shifting after finishing	No evidence of unsightly lines
Vertical grain slat 1/4" vs. 3/16"	More stable, significantly reduces warping
All components are primed prior to assembly	No unpainted surface to show through. More consistent finishing
Engineered LVL (Laminated Veneer Lumber) bifold stiles	Will not warp. No unsightly finger-joints
Wide edge band	Doors are trimmable on the edge beyond 1/4". Frameport uses 3/4" edge band so trimming 1/2" off each side is possible.
Each door is individually polyolefin wrapped; can be pre-hung in the plastic	Door remains clean in warehouse or on the job. No dust, no oily fingerprints.
5-Year Limited Warranty	Other manufacturers typically offer a 1-year warranty
Charlotte, NC warehouse	Inventory for fill-in and items not stocked at distributor locations
More dowels per rail (see below)	Stronger, more stable construction. Eliminates separation
Top: 3 vs. 2 Lock: 5 vs. 3 Bottom: 6 vs. 4	


Frameport Construction



Typical Door Manufacturer



Why Frameport Doors?

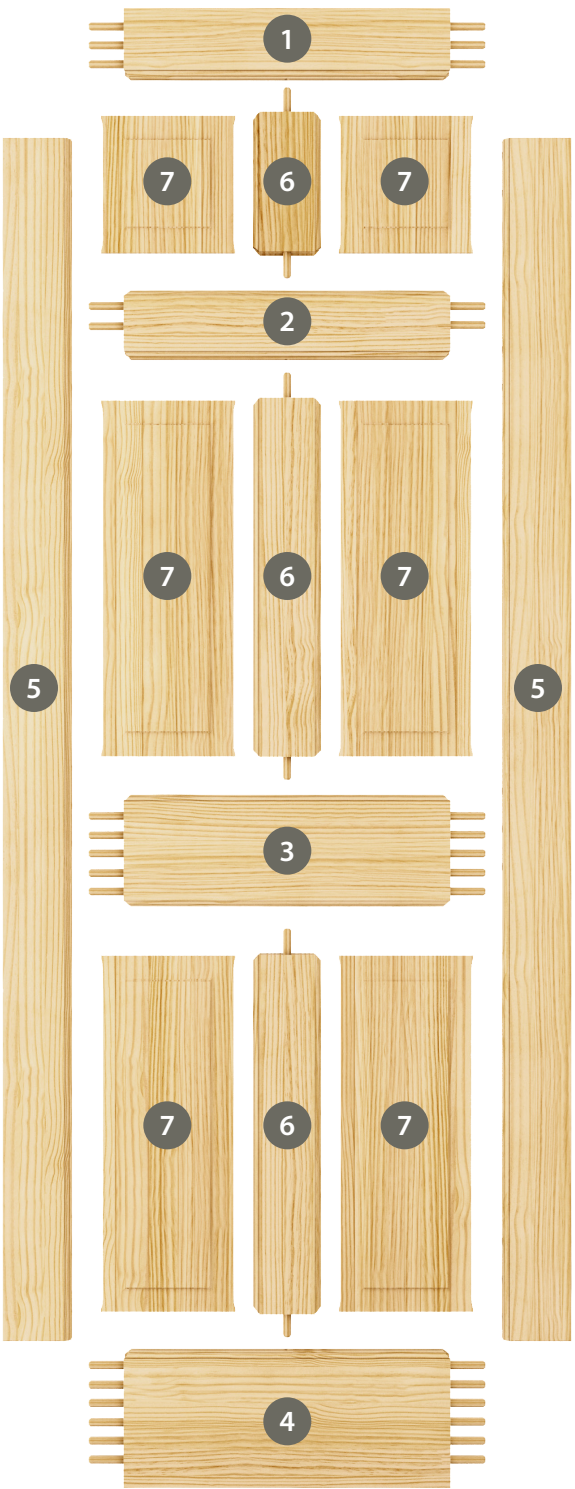

- 1 Top Rail
- 2 Cross Rail
- 3 Lock Rail
- 4 Bottom Rail
- 5 Stile
- 6 Mullion
- 7 Raised Panel



Contoured Panel Shape

Contoured panel provides snug fit while allowing panel to breathe and accommodate any expansion/shrinking that may occur from changes in humidity. This eliminates panel shifting after assembly.



Flat panel edges are kerfed and squeezed during panel insertion, allowing them to expand and grip the inside door frame, eliminating rattling.