


END VIEW

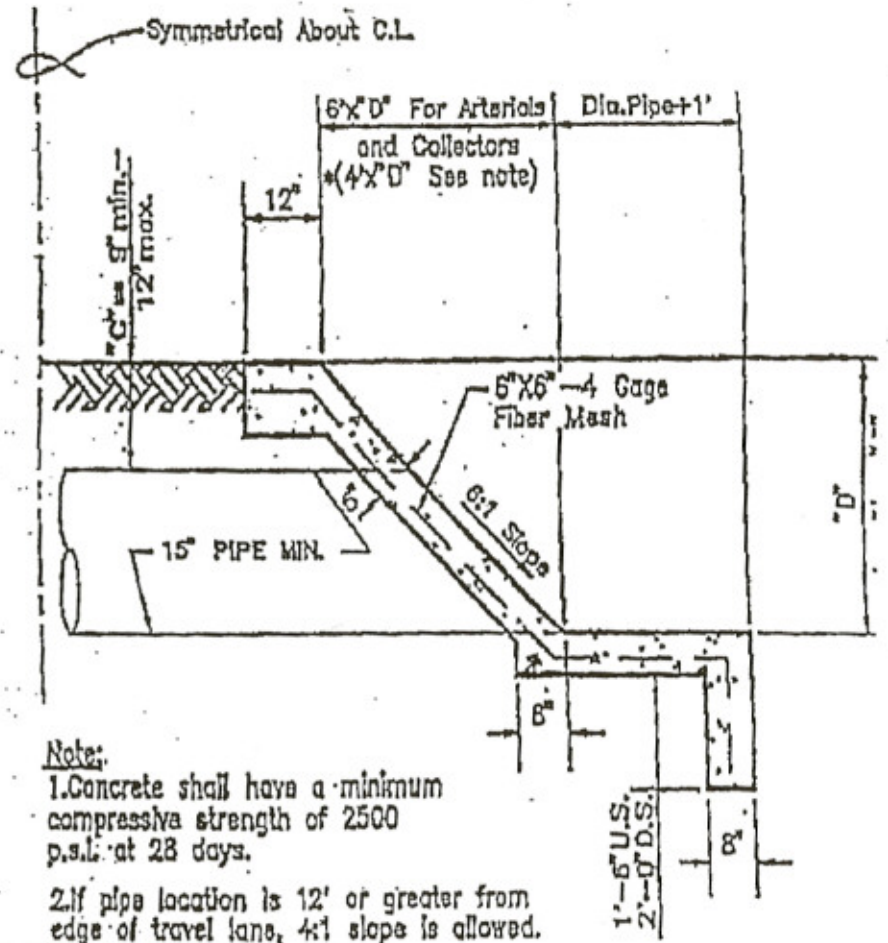

Note:
 1. Concrete shall have a minimum compressive strength of 2500 p.s.i. at 28 days.
 2. If pipe location is 12' or greater from edge of travel lane, 4:1 slope is allowed. 6:1 otherwise.

SECTION "B-B"

DETAILS FOR CONCRETE END TREATMENT