

# RT-MINI

Self-flashing base for asphalt & metal roof-top PV mounting systems

RT-MINI is suitable for mounting any rail system with a conventional L-Foot.



Dual bolt design: M8 or 5/16" for L-Foot & 1/4" for EMC




ICC ESR 3575

Call Now for more details  
858-935-6064

Easy tapping screw guide


1/4" Hex Bolt upper channel

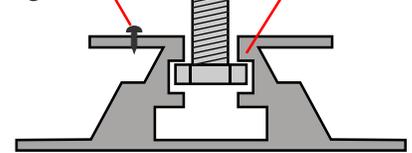

Flat lip for PV Cable clips

M8 or 5/16"

Hex Bolt bottom channel

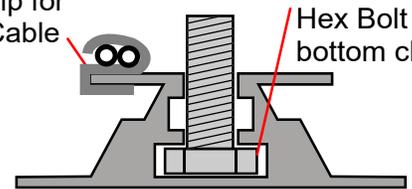

 Roof Tech

Smarter PV mounting solutions from top of roof to bottom line®  
www.roof-tech.us info@roof-tech.us

# RT-MINI

Flexible Flashing certified by the International Code Council (ICC)

Engineered to **ASTM D 1761** (Standard Test Methods for Mechanical Fasteners in Wood)


## Components

RT2-00-MINIBK  
PAT : PENDING




MINI base : 20 ea.  
Screw : 40 ea.  
Extra RT-Butyl : 10 ea.


## Dimensions in (mm)

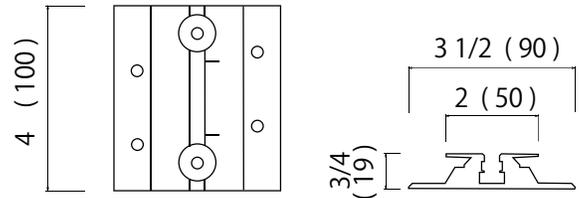

## Rafter installation

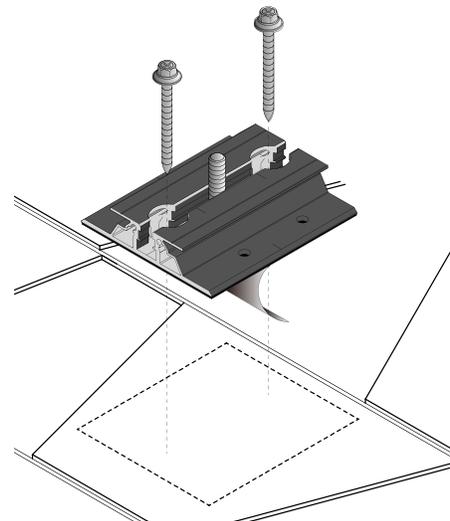



## Deck installation

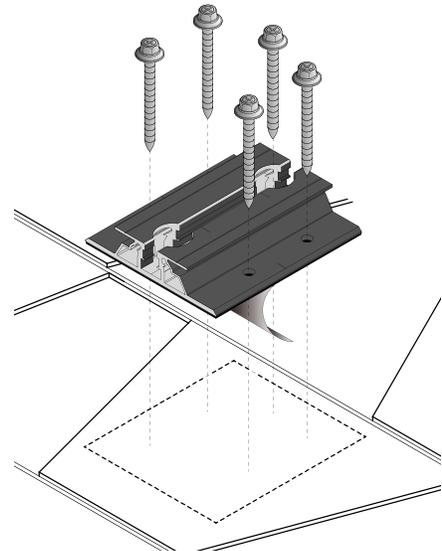

RT-Butyl is Roof Tech's flexible flashing used in 550,000 residential PV systems for the last 20 years. It is the first PV mounting system with Flexible Flashing certified by the ICC.

Metal Flashing Retrofit

Flexible Flashing

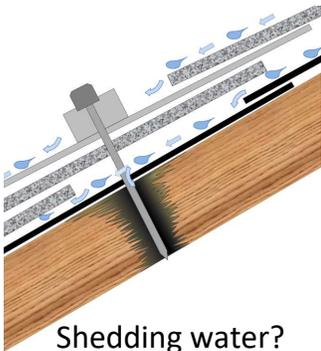

Shedding water?

**100% Waterproof**

ICC ESR-3575    ASTM2140 testing    UV testing (7500 hrs.)



P.E. Stamped Letters available at [www.roof-tech.us/support](http://www.roof-tech.us/support)

Roof Tech Inc.

[www.roof-tech.us](http://www.roof-tech.us)    [info@roof-tech.us](mailto:info@roof-tech.us)  
10620 Trenea Street, Suite 230, San Diego, CA 92131  
858.935.6064