

Pre-Owned & Refurbished Inventory

Refurbished: Limited Inventory

COLOR iR A C5740 Retail \$25500 Cash Price \$8750.00
40 Copies per minute Color print & color scan w 11X17, Inner
Fiinisher, 4 paper drawers 32000 original Copy

Total 48 Mo FMV Lease \$ 215.00
Maintenance Option: QUARTER Base Rate = \$ 504.35
(\$168.12 / Month average) Includes 6000 Color / quarter (2000 /
month) & 4500 Black / quarter (1500 / month)

COLOR iR A C5760 Retail \$29500 Cash Price \$10250.00
40 Copies per minute Color print & color scan w 11X17,
External Finisher with 3/8 hole punch, 4 paper drawers,
32000 original Copy

Total 48 Mo FMV Lease \$ 228.19
Maintenance Option: QUARTER Base Rate = \$ 552.88
(\$168.12 / Month average) Includes 6000 Color / quarter (2000 /
month) & 4500 Black / quarter (1500 / month)



Consistently Winning, Always Excelling



Keypoint Intelligence
2024-2026 Most Color
Consistent A4 Brand

Color consistency led to increased uptime
and reduced waste
Colors produced
were most stable for entire length of testing



CANON SOLUTIONS AMERICA

imageRUNNER
ADVANCE DX
C5760i / C5750i
C5740i / C5735i

imageRUNNER ADVANCE DX C5700 Series

Print up to 60 ppm (BW/color)

Scan up to 270 ipm (300 dpi) (BW/color, duplex)

Print up to 12" × 18"

6,350-sheet maximum paper capacity

Canon's comprehensive portfolio of imageRUNNER ADVANCE DX multifunction printers and integrated solutions can help **simplify** the end user experience and management of technology, better **control** sensitive information and print-related costs, and help ensure that technology investments proactively **evolve** with changing needs.

Color
Mid-volume
Multifunction



WORKFLOW EFFICIENCY

- 10.1" intuitive touchscreen with smartphone-like usability.
- A unique, customized experience tailored to individual preferences using My ADVANCE.
- Supports mobile solutions and integration with many popular cloud services like Google Drive.¹
- Scan and convert documents to searchable digital files in a variety of file formats.
- Integration with Canon and various third-party software with embedded application platform.
- Hot Folders allow users to drag and drop a file into a hot folder and automatically print with pre-defined settings such as number of copies and finishing requirements.



SECURITY

- Advanced standard security feature set to help safeguard sensitive information and assist in regulatory compliance.
- Integrates with existing, third-party SIEM^{*2} systems to help provide real-time, comprehensive insights into potential threats to the network and printers.
- Technology to verify that the device boot process, firmware, and applications initialize without alteration at startup. McAfee Embedded Control³ utilizes a whitelist to protect against malware and tampering of firmware and applications.
- Security policy settings can be controlled with a dedicated password, configured from a central location, and exported to other supported devices.
- Control access to the device and specific features, using a host of flexible authentication methods—PIN code, user name/password, or card access.⁴



QUALITY AND RELIABILITY

- Canon's signature reliability and engine technologies help keep productivity high and minimize the impact on support resources.
- Outstanding imaging technologies and toner allow for consistently striking images, thanks to Canon's V² color profile.
- Designed to achieve maximum uptime with status notifications that help keep supplies replenished and intuitive maintenance videos for consumables replacement.
- imageRUNNER ADVANCE models have received many awards and recognition from leading industry analysts, often referencing strong reliability.

^{*} Security Information and Event Management



DEVICE AND FLEET MANAGEMENT

- Designed for quick, easy deployment.
- Remote diagnostics and parts life management for proactive maintenance and rapid fixes.
- Easy and intuitive to monitor device status and consumable levels, turn off devices remotely, observe meter readings, manage settings, and implement security policies.
- Common firmware and regular updates with Unified Firmware Platform (UFP) for continuous improvements and consistency across a fleet.



COST MANAGEMENT


- Track and assess print, copy, scan, and fax usage and allocate costs to departments or projects.
- Apply print policies and restrict usage by user to help reduce unnecessary printing and contribute to cost efficiency.
- Standard cloud-based solution provides a centralized dashboard with up-to-the-minute insights into printer activity.
- Upgrade to uniFLOW server or cloud-based solutions for full accounting and reporting for compatible Canon and third-party devices, pull printing, job routing, and powerful scan workflows.



SUSTAINABILITY

- A combination of fusing technologies and low-melting-point toner minimizes power requirements and helps achieve low energy consumption.
- Encourage environmentally conscious work practices by enabling multiple settings that can help save paper and energy.
- ENERGY STAR® certified and rated EPEAT® Gold⁵

CONFIGURATION OPTIONS

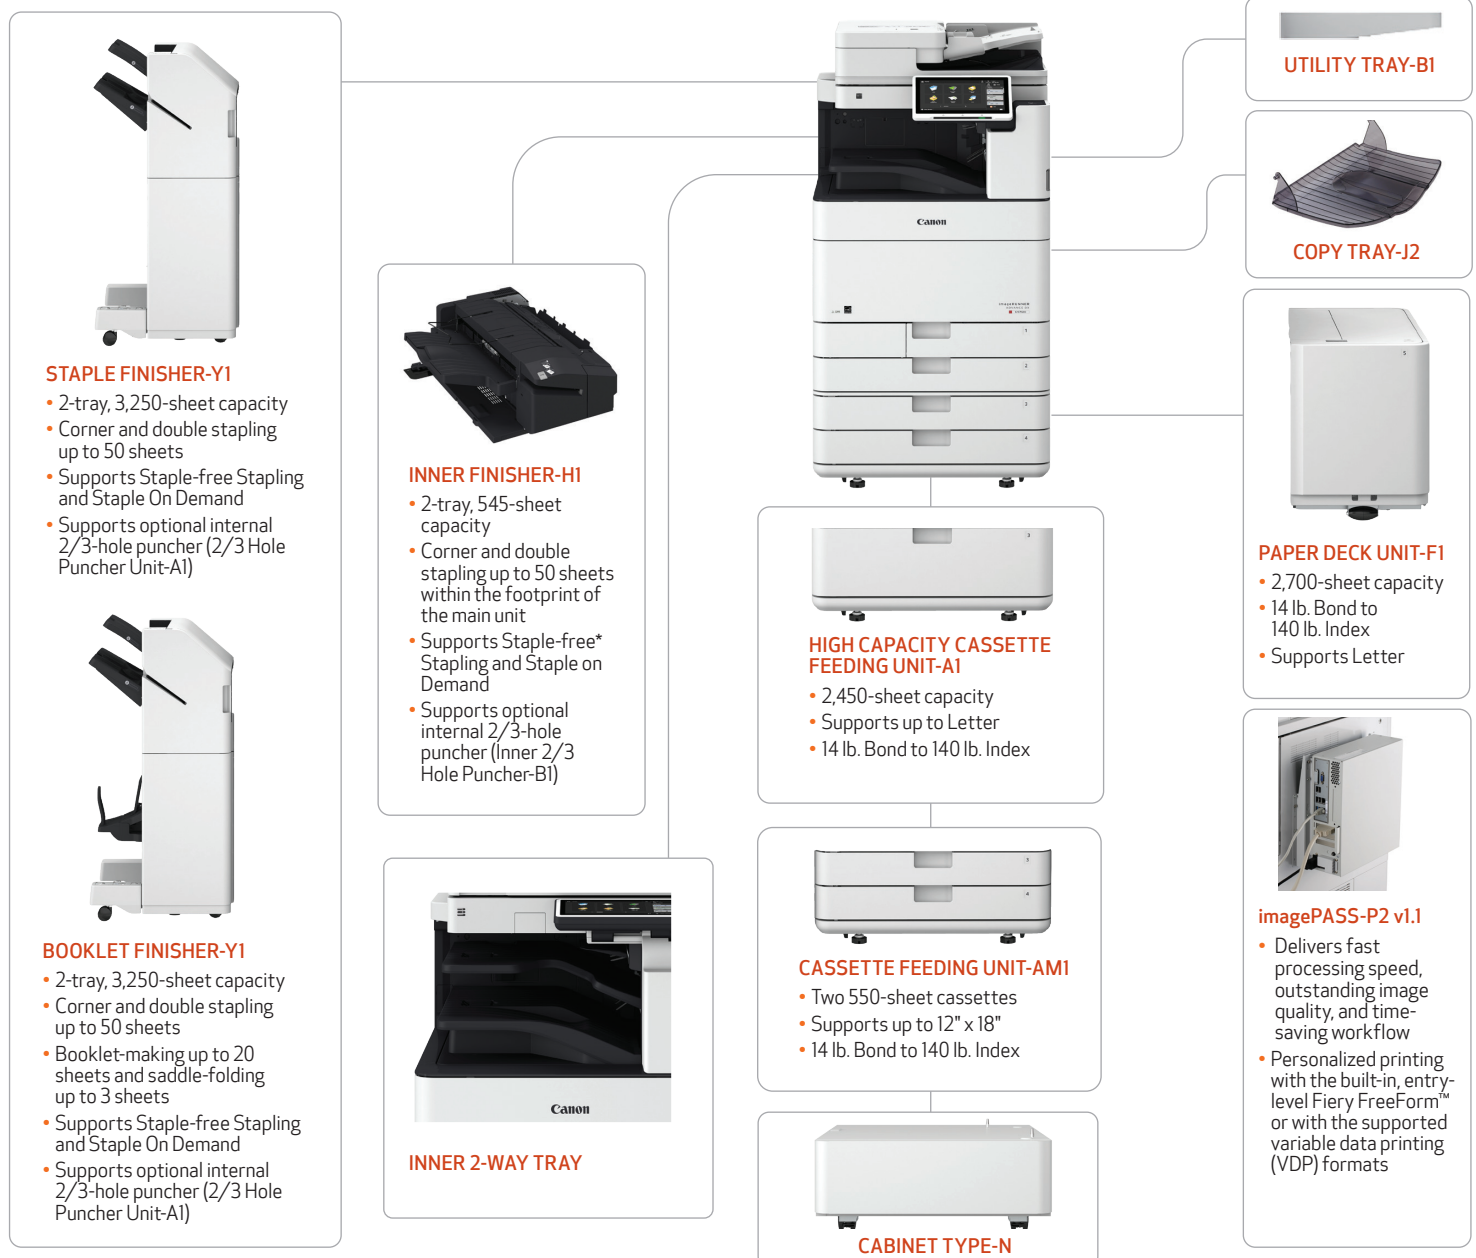

* Staple-free stapling, up to five pages of 17 lb. Bond.

SPECIFICATIONS

Main Unit

Type

Color Laser Multifunctional

Core Functions

Standard: Print, Copy, Scan, Send, Store
Optional: Fax

Processor

1.75GHz Dual Core Processor

Control Panel

10.1" TFT LCD WSVGA Color Flat-panel

Memory

4.0 GB RAM

Hard Disk Drive

Standard: 250 GB/Maximum: 1 TB

Interface Connection

Network: 1000Base-T/100Base-TX/10Base-T,
Wireless LAN (IEEE 802.11 b/g/n)

Others

Standard: USB 2.0 (Host) x1, USB 3.0 x1 (Host),
USB 2.0 x1 (Device)
Optional: Serial Interface, Copy Control Interface

Paper Output Capacity (LTR, 20 lb. Bond)

Standard: 250 Sheets
Maximum: 3,450 Sheets
(with External Finisher and Copy Tray)

Paper Sources (LTR, 20 lb. Bond)

Standard: Dual 550-sheet Paper Cassettes,
100-sheet Stack Bypass
Optional: Dual 550-Sheet Paper Cassettes
(Cassette Feeding Unit-AM1), 2,450-Sheet
High Capacity Paper Cassette (High
Capacity Cassette Feeding Unit-A1),
2,700-Sheet Paper Deck
(Paper Deck Unit-F1)

Paper Capacity (LTR, 20 lb. Bond)

Standard: 1,200 Sheets
Maximum: 6,350 Sheets

Finishing Capabilities

Standard: Collate, Group
With Options: Collate, Group, Offset, Staple, Saddle-Stitch,
Hole Punch, Eco Staple, Staple On Demand

Supported Media Types

Multi-Purpose Tray: Thin, Plain, Recycled, Color, Heavy, Coated,
Tracing, Bond, Transparency, Label,
Pre-punched, Letterhead, Tab, Envelope
Paper: Thin, Plain, Recycled, Color, Heavy, Bond,
Cassettes: Transparency, Pre-punched, Letterhead,
Envelope⁶

Supported Media Sizes

Upper Cassette: Letter, Executive, Statement-R, Envelope
[No.10 (COM10), DL, ISO-C5], Custom Size
(3-7/8" x 5-7/8" to 11-3/4" x 8-1/2")
Lower Cassette: 12" x 18", 11" x 17", Legal, Letter, Letter-R,
Executive, Statement-R, Envelope
[No.10 (COM10), Monarch, DL, ISO-C5],
Custom Size (3-7/8" x 7-1/8" to 12" x 18")
Multi-Purpose Tray: 12" x 18", 11" x 17", Legal, Letter, Letter-R,
Executive, Statement, Statement-R,
Envelope [No.10 (COM10), Monarch, DL,
ISO-C5], Envelope Custom Size (3-7/8" x
3-7/8" to 12-5/8" x 18"), Custom Size/
Free Size (3-7/8" x 5-1/2" to 12-5/8" x 18")

Supported Media Weights

Cassettes: 14 lb. Bond to 140 lb. Index (52 to 256 g/m²)
Stack Bypass: 14 lb. Bond to 110 lb. Cover (52 to 300 g/m²)
Duplexing: 14 lb. Bond to 80 lb. Cover (52 to 220 g/m²)

Print/Copy Speed (BW and Color)

C5760i: Up to 60 ppm (Letter); Up to 36 ppm
(Letter-R); Up to 34 ppm (Legal);
Up to 32 ppm (11" x 17")
C5750i: Up to 50 ppm (Letter); Up to 30 ppm
(Letter-R); Up to 29 ppm (Legal);
Up to 27 ppm (11" x 17")
C5740i: Up to 40 ppm (Letter); Up to 24 ppm
(Letter-R); Up to 23 ppm (Legal);
Up to 22 ppm (11" x 17")
C5735i: Up to 35 ppm (Letter); Up to 23 ppm
(Letter-R); Up to 21 ppm (Legal);
Up to 18 ppm (11" x 17")

Warm-up Time

From Power On: Approx. 10 Seconds⁷
From Sleep Mode: Approx. 10 Seconds⁸
Quick Startup Mode: Approx. 4 Seconds⁹

Dimensions (W x D x H)

24-3/8" x 28-1/2" x 36-7/8" (620 x 722 x 937 mm)¹⁰

Installation Space (W x D)

Basic: 42-5/8" x 45-3/4" (1,083 x 1,162 mm)
(Right Cover Open with Multi-purpose
tray extended + Cassette Drawers Open)
Fully Configured: 73-1/2" x 45-3/4" (1,866 x 1,162 mm)
(Booklet Finisher-Y1 with the extension
tray extended + Paper Deck Unit-F1 +
Cassette Drawers open)

Weight

Approx. 310.9 lb. (141 kg)¹¹

Print Specifications

Print Resolution (dpi)

1200 x 1200

Standard Page Description Languages

UFR II, PCL6, Adobe PS 3

Supported File Types

PDF, TIFF, JPEG, EPS,¹² XPS

Printing from Mobile Devices and Cloud-based Services

A range of standard and optional software and MEAP-based solutions (including AirPrint, Mopria, Universal Print by Microsoft®, Canon PRINT Business, and uniFLOW Online) are available to provide printing from mobile devices or internet-connected devices and cloud-based services depending on your requirements. Please contact your sales representative for further information.

Fonts

PCL: 93 Roman, 10 Bitmap fonts, 2 OCR fonts,
Andalé Mono WT J/K/S/T (Japanese,
Korean, Simplified and Traditional Chinese),¹³
Barcode Fonts¹⁴
PS: 136 Roman

Operating System¹⁵

UFR II/PS: Windows® 7/8.1/10/Server2008/
Server2008 R2/Server2012/Server2012
R2/Server2016/Server2019, Mac OS X
(10.10 or later)
PCL: Windows® 7/8.1/10/Server2008/
Server2008 R2/Server2012/Server2012
R2/Server2016/Server2019
PPD: Windows® 7/8.1/10, Mac OS X(10.9 or later)

Copy Specifications

First-Copy-Out Time

C5760i: As fast as 2.9 seconds (BW)/
4.5 seconds (Color)
C5750i: As fast as 3.5 seconds (BW)/
5.2 seconds (Color)
C5740i: As fast as 4.1 seconds (BW)/
6.1 seconds (Color)
C5735i: As fast as 4.9 seconds (BW)/
7.4 seconds (Color)

Copy Resolution (dpi)

600 x 600

Multiple Copies

Up to 999

Magnification

25%-400% (1% Increments)

Preset Reductions/Enlargements

25%, 50%, 64%, 73%, 78%, 100% (1:1), 121%, 129%,
200%, 400%

Scan Specifications

Type

Single-Pass Duplexing Automatic Document Feeder

Document Feeder Paper Capacity

Up to 200 Sheets (20 lb. Bond)

Document Feeder Supported Media Sizes

11" x 17", Legal, Letter, Letter-R, Statement, Statement-R,
Custom Size: 2-3/4" x 5-1/2" to 12" x 17"

Document Feeder Supported Media Weights

Single-Sided Scanning: 13.3 lb. Bond to 80 lb. Cover (50 to 220 gsm)
(BW, CL)
Double-Sided Scanning: 13.3 lb. Bond to 80 lb. Cover (50 to 220 gsm)
(BW, CL)

Platen Acceptable Originals

Sheet, Book, 3-Dimensional Objects

Pull Scan

Color Network ScanGear2 for both Twain and WIA
Supported OS: Windows® 7/8.1/10/Server 2008/
Server 2008 R2/Server 2012/
Server 2012 R2/Server 2016

Scan Resolution (dpi)

Scan for Copy: 600 x 600
Scan for Send: (Push) 600 x 600 (SMB/FTP/WebDAV/
IFAX), (Pull) 600 x 600
Scan for Fax: 600 x 600

Scan to Mobile Devices and Cloud-based Services

A range of solutions is available to provide scanning to compatible mobile devices and certain cloud-based services depending on your requirements.

Scan Speed (LTR) (BW/CL)

Single-sided Scanning: 135/135 (300 dpi), 80/80 (600 dpi),
Double-sided Scanning: 270/270 (300 dpi), 160/90
(600 dpi)

Send Specifications

Destination

Standard: E-mail/Internet FAX (SMTP), SMB3.0, FTP,
WebDAV, Mail Box
Optional: Super G3 FAX, IP Fax

Address Book

LDAP (2,000)/Local (1,600)/Speed Dial (200)

Send Resolution (dpi)

Push: Up to 600 x 600
Pull: Up to 600 x 600

Communication Protocol

File: FTP(TCP/IP), SMB3.0 (TCP/IP), WebDAV
Email: SMTP, POP3

File Format

Standard: TIFF, JPEG, PDF (Encrypted, Compact,
Searchable, Apply Policy, Optimize for
Web, User Signature, PDF A/1-b, Limited
Color, Device Signature, User Signature),
XPS (Compact, Searchable, Device Signature,
User Signature), Office Open XML
(PowerPoint, Word)

Fax Specifications (Optional)

Modem Speed

Super G3: 33.6 Kbps
G3: 14.4 Kbps

Compression Method

MH, MR, MMR, JBIG

Resolution (dpi)

400 x 400, 200 x 400, 200 x 200, 200 x 100

Sending/Recording Size

Statement-R to 11" x 17"

Fax Memory

Up to 30,000 Pages (2,000 jobs)

Speed Dials

Max. 200

Group Dials/Destinations

Max. 199 Dials

Sequential Broadcast

Max. 256 Addresses

Memory Backup

Yes

Store Specifications

Mail Box (Number Supported)

100 User In-boxes, 1 Memory RX In-box, 50 Confidential Fax In-boxes, Maximum 10,000 Pages (2,000 jobs) Stored

Advanced Box

Communication Protocol: SMB or WebDAV

Supported

Client PC: Windows (Windows 8.1/10)

Concurrent Connections (Max.)

SMB: 64

WebDAV: 3

Advanced Box Available Disc Space

Approx. 16 GB (Standard HDD)

Approx. 480 GB (With Optional 1 TB HDD)

Security Specifications

Authentication

Standard: Universal Login Manager, uniFLOW Online Express,¹⁶ User Authentication, Department ID Authentication, Access Management System, Device and Function Level Log-in uniFLOW

Optional:

Data

Standard: Trusted Platform Module (TPM), Hard Disk Password Lock, Hard Disk Drive Erase, Mail Box Password Protection, Hard Disk Drive Encryption (FIPS140-2 Validated), Verify System at Startup,³ McAfee Embedded Control³

Optional: Hard Disk Drive Mirroring, IEEE 2600.2 Common Criteria Certification, Data Loss Prevention (Requires uniFLOW)

Network

Standard: Encrypted Secure Print, IP/Mac Address Filtering, IPsec, TLS Encrypted Communication (v1.0/1.1/1.2/1.3), SNMP V3.0, IEEE 802.1X, IPv6, SMTP Authentication, POP Authentication before SMTP, S/MIME, SIEM Integration

Document

Standard: Secure Watermark, Secure Print, Adobe LiveCycle® Rights Management ES2.5 Integration, Encrypted PDF, Encrypted Secure Print, Digital Signature User Signature

Environmental Specifications

Operating Environment

Temperature: 50 to 86°F

Humidity: 20 to 80% RH (Relative Humidity)

Power Requirements

C5760i/ C5750i: 110-127V, 60Hz, 11.5A
C5740i/ C5735i: 110-127V, 60Hz, 10A

Power Consumption

Maximum: Approx. 1,800 W
Standby: Approx. 63.1 W¹⁷
Sleep Mode: Approx. 0.8 W¹⁸
Typical Electricity Consumption (TEC) Rating¹⁹
C5760i: 0.84 kWh
C5750i: 0.68 kWh
C5740i: 0.57 kWh
C5735i: 0.47 kWh

Standards

ENERGY STAR® Certified
Rated EPEAT® Gold⁵

Consumables

Toner

GPR-55 Toner²⁰

Toner Yield (Estimated @ 5% Coverage)

Black: 69,000 Images
Color (C,M,Y): 60,000 Images

¹ Subscription to a third-party cloud service required. Subject to third-party cloud service providers' Terms and Conditions.

² Third-party SIEM system required. Subject to third-party SIEM system's Terms and Conditions. Canon cannot ensure compatibility with all third-party SIEM systems.

³ This feature is off by default and must be turned on by the user. Warm-up times are affected once turned on.

⁴ Requires additional option.

⁵ For current EPEAT rating (Gold/Silver/Bronze), please visit www.epeat.net.

⁶ Envelope Feeder Attachment (standard) is required.

⁷ Time from device power-on, until copy ready (not print reservation).

⁸ Time from exiting Sleep mode to when printing is operational.

⁹ Time from device power-on to when the copy icon appears and is enabled to operate on the touch panel display.

¹⁰ Includes main unit and either Cassette Feeding Unit-AM1, High Capacity Cassette Feeding Unit-A1, or Cabinet Type-N.

¹¹ Includes main unit, consumables, and Cassette Feeding Unit-AM1.

¹² EPS can be printed directly only from the Remote User Interface.

¹³ Requires the optional PCL International Font Set-A1.

¹⁴ Requires the optional Barcode Printer Kit-D1.

¹⁵ Other operating systems and environments, including AS/400, UNIX, Linux, and Citrix may be supported. Some of these solutions are chargeable. SAP Device Types are available via the SAP Market Place. For more information, contact your sales representative.

¹⁶ No charge for this solution; however, activation is required.

¹⁷ Reference Value (measured one unit).

¹⁸ 0.8 W Sleep mode not available in all circumstances due to certain settings.

¹⁹ Based on ENERGY STAR Product Specification for Imaging Equipment Version 3.0.

²⁰ GPR-55L Toner also available for Color (C, M, Y). Yield (estimated @ 5% coverage) is 26,000 images.

For more information,
call 1.800.815.4000
or visit csa.canon.com/enterprisesolutions



As an ENERGY STAR® Partner, Canon U.S.A., Inc. has certified these models as meeting the ENERGY STAR energy efficiency criteria through an EPA recognized certification body. ENERGY STAR and the ENERGY STAR mark are registered U.S. marks. Canon, imageRUNNER, imagePASS, and the GENUINE logo are registered trademarks or trademarks of Canon Inc. in the United States and may also be registered trademarks or trademarks in other countries. Canon products offer certain security features, yet many variables can impact the security of your devices and data. Canon does not warrant that use of its features will prevent security issues. Nothing herein should be construed as legal or regulatory advice concerning applicable laws; customers must have their own qualified counsel determine the feasibility of a solution as it relates to regulatory and statutory compliance. McAfee and the McAfee logo are trademarks of McAfee LLC in the US and/or other countries. All other referenced product names and marks are trademarks of their respective owners. All features presented in this brochure may not apply to all Series and/or products and may be optional; please check with your Canon Solutions America sales representative for details. Product shown with optional accessories. Canon U.S.A. and Canon Solutions America do not provide legal counsel or regulatory compliance consultancy, including without limitation, Sarbanes-Oxley, HIPAA, GLBA, Check 21 or the USA Patriot Act. Each customer must have its own qualified counsel determine the advisability of a particular solution as it relates to regulatory and statutory compliance. Specifications and availability subject to change without notice. Not responsible for typographical errors.
©2020 Canon U.S.A., Inc. All rights reserved.

Federal Law prohibits copying of certain documents. Violators may be subject to penalties. We suggest that you check with your own legal counsel. Canon U.S.A., Inc., Canon Solutions America, Inc., and Canon Canada, Inc. intend to cooperate with Law Enforcement Agencies in connection with claims of unauthorized copying.

CSA-20-1132-4747
1220R4-iRA5700SR5B-PDF-IH



To learn about Canon's many awards, visit
ess.csa.canon.com/awards.

Canon
CANON SOLUTIONS AMERICA

imageRUNNER ADVANCE C3500 III Series

Color | Low- to Mid-volume | Multifunction

Print up to 30 ppm (BW/color)

Scan up to 160 ipm (300 dpi) (BW/color, duplex)

Print up to 12" × 18"

2,300-sheet maximum paper capacity



Canon's comprehensive portfolio of imageRUNNER ADVANCE multifunction printers and integrated solutions can help **simplify** the end user experience and management of technology, better **control** sensitive information and print-related costs, and help ensure that technology investments proactively **evolve** with changing needs.



WORKFLOW EFFICIENCY

- 10.1" intuitive touchscreen with smartphone-like usability.
- A unique, customized experience tailored to individual preferences using My ADVANCE.
- Supports mobile solutions and integration with many popular cloud services like Google Drive.¹
- Scan and convert documents to searchable digital files in a variety of file formats.
- Integration with Canon and various third-party software with embedded application platform.



SECURITY

- Advanced standard security feature set to help safeguard sensitive information and assist in regulatory compliance.
- Integrates with existing, third-party SIEM* systems to help provide real-time, comprehensive insights into potential threats to the network and printers.
- Technology to verify that the device boot process, firmware, and applications initialize without alteration at startup. McAfee Embedded Control² utilizes a whitelist to protect against malware and tampering of firmware and applications.
- Security policy settings can be controlled with a dedicated password, configured from a central location, and exported to other supported devices.
- Control access to the device and specific features, using a host of flexible authentication methods—PIN code, user name/password, or card access.³



QUALITY AND RELIABILITY

- Canon's signature reliability and engine technologies help keep productivity high and minimize the impact on support resources.
- Outstanding imaging technologies and toner allow for consistently striking images, thanks to Canon's V² color profile.
- Designed to achieve maximum uptime with status notifications that help keep supplies replenished and intuitive maintenance videos for consumables replacement.
- imageRUNNER ADVANCE models have received many awards and recognition from leading industry analysts, often referencing strong reliability.

* Security Information and Event Management



DEVICE AND FLEET MANAGEMENT

- Designed for quick, easy deployment.
- Remote diagnostics and parts life management for proactive maintenance and rapid fixes.
- Easy and intuitive to monitor device status and consumable levels, turn off devices remotely, observe meter readings, manage settings, and implement security policies.
- Common firmware and regular updates with Unified Firmware Platform (UFP) for continuous improvements and consistency across a fleet.



COST MANAGEMENT


- Track and assess print, copy, scan, and fax usage and allocate costs to departments or projects.
- Apply print policies and restrict usage by user to help reduce unnecessary printing and contribute to cost efficiency.
- Standard cloud-based solution provides a centralized dashboard with up-to-the-minute insights into printer activity.
- Upgrade to uniFLOW server or cloud-based solutions for full accounting and reporting for compatible Canon and third-party devices, pull printing, job routing, and powerful scan workflows.



SUSTAINABILITY

- A combination of fusing technologies and low-melting-point toner minimizes power requirements and helps achieve low energy consumption.
- Encourage environmentally conscious work practices by enabling multiple settings that can help save paper and energy.
- ENERGY STAR® certified and rated EPEAT® Gold⁴

CONFIGURATION OPTIONS

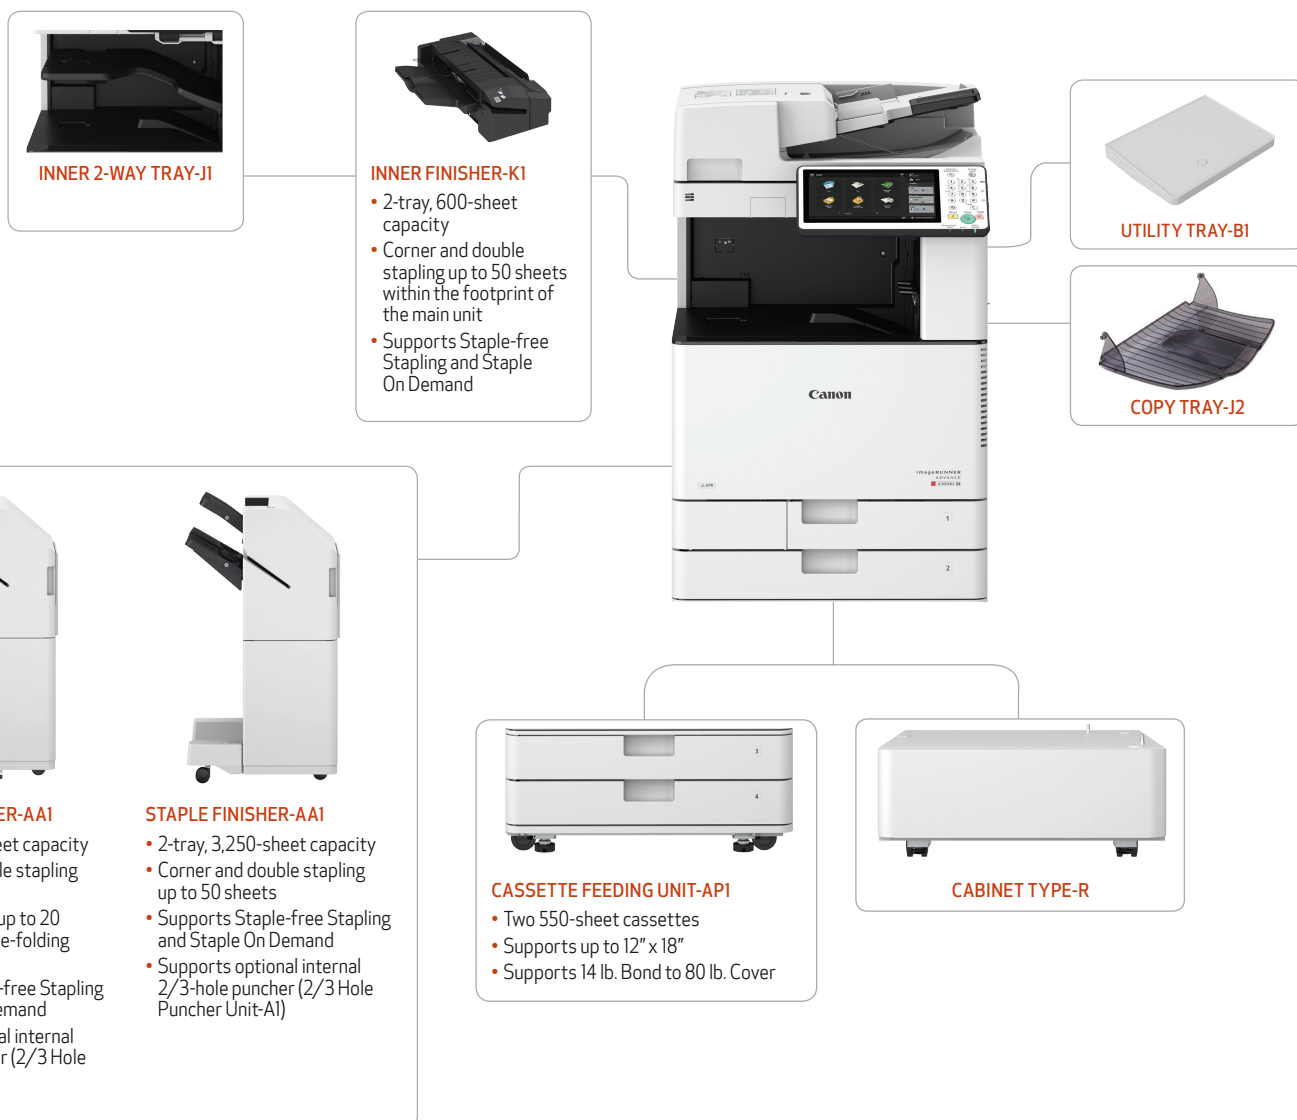

SPECIFICATIONS

Main Unit

Type

Color Laser Multifunctional

Core Functions

Standard: Print, Copy, Scan, Send, Store
Optional: Fax

Processor

Canon Dual Custom Processor (Shared)

Control Panel

10.1" TFT LCD WSVGA Color Flat-panel

Memory

3.0 GB RAM

Hard Disk Drive

Standard: 250 GB

Interface Connection

Network: 1000Base-T/100Base-TX/10Base-T,
Wireless LAN (IEEE 802.11 b/g/n)
Optional: NFC, Bluetooth Low Energy
Others
Standard: USB 2.0 x1 (Host), USB 3.0 x1 (Host),
USB 2.0 x1 (Device)
Optional: Serial Interface, Copy Control Interface

Paper Capacity (LTR, 20 lb. Bond)

Standard: 1,200 Sheets
Maximum: 2,300 Sheets

Paper Sources (LTR, 20 lb. Bond)

Standard: Dual 550-sheet Paper Cassettes, 100-sheet
Stack Bypass
Optional: Dual 550-sheet Paper Cassettes
(CASSETTE FEEDING UNIT-API)

Paper Output Capacity (LTR, 20 lb. Bond)

Standard: 250 Sheets
Maximum: 3,450 Sheets
(with External Finisher and Copy Tray)

Finishing Capabilities

Standard: Collate, Group
With Inner Collate, Group, Offset, Staple, Staple-Free
Finisher: Staple, Staple On Demand
With External Collate, Group, Offset, Staple, Booklet, Staple-
Finishers: Free Staple, Staple On Demand,
Hole Punch (Optional)

Supported Media Types

Paper Thin, Plain, Recycled, Color, Heavy,
Cassettes Pre-punched, Bond, Transparency,
(1/2): Envelope
Stack Bypass: Thin, Plain, Recycled, Color, Heavy,
Pre-punched, Labels, Bond, Coated,
Transparency, Tracing, Envelope
Cassette
Feeding Unit-API: Thin, Plain, Recycled, Color, Heavy,
Pre-punched, Bond, Transparency

Supported Media Sizes

Paper Letter, Executive, Statement-R, Envelope
Cassette 1: [ISO-C5], Custom Size (5-1/2" x 7-1/8"
to 11-3/4" x 8-1/2")
Paper Cassette 12" x 18", 11" x 17", Legal, Letter, Letter-R,
2: Executive, Statement-R, Envelope
[No.10 (COM10), Monarch, DL], Custom Size
(5-1/2" x 7-1/8" to 12" x 18")
Stack Bypass: 12" x 18", 11" x 17", Legal, Letter, Letter-R,
Executive, Statement, Statement-R,
Envelope [No.10 (COM10), Monarch,
DL, ISO-C5], Envelope Custom Size
(3-7/8" x 3-7/8" to 12-5/8" x 18"),
Custom Size (3-7/8" x 5-1/2" to
12-5/8" x 18"), Free Size (3-7/8" x 5-1/2"
to 12-5/8" x 18")⁵
Cassette 12" x 18", 11" x 17", Legal, Letter, Letter-R,
Feeding Unit-API: Executive, Statement-R, Custom Size
(5-1/2" x 7-1/8" to 12" x 18")

Supported Media Weights

Cassettes: 14 lb. Bond to 80 lb. Cover (52 to 220 g/m²)
Stack Bypass: 14 lb. Bond to 110 lb. Cover (52 to 300 g/m²)
Duplexing: 14 lb. Bond to 80 lb. Cover (52 to 220 g/m²)

Print/Copy Speed (BW and Color)

C3530i III: Up to 30 ppm (Letter); Up to 20 ppm
(Letter-R); Up to 15 ppm (Legal);
Up to 15 ppm (11" x 17")

C3525i III: Up to 25 ppm (Letter); Up to 20 ppm
(Letter-R); Up to 15 ppm (Legal);
Up to 15 ppm (11" x 17")

Warm-up Time

From Power On: Approx. 10 Seconds⁵
From Sleep: Approx. 10 Seconds⁷
Mode:
Quick Startup: Approx. 4 Seconds⁸
Mode:

Dimensions (W x D x H)

22-1/4" x 29-1/4" x 45-1/5" (565 mm x 742 mm x 1148 mm)⁹

Installation Space (W x D)

Basic: Stack Bypass + Cassette Drawers open:
38-1/2" x 44-1/4" (978 mm x 1123 mm)⁹
Fully Configured: 63-3/4" x 44-1/4" (1620 mm x 1123 mm)¹⁰

Weight

Approx. 213.8 lb. (97 kg)¹¹

Print Specifications

Print Resolution (dpi)

1200 x 1200, 600 x 600

Standard Page Description Languages

UFR II, PCL[®]6, Adobe[®] PS[®]3

Direct Print

Available from USB, Advanced Box, Remote UI,
and Web Access¹¹

Supported File Types

PDF, TIFF, JPEG, EPS, XPS

Printing from Mobile Devices and Cloud-based Services

A range of software and MEAP-based solutions are
available to provide printing from mobile devices or
Internet-connected devices and cloud-based services
depending on your requirements.

Fonts

PCL fonts: 93 Roman, 10 Bitmap fonts, 2 OCR fonts,
Andalé Mono WT J/K/S/T (Japanese,
Korean, Simplified and Traditional Chinese),¹³
Barcode Fonts¹⁴
PS fonts: 136 Roman

Operating System¹⁵

UFR II/PS: Windows[®]/Server 2008/Windows[®] 7/
Server 2008 R2/Server 2012/Windows 8.1/
Server 2012 R2/Windows 10/Server 2016,
MAC OS X (10.9 or later)
PCL: Windows/Server 2008/Windows 7/Server
2008 R2/Server 2012/Windows 8.1/Server
2012 R2/Windows 10/Server 2016
PPD: MAC OS X (10.3.9 or later), Windows 7/8.1/10

Copy Specifications

First-Copy-Out Time (LTR)

As fast as 5.9 seconds (BW)/8.2 seconds (Color)

Multiple Copies

Up to 999

Magnification

25%-400% (1% Increments)

Preset Reductions

25%, 50%, 64%, 73%, 78%

Preset Enlargements

121%, 129%, 200%, 400%

Basic Copy Features

Preset Reduction/Enlargement Ratios by Area, Paper
Setting, Previous Settings, Favorite Settings, Finishing, Two-
sided, Density Adjustment, Original Type Selection, Interrupt
Mode, Setting Confirmation/Cancel

Special Copy Features

Book to Two Pages, Two-sided Original, Finishing, Booklet,
Job Build, N on 1, Add Cover, Insert Sheets, Different-size
Originals, Density Adjustment, Original Type Selection,
Transparency Cover Sheets, Page Numbering, Copy Set
Numbering, Sharpness, Erase Frame, Secure Watermark,
Print Date, Shift, Gutter, Print & Check, Negative/Positive,
Repeat Images, Job Done Notice, Mirror Image, Copy ID
Card, Multi Sheet Feed Detection, Free Size Original, Adjust
One-Touch Color, Color Balance, Area Designation, Skip
Blank Pages

Scan Specifications

Type

Single-pass Duplexing Automatic Document Feeder¹⁶

Document Feeder Paper Capacity

150 Sheets (20 lb. Bond)

Document Feeder Supported Media Sizes

11" x 17", Legal, Letter, Letter-R, Statement, Statement-R,
Custom Size: 5" x 5-1/2" to 12" x 17" (128 mm x 139.7 mm to
304.8 mm x 431.8 mm)

Document Feeder Supported Media Weights

BW Original: 13 lb. Bond to 58 lb. Cover (50 to 157 g/m²)
Color Original: 17 lb. Bond to 58 lb. Cover (64 to 157 g/m²)

Platen Acceptable Originals

Sheet, Book, 3-Dimensional Objects [Height: Up to 2" (50mm),
Weight: up to 4.4 lb. (2kg)]

Platen Maximum Scanning Size

11-3/4" x 17" (297.0 mm x 431.8 mm)

Pull Scan

Color Network ScanGear2 for both Twain and WIA
Supported OS: Windows 7/8.1/10/
Server 2008/Server 2008 R2/
Server 2012/Server 2012 R2/Server 2016

Scan Resolution (dpi)

600 x 600, 400 x 400, 300 x 300, 200 x 400, 200 x 200,
200 x 100, 150 x 150, 100 x 100

Scan to Mobile Devices and Cloud-based Services

A range of solutions is available to provide scanning to
mobile devices and cloud-based services depending on
your requirements.

Scan Speed (LTR)

Single-sided Scanning (BW and Color):
80 ipm (300 dpi)/51 ipm (600 dpi)
Double-sided Scanning (BW and Color):
160 ipm (300 dpi)/51 ipm (600 dpi)

Send Specifications

Destination

Email/Internet Fax (SMTP), SMB v3.0, FTP, WebDAV, Mail
Box, Super G3 Fax (Optional), IP Fax (Optional)

Address Book

LDAP (2,000)/Local (1,600)/Speed Dial (200)

Send Resolution (dpi)

600 x 600, 400 x 400, 300 x 300, 200 x 400, 200 x 200,
200 x 100, 150 x 150, 100 x 100

Communication Protocol

File: FTP (TCP/IP), SMB v3.0, WebDAV
Email: SMTP, POP3

File Format

Standard: TIFF, JPEG, PDF (Compact, Searchable,
Apply Policy, Optimize for Web, PDF
A/1-b, Encrypted, Device Signature), XPS
(Searchable, Compact, Device Signature),
Office Open XML (PowerPoint, Word)
Optional: PDF (Trace & Smooth, User Signature),
XPS (User Signature)

Universal Send Features

Original Type Selection, Two-sided Original, Book to Two
Pages, Different-size Originals, Density Adjustment,
Sharpness, Copy Ratio, Erase Frame, Job Build, Delayed Send,
Preview, Job Done Notice, File Name, Subject/Message, Reply-
To, Email Priority, TX Report, Original Content Orientation,
Skip Blank Originals, Multi Sheet Feed Detection

Fax Specifications

Maximum Number of Connection Lines

2

Modem Speed

Super G3: 33.6 Kbps
G3: 14.4 Kbps

Compression Method

MH, MR, MMR, JBIG

Resolution (dpi)

400 x 400, 200 x 400, 200 x 200, 200 x 100

Sending/Recording Size

Statement-R to 11" x 17"

Fax Memory

Up to 30,000 Pages

Speed Dials

Max. 200

Group Dials/Destinations

Max. 199 Dials

Sequential Broadcast

Max. 256 Addresses

Memory Backup

Yes

Fax Features

Original Type Selection, Two-sided Original, Book to Two Pages, Different-size Originals, Density for Scanning, Sharpness, Copy Ratio, Erase Frame, Job Build, Sender's Name (TTI), Select Line, Selecting the Telephone Line, Direct Send, Delayed Send, Preview, Job Done Notice, TX Report, Multi Sheet Feed Detection

Store Specifications

Mail Box Simple (Number Supported)

100 User In-boxes, 1 Memory RX In-box, 50 Confidential Fax In-boxes, 30,000 Maximum Pages Stored

Advanced Box

Communication Protocol: SMB or WebDAV
Supported
Client PC: Windows (Windows 7/8.1/10)
Concurrent Connections (Max.)
SMB: 64
WebDAV: 3 (Active Sessions)

Advanced Box Available Disc Space

Approx. 16 GB

Advanced Box Features

Authentication for Advanced Box Log-in, Sort Function, Printing a PDF File with a Password, imageWARE Secure Audit Manager Support

Memory Media

Standard: USB

Security Specifications

Authentication

Standard: Universal Login Manager, uniFLOW Online Express,¹⁷ User Authentication, Department ID Authentication, Access Management System, Device and Function Level Log-in uniFLOW

Optional:

Data

Standard: Trusted Platform Module (TPM), Hard Disk Password Lock, Hard Disk Drive Erase, Mail Box Password Protection, Hard Disk Drive Encryption (FIPS140-2 Validated), Verify System at Startup, McAfee Embedded Control¹²

Optional: Hard Disk Drive Removal, IEEE 2600.2 Common Criteria Certification, Data Loss Prevention (Requires uniFLOW)

Network

Standard: Encrypted Secure Print, IP/Mac Address Filtering, IPsec, TLS Encrypted Communication, SNMP V3.0, IEEE 802.1X, IPv6, SMTP Authentication, POP Authentication before SMTP, S/MIME, SIEM Integration

Document

Standard: Secure Watermark, Secure Print, Adobe LiveCycle® Rights Management ES2.5 Integration, Encrypted PDF, Encrypted Secure Print, Digital Signature, User Signatures, Document Scan Lock

Optional:

Environmental Specifications

Operating Environment

Temperature: 50 to 86 °F
Humidity: 20 to 80 % RH (Relative Humidity)

Power Requirements

C3530i III/ 120-127V AC 60 Hz, 7.5 A
C3525i III:

Plug (Main Unit)

C3530i III/ NEMA 5-15P
C3525i III:

Power Consumption

Maximum: Approx. 1,500 W
Standby: Approx. 42.9 W¹⁸
Sleep Mode: Approx. 0.8 W¹⁹
Typical Electricity Consumption (TEC) Rating²⁰
C3530i III: 0.37 kWh
C3525i III: 0.31 kWh

Standards

ENERGY STAR® Certified
Rated EPEAT® Gold⁴

Consumables

Toner

GPR-53 Toner²¹

Toner Yield (Estimated @ 5% Coverage)

Black: 36,000 Images
Color (C,M,Y): 19,000 Images

¹ Subscription to a third-party cloud service required. Subject to third-party cloud service providers' terms and conditions.

² Requires Unified Firmware Platform v3.9.

³ Requires additional option.

⁴ For current EPEAT rating (Gold/Silver/Bronze), please visit www.epeat.net.

⁵ Heavy paper (95 to 110 lb. Cover) can be supported as follows: Standard format paper size (excluding SRA3), Custom size (3-7/8" x 5-1/2" to 12" x 18"), Free size (3-7/8" x 5-1/2" to 12" x 18")

⁶ Time from device power-on to when copy jobs can be programmed with Quick Start Up mode.

⁷ Time from exiting Sleep mode to when printing is operational.

⁸ Time from device power-on to when key operation can be performed on the touch screen.

⁹ Includes main unit and either Cassette Feeding Unit-API or Cabinet Type-R.

¹⁰ Includes main unit and either Cassette Feeding Unit-API or Cabinet Type-R and Staple/Booklet Finisher-AAI.

¹¹ Includes main unit, ADF consumables, and Cassette Feeding Unit-API.

¹² PDF print from Web sites is supported.

¹³ Requires the optional PCL International Font Set-A1.

¹⁴ Requires the optional Barcode Printer Kit-D1.

¹⁵ Other operating systems and environments, including AS/400, UNIX, Linux and Citrix, may be supported. Some solutions are chargeable. SAP Device Types are available via the SAP Market Place. For more information, contact your sales representative.

¹⁶ Detect Feeder Multi Sheet Feed is supported.

¹⁷ No charge for this solution; however activation is required.

¹⁸ Reference value (measured one unit).

¹⁹ 0.8 W sleep mode not available in all circumstances due to certain settings.

²⁰ Based on ENERGY STAR Product Specification for Imaging Equipment Version 3.0.

²¹ GPR-53L Toner also available for Color (C, M, Y). Yield (estimated @ 5% coverage) is 8,500 images.

For detailed specifications and a comprehensive list of optional accessories, see the imageRUNNER ADVANCE C3500 III Series Specifications document.

USA.CANON.COM/SIMPLYADVANCED



As an ENERGY STAR® Partner, Canon U.S.A., Inc. has certified these models as meeting the ENERGY STAR energy efficiency criteria through an EPA recognized certification body. ENERGY STAR and the ENERGY STAR mark are registered U.S. marks. AirPrint and the AirPrint logo are trademarks of Apple Inc. Canon, imageRUNNER, imageWARE, imagePASS, and the GENUINE logo are registered trademarks or trademarks of Canon Inc. in the United States and may also be registered trademarks or trademarks in other countries. Canon products offer certain security features, yet many variables can impact the security of your devices and data. Canon does not warrant that use of its features will prevent security issues. Nothing herein should be construed as legal or regulatory advice concerning applicable laws; customers must have their own qualified counsel determine the feasibility of a solution as it relates to regulatory and statutory compliance. McAfee and the McAfee logo are trademarks of McAfee LLC in the US and/or other countries. All other referenced product names and marks are trademarks of their respective owners. All printer output images are simulated. All features presented in this brochure may not apply to all Series and/or products and may be optional; please check with your Canon Authorized Dealer for details. Products shown with optional accessories. Canon U.S.A. does not provide legal counsel or regulatory compliance consultancy, including without limitation, Sarbanes-Oxley, HIPAA, GLBA, Check 21 or the USA Patriot Act. Each customer must have its own qualified counsel determine the advisability of a particular solution as it relates to regulatory and statutory compliance. Specifications and availability subject to change without notice. Not responsible for typographical errors.
©2019 Canon U.S.A., Inc. All rights reserved.

Federal Law prohibits copying of certain documents. Violators may be subject to penalties. We suggest that you check with your own legal counsel. Canon U.S.A., Inc. and Canon Canada, Inc. intend to cooperate with Law Enforcement Agencies in connection with claims of unauthorized copying.



To learn about Canon's many awards, visit usa.canon.com/awards.