


Fuller bust adjustment

By Patty Dunn www.alldunndesigns.com - Fitting help

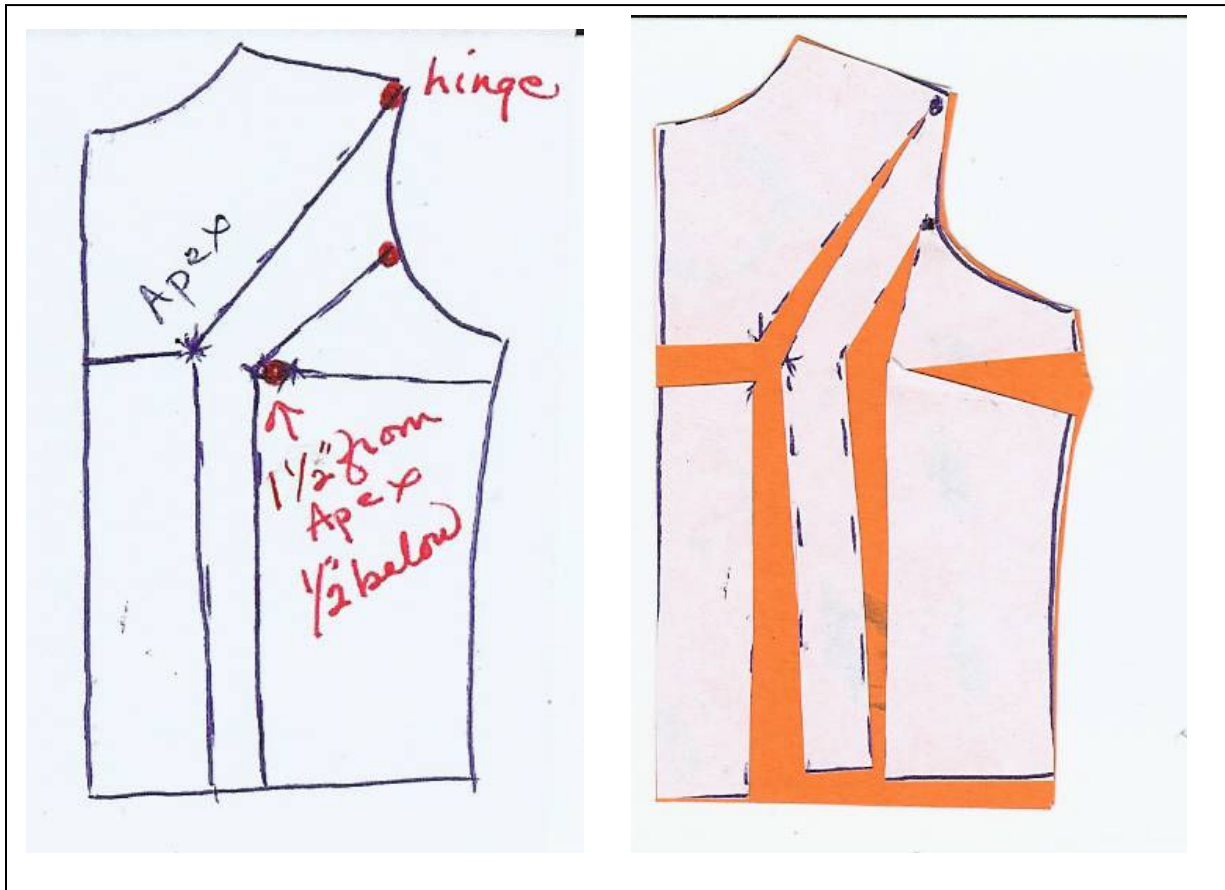

Cut pattern from the bottom through the center of the apex and up to the shoulder corner leaving a hinge. Mark $1\frac{1}{2}$ " from the apex (toward the armhole) and $\frac{1}{2}$ " lower. Cut from the bottom through that point and to the armhole leaving a hinge.

If you are adding more than 2" to the bust area you should add a side dart. This side dart will be sewn back in as a dart later. This will eliminate the extra floating fabric under the bust area. Cut across from the side seam to 2nd slash point leaving a hinge. Notice the line is straight into the point. This should line up with your bust pull each piece out opening it the amount you need. The more width you need in the bust the more slashes you will need to make $\frac{3}{4}$ " is really the most you want to spread one opening. If you need 3 put the slashes closer together.