



Have a Fit with Patty Dunn


Back width of jackets or blouses to tight? Try adding comfort with this pivoting method.

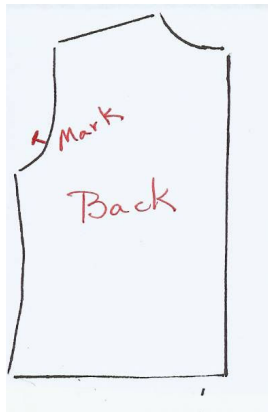


Trace the outline of the pattern. Mark the width you need at the place you need it (usually the notch area). You are adding to both sides when you are working with the half pattern so you need $\frac{1}{2}$ the amount.

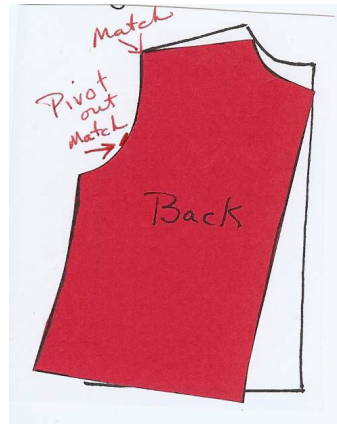

Lay your pattern on the trace image and match at the shoulder point. Pivot the pattern out to match the marked line and trace the sleeve opening stopping at the under arm.

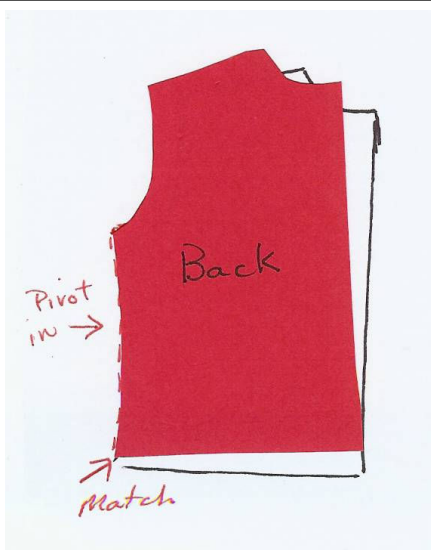

Leave your pattern on the under arm point and pivot back in matching the bottom corner.

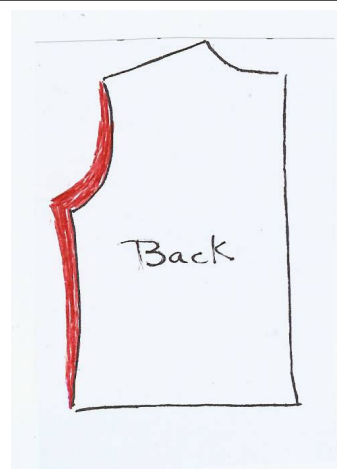

Notice the extra is now in the width of the back. This has not changed the armhole. If you need more or less length in the arm length you need to do that adjustment before you pivot the extra in. The beauty of this method is the arm hold shape or length does not change so there is not adjustment needed for the sleeve.