

HL-CONT Plus

Sewage Treatment Plants




IMO certified MEPC.227 (64)

KEY FEATURES

- The plant's small footprint allows the installation in tight spaces.
- Dismountable for retrofitting
 Disassembled, the largest components
 fit through standard sized hatches and
 doors.
- Low Maintenance Requirements
 Our open design gives easy access for inspection and service. There are no membranes or filters to clean, service or replace. The system includes few wearing parts.
- Easy Operation
 Routine functions are completely
 automatic. System status is displayed on
 an easy-to-use digital touch screen.
- Low operating costs

 The minimum number of wearing parts, only one operating supply (flocculant) and low electrical consumption keep operating costs down.

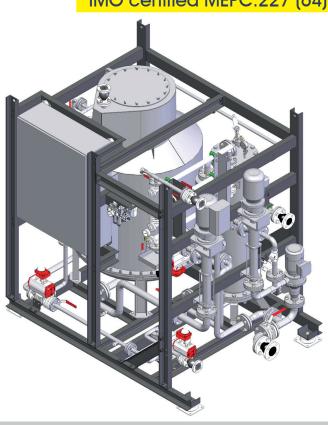


HAMANN Quality

- Over 45 years experience in sewage treatment
- Proven track record; over 5.000 units sold to date
- All parts and materials selected to meet the most demanding requirements
- Designed and manufactured in Hollenstedt,
 Germany according to our accredited
 ISO9001 quality management system
- Supported by a worldwide service network



TECHNOLOGY

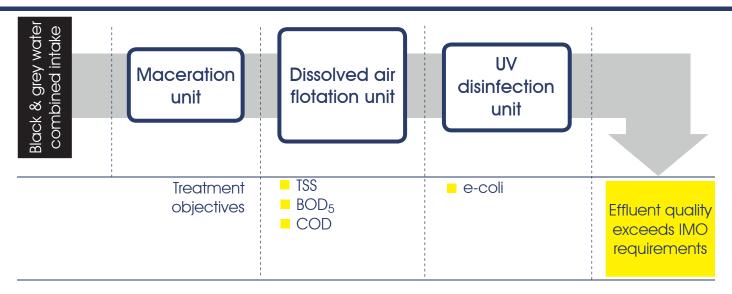

SPECIFICATIONS

Size	Capacity (liters/day)	People on board (135 l/day)	People on board (180 l/day)	Size W/L/H (m)	Empty weight (kg)	Electrical consumption (kW)	Vent connection (Inch)
0125	3.000	22	16	0,8/0,9/0,9	165	2,1	1/2
025	6.000	44	33	0,9/1,2/0,9	312	2,3	1
05	12.000	88	66	1,0/1,3/1,4	691	2,6	1
10	24.000	177	133	1,2/1,6/1,8	880	3,5	1
20	48.000	355	266	1,6/2,1/2,1	1.600	5,2	1
40	96.000	711	533	2,3/2,5/2,3	2.234	8,5	1
80	192.000	1.422	1.066	2,1/4,7/2,8	4.700	15,0	2

Supported by




on the basis of a decision by the German Bundestag

Follow us!



linkedin.com/company/hamannag





www.hamannag.com

21279 Hollenstedt

Germany