

basicDIM Wireless Passive Module

Casambi Ready Dual DALI outputs

Created By **TRIDONIC**

Powered By **CASAMBI**



Features & Benefits:

- Small form factor for luminaire installation
- 2 channel DALI Control
- Easily implemented color temperature controls
- Device firmware can be updated over-the-air
- 5 years guarantee

Product Description

The basicDIM Wireless Passive module is a Bluetooth DALI controller. The module is powered by the DALI bus - no additional mains supply is needed. Typical use cases for the basicDIM Wireless Passive module are to act as a DALI to Bluetooth gateway for an existing DALI network, or to be connected to a DALI sensor, or to be used directly with a DALI controlled LED Driver with an integrated or external DALI power supply.

basicDIM Wireless Passive Module


Created By **TRIDONIC**

Casambi Ready Dual DALI outputs

Powered By **CASAMBI**

Specifications:

Supply voltage	DC 9.5 – 22.5 V
Max. input current when idle (approximately 3 DALI loads)	5 mA
Max. DALI bus current	250 mA
Operating temperature	-20 ... +55 °C
Dimensions LxWxH	40.4 x 36.3 x 14.0 mm
Type of protection	IP20

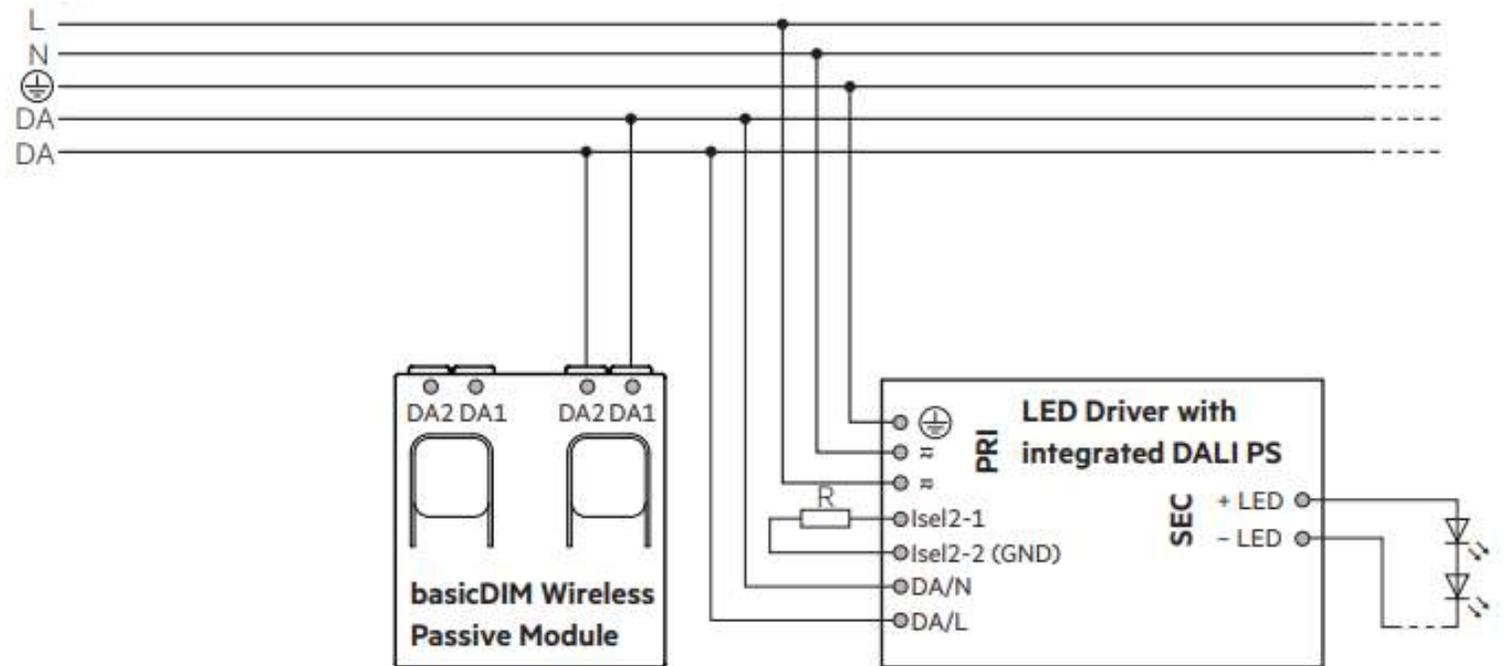

Ordering Information:

Part Number:	Description:
basicDIM Wireless Passive	2 Channel DALI output