

AVRASYA


Turn-Key Livestock Projects



www.avrasyaexport.com





www.avrasyaexport.com

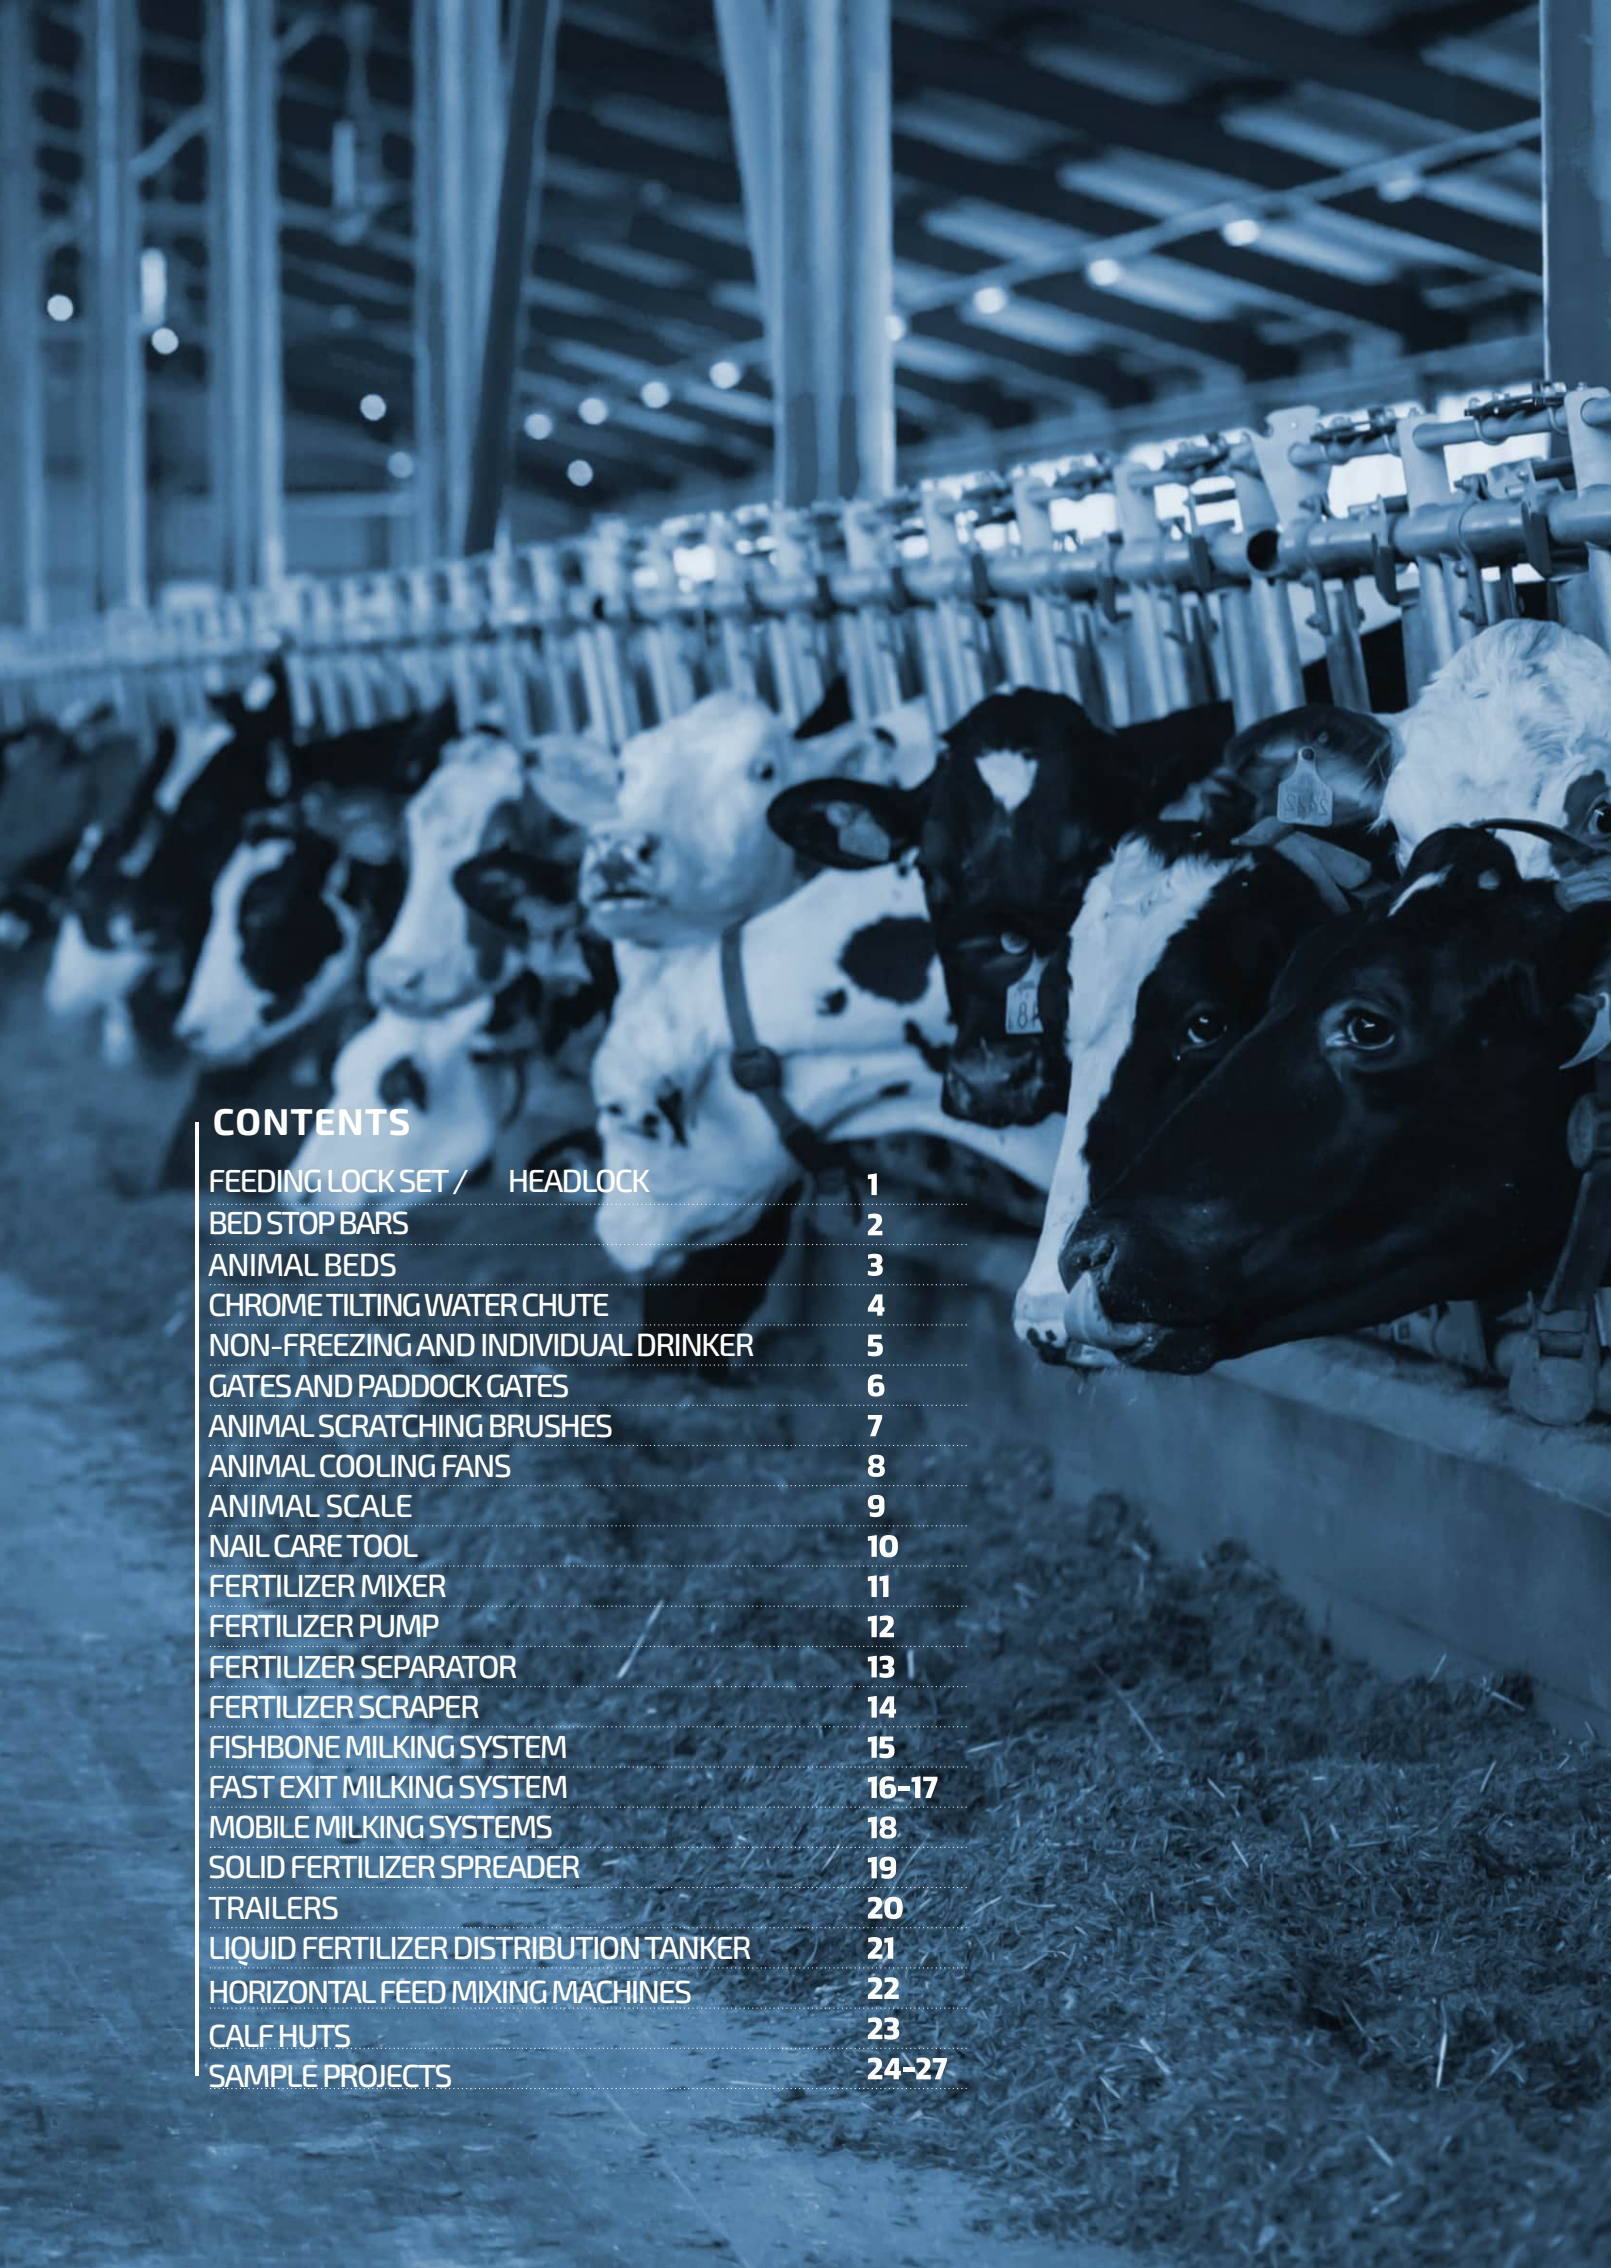

CONTENTS

FEEDING LOCK SET / HEADLOCK	1
BED STOP BARS	2
ANIMAL BEDS	3
CHROME TILTING WATER CHUTE	4
NON-FREEZING AND INDIVIDUAL DRINKER	5
GATES AND PADDOCK GATES	6
ANIMAL SCRATCHING BRUSHES	7
ANIMAL COOLING FANS	8
ANIMAL SCALE	9
NAIL CARE TOOL	10
FERTILIZER MIXER	11
FERTILIZER PUMP	12
FERTILIZER SEPARATOR	13
FERTILIZER SCRAPER	14
FISHBONE MILKING SYSTEM	15
FAST EXIT MILKING SYSTEM	16-17
MOBILE MILKING SYSTEMS	18
SOLID FERTILIZER SPREADER	19
TRAILERS	20
LIQUID FERTILIZER DISTRIBUTION TANKER	21
HORIZONTAL FEED MIXING MACHINES	22
CALF HUTS	23
SAMPLE PROJECTS	24-27



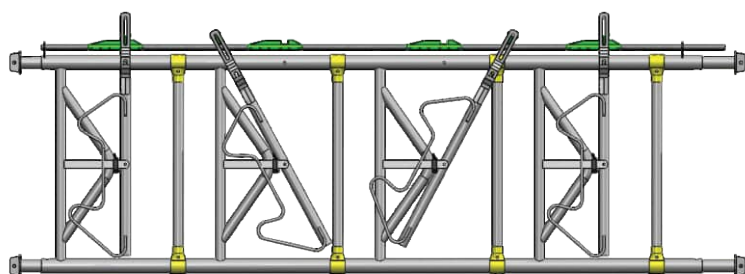
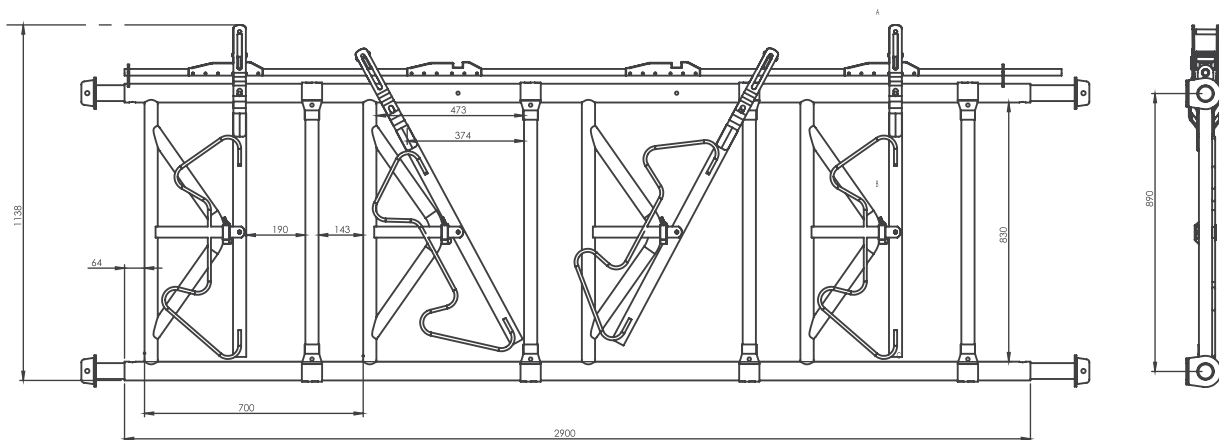


- Our Feeding Locks feature hot-dip galvanized coating.
- Our locks for adult cows are manufactured with a standard spacing of 70 cm.
- Lock Bottom and Top Pipe Diameter $\varnothing 60 \text{ mm} \times 3 \text{ mm}$
- Suitable for group and individual locking.
- Applied in 4-piece and 8-piece modules.
- Custom production based on project specifications is available.
- To prevent damage to the cows' necks while feeding after milking, the locks are manufactured with an internal length of 90 cm.

PRODUCT TECHNICAL SPECIFICATIONS

Feeding Lock Set

Product Model	FX 100-KS
Product Weight per Animal	65 to 75 cm
Material Pipe Diameters	Body: 60mm*3mm pipe Partitions: 42 mm*2.5 mm pipe
Locking Mechanism	Two Way - PWC
Number of Locks per Product	FX100-KS3m-4H- 4 Lock FX100-KS6m-8H- 8 Lock
Product Coating Material	Hot-dip Galvanizing Inside and Outside
Product Height	190-120 cm/170-120 cm
Individual Locking	Yes
Installation	It is suitable for mounting on all poles of different sizes located on the feed path concrete.

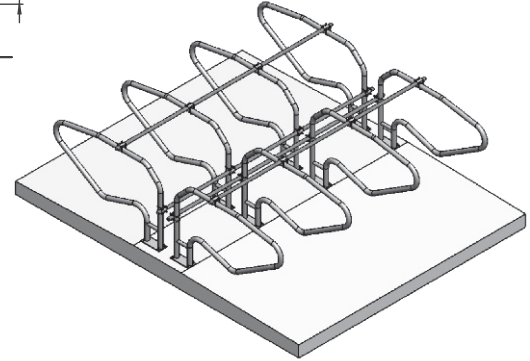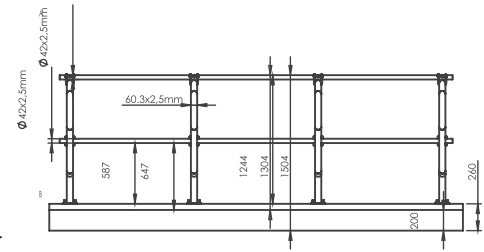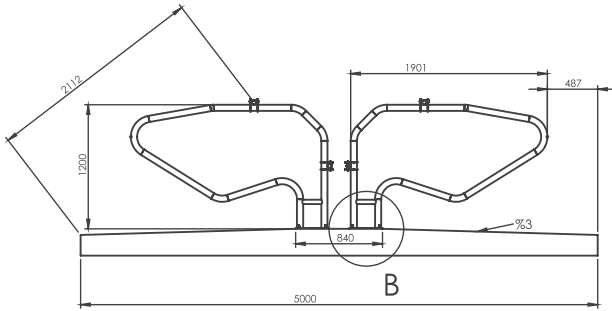

PRODUCT TECHNICAL SPECIFICATIONS

Bed Stop Bars

Product Model	FX 100-DD
Product Weight per Animal	Special Rubber Cord Fabric + Sponge
Material Pipe Diameters	Material: 60mm*2.5mm pipe Neck Material: 42 mm*2.5 mm pipe
Chest Board	No
Neck Space	Adjustable
Product Coating Material	Hot-dip Galvanizing Inside and Outside
Product Size	190-120 cm/170-120 cm
Individual Locking	No
Installation	Installation is performed on the bed concrete using M10*150 Gijon and chemical anchors or steel anchors.


- The stall rail system ensures maximum freedom of movement for each animal in its own stall, both when lying down and standing up.
- The stall rail system ensures maximum freedom of movement for each animal in its own stall, both when lying down and standing up.
- Chest supports and neck bars have been used to ensure our animals are positioned correctly.
- Our bed railings are disassembled products and are connected to each other during assembly.
- Our bed railings, manufactured with quality, feature hot-dip galvanized coating.



INDIVIDUAL AND ROLLED ANIMAL BEDDING



DOUBLE-LAYER PET BED


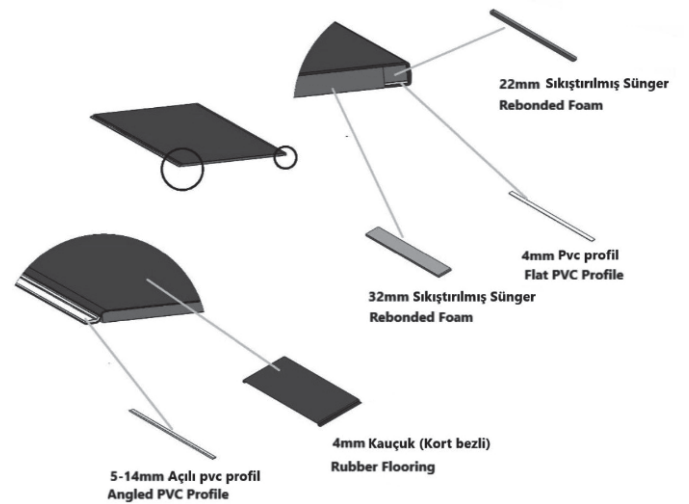


PRODUCT TECHNICAL SPECIFICATIONS

Animal Beds	
Product Model	FXB1 Double Layer Mattress
Components	Special Rubber Cord Fabric + Sponge
Width	180 cm
Height	Paddock Length (variable)
Thickness	37 mm
Layer	Double Layered

Animal Beds	
Product Model	FXB2 Individual Bed
Components	Rubber
Width	110 cm & 120 cm
Height	180 cm & 190 cm
Thickness	20-30 mm
Layer	Single Layer

Farmonox cattle bedding is a specially designed bedding system to increase animal comfort, protect their health, and improve productivity. Made from soft, durable, and hygienic materials, these beds support foot and joint health, increase lying time, and positively affect milk yield. Their non-slip surfaces ensure animal safety and are easy to clean. With models suitable for different climatic conditions, they can be used comfortably in any farm environment.

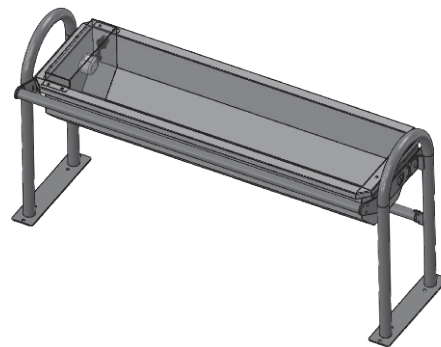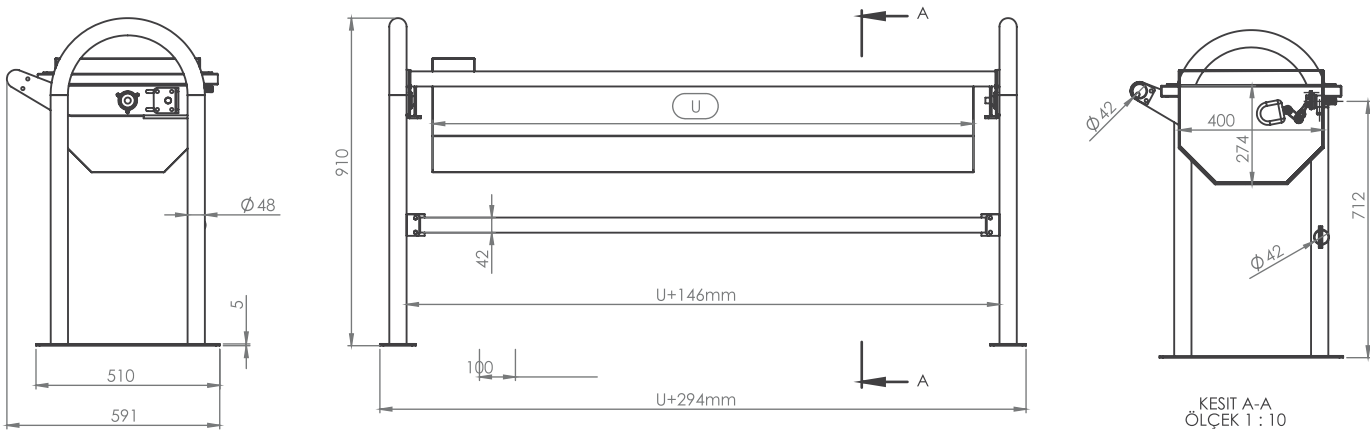

PRODUCT TECHNICAL SPECIFICATIONS

Chrome Tilting Water Chute

Product Model	FX100-DS Flip-Top Chrome Water Bottle
Product Dimension	27x43x150-200 cm
Product Capacity	150-200 liter
Product Divisions	1 section
Product Automation	Yes
Product Material	Chrome 304 Grade Stainless Steel Tank Hot-Dip Galvanized Frame

- We offer two types of chrome-plated water troughs: 150 liters and 200 liters.
- Made of 304-grade stainless steel, each trough features a single compartment with an automatic float valve.
- Dimensions: 27x150x43 cm and 27x200x43 cm.



Water is as important for our cows as it is for humans. Since 87% of milk is supported by clean water, you can choose the Farmonox watering models that are suitable for your farm.



Single Non Freezing Drinker

The Single Non-Freezing Drinker can be used as an automatic animal drinker for all small and large livestock. A 3/4 float valve has been used, and it is non-freezing up to -25C. It has a 40 liter capacity with 2 compartments, is Automatic, and is made of Polyurethane material.

Double Non Freezing Drinker

Our Tilting Non-Freezing Drinkers are a special product unique to our company, specifically designed for easy cleaning. Its 90-degree tilting feature allows for easy cleaning and maintenance without the need to shut down the water system. Its stainless steel property ensures a long service life, and it has a non-freezing feature up to -25C. This drinker has a 110 liter capacity with 2 compartments, is Automatic, and is made of Polyurethane material.

PRODUCT TECHNICAL SPECIFICATIONS

Single Non Freezing Drinker



Product Model	FX100-BS Non Freezing Elliptical
Product Dimension	75*50*55 cm
Product Capacity	60 liter
Product Divisions	1 section
Product Automation	Auto
Product Heater	No
Product Material	Polyethylene-Polyurethane Material

Double Non Freezing Drinker


Product Model	FX100-BS Non Freezing Elliptical
Product Dimension	110*50*59 cm
Product Capacity	90 liter
Product Divisions	2 section
Product Automation	Auto
Product Heater	No
Product Material	Polyethylene-Polyurethane Material



Paddock Gates

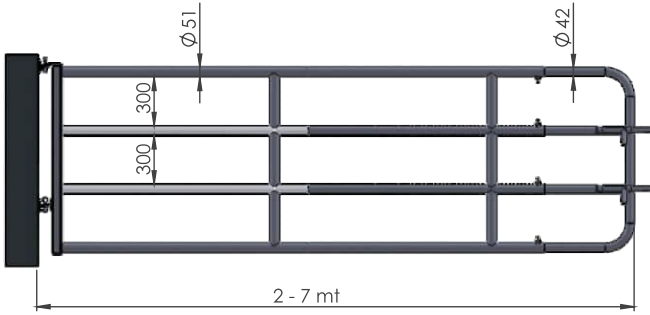

Farklı modellerde çarpma kilit mekanizmaları mevcuttur.



PRODUCT TECHNICAL SPECIFICATIONS	
Paddock GATES	
Product Model	FX100-PF
Material Pipe Diameters	51x3mm & 42x2,5 mm
Material Properties	Hot-Dip Galvanized
Door Length Measurement	2-7 mt
Door Height Measurement	2-7 mt
Lock System	Sliding or impact mechanism
Installation	Hinged, easy to install

FEED PASSAGE GATE	
Product Model	FX100-KP-YY
Material Pipe Diameters	60X2,5 MM & 42X2,5 mm
Material Properties	Hot-Dip Galvanized
Door Length Measurement	0,7 mt - 1,2 mt
Door Height Measurement	1,5 mt - 2 mt
Lock System	Sliding model
Installation	Easily installs onto the headlock





Feed Passage Gate

Barn interior paddock gates are durable gate systems designed to allow large livestock to move in a safe and controlled manner. They are generally made of galvanized steel or stainless steel material, making them long-lasting and robust. They have rounded edges to prevent harm to the animals and easy-to-open and close hinge systems.

Passage Gates from Feed Lane to Paddocks are used to provide safe access from the feeding areas to the paddocks. These gates, which facilitate farm management, optimize the animals' movement and access to feed. Thanks to their easy-to-open and close mechanisms, they offer quick entry and exit and reduce labor. Additionally, they help lower stress levels by enhancing animal welfare.




Our Animal Scratching Brushes are designed and manufactured for the sole purpose of providing our cows with a comfortable farm life. This is because mites, parasites, hair, and dirt on the animals bother them and reduce productivity. Especially cleaning around the head area is crucial. A cow that has finished scratching feels relaxed and noticeably calm. They get rid of the excess material on their bodies, thereby increasing milk and meat yield. Thanks to our Automatic Scratching Brushes, their blood circulation accelerates, and productivity increases.

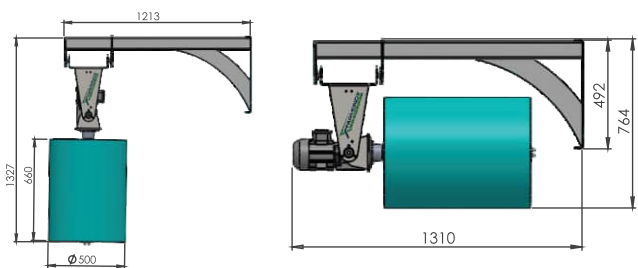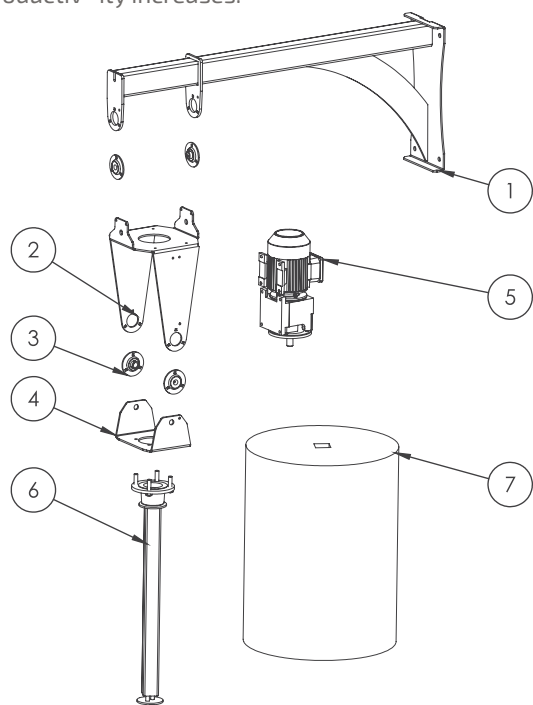

- The motor power is 0.18-0.25 KW.
- Brush diameter is 50-60 cm, and brush length is 60-70 cm.
- There is 1 brush on the body. It has a motion sensor.
- It is shipped with the necessary materials for mounting.
- The scratching brush is double-sided (or reversible/bi-directional).

PRODUCT TECHNICAL SPECIFICATIONS	
ANIMAL SCRATCHING BRUSHES	
Product Model	FX100-KF
Num. of Wire Brushes Per Prd.	1
Product Brush Diameter	50-60 cm
Product Brush Length	60-70 cm
Product Engine Power	0,18 - 0,25 kW
Product Sensor	Soil Surface Level Reader Sensor
Product Coating Material	Standard Painted - Opt. Galvanized
Product Type	With reducer
Brush Revolution	30 d/min

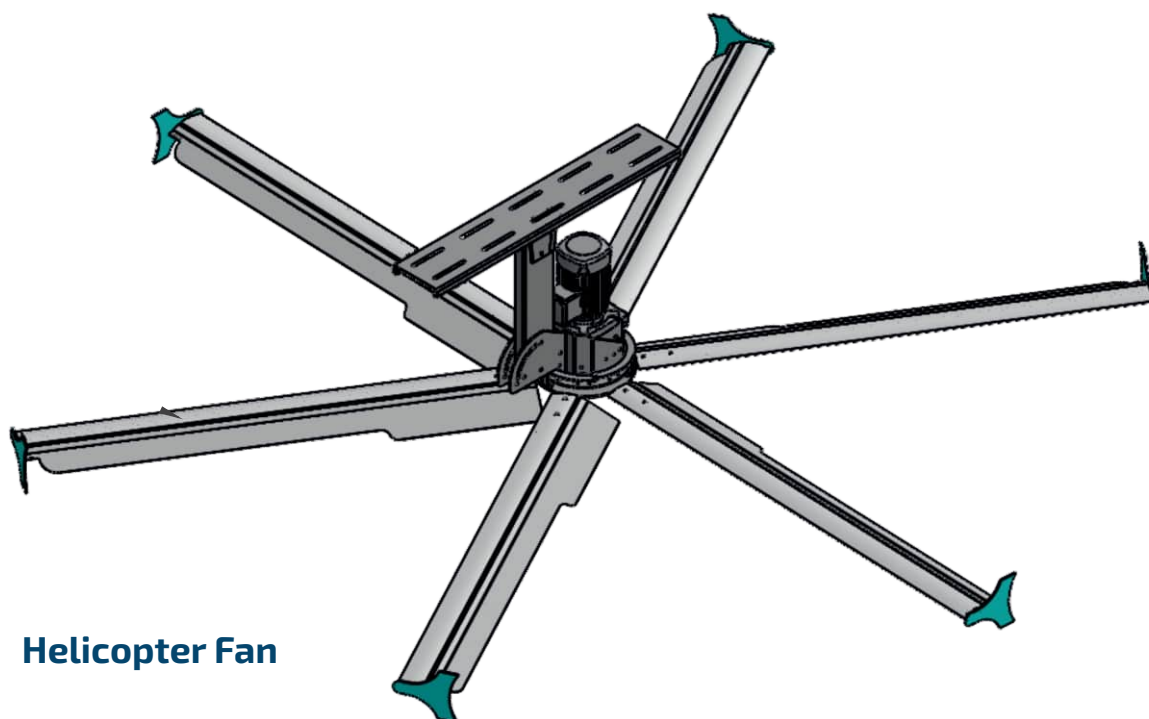

Helicopter Fan



Square Fan



Circular Fan

PRODUCT TECHNICAL SPECIFICATIONS

HELICOPTER FAN

Product Model	FX100 SF Helicopter Cooling Fan
Product Dimension	4-6 m
Engine Power	1-2 kw
Product Fan Power	46000 mt ³ /hour
Product Wing Material	Aluminium Profile
Number of Wings	6

SQUARE FAN

Product Model	FX100 SF Square Cooling Fan
Product Dimension	130 cm * 21 cm
Engine Power	0,75 kW
Product Fan Power	46000 mt ³ /hour
Product Wing Material	Polyethylene
Number of Wings	3

Air temperatures above 25°C and high temperature fluctuations are not comfortable air temperatures for cows, and serious yield loss can occur due to heat stress. Our cooling fans help keep the animals' living areas and resting places dry, enabling many animals to rest comfortably.



Cattle scales help improve animal health and productivity by tracking weight in livestock and dairy operations.

PRODUCT TECHNICAL SPECIFICATIONS	
ANIMAL SCALE	
Product Model	FX100-HK Cage Load Cell and Fixed
Product Dimension	100x200x100 cm
Precision Measurement	Ensures accurate weight tracking for animals
Durable Structure	Made from sturdy materials capable of carrying heavy loads
Easy Use	Digital display models offer data recording and analysis capabilities
Animal Friend Design	Non -slip floor and secure doors for easy use




PRODUCT TECHNICAL SPECIFICATIONS

NAIL CARE TOOL


Product Model	FX 100-TB
Product Size	1920*880*1950 cm
Product Weight	420 kg
Product Lifting System	Rope
Product Material	42*25 mm - 60*2,5 mm Pipe
Product Manual	Portable Manual

Its dimensions are 1920x 880 x 1950 cm, and its weight is 420 kg. It has rear squeezing and kicking prevention features, as well as ropes and hand winches to lift the animal's body off the ground. It is a modular design with 6 pieces of 40 x 60 x 3 mm strong profile construction.

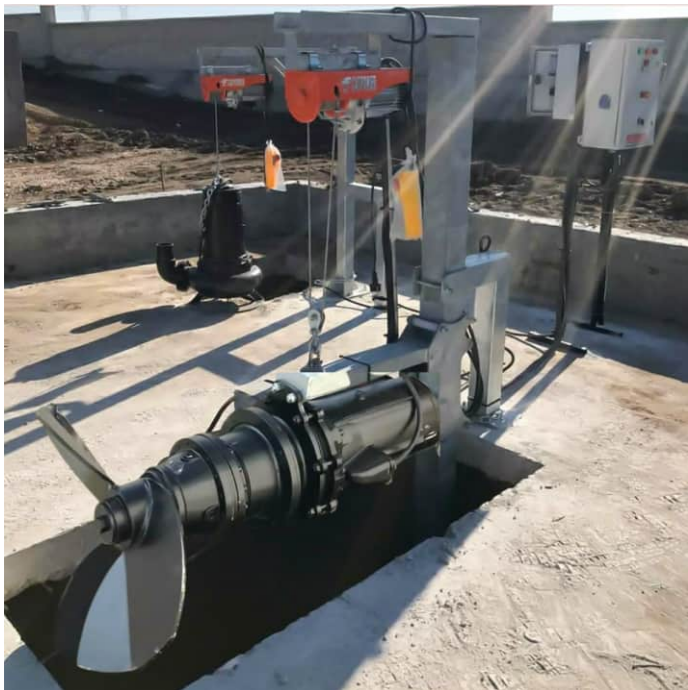

PRODUCT TECHNICAL SPECIFICATIONS	
FERTILIZER MIXER	
Product Model	FX 200-GK
Product Motor Power	11 Kw - 18 Kw
Product Capacity	+-%15-1450 m3/h
Product Material	Spherical Casting
Product Platform	Clasp and Lifting/Lowering Device
Product Chassis	120*120*3 mm Hot-Dip Galvanized Frame

Farmonox is an ergonomic product within manure management systems for the homogeneous mixing of manure, its transportation, and to enable its healthy separation process.

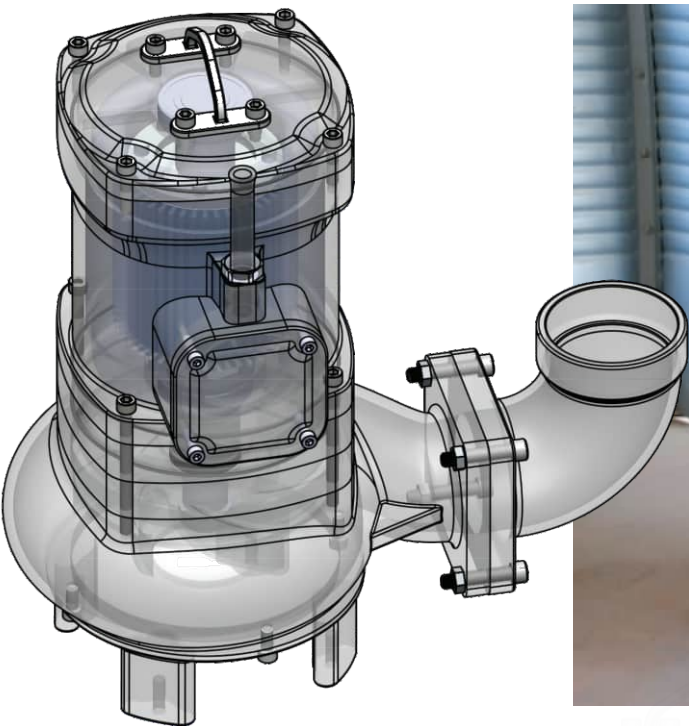

PRODUCT TECHNICAL SPECIFICATIONS	
MANURE PUMPS	
Product Model	FX 200-GP Manure Pumps
Product Motor Power	5.5kW - 27.5kW 31,1 kW
Product Body Type	Cast Iron
Product Pump Outlet	3 inch - 4 inch
Product Platform	Includes Hoisting and Lowering Device
Product Chassis	80x80x3 mm Hot-Dip Galvanized


Manure Pumps are products with shredding capabilities that can be used for all wastewater and manure systems in your business, offering easy, smart solutions for manure transport and discharge points in the livestock sector.



Our Fertilizer Separators are ideal for separating an environment into its solid and liquid components. With fully stainless steel body structures and different motor and reducer options ranging from 5.5 kW to 7.5 kW, capacities between 50 and 300 m³ can be achieved depending on the application.

PRODUCT TECHNICAL SPECIFICATIONS
MANURE SEPERATOR

Product Model	FX 200-GSP Manure Seperator Stainless
Product Motor Power	5.5kW - 27.5kW Platform Included
Product Internal Manure Pump Syste	Optional
Product Screen Mesh Options	0,25/0,50/0,75/1,0 Cast Iron Main Body
Product Platform	Included
Product Capacity	20-50m3/hour

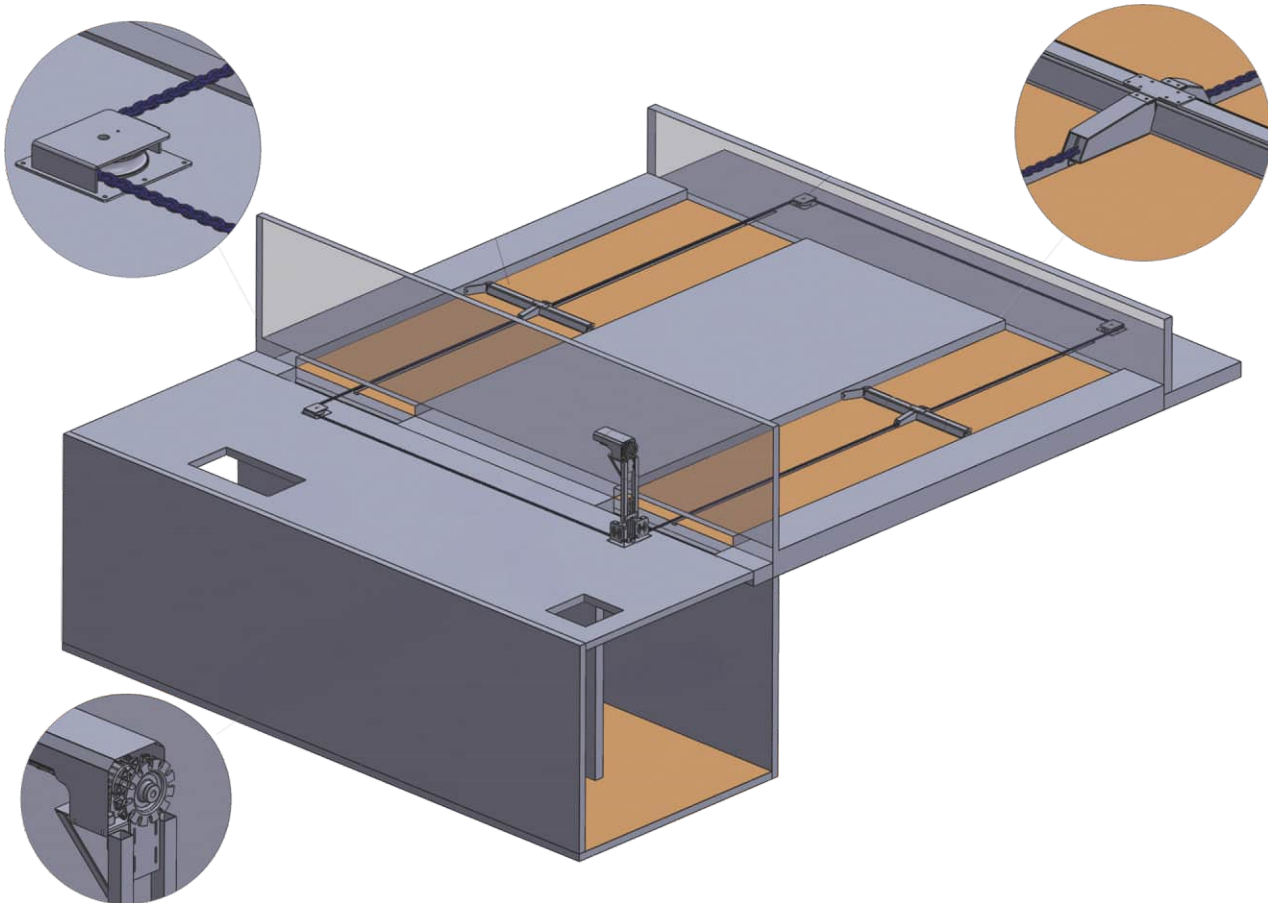

PRODUCT TECHNICAL SPECIFICATIONS

MANURE SCRAPERS

Product Model	FX 200-GS
Product Motor Power	1.1 - 2 kW
Product Galvanized Way Lane Quantity	1-2 Ways/Lanes
Product Drive Unit	1 Unit
Product Material	Spheroidal Cast Iron / Sheet Metal and Hot-Dip Galvanized Platinum
Product Chain Thickness	13 mm Caliber Chain
Product Lane Length	40 m - 150 m

Cleanliness is one of our essentials on our farms where we need healthy cattle. We are always by your side with our Farmonox Manure Scraper models, which can be applied to all conditions of your farms.

- Chained Galvanized Manure Scraper
- Chrome Roped Galvanized Manure Scraper
- Mechanical System Galvanized Manure Scraper
- Hydraulic System Galvanized Manure Scraper



Animal Placement:

As the animals enter the milking area, they line up at an angle in a herringbone pattern. This arrangement provides easy access for milkers to the animals' milking regions.

Ease of Milking:

It allows the milker to milk the animals quickly and efficiently. Milking machines are placed equally on both sides, and efficiency is increased by milking the animals in sequence.

Time Management:

The ability for animals to enter and exit milking simultaneously shortens the milking duration. It is possible to milk more animals with less labor.

Comfort and Safety:

It offers a comfortable environment for the animals. It provides a safe working area for the milkers because the leg movements of the animals are minimized.

Advantages:

- ✓ High efficiency: Fast milking is achieved thanks to multiple animals entering the milking parlor simultaneously.
- ✓ Easy cleaning: Since the milking area is organized, providing hygiene is easier.
- ✓ Low labor requirement: More milking can be done with fewer workers.



PRODUCT TECHNICAL SPECIFICATIONS
FISHBONE MILKING SYSTEM

Product Model	FX 300-BKSS
Animal Placement Angle	32°sloped layout
Milking Unit Capacity	2x4, 2x6, 2x8,2x10 and larger modular systems
Milking Machine Type	Automatic vacuum-assisted milking system
Vacuum Pump Power	1.5 - 5.5kW (depending on the model)
Milk Collection Line	Stainless steel pipe line, 63-76 mm diameter
Milk Tank Capacity	500 - 10,000 liters (according to need)
Advanced Technology Sensors	Flow meter, automatic milking cut-off, milk measurement system
Animal Entry and Exit	Mechanical or optionally pneumatic controlled gates
Washing System	Automatic CIP (Clean-in-Place) washing system

The Herringbone milking system is a milking system primarily used for milking cattle. This system enables the animals to be lined up at an angle, in a herringbone pattern (32 degrees)



The Fast Exit Milking System is a mechanism that allows animals to leave the milking area quickly and orderly after the milking process is completed. It is generally used in conjunction with herringbone and parallel milking systems.

Operating Principle

The animals exit in a single movement as the front bars lift up. This system allows for a group exit instead of waiting for each animal to exit individually. By enabling the rapid entry of new animals into the milking area, it shortens the total milking time.

Advantages


- ✓ Shorter Milking Time: The total milking time is reduced by 20-30% thanks to the quick exit of the animals.
- ✓ Labor Efficiency: More milking can be done with less personnel.
- ✓ Animal Welfare: Allows the animals to exit comfortably without stress.
- ✓ Hygiene and Cleaning: The faster emptying of the milking area speeds up the cleaning process.

Fast Exit System - Technical Specifications
1. Mechanical and Structural Features

Exit Mechanism: Pneumatic front bar lifting system
Allows for the simultaneous exit of all animals after milking is completed.

PRODUCT TECHNICAL SPECIFICATIONS	
RAPID EXIT MILKING SYSTEM	
Product Model	FX300-HCSS
Exit Mechanism	Pneumatic front lift-up system
Capacity	Suitable for 2x14, 2x15, 2x16... 2x30 and larger ststems
Exit Time	3-5 seconds per animal, 10-15 seconds for the entire group
Automation Options	PLC-controlled touchscreen management system
Material	Stainless steel or galvanized steel construction

Material:
Main body: Hot-dip galvanized steel
Connection elements: Corrosion-resistant steel screws and hinges
Floor covering: Non-slip rubber flooring (for animal welfare and safety)
Control Cabinet system: Stainless steel (AISI 304)
Dimensions (May Vary by Model):
Width per animal: 68 cm
Passage height: 130-165 cm
Milking parlor length: 12-30 meters (depending on capacity)

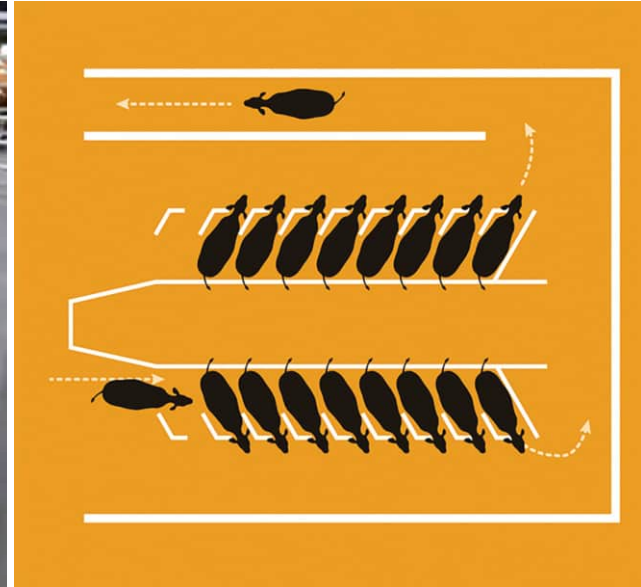

2. Milking Technology

Milking System Compatibility:

Can be integrated into fishbone milking systems
Adaptable to existing systems thanks to its modular structure

Vacuum Pump:

Capacity: 1.5 kW - 7.5 kW

Operating Pressure: 50 kPa - 60 kPa

Low Noise Operation: (65–75 dB)

Milking Claw:

Lightweight, ergonomic design

Automatic Milk Flow Meter

Integrates with milk completion detection sensors

Milk Line:

Material: Stainless steel (AISI 316) or food-grade PVC

Diameter: 51 mm - 76 mm

Connection: Hygienic clamp system

3. Automation and Control System

Milking Management:

PLC-based central control unit

Touchscreen control panel

Automatic milking completion detection and individual animal-based milking time tracking

Animal Identification (Optional):

RFID or sensor-based identification

Individual animal milk yield monitoring

Safety Sensors:

Emergency stop button

Pressure sensors in hydraulic/pneumatic systems

4. Efficiency and Performance

Output Time:

10–15 seconds for the entire group

3–5 seconds per animal on average

Milking Time Optimization:

20–30% time savings

Higher capacity milking with less labor

Energy Consumption:

Low power usage

Available in 220V or 380V power options

5. Cleaning and Hygiene

Automatic CIP (Clean-in-Place)

Washing System:

4-stage cleaning (pre-rinse, detergent wash, hot water rinse, disinfection)

Stainless steel CIP circuit

Milking Unit Cleaning:

Design prevents residue in milk transfer lines

Automatic air-drying function



Mobile milking machines are portable, robust units that enable milk collection in different areas without the need for fixed milking systems. They are generally preferred by small and medium-sized dairy producers. Powered by electric motors, these systems make the milking process practical and hygienic.

PRODUCT TECHNICAL SPECIFICATIONS		
MOBILE MILKING SYSTEMS		
Product Model	FX300-MSS	
	SINGLE MILKING UNIT	DOUBLE MILKING UNIT
Power Source	220V Electricity	220V Electricity
Vacuum Pump Capacity	150-200 L/minute	200/250 L/minute
Vacuum Pressure	50-60 kPa	50-60 kPa
Milking Claw Quantity	1 (Single Animal)	2 (Double Animal)
Milk Bucket Capacity	25-30 L	30-40 L
Milk Bucket Material	Stainless Steel or Aluminium	Stainless Steel or Aluminium
Wheel Quantity	2 or 4 Units	2 or 4 Units
Sound Level	≤70dB	≤72dB
Weight	35-50 kg	50-65 kg
Operating Environment	Indoor or Outdoor	Indoor or Outdoor
Cleaning System	Manual/CIP Optional	Manual/CIP Optional



Solid Manure Spreader Trailers are produced with two different spreading systems depending on the product.

Vertical beaters, hydraulic lid, and chain conveyor provide good distribution from front to back and in spreading width.

Farmonox Solid Manure Spreader Trailers are effective in spreading farm and poultry manure, just as they play an important role in reducing soil nutrient value and pollution with the spreading they perform.

Farmonox machinery effectively shreds the organic product thanks to its spreader and carries out its distribution to the field.

PRODUCT TECHNICAL SPECIFICATIONS

SOLID FERTILIZER SPREADER MACHINE

Product Model	FX-5T	FX-10T	FX-15T	FX-20T
Capacity (Ton)	5	10	15	20
Axle Type	Single Axle	Tandem	Tandem	Tandem
Length (mm) (A)	5000	5480	6900	6350
Width (mm) (B)	2300	2310	2500	2490
Height (mm) (C)	2550	2750	2880	3020
Empty Weight	2950	4100	4460	4950
Brake System	Optional	Optional	Optional	Optional
Revolution (rpm)	540	540	540	1000
Power Requirement	60/45	78/59	96/70	109/80
Spreading Width (m)	5/18	5-18	5-18	5-18



A Farm Trailer is a type of trailer pulled by a tractor and used for transporting agricultural products, equipment, or animals.

Features: Can be single or double-axle. Has a closed or open box design Dumper models facilitate unloading with a hydraulic system. Tonnage capacity is variable (between 1-20 tons). Has a durable chassis and a robust tire structure.

Areas of Use:

Grain, silage, straw, fertilizer, fruit/vegetable transport. Transport of agricultural machinery or animals

PRODUCT TECHNICAL SPECIFICATIONS							
TRAILERS							
Product Model	FX-4T	FX-5T	FX-6T	FX-6T	FX-8T	FX-10T	FX-15T
Capacity (Ton)	4	5	6	6	8	10	15
Axle Type	Single Axle	Single Axle	Single Axle	Tandem	Tandem	Tandem	Tandem
Body Dimensions (mm)	3300x2000x500	3500x2500x500	3800x2000x500	4500x2000x570	4750x2100x570	5000x2200x670	5500x2200x770
Additional Load (kg)	250+250	250+250	300+300	300+300	300+300	300+300	385+385
Tire Size	12,5/80-15.3	400/60-15.5	400/60-15.5	12,5/80-15.3	400/60-15.5	400/60-15.5	385/65-22.5



Farmonox Liquid Manure Trailers have vacuum pumps with superior operating performance for every capacity. They operate with maximum suction power for short filling times. They are produced with baffles (wave breakers) to prevent sloshing inside the tank during movement. The design results in the optimum level of pressure on the tractor. Farmonox Liquid Manure Tankers are a product thought out to the finest detail and have high-quality workmanship. Thanks to the high-quality steel and durability used, they offer long-term usability. They are resistant to wear thanks to their special paint. Optional production in a galvanized form is available.

PRODUCT TECHNICAL SPECIFICATIONS FERTILIZER SPREADING MACHINE

Product Model	FX7	FX8	FX10	FX12	FX20
Capacity (Ton)	7000	8000	10000	12000	20000
Axle Type	Single Axle	Tandem	Tandem	Tandem	Triple Axle
Length (mm) (A)	6500	8150	7200	7550	9950
Width (mm) (B)	2400	2300	2260	2400	2250
Height (mm) (C)	2850	2600	3150	3250	2870
Empty Weight	3280	3380	3850	3950	5100
Brake System	Optional	Optional	Optional	Optional	Optional
Revolution (rpm)	640	540	540	540	1000
Power Requirement	78/59	80/59	82/60	87/64	96/70
Spreading Width (m)	6/18	5-18	5-18	5-18	5-18
Top Spraying	Optional	Optional	Optional	Optional	Optional



The blades on the augers in Farmonox Horizontal Auger Feed Mixer Machines are designed to meet specific needs and to prepare feed that can be consumed by all kinds of small and large livestock.

Our Horizontal Auger Feed Mixer Machines are produced with our own brand planetary gear group and imported transmissions.

Our developed horizontal feed mixer machines are designed to mix your bales quickly with powerful transmissions.

They have been made more efficient in feeding thanks to the special parts on the horizontal augers.

PRODUCT TECHNICAL SPECIFICATIONS


SOLID FERTILIZER SPREADER MACHINE

Product Model	FX6	FX8	FX10	FX12
Capacity (Ton)	6	8	10	12
Auger Quantity	2	2	2	2
Length (mm) (A)	5280	5500	6075	6800
Width (mm) (B)	1810	2149	2145	2145
Height (mm) (C)	2418	2600	2600	2600
Empty Weight	2600	3370	4450	4950
Max. Cutter Blade Quantity	80+15	56+28	80+28	88+32
Base Plate Thickness (mm)	8	8	10	10
Body Plate Thickness (mm)	4	4	5	5
Axle Quantity	1	1	1	1
Tire/Tyre	10,0/75-15,3	12,5/80-15,3	400/60-15,5	400/60-15,5
RPM	540	540	540	540
Power Requirement (hp/kW)	62/45	75/55	95/82	110/90



What are Calf Huts?

Calf huts are shelters specially designed to ensure the healthy growth of newborn calves and protect them from disease. They can be used individually or in groups and are usually made of durable plastic, fiberglass, or metal-framed materials.

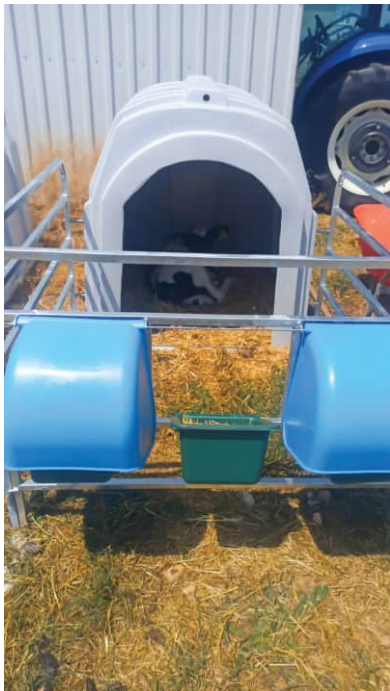

PRODUCT TECHNICAL SPECIFICATIONS	
CALF HUTCH	
Product Model	FX400-BK
Feature	Individual Hutch
Material	Fiberglass/Plastic/Metal
Dimensions (LxWxH)	120x100x130 cm
Ventilation	Adjustable air vents
Water & Feed Trough	Integrated
Portability	Medium (Fixed)
Insulation	Medium High
Door & Pen System	Yes (With Front Pen)
Suitable Age Range	0-2 months

The Importance of Calf Huts

Strengthens the immune system. Reduces the risk of disease transmission through individual housing. Provides a comfortable environment: Its insulated structure makes it resistant to weather conditions. Hygiene and Ease of Cleaning: Made from easy-to-clean materials.

Healthy Growth: Proper ventilation prevents respiratory diseases in calves.

