


500 Series

Databook

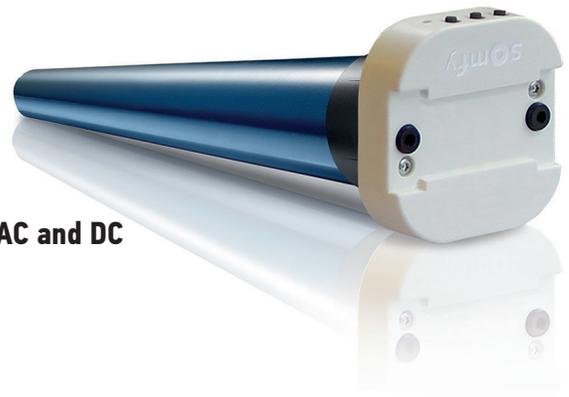

Somesse® ULTRA 50 AC and DC

Why Somfy?

Somfy is the leading global manufacturer of strong, quiet, motors with electronic and app controls for interior and exterior window coverings. Over 270 million users worldwide enjoy the more than 150 million motors produced since 1980. For more than four decades, Somfy engineers have designed products for both the commercial and residential markets to motorize window coverings such as interior shades, wood blinds, draperies, awnings, rolling shutters, exterior solar screens and projection screens. Somfy motorization systems are easily integrated with security, HVAC and lighting systems, providing total home or building automation.

Somfy has a committed customer support team comprised of Somfy motor and control specialists available for assistance:

Somfy Corporate Headquarters

800-22-SOMFY (76639)

General Customer Service

877-210-5327

CustomerService_us@somfy.com

Standard Purchase Order

Ordering_us@somfy.com

Rush Purchase Order

ExpeditedShippingOrders_us@somfy.com

Accounting Inquiries

AccountsReceivable@somfy.com

Technical Support

877-233-0019

TechnicalSupport_us@somfy.com

Warranty Claim Requests

us_Return@somfy.com

- Somfy has a production capacity of more than 70,000 motors per day.
- Somfy motors have over 600 standards approvals worldwide.
- Somfy has certified over 100 patents since the year 2000.
- Every Somfy motor goes through an extensive quality assurance process including testing in extreme environmental conditions, for electrostatic discharge, mechanical shock, and high life cycle.
- Somfy has a network of 15,000 trained professional installers throughout the world.



Somfy operates in 60 countries, with 76 subsidiaries, and 60 agencies spread across 5 continents. With 8 production centers, Somfy is an efficient and reactive industry leader. Thanks to its strict quality standards, Somfy is able to satisfy the needs of over 270 million users worldwide.



Somfy understands that training and support are critical to success. Somfy's Expert Program provides a platform for those who want to enhance their expertise of Somfy motorization and control solutions. Contact Somfy directly or visit [somfypro.com/expert-program](https://www.somfypro.com/expert-program) to learn more.

TABLE OF CONTENTS

SOMFY'S 500 SERIES MOTOR RANGE

| | |
|--------------------|-----|
| Introduction | 2-3 |
|--------------------|-----|

SONESSE® 50 MOTOR RANGE SPECIFICATION SHEETS

| | |
|----------------------------------|----|
| Sonesse® ULTRA 50 RA | 4 |
| Sonesse® 50 RA | 5 |
| Sonesse® 50 PA & PS | 6 |
| Sonesse® ULTRA 50 RTS | 7 |
| Sonesse® ULTRA 50 DC RTS | 8 |
| Sonesse® 50 RTS | 9 |
| Sonesse® ULTRA 50 RS485 | 10 |
| Sonesse® ULTRA 50 DC RS485 | 11 |
| Sonesse® 50 RS485 | 12 |

LT50 MOTOR RANGE SPECIFICATION SHEETS

| | |
|-----------------------|----|
| LT50 RA | 13 |
| LT50 RA CMO | 14 |
| LT50 ALTUS® RTS | 15 |
| LT50 RTS CMO | 16 |
| LT50 OREA® RTS | 17 |
| OXIMO™ 50 RTS | 18 |
| Sunea® RTS CMO | 19 |
| Maestria™ RTS | 20 |
| LT50 RS485 | 21 |

CONTROL ACCESSORIES

| | |
|-------------------------------------|-------|
| Motor Cable Options | 22 |
| Radio Technology Somfy® (RTS) | 23-24 |
| Digital Motor Interfaces | 25 |
| animeo® IP | 25 |
| Wired AC Controls & Switches | 25-26 |

HARDWARE SYSTEMS, LIGHT GAP SPECIFICATIONS & BRACKET PROJECTIONS

| | |
|-----------------------------------|-------|
| Somfy 2" System | 27 |
| Acmeda® | 28-29 |
| RollEase® Silent Pin System | 30 |
| ZMC® | 31-32 |

500 SERIES MECHANICAL ACCESSORIES

| | |
|-------------------------------------|-------|
| Motor Brackets | 33-35 |
| Idler Brackets | 35-36 |
| End Caps | 37 |
| Intermediate Brackets | 38 |
| Rigid Links | 38 |
| Miscellaneous | 39 |
| CMO Mechanical Accessories | 40 |
| Crowns and Drives | 41-44 |
| Standard and CMO Product Kits | 45 |

Acmeda® is a registered trademark of Acmeda International Group Incorporated in Australia, Taiwan and/or other countries.

RollEase® is a registered trademark of RollEase®, Inc.—Stamford, CT.

ZMC® is a registered trademark of ZMC Window Coverings.

Z-Wave® is a registered trademark of Zensys, Inc. and its subsidiaries in the United States and other countries.

Zigbee® is a registered trademark of Zigbee Alliance.

iPad® and iPhone® are registered trademarks of Apple, Inc. App Store is a service mark of Apple Inc.


Amazon, Alexa, and all related logos are trademarks of Amazon.com, Inc. or its affiliates.

All brands, products and trademarks are the property of their respective owners.

Somfy's 500 Series Motor Range

MOTOR IDENTIFICATION KEY

Sonesse® RTS 510 S 2 RH

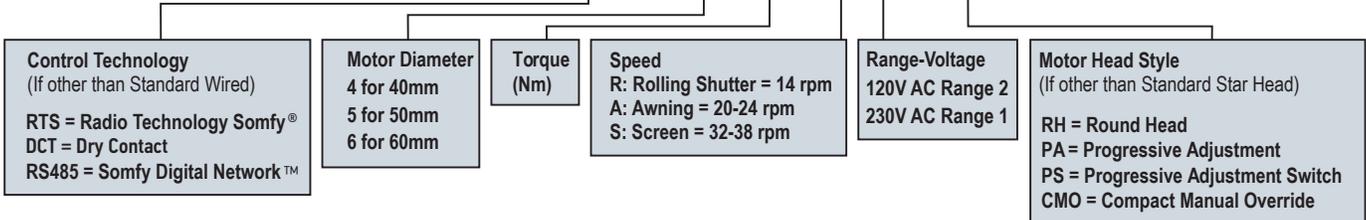

SOMFY DESIGNED FOR SILENCE - Quietness Scale



Somfy
DESIGNED FOR
SILENCE

The Sonesse® range of motors are rated according to their quietness. The volume scale below appears on all Sonesse range specification pages and designates the motor's level of sound output.



SOMFY TECHNOLOGIES



Radio Technology Somfy

Radio Technology Somfy® (RTS) allows wireless radio control of motorized applications via the RTS family of controls.



Wired Technology

Offers control via standard AC switching.



Dry Contact

Is a dry contact input for a basic low voltage control.




RS485

RS485 is another control method that uses a two-wired bus. Due to the open source nature of the RS485 protocol, many building management systems and home automation systems use this protocol to communicate to devices. Systems that use the RS485 connection can be programmed to Somfy RS485 motors or controllers to operate the installation.

Electronic Limit Switch Unit with Integrated RTS

Sonesse® 6Nm Motor

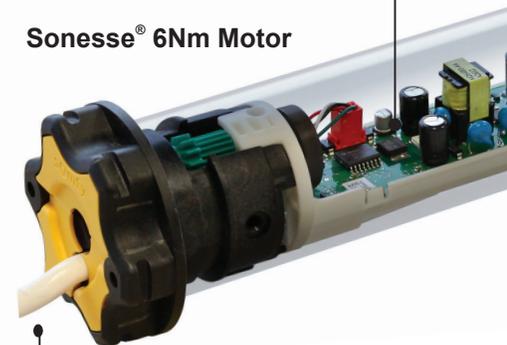

Includes Somfy patented antenna that is integrated into the power cord for enhanced reception.



As with all Somfy motors and controls, our motors are backed by a 5 year warranty.

WHY CHOOSE SOMFY'S SONESSE® RANGE?

Quiet and Strong:

- Stronger torque for larger applications including multi-banded/ coupled window coverings
- *Uniform quiet operation in both the up and down directions under 40dBA

Wide Range of Solutions:

- Interior and exterior applications
- Residential and commercial markets
- RTS, wired and RS485 integrated network options

Simplified Fabrication and Installation:

- Utilizes existing fabrication methods on the market today
- Compatible with leading industry hardware solutions
- Can be installed in 6 different orientations
- Advanced design enables simple "Snap-On" connection for roller tube adaptors

Streamlined Programming:

- RTS limits set via radio transmitter
- Wired simple push-button limit setting
- Improved RS485 commissioning process:
 - Motor auto discovery
 - Motor position feedback
 - Compatible with Somfy's animeo® IP system
 - Backward compatibility provides seamless integration with existing Somfy Digital Network projects
 - Multiple intermediate positions
 - Collision detection

Superior Quality:

- Motors undergo rigorous endurance, acoustic, radio, mechanical, electrical and safety tests in our 65,000 sq. ft. quality control and testing facility
- More than 600 approved standards worldwide
- Manufactured and sold over 150 million motors


Simple Electrical Connection:

- Available with UL approved 5 - 15P NEMA plug-in motor cable
- Plug-in option eliminates the need for an electrician
- Motor cable length can be customized to meet your installation requirements.

All Somfy Motors are UL Listed or Recognized

- All SOMFY motors are UL Listed or Recognized and can be found under the following file numbers:

E514135, E60495, E60888, E63714

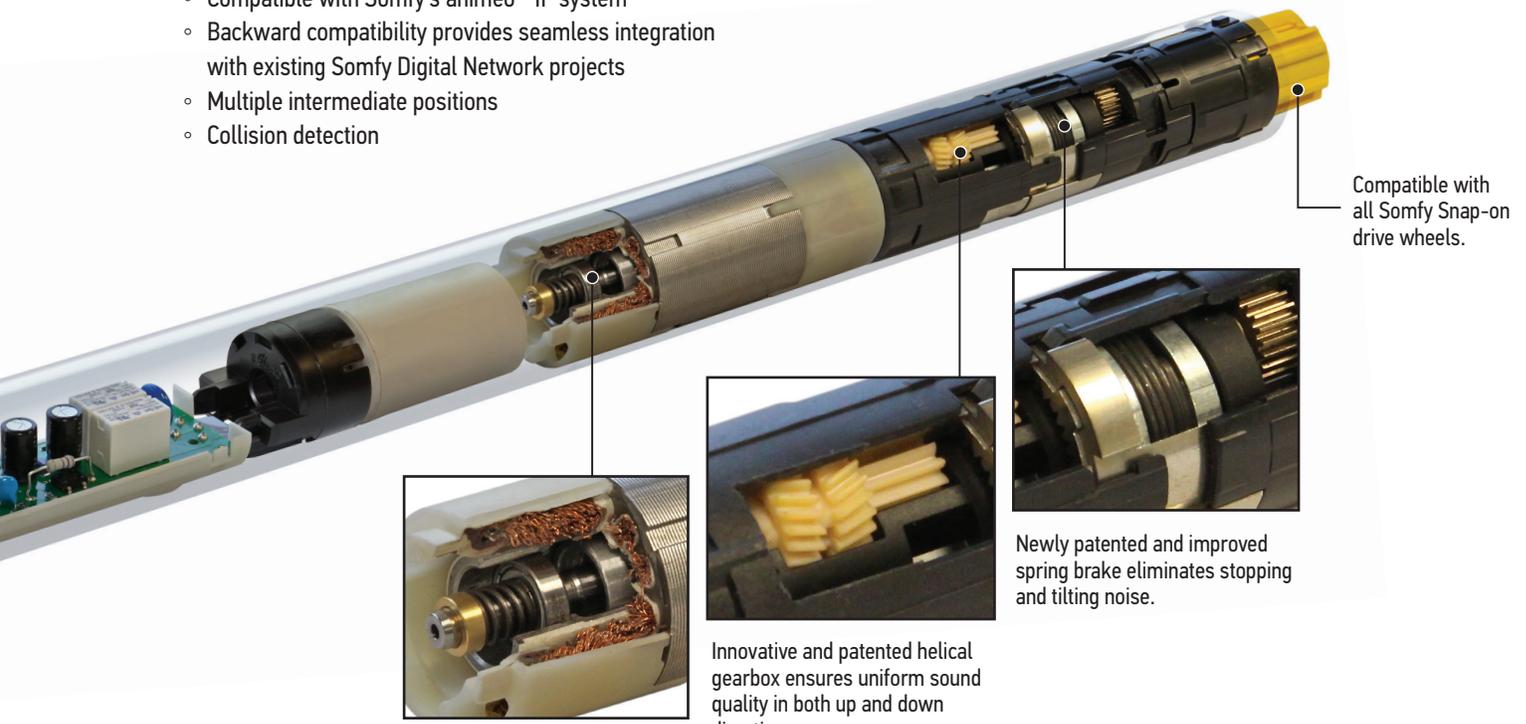

Compatible with all Somfy Snap-on drive wheels.

Newly patented and improved spring brake eliminates stopping and tilting noise.

Innovative and patented helical gearbox ensures uniform sound quality in both up and down directions.

A newly patented, asynchronous, high quality, maintenance-free motor that provides perfect rotary part alignment supported by roller bearings.

- According to standards ISO 3741 NF 31022 in dBA ref 1pW at nominal torque without end product.

Sonesse® ULTRA 50 RA

Star Head and Round Head Motors (rapid limit adjustment)

506A2 1002558
506A2RH 1002560



Offers control via power switching

Technical Features



| | |
|----------------------------------|---|
| Voltage Supply | 120V AC, 60Hz |
| Index Protection Rating | 506 - IP 31 (interior use) |
| Limit Switch Type | Rapid Adjustment RA |
| Limit Switch Capacity | 46 Turns |
| Temperature Working Range | 506: 32°F to 140°F (0°C to 60°C) (interior use only) |
| Insulation Class | Class 1 for 120V AC |
| Wiring | Do not parallel wire. |

Specifications

| | |
|---------------------------|-------------|
| Torque | 6 Nm |
| * Minimum Torque | 0.4 Nm |
| Nominal Voltage | 120V / 60Hz |
| Rated Current | .95A |
| Speed | 24 rpm |
| Thermal Protection | 4 minutes |
| **Sound Level | ≤ 38 dBA |



Dimensions

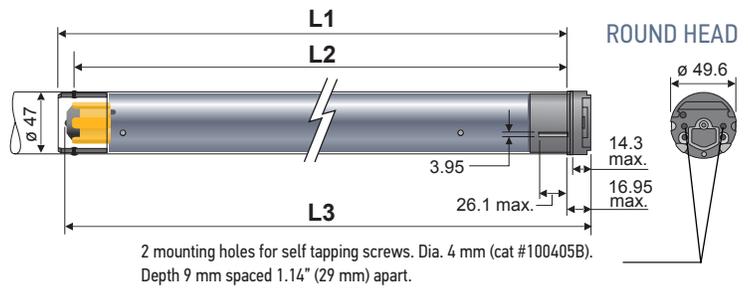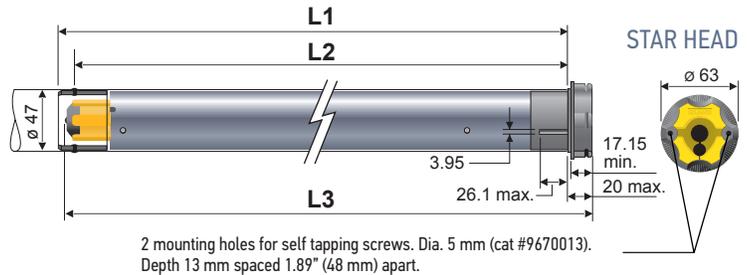

Dimensions

| | |
|--------------------------------|--|
| L1 | 30.8 in. (783 mm) |
| L2 | 30.3 in. (769 mm) |
| L3 | SH 31.4 in. (798 mm) RH 31.3 in. (795 mm) |
| SJTW Power Cable Length | 9.8 ft. (3 m) |

Optional 4-conductor cables available in various lengths.
Includes Fast Connector and open leads.

*** Minimum Torque:** Minimum application weight to ensure smooth operation.


**** Sound Level:** According to standards ISO 3741 NF 31022 in dBA ref 1pW at nominal torque without end product.

Fabrication Recommendations:

- Operational noise level is reduced when motor, tube, and mechanical accessories are properly adapted to motorized applications.
- Free play must be minimized between the accessories and the end product tube to ensure quiet performance of the motor. Due to the variances of standard aluminum extrusion tolerances, it is recommended to screw the drive wheel & pin end to immobilize them and ensure quiet performance throughout the life of the product.
- Interior Tube Diameter (ID) > 47 mm must be respected.
- A motor crown adaptor between motor and end product tube is required to ensure concentric operation of motor.
- 500 Series Drive Stop and Screw (9910004) is recommended to prevent noise and drive wheel separation from motor shaft. This drive stop screw must be tightened with a torque ranging between 1.5Nm and 1.8Nm.
- Somfy Soft Clip Drive Wheel Adaptors (brown in color) are not recommended.

Type of power cable

Wired
120V AC / 60Hz
4-conductor SJTW cable

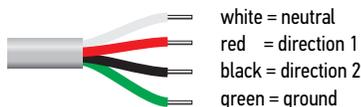

Sonesse® 50 RA

Star Head and Round Head Motors (rapid limit adjustment)

506S2 1001814 **506S2RH** 1001812
510S2 1001813 **510S2RH** 1001810



Somfy
DESIGNED FOR
SILENCE





Offers control via power switching

Technical Features

| | |
|----------------------------------|--|
| Voltage Supply | 120V AC, 60Hz |
| Index Protection Rating | IP 44 (interior and exterior use) |
| Limit Switch Type | Rapid Adjustment RA |
| Limit Switch Capacity | 46 Turns |
| Temperature Working Range | -4°F to 158°F (-20°C to 70°C) (interior and exterior use) |
| Insulation Class | Class 1 for 120V AC |
| Wiring | Do not parallel wire. |

Dimensions

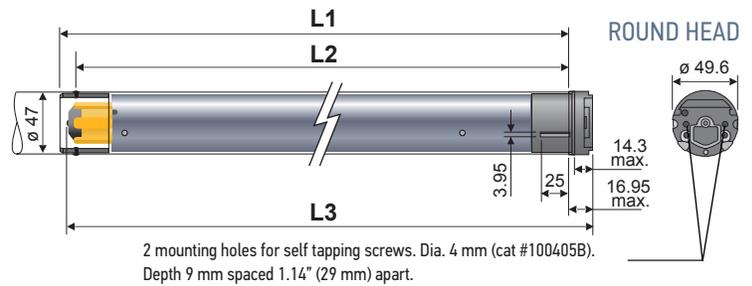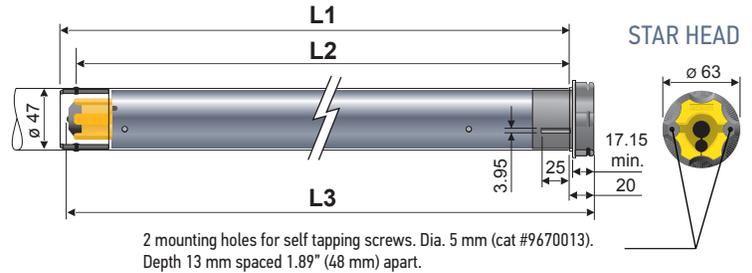

Specifications

| | 506 | 510 |
|---------------------------|-------------|-------------|
| Torque | 6 Nm | 10 Nm |
| Nominal Voltage | 120V / 60Hz | 120V / 60Hz |
| Rated Current | 1.2A | 1.67A |
| Speed | 32 rpm | 32 rpm |
| Thermal Protection | 4 minutes | 4 minutes |
| *Sound Level | ≤ 45 dBA | ≤ 47 dBA |

| Dimensions | 506 | 510 |
|--------------------------------|--|--|
| L1 | 23.7 in. (603 mm) | 23.7 in. (603 mm) |
| L2 | 23.2 in. (590 mm) | 23.2 in. (590 mm) |
| L3 | SH 24.3 in. (616 mm) RH 24.1 in. (613 mm) | SH 24.3 in. (616 mm) RH 24.1 in. (613 mm) |
| SJTW Power Cable Length | 9.8 ft. (3 m) | 9.8 ft. (3 m) |



Optional 4-conductor cables available in various lengths.
Includes Fast Connector and open leads.

* Sound Level:


According to standards ISO 3741 NF 31022 in dBA ref 1pW at nominal torque without end product.

Fabrication Recommendations:

- Operational noise level is reduced when motor, tube, and mechanical accessories are properly adapted to motorized applications.
- Free play must be minimized between the accessories and the end product tube to ensure quiet performance of the motor.
- Interior Tube Diameter (ID) > 47 mm must be respected.
- A motor crown adaptor between motor and end product tube is required to ensure concentric operation of motor.
- 500 Series Drive Stop and Screw (9910004) is recommended to prevent noise and drive wheel separation from motor shaft.
This drive stop screw must be tightened with a torque ranging between 1.5Nm and 1.8Nm.
- Somfy Soft Clip Drive Wheel Adaptors (brown in color) are not recommended.

Type of power cable

Wired
120V AC / 60Hz
4-conductor SJTW cable

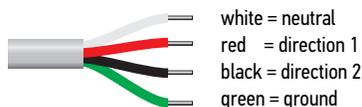

Soness® 50 PA & PS

(Progressive Limit Adjustment)

506S2PA 1001801 **506S2PS** 1001800
510S2PA 1002323 **510S2PS** 1002324




Offers control via power switching

Technical Features

| | |
|----------------------------------|--|
| Voltage Supply | 120V AC, 60Hz |
| Index Protection Rating | IP44 (interior and exterior use) |
| Limit Switch Type | Progressive Adjustment PA |
| Limit Switch Capacity | 29 Turns |
| Temperature Working Range | -4°F to 140°F (-20°C to 60°C) (interior and exterior use) |
| Insulation Class | Class 1 for 120V AC |
| Wiring | Do not parallel wire. |

Dimensions

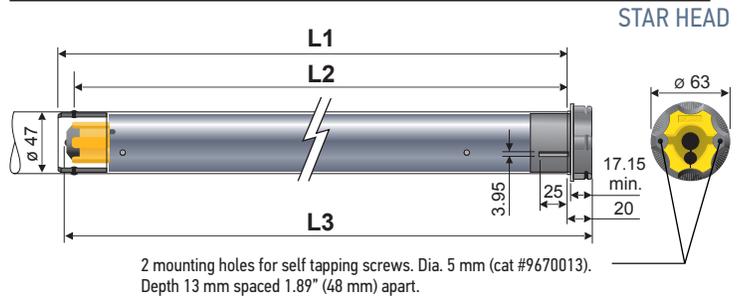


| Dimensions | 506S2PA | 506S2PS** | 510S2PA | 510S2PS** |
|---------------------|--------------------|--------------------|--------------------|--------------------|
| L1 | 23.74 in. (603 mm) |
| L2 | 23.23 in. (590 mm) |
| L3 | 24.25 in. (616 mm) |
| Cable Length | 5 in. (.12 m) |

Specifications

| | 506S2PA | 506S2PS** | 510S2PA | 510S2PS** |
|---------------------------|-------------|-------------|-------------|-------------|
| Torque | 6 Nm | 6 Nm | 10 Nm | 10 Nm |
| Nominal Voltage | 120V / 60Hz | 120V / 60Hz | 120V / 60Hz | 120V / 60Hz |
| Rated Current | 1.2A | 1.2A | 1.67A | 1.67A |
| Speed | 32 rpm | 32 rpm | 32 rpm | 32 rpm |
| Thermal Protection | 4 minutes | 4 minutes | 4 minutes | 4 minutes |
| *Sound Level | ≤ 45 dBA | ≤ 45 dBA | ≤ 47.2 dBA | ≤ 47.2 dBA |

Optional 4-conductor cables available in various lengths. Includes Fast Connector and open leads.




* **Sound Level:** According to standards ISO 3741 NF 31022 in dBA ref 1pW at nominal torque without end product.

Fabrication Recommendations:

- Operational noise level is reduced when motor, tube, and mechanical accessories are properly adapted to motorized applications.
- Free play must be minimized between the accessories and the end product tube to ensure quiet performance of the motor.
- Interior Tube Diameter (ID) > 47 mm must be respected.
- A motor crown adaptor between motor and end product tube is required to ensure concentric operation of the motor.
- 500 Series Drive Stop and Screw (9910004) is recommended to prevent noise and drive wheel separation from the motor shaft. This drive stop screw must be tightened with a torque ranging between 1.5Nm and 1.8Nm.
- Somfy Soft Clip Drive Wheel Adaptors (brown in color) are not recommended.


Type of power cable PA

Wired
120V AC / 60Hz
4-conductor SJTW cable

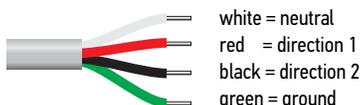

Type of power cable PS

Wired
120V AC / 60Hz
5-conductor SJTW cable

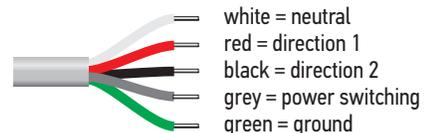

**Progressive Limit Adjustment with external power switching capability when limit is reached.

Sonesse® ULTRA 50 RTS

Star Head and Round Head Motors

506A2 1002562
506A2RH 1002564



Radio Technology Somfy® (RTS) allows for wireless radio control of motorized window coverings via the RTS family of controls.

Technical Features



| | |
|----------------------------------|--|
| Voltage Supply | 120V AC, 60Hz |
| Index Protection Rating | IP 31 (interior use) |
| Limit Switch Type | Electronic RTS |
| Limit Switch Capacity | 250 Turns |
| Temperature Working Range | 32°F to 140°F (0°C to 60°C) (interior use only) |
| Insulation Class | Class 1 for 120V AC |
| Antenna | Integrated into power cord. Power cord must be at least 12 inches and must not come in contact with metal. |
| Wiring | Parallel wiring allowed in accordance with NEC and local electrical codes. |

Specifications

| | |
|---------------------------|-------------|
| Torque | 6 Nm |
| * Minimum Torque | 0.4 Nm |
| Nominal Voltage | 120V / 60Hz |
| Rated Current | .95A |
| Speed | 24 rpm |
| Thermal Protection | 4 minutes |
| Radio Frequency | 433.42 MHz |
| **Sound Level | ≤ 38 dBA |



Dimensions

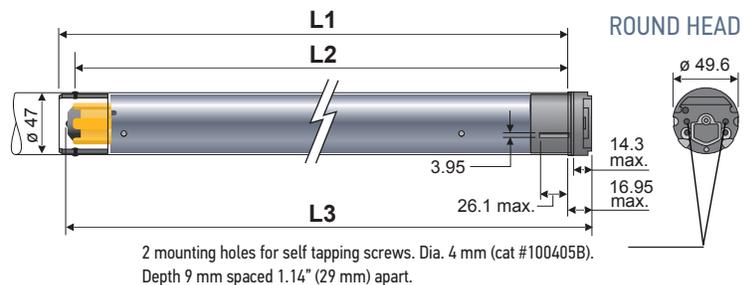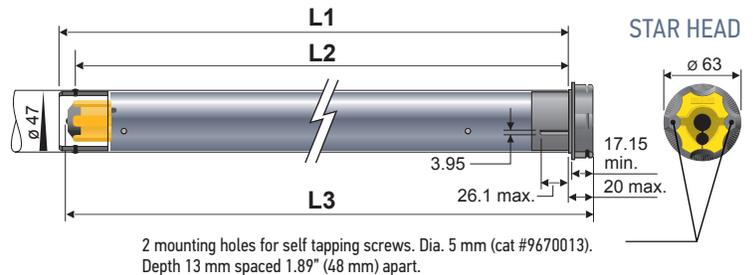

Dimensions

| | |
|--------------------------------|--|
| L1 | 31.8 in. (808 mm) |
| L2 | 31.3 in. (795 mm) |
| L3 | SH 32.4 in. (823 mm) RH 32.3 in. (820 mm) |
| SJTW Power Cable Length | 9.8 ft. (3 m) |

Optional 3C cables available in varying lengths with NEMA plug, Fast Connector and open leads.

* **Minimum Torque:** Minimum application weight to ensure smooth operation.


** **Sound Level:** According to standards ISO 3741 NF 31022 in dBA ref 1pW at nominal torque without end product.

Fabrication Recommendations:

- Operational noise level is reduced when motor, tube, and mechanical accessories are properly adapted to motorized applications.
- Free play must be minimized between the accessories and the end product tube to ensure quiet performance of the motor. Due to the variances of standard aluminum extrusion tolerances, it is recommended to screw the drive wheel & pin end to immobilize them and ensure quiet performance throughout the life of the product.
- Interior Tube Diameter (ID) > 47 mm must be respected.
- A motor crown adaptor between motor and end product tube is required to ensure concentric operation of motor.
- 500 Series Drive Stop and Screw (9910004) is recommended to prevent noise and drive wheel separation from motor shaft. This drive stop screw must be tightened with a torque ranging between 1.5Nm and 1.8Nm.
- Somfy Soft Clip Drive Wheel Adaptors (brown in color) are not recommended.

Type of power cable

RTS
120V AC / 60Hz
3-conductor SJTW cable



Sonesse® ULTRA 50 DC RTS

Square Head Motor

504A8 1134023




Radio Technology Somfy® (RTS) allows for wireless radio control of motorized window coverings via the RTS family of controls.

Technical Features

Dimensions

- NEW Sleep Mode** New feature that allows for advanced programming and grouping.
- Voltage Supply** 24V DC
- Index Protection Rating** IP 20 (interior use)
- Limit Switch Type** Electronic
- Limit Switch Capacity** 38 Turns
- Temperature Working Range** 32°F to 140°F (0°C to 60°C) (interior use only)
- Insulation Class** Class 3
- Wiring** In accordance with NEC and local electrical codes.
- Power Supply** Use only Somfy's power supplies to maintain UL listing requirements and guarantee motor's performance.

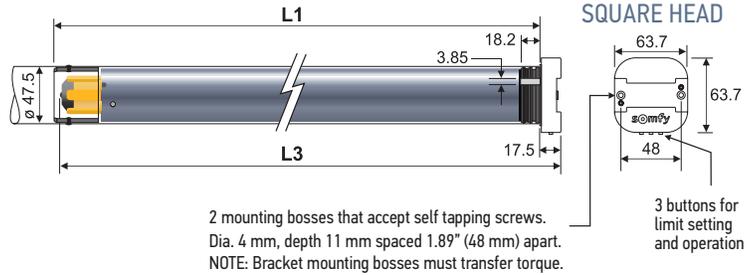

Dimensions

| | |
|--------------------------------------|-------------------|
| L1 | 30.7 in. (780 mm) |
| L3 | 31.5 in. (800 mm) |
| Data & Power Cable Length | 10 in. (250 mm) |


Specifications

- * **Minimum Torque:** Minimum application weight to ensure smooth operation.
- ** **Sound Level:** According to standards ISO 3741 NF 31022 in dBA ref 1pW at nominal torque without end product.

Fabrication Recommendations:

- Operational noise level is reduced when the motor, tube, and mechanical accessories are properly adapted to motorized applications.
- Free play must be minimized between the accessories and the end product tube to ensure quiet performance of the motor.
- Due to the variances of standard aluminum extrusion tolerances, it is recommended to screw the drive wheel & pin end to immobilize them and ensure quiet performance throughout the life of the product.
- Interior Tube Diameter (ID) > 47 mm must be respected.
- A motor crown adaptor between motor and end product tube is required to ensure concentric operation of the motor.
- 500 Series Drive Stop and Screw (9910004) is recommended to prevent noise and drive wheel separation from the motor shaft. This drive stop screw must be tightened with a torque ranging between 1.5Nm and 1.8Nm.
- Somfy Soft Clip Drive Wheel Adaptors (brown in color) are not recommended.

| | |
|---------------------------|------------------|
| Torque | 4 Nm |
| * Minimum Torque | 0.4 Nm |
| Nominal Voltage | 24V DC |
| Rated Current | 1.5A |
| Speed | 10-25 Adjustable |
| Thermal Protection | 5 minutes |
| ** Sound Level | ≤ 38 dBA |



Power Pigtail Cable: (Included with every motor. Also available separately, part # 9020005).

| JST to Motor | Weidmuller Connects to Network | Cable Detail View | Connector Markings Detail View Font: Ariel Height: 2.3 mm Color: Black | Maximum Power Cable Length (to guarantee characteristics) <table border="1" style="margin: auto;"> <thead> <tr> <th>GAUGE</th> <th>LENGTH</th> </tr> </thead> <tbody> <tr> <td>14 AWG</td> <td>240 ft.</td> </tr> <tr> <td>16 AWG</td> <td>150 ft.</td> </tr> <tr> <td>18 AWG</td> <td>100 ft.</td> </tr> </tbody> </table> | GAUGE | LENGTH | 14 AWG | 240 ft. | 16 AWG | 150 ft. | 18 AWG | 100 ft. |
|-------------------------|---|------------------------------|--|---|-------|--------|--------|---------|--------|---------|--------|---------|
| GAUGE | LENGTH | | | | | | | | | | | |
| 14 AWG | 240 ft. | | | | | | | | | | | |
| 16 AWG | 150 ft. | | | | | | | | | | | |
| 18 AWG | 100 ft. | | | | | | | | | | | |

Soness® 50 RTS

Star Head and Round Head Motors

506S2 1001809 **506S2RH** 1001806
510S2 1001807 **510S2RH** 1001805




Radio Technology Somfy® (RTS) allows for wireless radio control of motorized window coverings via the RTS family of controls.

Technical Features

| | |
|----------------------------------|--|
| Voltage Supply | 120V AC, 60Hz |
| Index Protection Rating | IP 44 (interior and exterior use) |
| Limit Switch Type | Electronic RTS |
| Limit Switch Capacity | 250 Turns |
| Temperature Working Range | -4°F to 158°F (-20°C to 70°C) (interior and exterior use) |
| Insulation Class | Class 1 for 120V AC |
| Antenna | Integrated into power cord. Power cord must be at least 12 inches and must not come in contact with metal. |
| Wiring | Parallel wiring allowed in accordance with NEC and local electrical codes. |

Dimensions

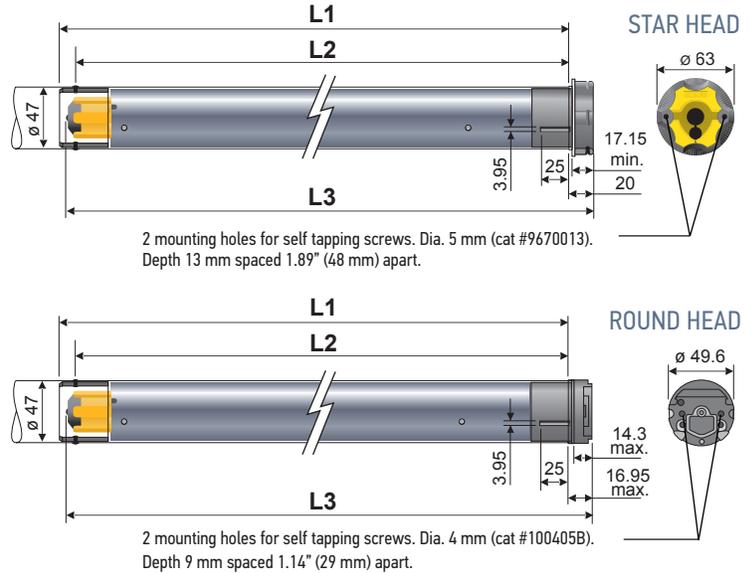

Specifications

| | 506 | 510 |
|---------------------------|-------------|-------------|
| Torque | 6 Nm | 10 Nm |
| Nominal Voltage | 120V / 60Hz | 120V / 60Hz |
| Rated Current | 1.2A | 1.67A |
| Speed | 32 rpm | 32 rpm |
| Thermal Protection | 4 minutes | 4 minutes |
| Radio Frequency | 433.42 MHz | 433.42 MHz |
| *Sound Level | ≤ 45 dBA | ≤ 47 dBA |

| Dimensions | 506 | 510 |
|--------------------------------|--|--|
| L1 | 25.7 in. (653 mm) | 25.7 in. (653 mm) |
| L2 | 25.2 in. (640 mm) | 25.2 in. (640 mm) |
| L3 | SH 26.2 in. (666 mm) RH 26.1 in. (663 mm) | SH 26.2 in. (666 mm) RH 26.1 in. (663 mm) |
| SJTW Power Cable Length | 9.8 ft. (3 m) | 9.8 ft. (3 m) |

Optional 3C cables available in varying lengths with NEMA plug, Fast Connector and open leads.



* Sound Level:

According to standards ISO 3741 NF 31022 in dBA ref 1pW at nominal torque without end product.

Fabrication Recommendations:

- Operational noise level is reduced when motor, tube, and mechanical accessories are properly adapted to motorized applications.
- Free play must be minimized between the accessories and the end product tube to ensure quiet performance of the motor.
- Interior Tube Diameter (ID) > 47 mm must be respected.
- A motor crown adaptor between motor and end product tube is required to ensure concentric operation of motor.
- 500 Series Drive Stop and Screw (9910004) is recommended to prevent noise and drive wheel separation from motor shaft. This drive stop screw must be tightened with a torque ranging between 1.5Nm and 1.8Nm.
- Somfy Soft Clip Drive Wheel Adaptors (brown in color) are not recommended.

Type of power cable

RTS
120V AC / 60Hz
3-conductor SJTW cable



Sonessse® ULTRA 50 RS485

Star Head Motor

506A2 1002566



Somfy
DESIGNED FOR
SILENCE



A new generation of intelligent motors that are controlled and monitored via Somfy Digital Network™ (SDN) solutions and animeo® IP total solar management system.

Technical Features


| | |
|----------------------------------|--|
| Voltage Supply | 120V AC, 60Hz |
| Index Protection Rating | IP 31 (interior use) |
| Limit Switch Type | Electronic |
| Limit Switch Capacity | 300 Turns |
| Temperature Working Range | 32°F to 140°F (0°C to 60°C) (interior use only) |
| Insulation Class | Class 1 for 120V AC |
| Wiring | Parallel wiring allowed in accordance with NEC and local electrical codes. |

Specifications

| | |
|---------------------------|-------------|
| Torque | 6 Nm |
| * Minimum Torque | 0.4 Nm |
| Nominal Voltage | 120V / 60Hz |
| Rated Current | .95A |
| Speed | 24 rpm |
| Thermal Protection | 4 minutes |
| **Sound Level | ≤ 38 dBA |



Dimensions

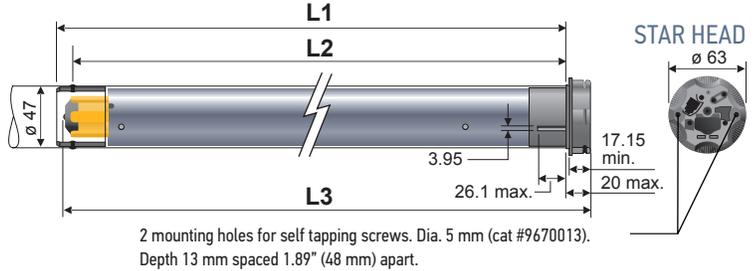


Dimensions

| | |
|--|---|
| L1 | 33.0 in. (838 mm) |
| L2 | 32.5 in. (825 mm) |
| L3 | 33.6 in. (853 mm) |
| SJTW Power Cable Length | 9.8 ft. (3 m) |
| Data Cable (must be ordered separately) | Customizable and available in various lengths |

Optional 3C cables available in varying lengths with NEMA plug, Fast Connector and open leads.

Type of power cable

120V AC / 60Hz
3-conductor SJTW cable



* **Minimum Torque:** Minimum application weight to ensure smooth operation.


** **Sound Level:** According to standards ISO 3741 NF 31022 in dBA ref 1pW at nominal torque without end product.

Fabrication Recommendations:


- Operational noise level is reduced when motor, tube, and mechanical accessories are properly adapted to motorized applications.
- Free play must be minimized between the accessories and the end product tube to ensure quiet performance of the motor. Due to the variances of standard aluminum extrusion tolerances, it is recommended to screw the drive wheel & pin end to immobilize them and ensure quiet performance throughout the life of the product.
- Interior Tube Diameter (ID) > 47 mm must be respected.
- A motor crown adaptor between motor and end product tube is required to ensure concentric operation of motor.
- 500 Series Drive Stop and Screw (9910004) is recommended to prevent noise and drive wheel separation from motor shaft. This drive stop screw must be tightened with a torque ranging between 1.5Nm and 1.8Nm.
- Somfy Soft Clip Drive Wheel Adaptors (brown in color) are not recommended.

Data Cable: RJ9/RJ45 (sold separately)

RJ9 connects to motor

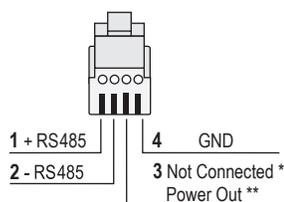

RJ45 connects to network

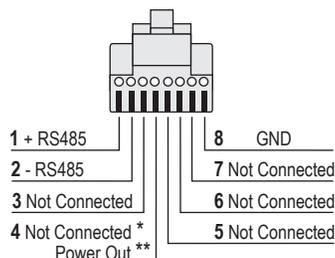

4 Cond. 26AWG modular cable with RJ9 on one end and RJ45 other end - (RTS, Z-Wave®, ZigBee modules)

| | | |
|----------------------------|--------------|----------|
| GREY WITH POWER OUT | 2.5 ft. long | #9018545 |
| | 8 ft. long | #9018546 |
| | 12 ft. long | #9018547 |
| | 24 ft. long | #9018548 |

4 Cond. 26AWG modular cable with RJ9 on one end and RJ45 other end - (SDN - animeo IP)

| | | |
|--------------------------------|--------------|----------|
| BLACK WITHOUT POWER OUT | 2.5 ft. long | #9018541 |
| | 8 ft. long | #9018542 |
| | 12 ft. long | #9018543 |
| | 24 ft. long | #9018544 |

* Data cable (black) for animeo IP networks

** Data cable (grey) for powering external modules

Visit somfypro.com/sdn-2-0 for complete information on SDN 2.0 Bus Distribution Products.

Sonessa® ULTRA 50 DC RS485

Square Head Motor

504A8 1134022




A new generation of intelligent motors that are controlled and monitored via Somfy Digital Network™ (SDN) solutions and animeo® IP total solar management system.

Technical Features

| | |
|----------------------------------|--|
| Voltage Supply | 24V DC |
| Index Protection Rating | IP 20 (interior use) |
| Limit Switch Type | Electronic |
| Limit Switch Capacity | 38 Turns |
| Temperature Working Range | 32°F to 140°F (0°C to 60°C) (interior use only) |
| Insulation Class | Class 3 |
| Wiring | In accordance with NEC and local electrical codes. |
| Power Supply | Use only Somfy's power supplies to maintain UL listing requirements and guarantee motor's performance. |

Dimensions

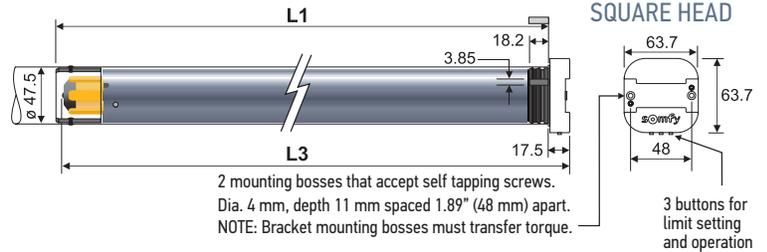

Dimensions

| | |
|--------------------------------------|-------------------|
| L1 | 30.7 in. (780 mm) |
| L3 | 31.5 in. (800 mm) |
| Data & Power Cable Length | 10 in. (250 mm) |

Specifications

- * **Minimum Torque:** Minimum application weight to ensure smooth operation.
- ** **Sound Level:** According to standards ISO 3741 NF 31022 in dBA ref 1pW at nominal torque without end product.

Fabrication Recommendations:

- Operational noise level is reduced when the motor, tube, and mechanical accessories are properly adapted to motorized applications.
- Free play must be minimized between the accessories and the end product tube to ensure quiet performance of the motor.
- Due to the variances of standard aluminum extrusion tolerances, it is recommended to screw the drive wheel & pin end to immobilize them and ensure quiet performance throughout the life of the product.
- Interior Tube Diameter (ID) > 47 mm must be respected.
- A motor crown adaptor between motor and end product tube is required to ensure concentric operation of the motor.
- 500 Series Drive Stop and Screw (9910004) is recommended to prevent noise and drive wheel separation from the motor shaft.
This drive stop screw must be tightened with a torque ranging between 1.5Nm and 1.8Nm.
- Somfy Soft Clip Drive Wheel Adaptors (brown in color) are not recommended.

| | |
|---------------------------|------------------|
| Torque | 4 Nm |
| * Minimum Torque | 0.4 Nm |
| Nominal Voltage | 24V DC |
| Rated Current | 1.5A |
| Speed | 10-25 Adjustable |
| Thermal Protection | 5 minutes |
| **Sound Level | ≤ 38 dBA |



Pigtail: Data and Power (Included with every motor. Also available separately, part # 9020004).

| <p>JST to Motor</p> <p>G + - NC V- V+</p> | <p>Weidmuller Connects to Network</p> <p>V+ V- + - G</p> | <p>Cable Detail View</p> <p>10 inches 1 in. max .75 in. max</p> | <p>Connector Markings Detail View</p> <p>Font: Ariel Height: 2.3 mm Color: Black</p> | <p>Maximum Power Cable Length (to guarantee characteristics)</p> <table border="1"> <tr> <th>GAUGE</th> <th>LENGTH</th> </tr> <tr> <td>14 AWG</td> <td>240 ft.</td> </tr> <tr> <td>16 AWG</td> <td>150 ft.</td> </tr> <tr> <td>18 AWG</td> <td>100 ft.</td> </tr> </table> | GAUGE | LENGTH | 14 AWG | 240 ft. | 16 AWG | 150 ft. | 18 AWG | 100 ft. |
|---|--|---|--|--|-------|--------|--------|---------|--------|---------|--------|---------|
| GAUGE | LENGTH | | | | | | | | | | | |
| 14 AWG | 240 ft. | | | | | | | | | | | |
| 16 AWG | 150 ft. | | | | | | | | | | | |
| 18 AWG | 100 ft. | | | | | | | | | | | |

Visit somfypro.com/sdn-2-0 for complete information on SDN 2.0 Bus Distribution Products.

Sonesse® 50 RS485

Star Head Motors

506S2 1002286
510S2 1002287



A new generation of intelligent motors that are controlled and monitored via Somfy Digital Network™ (SDN) solutions and animeo® IP total solar management system.

Technical Features


| | |
|----------------------------------|--|
| Voltage Supply | 120V AC, 60Hz |
| Index Protection Rating | IP 44 (interior and exterior use) |
| Limit Switch Type | Electronic |
| Limit Switch Capacity | 300 Turns |
| Temperature Working Range | -4°F to 158°F (-20°C to 70°C) (interior and exterior use) |
| Insulation Class | Class 1 for 120V AC |
| Wiring | Parallel wiring allowed in accordance with NEC and local electrical codes. |

Specifications

| | 506 | 510 |
|---------------------------|-------------|-------------|
| Torque | 6 Nm | 10 Nm |
| Nominal Voltage | 120V / 60Hz | 120V / 60Hz |
| Rated Current | 1.2A | 1.8A |
| Speed | 32 rpm | 32 rpm |
| Thermal Protection | 4 minutes | 4 minutes |
| *Sound Level | ≤ 45 dBA | ≤ 47 dBA |



Dimensions

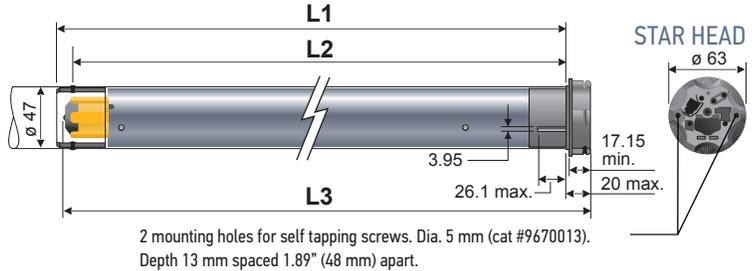

| Dimensions | 506 | 510 |
|--|---|---|
| L1 | 25.7 in. (653 mm) | 26.5 in. (673 mm) |
| L2 | 25.2 in. (640 mm) | 26.0 in. (660 mm) |
| L3 | 26.2 in. (666 mm) | 27.0 in. (686 mm) |
| SJTW Power Cable Length | 9.8 ft. (3 m) | 9.8 ft. (3 m) |
| Data Cable (must be ordered separately) | Customizable and available in various lengths | Customizable and available in various lengths |

Optional 3C cables available in varying lengths with NEMA plug, Fast Connector and open leads.

Type of power cable




** **Sound Level:** According to standards ISO 3741 NF 31022 in dBA ref 1pW at nominal torque without end product.

Fabrication Recommendations:


- Operational noise level is reduced when motor, tube, and mechanical accessories are properly adapted to motorized applications.
- Free play must be minimized between the accessories and the end product tube to ensure quiet performance of the motor.
- Interior Tube Diameter (ID) > 47 mm must be respected.
- A motor crown adaptor between motor and end product tube is required to ensure concentric operation of motor.
- 500 Series Drive Stop and Screw (9910004) is recommended to prevent noise and drive wheel separation from motor shaft. This drive stop screw must be tightened with a torque ranging between 1.5Nm and 1.8Nm.
- Somfy Soft Clip Drive Wheel Adaptors (brown in color) are not recommended.

Data Cable: RJ9/RJ45 (sold separately)

RJ9 connects to motor

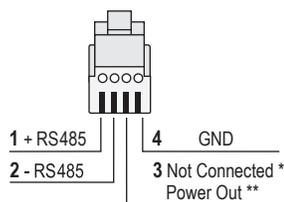

RJ45 connects to network

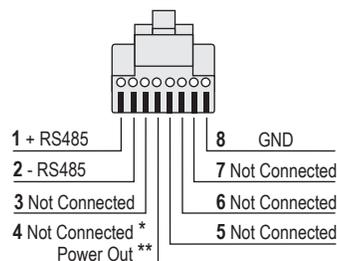

4 Cond. 26AWG modular cable with RJ9 on one end and RJ45 other end - (RTS, Z-Wave®, ZigBee modules)

| GREY WITH POWER OUT | Length | Part # |
|---------------------|--------------|----------|
| | 2.5 ft. long | #9018545 |
| | 8 ft. long | #9018546 |
| | 12 ft. long | #9018547 |
| | 24 ft. long | #9018548 |

4 Cond. 26AWG modular cable with RJ9 on one end and RJ45 other end - (SDN - animeo IP)

| BLACK WITHOUT POWER OUT | Length | Part # |
|-------------------------|--------------|----------|
| | 2.5 ft. long | #9018541 |
| | 8 ft. long | #9018542 |
| | 12 ft. long | #9018543 |
| | 24 ft. long | #9018544 |

* Data cable (black) for animeo IP networks
** Data cable (grey) for powering external modules

Visit somfypro.com/sdn-2-0 for complete information on SDN 2.0 Bus Distribution Products.

LT50 RA

Star Head and Round Head Motors (rapid limit adjustment)

| | | | | | |
|--------------|---------|--------------|---------|----------------|---------|
| 506S2 | 1033401 | 520R2 | 1042055 | 550R2 | 1051464 |
| 510R2 | 1038172 | 525A2 | 1043424 | 515S2RH | 1040061 |
| 510S2 | 1038171 | 530R2 | 1045793 | 520R2RH | 1041028 |
| 515A2 | 1040063 | 535A2 | 1047368 | 525A2RH | 1043025 |
| 515S2 | 1040062 | 540R2 | 1049894 | | |





Offers control via power switching

Technical Features

| | |
|----------------------------------|-------------------------------|
| Voltage Supply | 120V AC, 60Hz |
| Index Protection Rating | IP 44 |
| Limit Switch Type | Rapid Adjustment RA |
| Limit Switch Capacity | 46 Turns |
| Temperature Working Range | 14°F to 140°F (-10°C to 60°C) |
| Insulation Class | Class 1 for 120V AC |
| Wiring | Do not parallel wire. |

Dimensions

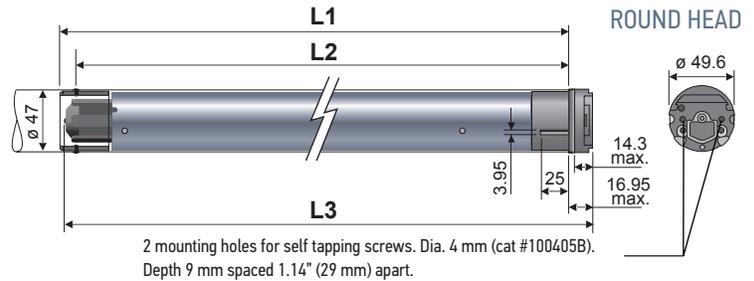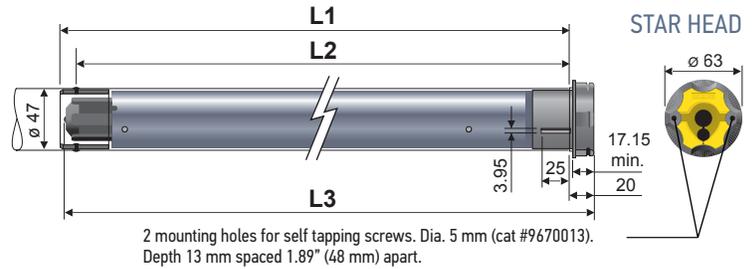

| Dimensions | 506S2 | 510R2 | 510S2 | 515A2 | 515S2 | 520 | 525 | 530 | 535 | 540 | 550 |
|----------------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|
| L1 | 20.67 in. (525 mm) | 19.88 in. (505 mm) | 21.85 in. (555 mm) | 20.67 in. (525 mm) | 23.82 in. (605 mm) | 20.67 in. (525 mm) | 21.85 in. (555 mm) | 21.85 in. (555 mm) | 23.82 in. (605 mm) | 23.82 in. (605 mm) | 23.82 in. (605 mm) |
| L2 | 20.10 in. (510 mm) | 19.29 in. (490 mm) | 21.26 in. (540 mm) | 20.10 in. (510 mm) | 23.23 in. (590 mm) | 20.10 in. (510 mm) | 21.26 in. (540 mm) | 21.26 in. (540 mm) | 23.23 in. (590 mm) | 23.23 in. (590 mm) | 23.23 in. (590 mm) |
| L3 (Star Head) | 20.98 in. (533 mm) | 20.20 in. (513 mm) | 22.17 in. (563 mm) | 20.98 in. (533 mm) | 24.13 in. (613 mm) | 20.98 in. (533 mm) | 22.17 in. (563 mm) | 22.17 in. (563 mm) | 24.13 in. (613 mm) | 24.13 in. (613 mm) | 24.13 in. (613 mm) |
| L3 (Round Head) | | | | | 24.02 in. (610 mm) | 20.98 in. (533 mm) | 22.17 in. (563 mm) | | | | |
| Cable Length | 9.8 ft. (3m) | | | | | | | | | | |


Specifications

| | 506S2 | 510R2 | 510S2 | 515A2 | 515S2 | 520 | 525 | 530 | 535 | 540 | 550 |
|------------------------------|-------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| Torque | 6 Nm | 10 Nm | 10 Nm | 15 Nm | 15 Nm | 20 Nm | 25 Nm | 30 Nm | 35 Nm | 40 Nm | 50 Nm |
| Nominal Voltage | 120V / 60Hz | | | | | | | | | | |
| Rated Current | .95A | 0.7A | 1.3A | 1.1A | 1.8A | 1.1A | 1.6A | 1.5A | 2.1A | 1.8A | 2.1A |
| Speed | 38 rpm | 14 rpm | 38 rpm | 20 rpm | 38 rpm | 14 rpm | 20 rpm | 14 rpm | 20 rpm | 14 rpm | 14 rpm |
| Thermal Protection | 5 minutes | | | | | | | | | | |
| Sound Level (RH only) | 55 dBA | NA | 56 dBA | NA | 56 dBA | NA | NA | NA | NA | NA | NA |

Optional 4C cables available in varying lengths with Fast Connector and open leads.

Type of power cable

Wired 120V AC / 60 Hz 4-conductor SJTW cable

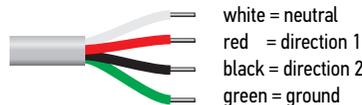

LT50 RA CMO

(Rapid Limit Adjustment - Compact Manual Override)

525A2 CMO 1043010
530R2 CMO 1045017
535A2 CMO 1047006

540R2 CMO 1049026
550R2 CMO 1051014




Offers control via power switching

Technical Features

| | | | |
|--------------------------------|---|----------------------------------|-------------------------------|
| Voltage Supply | 120V AC, 60Hz | Temperature Working Range | 14°F to 104°F (-10°C to 40°C) |
| Index Protection Rating | IP 44 | Insulation Class | Class 1 for 120V AC |
| Limit Switch Type | Rapid Adjustment (RA) (includes manual override) | Wiring | Do not parallel wire. |
| Limit Switch Capacity | 34 Turns | | |

Dimensions

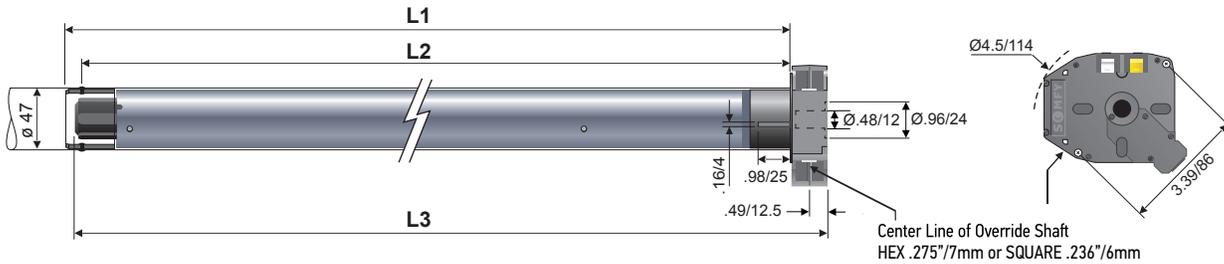

| Dimensions | 525A2 CMO | 530R2 CMO | 535A2 CMO | 540R2 CMO | 550R2 CMO |
|---------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| L1 | 23.39 in. (594 mm) | 23.39 in. (594 mm) | 26.14 in. (664 mm) | 26.14 in. (664 mm) | 26.14 in. (664 mm) |
| L2 | 22.80 in. (579 mm) | 22.80 in. (579 mm) | 25.55 in. (649 mm) | 25.55 in. (649 mm) | 25.55 in. (649 mm) |
| L3 | 23.90 in. (607 mm) | 23.90 in. (607 mm) | 26.65 in. (677 mm) | 26.65 in. (677 mm) | 26.65 in. (677 mm) |
| Cable Length | 6 ft. (1.8 m) | | | | |


Specifications

| | 525A2 CMO | 530R2 CMO | 535A2 CMO | 540R2 CMO | 550R2 CMO |
|---------------------------|-------------|-----------|-----------|-----------|-----------|
| Torque | 25 Nm | 30 Nm | 35 Nm | 40 Nm | 50 Nm |
| Nominal Voltage | 120V / 60Hz | | | | |
| Rated Current | 1.6A | 1.5A | 2.1A | 1.8A | 2.1A |
| Speed | 20 rpm | 14 rpm | 20 rpm | 14 rpm | 14 rpm |
| Thermal Protection | 5 minutes | | | | |

Optional CMO 4C cables available in varying lengths with open leads.

Type of power cable

Wired
120V AC / 60Hz
4-conductor cable

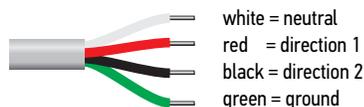

LT50 Altus® RTS

Star Head and Round Head Motors

| | | | |
|--------------|---------|--------------|---------|
| 506S2 | 1033399 | 535A2 | 1038168 |
| 510S2 | 1038165 | 540R2 | 1240556 |
| 525A2 | 1043423 | 550R2 | 1038170 |
| 530R2 | 1038169 | | |




Radio Technology Somfy® (RTS) allows for wireless radio control of motorized window coverings via the RTS family of controls.

Technical Features

| | |
|----------------------------------|---|
| Voltage Supply | 120V AC, 60Hz |
| Index Protection Rating | IP 44 |
| Limit Switch Type | Electronic RTS |
| Limit Switch Capacity | 250 Turns |
| Temperature Working Range | 14°F to 104°F (-10°C to 40°C) |
| Insulation Class | Class 1 for 120V AC |
| Wiring | Integrated into power cord. Must be at least 12 inches and must not come in contact with metal. |

Dimensions

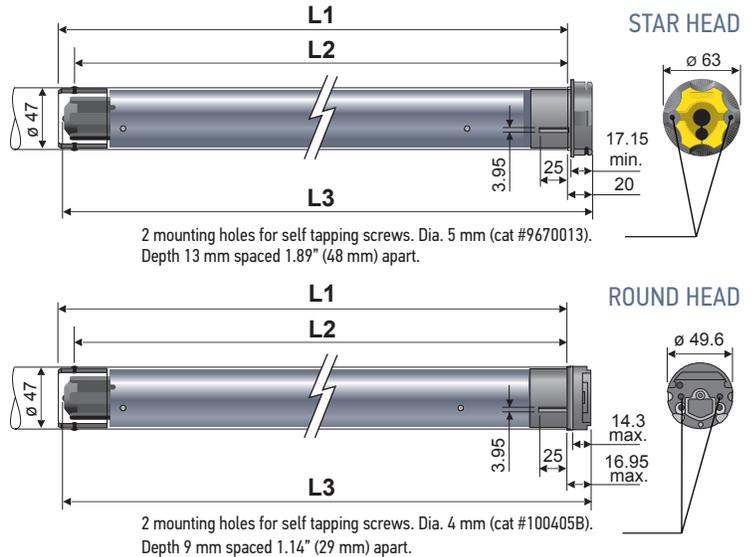

| Dimensions | 506 | 510 | 525 | 530 | 535 | 540 | 550 |
|---------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|
| L1 | 23.82 in. (605 mm) | 23.82 in. (605 mm) | 23.82 in. (605 mm) | 23.82 in. (605 mm) | 26.57 in. (675 mm) | 25.79 in. (655 mm) | 26.57 in. (675 mm) |
| L2 | 23.23 in. (590 mm) | 23.23 in. (590 mm) | 23.23 in. (590 mm) | 23.23 in. (590 mm) | 25.98 in. (660 mm) | 25.20 in. (640 mm) | 25.98 in. (660 mm) |
| L3 | 24.13 in. (613 mm) | 24.13 in. (613 mm) | 24.13 in. (613 mm) | 24.13 in. (613 mm) | 26.89 in. (683 mm) | 26.10 in. (663 mm) | 26.89 in. (683 mm) |
| Cable Length | 9.8 ft. (3 m) |


Specifications

| | 506 | 510 | 525 | 530 | 535 | 540 | 550 |
|---------------------------|------------|--------|--------|--------|--------|--------|--------|
| Torque | 6 Nm | 10 Nm | 25 Nm | 30 Nm | 35 Nm | 40 Nm | 50 Nm |
| Nominal Voltage | 120V/60Hz | | | | | | |
| Rated Current | 1.1A | 1.3A | 1.6A | 1.5A | 2.1A | 1.8A | 2.1A |
| Speed | 38 rpm | 38 rpm | 20 rpm | 14 rpm | 20 rpm | 14 rpm | 14 rpm |
| Thermal Protection | 5 minutes | | | | | | |
| Radio Frequency | 433.42 MHz | | | | | | |

Optional 3C cables available in varying lengths with NEMA plug, Fast Connector and open leads.

Type of power cable

RTS 120V AC / 60 Hz
3-conductor SJTW cable



LT50 RTS CMO

(Compact Manual Override)

525A2 RTS CMO 1043426 **540R2 RTS CMO** 1051477
530R2 RTS CMO 1051476 **550R2 RTS CMO** 1051466
535A2 RTS CMO 1047306




Radio Technology Somfy® (RTS) allows for wireless radio control of motorized window coverings via the RTS family of controls.

Technical Features

| | | | |
|--------------------------------|--|----------------------------------|---|
| Voltage Supply | 120V AC, 60Hz | Temperature Working Range | 14°F to 104°F (-10°C to 40°C) |
| Index Protection Rating | IP 44 | Insulation Class | Class 1 for 120V AC |
| Limit Switch Type | Rapid Adjustment RA and Electronic Receiver Integrated in motor tube | Antenna | Integrated into power cord. Must be at least 12 inches and must not come in contact with metal. |
| Limit Switch Capacity | 34 Turns | Wiring | Parallel wiring allowed in accordance with NEC and local electrical codes. |

Dimensions

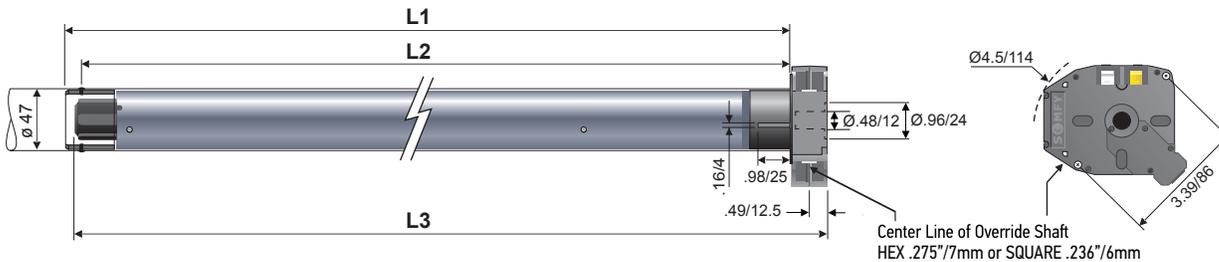

| Dimensions | 525A2 CMO | 530R2 CMO | 535A2 CMO | 540R2 CMO | 550R2 CMO |
|---------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| L1 | 30.47 in. (774 mm) |
| L2 | 29.88 in. (759 mm) |
| L3 | 30.98 in. (787 mm) |
| Cable Length | 9.8 ft. (3 m) | 9.8 ft. (3 m) | 12 ft. (3.6 m) | 9.8 ft. (3 m) | 9.8 ft. (3 m) |


Specifications

| | 525A2 CMO | 530R2 CMO | 535A2 CMO | 540R2 CMO | 550R2 CMO |
|---------------------------|-------------|-----------|-----------|-----------|-----------|
| Torque | 25 Nm | 30 Nm | 35 Nm | 40 Nm | 50 Nm |
| Nominal Voltage | 120v / 60Hz | | | | |
| Rated Current | 1.6A | 1.5A | 2.1A | 1.8A | 2.1A |
| Speed | 20 rpm | 14 rpm | 20 rpm | 14 rpm | 14 rpm |
| Thermal Protection | 5 minutes | | | | |
| Radio Frequency | 433.42 MHz | | | | |

Optional CMO 3C cables available in varying lengths with NEMA Plug and open leads.

Type of power cable

RTS
120V AC / 60Hz
3-conductor SJTW cable



*1047306 535A2 CMO Includes NEMA Plug

LT50 Orea® RTS

Specifically designed for use in cassette awnings only

535A2 1038173
550R2 1038174




Radio Technology Somfy® (RTS) allows for wireless radio control of motorized window coverings via the RTS family of controls.

Technical Features

| | | | |
|--------------------------------|----------------|----------------------------------|---|
| Voltage Supply | 120V AC, 60Hz | Temperature Working Range | 14°F to 104°F (-10°C to 40°C) |
| Index Protection Rating | IP 44 | Insulation Class | Class 1 for 120V AC |
| Limit Switch Type | Electronic RTS | Antenna | Integrated into power cord. Must be at least 12 inches and must not come in contact with metal. |
| Limit Switch Capacity | 250 Turns | Wiring | Parallel wiring allowed in accordance with NEC and local electrical codes. |

Dimensions

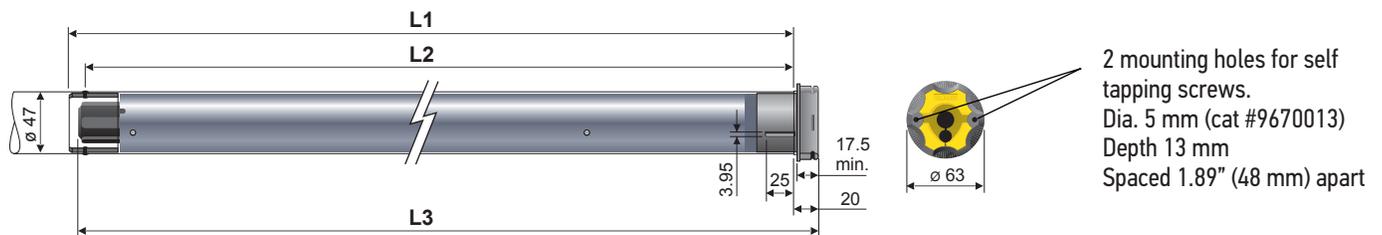

| Dimensions | 535 | 550 |
|--------------|--------------------|--------------------|
| L1 | 26.57 in. (675 mm) | 26.57 in. (675 mm) |
| L2 | 25.98 in. (660 mm) | 25.98 in. (660 mm) |
| L3 | 26.89 in. (683 mm) | 26.89 in. (683 mm) |
| Cable Length | 9.8 ft. (3 m) | |

Specifications

| | 535 | 550 |
|--------------------|-------------|------------|
| Torque | 35 Nm | 50 Nm |
| Nominal Voltage | 120V / 60HZ | |
| Rated Current | 2.1A | |
| Speed | 20 rpm | 14 rpm |
| Thermal Protection | 5 minutes | |
| Radio Frequency | 433.42 MHz | 433.42 MHz |


Please Note:

Orea® RTS motor is specifically designed for cassette awnings only. Automatic limit setting in the UP direction.

Optional 3C cables available in varying lengths with NEMA plug, Fast Connector and open leads.

Type of power cable

RTS
120V AC / 60Hz
3-conductor SJTW cable



Oximo™ 50 RTS

Star Head Motor

525A2 1033402
550R2 1244793




Radio Technology Somfy® (RTS) allows for wireless radio control of motorized window coverings via the RTS family of controls.

Technical Features

| | | | |
|--------------------------------|----------------|----------------------------------|---|
| Voltage Supply | 120V AC, 60Hz | Temperature Working Range | 14°F to 104°F (-10°C to 40°C) |
| Index Protection Rating | IP 44 | Insulation Class | Class 1 for 120V AC |
| Limit Switch Type | Electronic RTS | Antenna | Integrated into power cord. Must be at least 12 inches and must not come in contact with metal. |
| Limit Switch Capacity | 200 Turns | Wiring | Parallel wiring allowed in accordance with NEC and local electrical codes. |

Dimensions

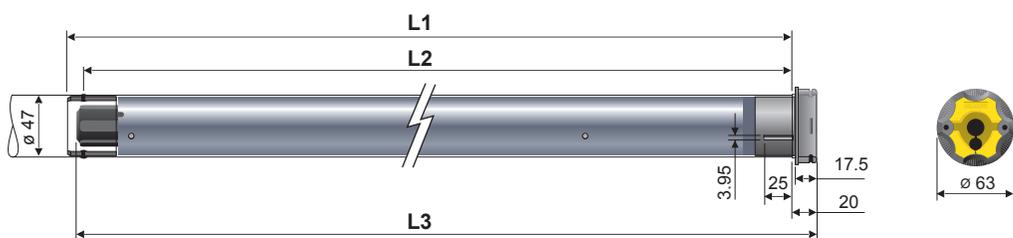

| Dimensions | 525 | 550 |
|---------------------|--------------------|--------------------|
| L1 | 23.81 in. (605 mm) | 26.57 in. (675 mm) |
| L2 | 23.23 in. (590 mm) | 25.98 in. (660 mm) |
| L3 | 24.13 in. (613 mm) | 26.89 in. (683 mm) |
| Cable Length | 9.8 ft. (3 m) | |

Specifications

| | 525 | 550 |
|---------------------------|-------------|--------|
| Torque | 25 Nm | 50 Nm |
| Nominal Voltage | 120V / 60HZ | |
| Rated Current | 1.6A | 2.1A |
| Speed | 20 rpm | 14 rpm |
| Thermal Protection | 4 minutes | |
| Radio Frequency | 433.42 MHz | |

Optional 3C cables available in varying lengths with NEMA plug, Fast Connector and open leads.

Type of power cable

RTS
120V AC / 60Hz
3-conductor SJTW cable



Sunea® RTS CMO (Compact Manual Override)

Specifically designed for use in cassette and standard retractable awnings only

525A2 CMO 1114304
535A2 CMO 1116321
550R2 CMO 1118210




Radio Technology Somfy® (RTS) allows for wireless radio control of motorized window coverings via the RTS family of controls.

Technical Features

| | | | |
|--------------------------------|----------------|----------------------------------|---|
| Voltage Supply | 120V AC, 60Hz | Temperature Working Range | 14°F to 104°F (-10°C to 40°C) |
| Index Protection Rating | IP 44 | Insulation Class | Class 1 for 120V AC |
| Limit Switch Type | Electronic RTS | Antenna | Integrated into power cord. Must be at least 12 inches and must not come in contact with metal. |
| Limit Switch Capacity | 250 Turns | Wiring | Parallel wiring allowed in accordance with NEC and local electrical codes. |

Dimensions

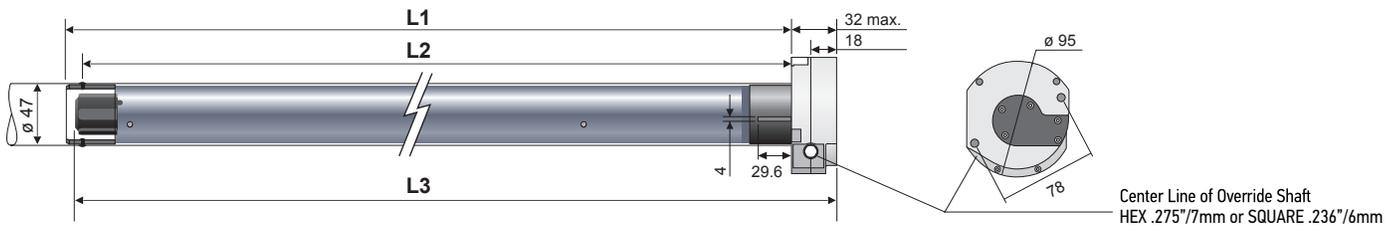

| Dimensions | 525A2 CMO | 535A2 CMO | 550R2 CMO |
|------------|--------------------|--------------------|--------------------|
| L1 | 27.40 in. (696 mm) | 27.40 in. (696 mm) | 27.40 in. (696 mm) |
| L2 | 26.93 in. (684 mm) | 26.93 in. (684 mm) | 26.93 in. (684 mm) |
| L3 | 28.35 in. (720 mm) | 28.35 in. (720 mm) | 28.35 in. (720 mm) |

Specifications

| | 525A2 CMO | 535A2 CMO | 550R2 CMO |
|---------------------------|-------------|-----------|-----------|
| Torque | 25 Nm | 35 Nm | 50 Nm |
| Nominal Voltage | 120V / 60HZ | | |
| Rated Current | 1.6A | 2.1A | 2.1A |
| Speed | 20 rpm | 20 rpm | 14 rpm |
| Thermal Protection | 4 minutes | | |
| Radio Frequency | 433.42 MHz | | |

3C Fast Connector extension cables available.

Type of power cable - SJTW + 18 in.

Fast Connector - Male
 (Do not cut fast connector cable)



LT50 RS485

Star Head Motors

515S2 1002427
535A2 1002288



A new generation of intelligent motors that are controlled and monitored via Somfy Digital Network™ (SDN) solutions and animeo® IP total solar management system.


Technical Features

| | |
|----------------------------------|--|
| Voltage Supply | 120V AC, 60Hz |
| Index Protection Rating | IP 44 (interior & exterior use) |
| Limit Switch Type | Electronic |
| Limit Switch Capacity | 300 Turns |
| Temperature Working Range | -4°F to 140°F (-20°C to 60°C) (interior and exterior use) |
| Insulation Class | Class 1 for 120V AC |
| Wiring | Parallel wiring allowed in accordance with NEC and local electrical codes. |

Specifications

| | 515 | 535 |
|---------------------------|-------------|-------------|
| Torque | 15 Nm | 35 Nm |
| Nominal Voltage | 120V / 60Hz | 120V / 60Hz |
| Rated Current | 1.8A | 2.1A |
| Speed | 38 rpm | 20 rpm |
| Thermal Protection | 4 minutes | 4 minutes |
| *Sound Level | ≤ 55 dBA | ≤ 55 dBA |

Dimensions

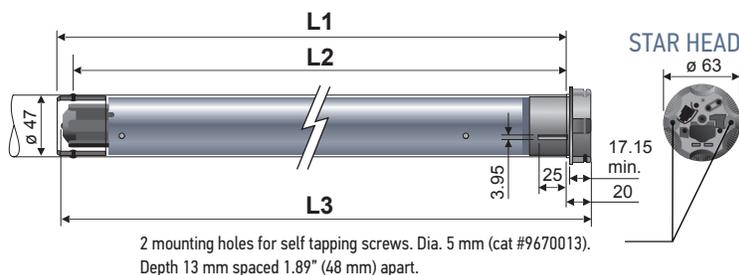

Dimensions

| | |
|--|---|
| L1 | 26.57 in. (675 mm) |
| L2 | 25.98 in. (660 mm) |
| L3 | 26.89 in. (683 mm) |
| SJTW Power Cable Length | 9.8 ft. (3 m) |
| Data Cable (must be ordered separately) | Customizable and available in various lengths |

Optional 3C cables available in varying lengths with NEMA plug, Fast Connector and open leads.

Type of power cable



* Sound Level:


According to standards ISO 3741 NF 31022 in dBA ref 1pW at nominal torque without end product.

Fabrication Recommendations:


- Operational noise level is reduced when motor, tube, and mechanical accessories are properly adapted to motorized applications.
- Free play must be minimized between the accessories and the end product tube.
- Interior Tube Diameter (ID) > 47 mm must be respected.
- A motor crown adaptor between motor and end product tube is required to ensure concentric operation of motor.
- 500 Series Drive Stop and Screw (9910004) is recommended to prevent noise and drive wheel separation from motor shaft. This drive stop screw must be tightened with a torque ranging between 1.5Nm and 1.8Nm.
- Somfy Soft Clip Drive Wheel Adaptors (brown in color) are not recommended.

Data Cable: RJ9/RJ45 (sold separately)

RJ9 connects to motor

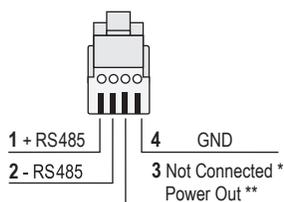

RJ45 connects to network

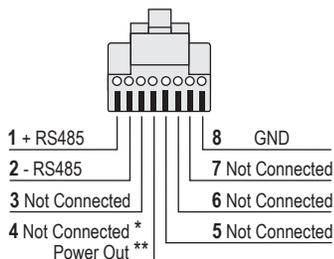

4 Cond. 26AWG modular cable with RJ9 on one end and RJ45 other end - (RTS, Z-Wave®, ZigBee modules)

| | | |
|----------------------------|-------------|----------|
| GREY WITH POWER OUT | 2.5 ft long | #9018545 |
| | 8 ft long | #9018546 |
| | 12 ft long | #9018547 |
| | 24 ft long | #9018548 |

4 Cond. 26AWG modular cable with RJ9 on one end and RJ45 other end - (SDN - animeo IP)

| | | |
|--------------------------------|-------------|----------|
| BLACK WITHOUT POWER OUT | 2.5 ft long | #9018541 |
| | 8 ft long | #9018542 |
| | 12 ft long | #9018543 |
| | 24 ft long | #9018544 |

* Data cable (black) for animeo IP networks

** Data cable (grey) for powering external modules

Visit somfypro.com/sdn-2-0 for complete information on SDN 2.0 Bus Distribution Products.

MOTOR CABLE OPTIONS

MOTOR CABLE OPTIONS

3-CONDUCTOR CABLES



3-conductor motor cable with Fast Connector:

Sonesse 50 & LT50 RTS/RS485 Motor Pigtail to Fast Connector SJTW 3C CABLE - 1.6FT
9020803



3-conductor Fast Connector extension cable with open leads:

Fast Connector Extension Cable 3C SJTW without NEMA Plug - 8.4 FT
9021157



3-conductor switch box panel mount connector:

Panel Mount, 3C Female Fast Connector
9026398



3-conductor Fast Connector extension cables with NEMA plug:

| | |
|---|--|
| Fast Connector Extension Cable 3C SJTW with NEMA Plug - 1.4 FT 9021113 | Fast Connector Extension Cable 3C SJTW with NEMA Plug - 10.4 FT 9020791 |
| Fast Connector Extension Cable 3C SJTW with NEMA Plug - 4.4 FT 9021114 | Fast Connector Extension Cable 3C SJTW with NEMA Plug - 18 FT 9020792 |
| Fast Connector Extension Cable 3C SJTW with NEMA Plug - 8.4 FT 9021115 | Fast Connector Extension Cable 3C SJTW with NEMA Plug - 24 FT 9020793 |



3-conductor motor cables with open leads:

Sonesse 50 & LT50/LT60 RTS/RS485 SJTW 3C Cable - 10 FT.
9018190

Sonesse 50 & LT50/LT60 RTS/RS485 SJTW 3C CABLE - 24 FT
9020985



3-conductor motor cables with NEMA plug:

Sonesse 50 & LT50/LT60 RTS/RS485 SJTW 3C CABLE with NEMA Plug- 1.5 FT
9021049

Sonesse 50 & LT50/LT60 RTS/RS485 SJTW 3C CABLE with NEMA Plug- 6 FT
9021050

Sonesse 50 & LT50/LT60 RTS/RS485 SJTW 3C CABLE with NEMA Plug- 10 FT
9021051

Sonesse 50 & LT50/LT60 RTS/RS485 SJTW 3C CABLE with NEMA Plug- 18 FT
9021052

Sonesse 50 & LT50/LT60 RTS/RS485 SJTW 3C CABLE with NEMA Plug- 24 FT
9021053



3-conductor CMO motor cables with open leads:

LT50 CMO RTS SJTW 3C CABLE 10FT
9021025

LT50 CMO RTS SJTW 3C CABLE 24FT
9021047



3-conductor CMO motor cables with NEMA plugs:

LT50 CMO RTS Cable with 5-15P Right Angle NEMA Plug - 12 ft.
9012148

LT50 CMO RTS Cable with 5-15P Right Angle NEMA Plug - 18 ft.
9012150

LT50 CMO RTS Cable with 5-15P Right Angle NEMA Plug - 24 ft.
9012149

4-CONDUCTOR CABLES



4-conductor motor cable with Fast Connector:

Sonesse 50 & LT50 Motor Pigtail to Fast Connector SJTW 4C CABLE - 1.6FT
9020804



4-conductor Fast Connection extension cables with open leads:

Fast Connector Extension Cable 4C SJTW - 4.4 FT
9021117

Fast Connector Extension Cable 4C SJTW - 8.4 FT
9021118

Fast Connector Extension Cable 4C SJTW - 16.4 FT
9021120

Fast Connector Extension Cable 4C SJTW - 22.4 FT
9021121



4-conductor motor cable with open leads:

Sonesse 50 & LT50/LT60 SJTW 4C CABLE - 10 FT
9018345

Sonesse 50 & LT50/LT60 SJTW 4C CABLE - 24 FT
9021046



4-conductor CMO motor cables with open leads:

CMO Motor Cable - 6 ft.
9208302

CMO Motor Cable - 12 ft.
9012137

CMO Motor Cable - 24 ft.
9208308

CONTROL ACCESSORIES

Learn more about controls and accessories and download RTS brochure at www.somfypro.com/controls



RADIO TECHNOLOGY SOMFY® (RTS)

SITUO & TELIS COLLECTIONS



Situo® 1 RTS
Pure Single
Channel Remote
1870571



Situo® 5 RTS
Pure Five
Channel Remote
1870575



Situo® 1 RTS
Iron Single
Channel Remote
1870572



Situo® 5 RTS
Iron Five
Channel Remote
1870576



Situo® 1 RTS
Natural Single
Channel Remote
1870573



Situo® 5 RTS
Natural Five
Channel Remote
1870577



Situo® 1 RTS
Arctic Single
Channel Remote
1870574



Situo® 5 RTS
Arctic Five
Channel Remote
1870578



Situo® 5 RTS
Soliris Five
Channel Remote
1870579



Situo® 5 RTS
Variation Five
Channel Remote
1811612



Telis 1 RTS Patio
Single Channel
Remote
1810643



Telis 4 RTS Patio
Five Channel
Remote
1810645



Telis 16 Channel RTS
Pure Remote with
On-screen display
1811081



Telis 16 Channel RTS
Silver Remote with
On-screen display
1811082



Telis 1 Chronis RTS
Pure Timer with
On-screen display
1805237

DECOFLEX WIREFREE™ WALL SWITCHES

SMOOVE® WALL SWITCH



DecoFlex 1 Channel RTS
WireFree™ Wall Switch



DecoFlex 2 Channel RTS
WireFree™ Wall Switch



DecoFlex 3 Channel RTS
WireFree™ Wall Switch



DecoFlex 4 Channel RTS
WireFree™ Wall Switch



DecoFlex 5 Channel RTS
WireFree™ Wall Switch



Smoove® 1 RTS Pure
1811533



Smoove® 4 RTS Pure
1811748

- Wall Switches shown in white. Also available in black and ivory finishes.
- Shown assembled with printed channel buttons.
- Custom engraved buttons are also available.



- Battery-operated convenience
- Surface mounts with ease
- Frames available in 7 colors

TABLE TOP ACCESSORIES



DecoFlex WireFree™ RTS
Table Top Accessory Black
1811051*



DecoFlex WireFree™ RTS
Table Top Accessory Silver
1810972*



DecoFlex WireFree™ RTS
Table Top Accessory White
1811185*

*DecoFlex Switch sold separately from Table Top Accessory.

CONTROL ACCESSORIES

RADIO TECHNOLOGY SOMFY® (RTS)



WIFI TO RTS/ZIGBEE INTERFACE



TaHoma® RTS/Zigbee Smartphone & Tablet Interface
1811731

Control window coverings, awnings, screens and rolling shutters using your tablet, smartphone or voice. Create timed events, scenes and more. Integration-ready for third-party control.

TAHOMA ETHERNET ADAPTOR



TaHoma Ethernet Adaptor

The TaHoma® Ethernet Adaptor adds an Ethernet LAN port to TaHoma, providing fast and stable internet connection.

1870470

ZRTSI



Z-Wave® to RTS Interface 2

1811265

16 CHANNEL INTERFACE



Universal RTS Interface 16-Channel (Converts IR, RS232, RS485 to RTS)

1810872

RTS REPEATER



RTS Repeater

1810791

DIMMABLE LED RTS LIGHT KIT



Dimmable LED RTS Light Kit

Warm White
1811491

Cool White
1811506

Dimming LED RTS Receiver
1811486

OUTDOOR RECEIVERS



Outdoor Lighting Receiver
1810875

Universal RTS Receiver
1810627

DRY CONTACT INTERFACE



RTS Dry Contact Interface Single Channel

1810493

SUNIS & THERMOSUNIS INDOOR SENSORS



Sunis Indoor WireFree™ RTS

9013707



ThermoSunis Indoor WireFree™ RTS

9013708

EOLIS 3D SENSOR



Eolis 3D WireFree™ RTS Wind Sensor

1816081

EOLIS SENSOR



Eolis RTS Wind Sensor 24V

9012499

SOLIRIS SENSOR



Soliris RTS Sun and Wind Sensor 24V

9012500

ONDEIS RAIN & SUN SENSOR



Ondeis WireFree™ RTS Rain and Sun Sensor

9019617

CONTROL ACCESSORIES



DIGITAL MOTOR INTERFACES



Control4® to Digital
Motor Interface
1870533



Z-Wave® to Digital
Motor Interface
1870171

animeo IP is a total solar management system utilizing Somfy-powered intelligent motorized window coverings as well as digital keypads and weather sensors. The system's controllers, sensors and keypads can be added to both new and existing Somfy Digital Network installations for comprehensive solar management as either a stand-alone solution or integrated into third party control systems.

An intuitive user interface allows for simplified commissioning, building management and technical support, featuring drag-and-drop programming, motor auto discovery and at-a-glance system status update.



animeo® IP Building Controller
1822314

Visit somfypro.com/animeo to learn more

WIRED AC CONTROLS & SWITCHES



GROUP CONTROL SYSTEM II (GCS II)



Group Control System II (GCS II)
1810476



GCS II RTS Radio Receiver
1810854




SDN 0-10V Interface V2
1870857

INDIVIDUAL GROUP CONTROL (IGC) 4N1 MOTOR CONTROLLER



IGC 4N1 Motor Controller
1811416

IGC 4N1 Motor Controller Shutter Mode
1870902



IGC 4N1 RTS Radio Receiver
1811492



DecoFlex Dry Contact Keypad
1811402

CONTROL ACCESSORIES

WIRED AC CONTROLS & SWITCHES

WIRED TECHNOLOGY



DECORATOR TOGGLE SWITCHES (single pole, double throw) & SWITCHPLATES



Maintained Toggle Switch
(White)
1800381



Maintained Toggle Switch
(Ivory)
1800380



Momentary Toggle Switch
(White)
1800383



Momentary Toggle Switch
(Ivory)
1800382



Standard Metal Toggle Switchplate
(White)
9011954



Standard Metal Toggle Switchplate
(Ivory)
9011953



Plastic Toggle Switchplate
(White)
9011963



Plastic Toggle Switchplate
(Ivory)
9011962

DECORATOR PADDLE SWITCHES & SWITCHPLATES



Maintained Paddle Switch
(White)
1800374



Maintained Paddle Switch
(Ivory)
1800373



Momentary Paddle Switch
(White)
1800378



Momentary Paddle Switch
(Ivory)
1800377



Maintained Double Pole,
Double Throw Paddle Switch
(White)
1800375



Maintained Double Pole,
Double Throw Paddle Switch
(Ivory)
1800376



Single Gang Paddle Switchplate
(White)
9011967



Single Gang Paddle Switchplate
(Ivory)
9011966

SPECIALTY SWITCH




5 position Momentary/Maintained Rocker Switch
Switchplate included
(White)
1800388


500 SERIES HARDWARE SYSTEMS

SOMFY 2" SYSTEM

STANDARD BRACKET COMPONENTS

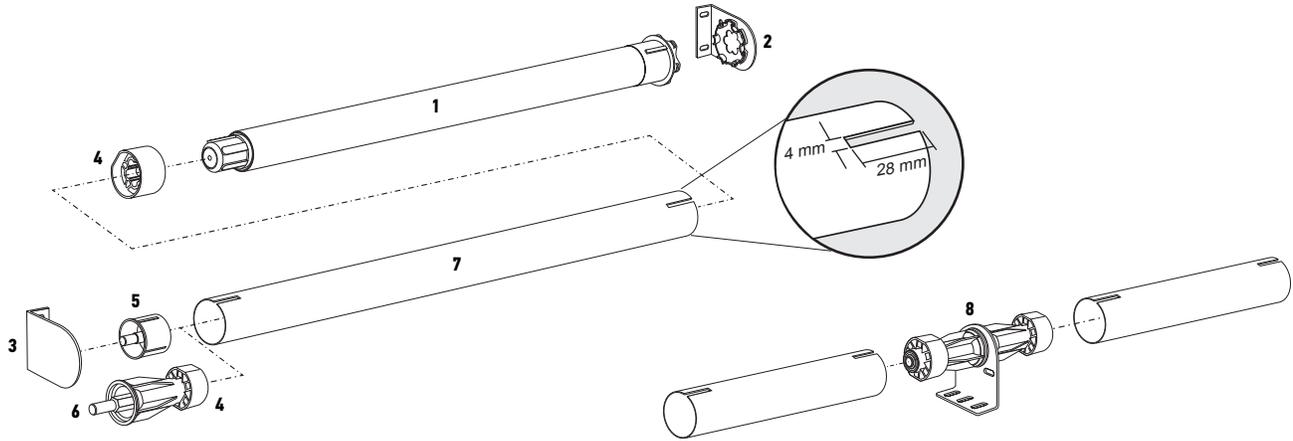

DIMENSIONS AND LIGHT GAP SPECIFICATIONS

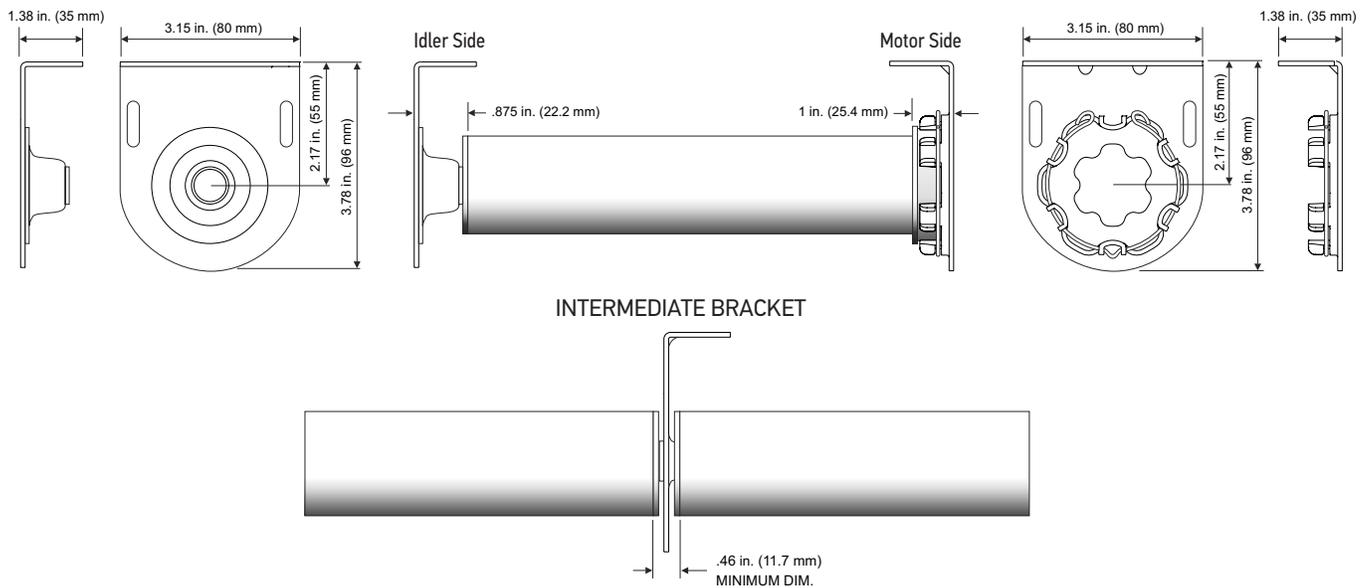


PRODUCT CHART

| IMAGE | DESCRIPTION | CATALOG NUMBER |
|-------|---|---|
| 1 | Motor - LT50 shown | Refer to individual 500 Series Spec Sheet |
| 2 | LT50 Universal Motor Bracket | 9410651 |
| 3 | LT50 Idler Bracket with 10 mm Hole Nylon Bearing | 9410635 |
| 4 | 2" Round LT50 - Hard Clip | 9206088 |
| 5 | 2" Collapsible End Cap (silent) - 10 mm Shaft (requires notch in tube) | 9013592 |
| 6 | 2" Universal End Cap - Collapsible 10 mm Shaft (requires notch in tube) | 9420800 |
| 7 | 2" Aluminum Tube | 1781148 |
| 8 | LT50 2" Universal Intermediate Bracket Kit (requires notch in tube) | 9410648 |


500 SERIES HARDWARE SYSTEMS

ACMEDA®

STANDARD BRACKET COMPONENTS

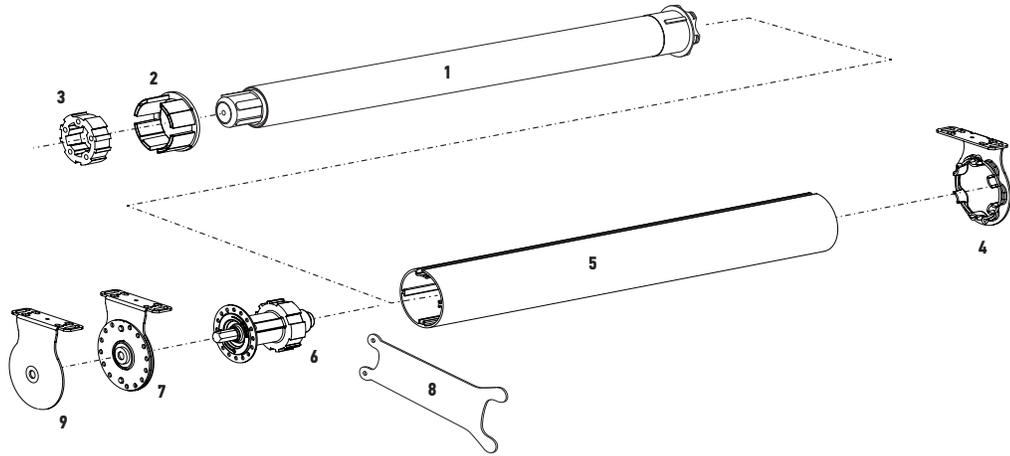

DIMENSIONS AND LIGHT GAP SPECIFICATIONS

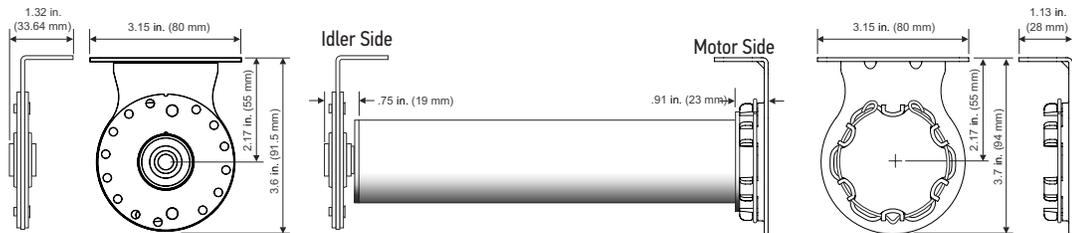

PRODUCT CHART


| IMAGE | DESCRIPTION | CATALOG NUMBER |
|-------|---|---|
| 1 | Motor (Sonesse® 50 RTS) | Refer to individual 500 Series Spec Sheet |
| 2 | ST50 Crown 56 mm Tube | 9014125 |
| 3 | ST50 Drive Wheel 56 mm Tube | 9014126 |
| 4 | ST50 Star Head Motor Bracket 55P | 9014135 |
| 5 | 56 OD Aluminum Sonesse 50 Tube (ft) - White Powder Coat | 1780744 |
| 5A | 56 OD Aluminum Sonesse 50 Tube (ft) - Mill Finish | 1780743 |
| 6 | ST50 Auto Plug End 56 mm Tube | 9014097 |
| 7 | ST50 Adjustable Idler Bracket - Ceiling Mount 55P | 9014110 |
| 7A | ST50 Adjustable Idler End Bracket - Wall Mount 55P | 9014238 |
| 8 | ST50 Bracket Leveling Adjuster Tool | 1780742 |
| 9 | Non-Adjustable Idler Bracket 55P | 9014683 |

500 SERIES HARDWARE SYSTEMS


ACMEDA®

INTERMEDIATE BRACKET COMPONENTS (STANDARD & 0-90°)


INTERMEDIATE STANDARD

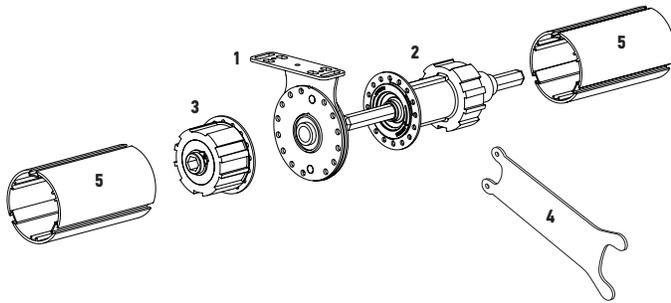

INTERMEDIATE 0°- 90°

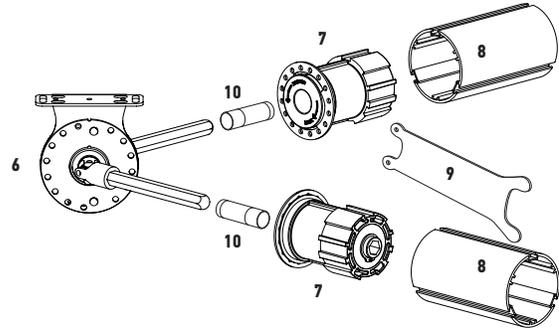

DIMENSIONS AND LIGHT GAP SPECIFICATIONS (INTERMEDIATE)

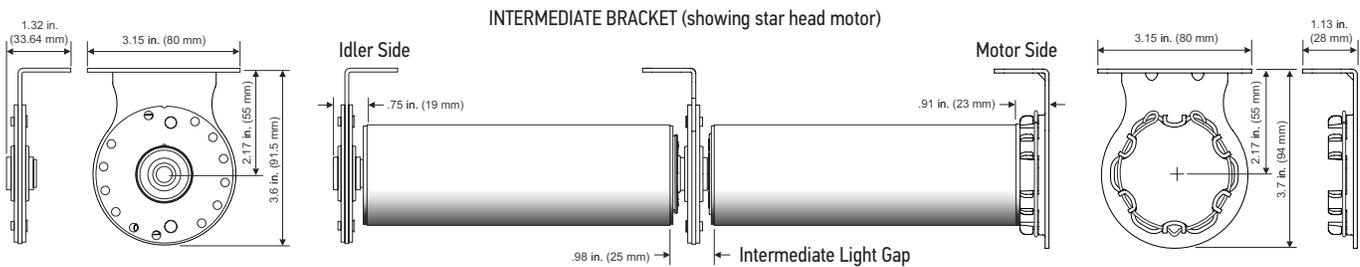

PRODUCT CHART - STANDARD

| IMAGE | DESCRIPTION | CATALOG NUMBER |
|-------|---|----------------|
| 1 | ST50 Intermediate Bracket Ceiling Mount 55P | 9014120 |
| 1 | ST50 Intermediate Bracket Wall Mount 55P | 9014240 |
| 2 | ST50 Intermediate Drive 56 mm Tube | 9014114 |
| 3 | ST50 Intermediate Receiver 56 mm Tube | 9014121 |
| 4 | ST50 Bracket Leveling Adjuster Tool | 1780742 |
| 5 | 56mm OD Aluminum Sonesse 50 Tube (ft) - White Powder Coat | 1780744 |
| 5 | 56mm OD Aluminum Sonesse 50 Tube (ft) - Mill Finish | 1780743 |


PRODUCT CHART - 0° to 90°

| IMAGE | DESCRIPTION | CATALOG NUMBER |
|-------|---|----------------|
| 6 | 50 Intermediate Bracket Ceiling Mount 55P / 90° | 9014122 |
| 6 | ST50 Intermediate Bracket Wall Mount 55P / 90° | 9014239 |
| 7 | ST50 Intermediate Receiver 56 mm Tube 90° (spacer included) | 9014123 |
| 8 | 56mm OD Aluminum Sonesse 50 Tube (ft) - White Powder Coat | 1780744 |
| 8 | 56mm OD Aluminum Sonesse 50 Tube (ft) - Mill Finish | 1780743 |
| 9 | ST50 Bracket Leveling Adjuster Tool | 1780742 |
| 10 | Spacer (included with 9014123) | NA |


500 SERIES HARDWARE SYSTEMS

ROLLEASE® SILENT PIN SYSTEM

STANDARD BRACKET COMPONENTS

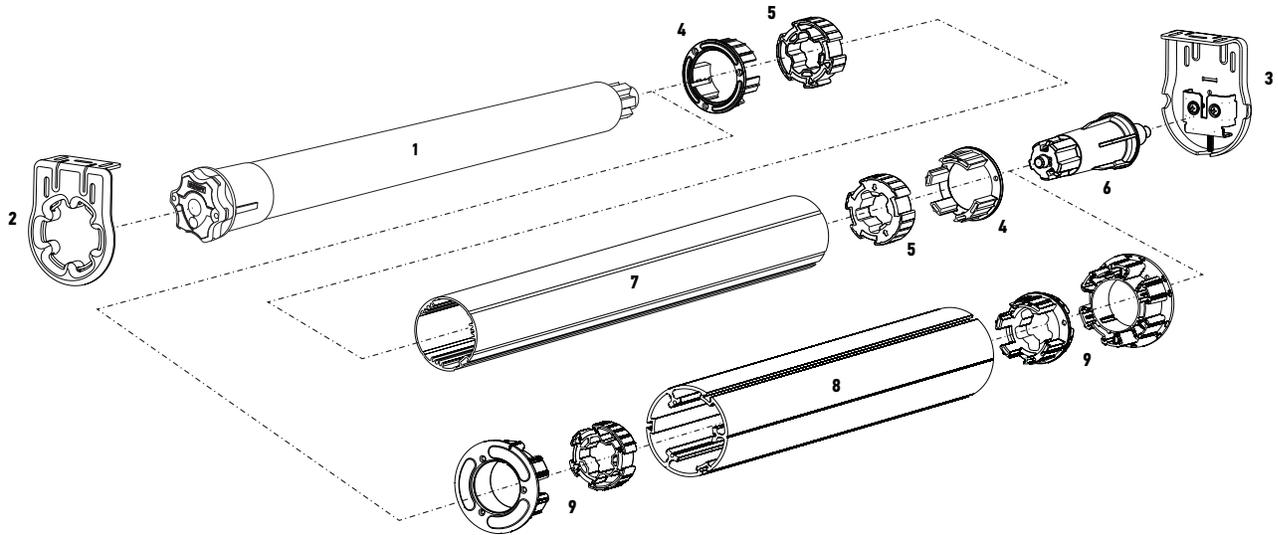

DIMENSIONS AND LIGHT GAP SPECIFICATIONS

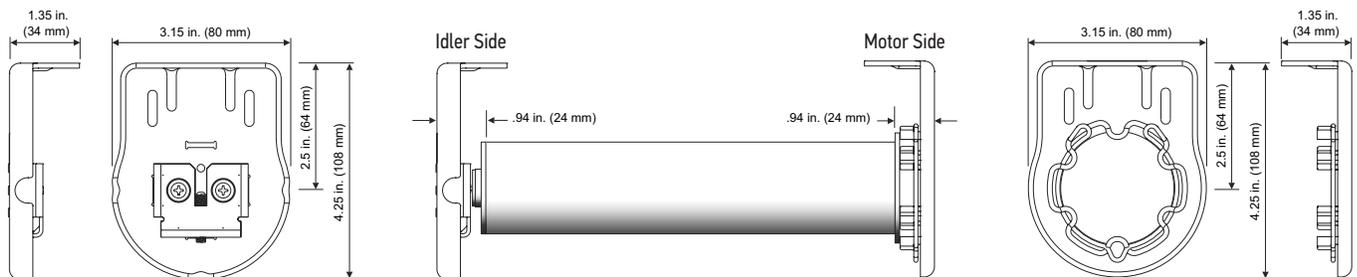


PRODUCT CHART

| IMAGE | DESCRIPTION | CATALOG NUMBER |
|-------|--|---|
| 1 | Motor - LT50 shown | Refer to individual 500 Series Spec Sheet |
| 2 | RollEase® "Silent Pin" Motor Bracket White | 9016858 |
| 3 | RollEase® "Silent Pin" Idler Bracket Wall and Ceiling Mount - White | 9016859 |
| 4 | RollEase® "Silent Pin" Crown only for RollEase 2.5" (63 mm) Tube | 9016856 |
| 4 & 5 | RollEase® "Silent Pin" Crown and Drive Adaptor for RollEase 2.5" (63 mm) Tube | 9015234 |
| 6 | RollEase® "Silent Pin" Idler End Pin | 9016857 |
| 7 | 2.5" O.D. Aluminum Tube | 1781343 |
| 8 | 3.25" O.D. Aluminum Tube | 1782096 |
| 9 | RollEase® "Silent Pin" Crown and Drive Adaptor for RollEase 3.25" (83 mm) Tube | 9016855 |


500 SERIES HARDWARE SYSTEMS

ZMC®


STANDARD ROLLER TUBE AND ACCESSORIES

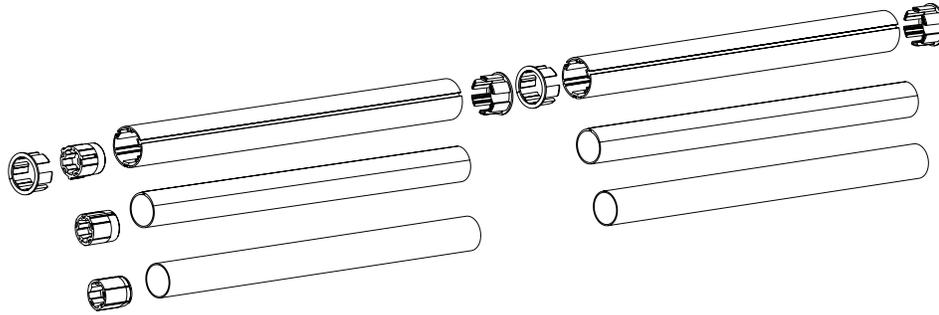


MOTOR BRACKETS AND ACCESSORIES FOR SOMFY 500 SERIES MOTORS

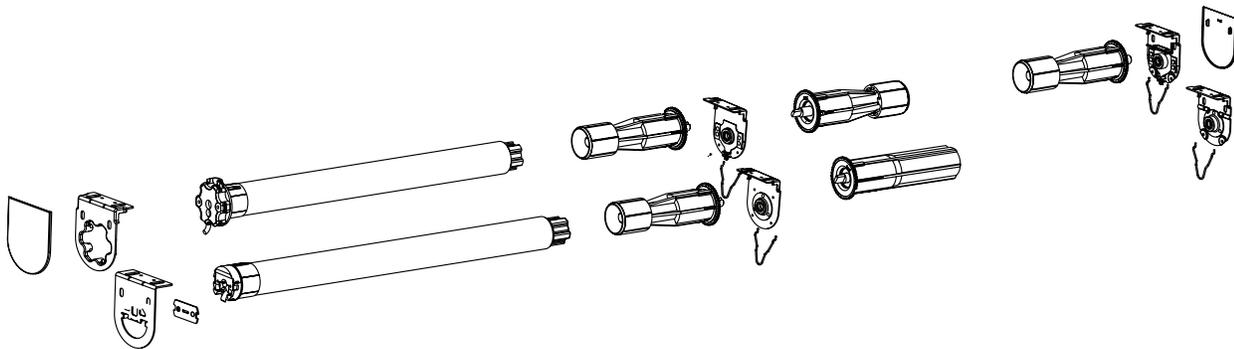

MOTOR U-JOINT INDEXABLE BRACKET FOR SOMFY 500 SERIES MOTORS

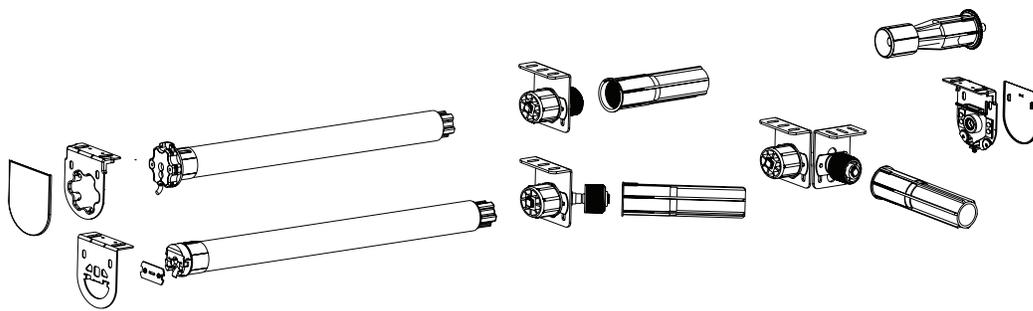


4" ADJUSTABLE U-JOINT INDEXABLE FASCIA BRACKET FOR SOMFY 500 SERIES MOTORS

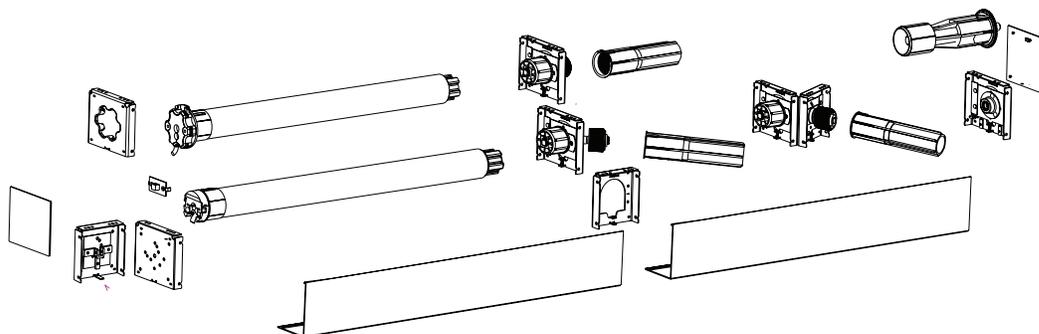


500 SERIES HARDWARE SYSTEMS

ZMC®


4" FASCIA BRACKETS FOR SOMFY 500 SERIES MOTORS

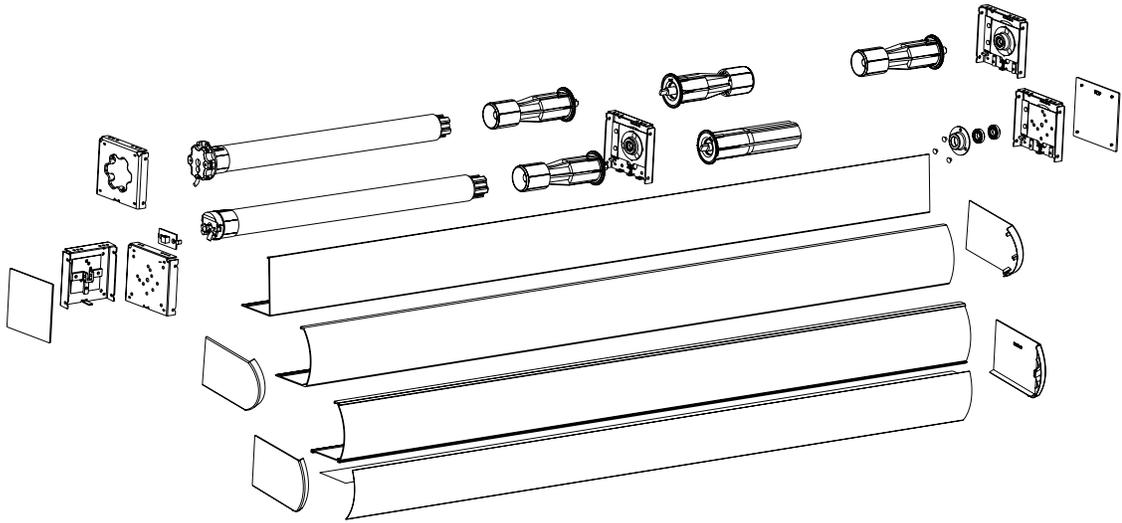


5.5" SMART HEAD BOX SYSTEM FOR SOMFY 500 SERIES MOTORS

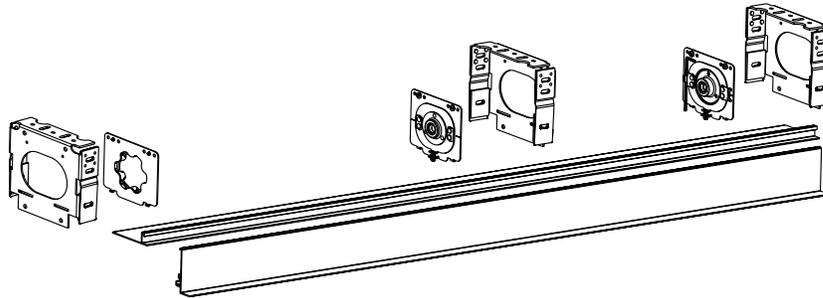

7" FASCIA SYSTEM FOR SOMFY 500 SERIES MOTORS










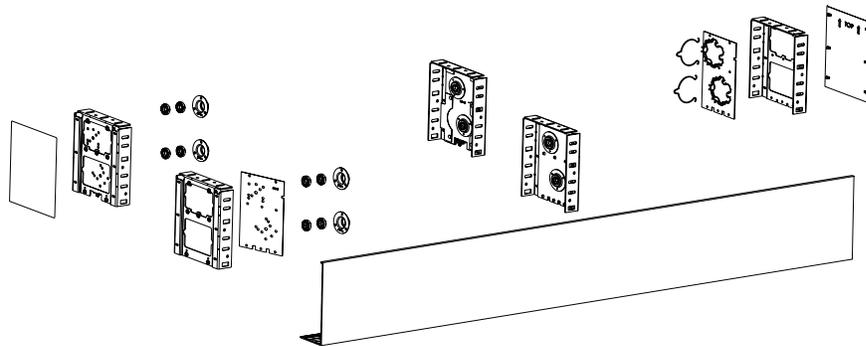


7" SMART HEAD BOX SYSTEM FOR SOMFY 500 SERIES MOTORS

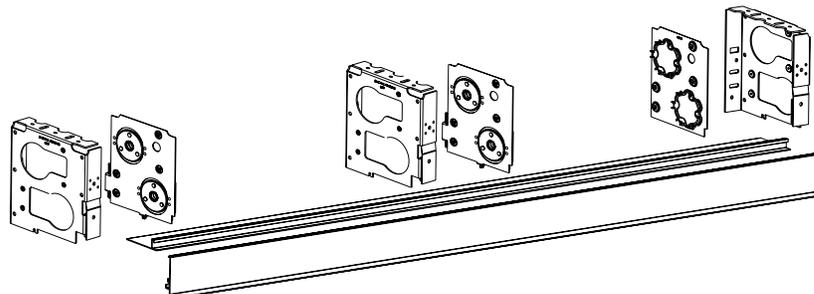

500 SERIES MECHANICAL ACCESSORIES

500 SERIES MOTOR BRACKETS

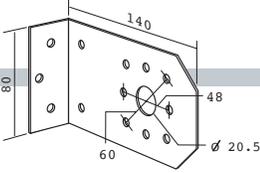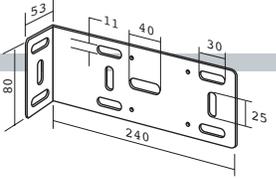
| LT50 Motor Angle Bracket | Universal LT50 Motor Bracket (LS Style) for 10 mm Square Stud | "U" Shape LS Style Motor Bracket for 10 mm Square Stud | Heavy Duty Angle Plate |
|--|--|--|---|
|  <ul style="list-style-type: none"> - Zinc plated steel - .807 in. diameter through hole - Maximum motor torque - 40 Nm - Compatible with # 1781098 idler end bearing support - Maximum system load - See note below* <p>Part # 9012250</p> |  <ul style="list-style-type: none"> - Zinc plated steel - Maximum motor torque - 25 Nm - Horizontally and vertically adjustable - Maximum system load - 126 Lbs. (57 Kg.) <p>Part # 9410665</p> |  <ul style="list-style-type: none"> - Maximum motor torque - 25 Nm - Zinc plated steel - Maximum system load - See note below* - Cotter Pin included <p>Part # 9510658</p> |  <ul style="list-style-type: none"> - For ceiling and wall installation in combination with # 9012263 - Black oxide finish - Compatible with brackets # 9012263, 9701310 and 9132065 - Maximum motor torque - 100 Nm - Maximum system load - See note below* <p>Part # 9701091</p> |
| Motor Bracket LT60 FTS | Motor Bracket With Spring Ring (100 mm x 100 mm) | LT50/60 Motor Bracket with 1/2" Conduit Connector | Motor Bracket With Spring Ring (120 mm x 120 mm) |
|  <ul style="list-style-type: none"> - Zinc plated steel, gauge 3 (0.24 in.) - For use with LT FTS 60 - Maximum motor torque - 100 Nm - Includes universal bracket with spring ring - Maximum system load - 441 Lbs. (200 kg.) - Must use locking spring ring # 9910002 to obtain full torque and load capability. - Compatible with idler bracket # 9430603 and intermediate bracket # 9420763 <p>Part # 9430601</p> |  <ul style="list-style-type: none"> - Four mounting holes provided with a through hole in the center of the bracket - Zinc plated steel - Lateral space requirement for installation: 28 mm - Maximum motor torque - 85 Nm - Maximum system load - See note below* <p>Part # 9763508</p> |  <ul style="list-style-type: none"> - Four mounting holes provided - Lateral space requirement: 28 mm - Zinc plated steel - Must be used with either spring ring # 9206033, or locking spring ring # 9910002 (not included) - Maximum motor torque - 85 Nm or 100 Nm when locking spring ring # 9910002 is used. <p>Part # 9012262</p> |  <ul style="list-style-type: none"> - Four mounting holes provided - Zinc plated steel - Lateral space requirement for installation: 28 mm - Maximum motor torque - 85 Nm - Maximum system load - See note below* <p>Part # 9763503</p> |
| Universal Bracket with Spring Ring | | Weld-on Bracket Without Spring Ring | |
|  <p>Spring ring needs to be replaced with locking spring ring #9910002 to obtain maximum torque and load capability.</p> <p>Note: Screws must engage bracket's thread on its full length with recommended tightening torque of 105 in. lbs. for Grade 8 bolts.</p> <ul style="list-style-type: none"> - 2 holes for M6 hex screw on 48 mm diameter - 2 holes on M8 hex screw on 60 mm diameter - 2 countersunk holes for M8 screw on 60 mm diameter - No threaded holes - Used for bolts to protrude through back of bracket - Lateral space requirement for installation: 27 mm - Maximum motor torque - 85 Nm or 100 Nm when used with locking spring ring # 9910002, and M8 bolts - Maximum system load - 441 Lbs. (200 kg.) when used with locking spring ring # 9910002 <p>Part # 9420631</p> <p>Same as above: Threaded to accept Inch Series threaded screws 1/4 - 20, 5/16 - 18</p> <p>Part # 9910021</p> <p>Same as above: Threaded to accept M6 and M8 bolts</p> <p>Part # 9910001</p> | |  <p>Spring ring must be ordered separately (not included)</p> <ul style="list-style-type: none"> - Steel bracket without surface treatment - For welding to mounting plates of all kinds. Lateral space requirement for installation: 23 mm + thickness of mounting plate - Must be used with spring ring # 9206033 or locking spring ring # 9910002 (not included) - Maximum motor torque - 85 Nm or 100 Nm depending on spring ring and quality of weld - Maximum system load - 441 Lbs. (200 kg.) when used with locking spring ring # 9910002 <p>Part # 9206029</p> | |

* Note: Maximum system load will vary depending on application. SOMFY recommends testing of component in actual application to determine its suitability.

500 SERIES MECHANICAL ACCESSORIES

500 SERIES MOTOR BRACKETS


LT50 Compact Bracket



- Two mounting holes with molded in M5 nuts 60 mm apart
- Maximum motor torque 35Nm when used with Locking Spring Ring
- Black nylon material

Part # 9708461

Heavy Duty Angle Plate with Universal Motor Bracket

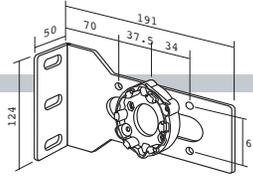


- With two M8 screws and nuts included
- Angle plate (zinc plated steel)
- Three adjustment positions possible
- Maximum motor torque - 85 Nm or 100 Nm when used with locking spring ring # 9910002
- Maximum system load - 287 Lbs. (130 Kg.) or 441 Lbs. (200 Kg.) with locking spring ring # 9910002

Part # 9420602

Heavy Duty Angle Plate - Part # 9420604

- Same as above but without the universal motor bracket

LT50 Angle Plate with Elongated Holes Allowing Adjustment



- Zinc plated steel
- Compatible with idler end bearing support # 1781098 and intermediate bearing support # 9146011
- Maximum motor torque - 50 Nm
- Maximum load - 152 Lbs. (69 Kg.)

Part # 9410639


LT50/60 Radial Motor Bracket



- Maximum motor torque 80 Nm
- Zinc plated steel
- Allows for easy removal of LT motor without removing entire bracket. It disassembles in 2 pieces with one part remaining attached to structure
- Maximum system load - See note below*

Part # 9420620


LT50 Universal Motor Bracket



- Maximum motor torque - 50 Nm
- Zinc plated steel
- Maximum system load - 254 Lbs. (115 Kg.)
- Compatible with idler bracket # 9410635, # 9410633 and intermediate bracket # 9410648

Part # 9410651


LT50 Adjustable Universal Motor Bracket



- Zinc plated steel
- Without molded nuts
- Maximum motor torque - 50 Nm
- Maximum system load - 254 Lbs. (115 Kg.)

Part # 9002550

Retrofit Brackets




- Zinc plated steel - yellow
- LO LT motor bracket with a 10 mm stud. Vertical pin hole
- Mounting screws # 9670013 not included
- Maximum motor torque - 25 Nm for new LT applications
- 35 Nm for replacing LS motor with LT motor
- Maximum system load - 154 Lbs. (70 Kg.)

Part # 9206020

Same as above, except pin hole is horizontal

Part # 9206021

Adjustable Motor Bracket with Spring Ring



- Zinc plated steel
- Horizontally and Vertically adjustable
- Lateral space requirement for installation: 27 mm
- Maximum motor torque 50 Nm
- Maximum system load - See note below*


Part # 9703948

* Note: Maximum system load will vary depending on application. SOMFY recommends testing of component in actual application to determine its suitability.

500 SERIES MECHANICAL ACCESSORIES

500 SERIES MOTOR BRACKETS


LT50 HA Motor Bracket*



- Allows flush mounting of the motor head against the mounting surface
- Zinc plated steel
- Maximum motor torque - 50 Nm

Part # 9410715

LT RH Motor Bracket




- Pin hole is vertical
- Zinc plated steel
- 10 mm square stud
- Maximum motor torque - 25 Nm
- Mounting Screws # 100405B included
- Maximum system load - 154 Lbs. (70 Kg.)

Part # 9910016

Same as above except pin hole is horizontal

Part # 9910017


LT50 Angle Bracket*



- For ceiling and wall installation
- Zinc plated steel
- Horizontally and vertically adjustable
- Maximum motor torque - 50 Nm

Part # 9410637

CTS50 Motor Mounting Bracket* (Cord Take-Up System)




- Zinc plated steel
- Attaches directly to LT50 motor head (48 mm on center)
- Adaptable for Nichibei headrail (70 x 70)
- Maximum motor torque - 10 Nm

Part # 1781110

500 SERIES IDLER BRACKETS

LT Idler End Bracket (inside diameter 10 mm)




- Zinc plated steel
- 10 mm ID Nylon ball bearing
- Compatible with motor brackets # 9410665 and # 9410651
- Maximum motor torque - 50 Nm
- Maximum system load 287 Lbs. (130 Kg.)

Part # 9410635

Same but with a 12 mm ID Nylon Ball Bearing

Part # 9410633

Idler Bracket 10 mm Ball Bearing and Holder Kit



Part # 9012657

Ball Bearing with 10 mm ID

Part # 9410803

Ball Bearing with 12 mm ID


Part # 9028665

Ball Bearing Holder

- Used with # 9410803 or # 9028665 ball bearings
- Zinc plated steel
- Maximum motor torque - 50 Nm
- Maximum system load - up to 287 Lbs. (130 Kg.)

Part # 1781030


Heavy Duty Idler Bracket*



- Used with end cap having stationary 16 mm diameter shaft
- Cotter pin holding end cap's shaft included
- Zinc plated steel
- Maximum motor torque - 100 Nm

Part # 9132065


LT50 Round Anti-Vibration Idler Bracket*



- Zinc plated steel with a 10 mm round insert surrounded by rubber
- Can be mounted on # 9410637
- Maximum motor torque - 20 Nm
- Can reduce sound levels by 2-4 dB

Part # 9701310

LT50 Idler Bracket with 14 mm ID Bearing*

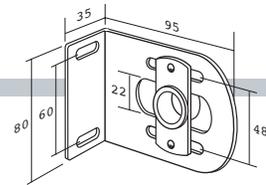

- Zinc plated steel
- Adjustable bearing location
- Maximum motor torque - 50 Nm


Part # 9002540

* Note: Maximum system load will vary depending on application. SOMFY recommends testing of component in actual application to determine its suitability.

500 SERIES MECHANICAL ACCESSORIES

500 SERIES IDLER BRACKETS

Idler End Bearing Support for 14 mm Diameter Shaft*



- Two threaded mounting holes for M5 screws
- Sintered Brass in a zinc plated steel plate
- Mounting hardware included
- Compatible with shaft # 1781011 and brackets # 9012250 and # 9146001
- Maximum motor torque 50 Nm

Part # 1781098


Same as above but hardware not included

Part # 9146007

With 16 mm Dia. Shaft (no hardware)

Part # 9146011


Idler End 12 mm Nylon Ball Bearing with Holder



- Cast aluminum
- Compatible with bracket # 9420604
- Maximum motor torque:
 - FTS range - 25 Nm
 - LT range - 100 Nm
- Maximum system load - 287 Lbs. (130 Kg.)

Part # 9430610


Idler End Cap Holder and Cotter Pin



- Zinc plated steel
- Compatible with bracket # 9420604
- Used with end cap having stationary 16 mm diameter shaft
- Maximum motor torque when properly installed with cotter pin:
 - FTS range - 55 Nm
 - LT range - 100 Nm
- Maximum system load - 441 Lbs. (200 Kg.)
- Open end of the "U" must face up
- Cotter pin 6.3mm x 80 mm (zinc plated) # 132444A

Part # 9540786


Heavy Duty Idler Bracket with Idler End Cap Holder



- Two screws and cotter pin included
- Zinc plated steel, gauge 3(0.2391 in.)
- Used with end cap having stationary 16 mm diameter shaft
- Maximum motor torque when properly installed with cotter pin:
 - FTS range - 55 Nm
 - LT range - 100 Nm
- Maximum system load - 441 Lbs. (200 Kg.)

Part # 9430603


"U" Shaped Idler Bracket



- Zinc plated steel
- Idler bearing securing screw included
- Maximum motor torque - 40 Nm
- Maximum system load - 254 Lbs. (115 Kg.)

Part # 9127808


White Dress Cover for Idler Brackets



- # 9410635, # 9410633 and motor brackets # 9410665 and # 9410651
- White composite

Part # 9002519

Idler Bearing (for Ø 12mm Shaft)

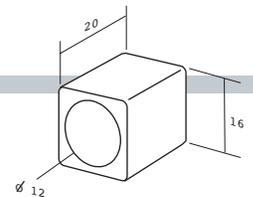











- Nylon material
- Maximum motor torque - 40 Nm
- Compatible with # 9127808
- Maximum system load - 254 Lbs. (115 Kg.)

Part # 1781015

* Note: Maximum system load will vary depending on application. SOMFY recommends testing of component in actual application to determine its suitability.

500 SERIES MECHANICAL ACCESSORIES

500 SERIES END CAPS

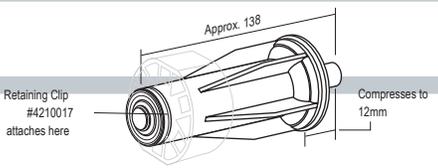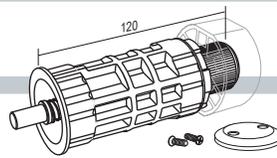
| Die Cast End Cap* | 2" Anti-Vibration End Cap | Molded Composite End Cap* | 2" Tube Idler End Cap without Shaft |
|---|--|---|---|
|  <ul style="list-style-type: none"> - For tube diameter 2" (50 mm) - Shaft Diameter 0.39" (10 mm) - Maximum motor torque - 50 Nm <p>Part # 9128101</p> <p>Same as Above but with 12 mm Shaft</p> <p>Part # 9132087</p> |  <ul style="list-style-type: none"> - For tube diameter 2" (50 x 1.5 mm, 50 x 1.6 mm) - Shaft Diameter 0.39" (10 mm) - Zinc plated steel parts with molded rubber <p>Part # 9701380</p> |  <ul style="list-style-type: none"> - For tube diameter 2.5" (63 mm) - Shaft Diameter 0.59" (15 mm) - Maximum motor torque - 40 Nm <p>Part # 9701116</p> <ul style="list-style-type: none"> - For tube diameter 2.0" (50 mm) - Shaft diameter 0.40" (10 mm) - Maximum motor torque - 50 Nm <p>Part # 9700958</p> |  <p>NOTE: Set screw must use Lock-tight to prevent screw from vibrating free.</p> <ul style="list-style-type: none"> - Cast aluminum with set screw <p>Part # 9129631</p> <p>2.5" Tube Idler End Cap without Shaft</p> <ul style="list-style-type: none"> - Cast aluminum with set screw <p>Part # 9129632</p> <p>2.75" Tube Idler End Cap without Shaft</p> <ul style="list-style-type: none"> - Cast aluminum with set screw <p>Part # 9129633</p> |
| <p>13 mm Square Drive Shaft with 12 mm Diameter Shaft</p>  <ul style="list-style-type: none"> - Zinc plated steel shaft <p>Part # 1781009</p> <p>13 mm Square Drive Shaft with 14 mm Diameter Shaft</p> <ul style="list-style-type: none"> - Zinc plated steel shaft <p>Part # 1781011</p> | <p>Heavy Duty End Cap with 16 mm Diameter Shaft</p>  <ul style="list-style-type: none"> - Adaptable to any tube profile using matching LT drives - To be used with Idler bracket accepting stationary shaft # 9430643 - Extruded aluminum shaft w/heavy duty ball bearings - Maximum motor torque: <ul style="list-style-type: none"> - FTS range - 55 Nm - LT range - 100 Nm - Maximum system load - 441 Lbs. (200 Kg.) <p>Part # 9420674</p> | <p>Roller Tube End Cap with 12 mm Hole*</p>  <ul style="list-style-type: none"> - For tube 50 x 1.5 mm - Black composite with ball bearing <p>Part # 9701288</p> <p>Roller Tube End Cap with 10 mm Hole*</p> <p>Part # 60903170</p> | <p>Idler End Cap for CTS 50 Tube</p>  <ul style="list-style-type: none"> - Maximum system load - See note below - Used with # 1781112 <p>Part # 1781113</p> |
| <p>Universal End Cap with 10 mm Collapsible Shaft</p>  <p>Retaining Clip #4210017 attaches here</p> <p>Approx. 138</p> <p>Compresses to 12mm</p> <ul style="list-style-type: none"> - Directly compatible with 2" tube and requires notched 2" tube and 2" drive held in place with retaining clip included - End cap is adaptable to all tubes w/LT50/60 crown and drive sets - Black nylon - Maximum motor torque: <ul style="list-style-type: none"> - With awning - 50 Nm - With FTS - 25 Nm - Maximum system load - 88 Lbs. (40 Kg.) <p>Part # 9420800</p> <p>Same as above but with 9.15 mm shaft & shorter pin</p> <p>Part # 9420814*</p> <p>Same as above but with 12 mm shaft - Part # 9420801</p> <p>Same as above but with 14 mm Shaft - Part # 9420802</p> | <p>Soness 50 Pin End Cap with 10 mm Collapsible Shaft</p>  <p>90</p> <ul style="list-style-type: none"> - Ultra Quiet rubber over-molded end cap compatible with 2" tube (requires notched 2" tube) - Black nylon housing with yellow rubber over-mold - 2 roller bearings for smooth, quiet operation - Maximum motor torque: 50 Nm - Maximum system load - 88 Lbs. (40 Kg.) <p>Part # 9016628</p> <p>Same as above but with 12 mm Shaft</p> <p>Part # 9018228</p> | <p>Soness ULTRA 50 Universal End Cap with 10 mm Collapsible Shaft</p>  <p>120</p> <ul style="list-style-type: none"> - Universal Ultra Quiet rubber over-molded end cap is adaptable to all tubes by mounting LT50/60 crown and drive sets (drive stop & screws included) - Black nylon housing with rubber over-mold - 2 roller bearings for smooth, quiet operation - Maximum motor torque: 50 Nm - Maximum system load - 88 Lbs. (40 Kg.) <p>Part # 9019716</p> <p>Same as above but with 12 mm Shaft</p> <p>Part # 9019717</p> | |

* Note: Maximum system load will vary depending on application. SOMFY recommends testing of component in actual application to determine its suitability.

500 SERIES MECHANICAL ACCESSORIES

500 SERIES INTERMEDIATE BRACKETS


Heavy Duty LT Intermediate Support Bracket*

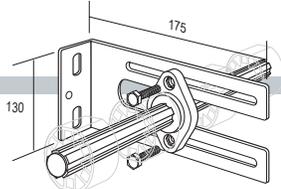

- Will adapt to any tube profile using tube matching LT drives
- The 4 drives are not included and must be specified separately
- Maximum motor torque:
FTS range - 55 Nm, LT range - 100 Nm
- Heavy gauge 3 (0.24 in.), zinc plated steel
- Extruded aluminum shaft with heavy duty roller bearing

Part # 9420673


LT50 Intermediate Bracket with 16 mm ID Bearing



- Zinc plated steel
- 16 mm bearing plate # 9146011 also sold separately
- Square shaft # 1781018 also sold separately
- Maximum motor torque:
FTS range - 25 Nm, LT50 range - 50 Nm
- Maximum system load - 152 Lbs. (69 Kg.)

Part # 9002541

LT50 Adjustable Intermediate Support Bracket for a 2" Tube




- Zinc plated steel bracket
- Cast aluminum drives, with set screw - set screw must use lock tight to prevent screw from vibrating free
- Maximum motor torque:
FTS range - 25 Nm, LT50 range - 50 Nm
- Maximum system load - 152 Lbs. (69 Kg.)

Part # 9012203

**LT50 Adjustable Intermediate Support
Bracket for a 2.5" Tube
Part # 9012204**

LT Intermediate Bracket for 2" Tube Only

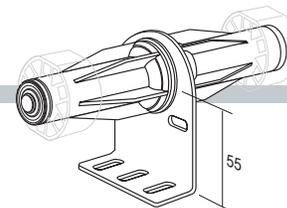

- Zinc plated steel bracket
- Composite end caps
- Maximum motor torque - 15 Nm
- Requires notched 2" tube for transfer of torque
- Recommended tube used included with 2" LT drives
- Maximum system load - 152 Lbs. (69 Kg.)
- Compatible with LT brackets # 9410665, # 9410651, # 9410635, and # 9410633

Part # 9410648









* Note: Maximum system load will vary depending on application. SOMFY recommends testing of component in actual application to determine its suitability.

RIGID LINKS - Recommended to be used in conjunction with Oximo motor.

| | Rigid Link - 1 Link | Rigid Link - 1 Link | Rigid Link - 2 Links | Rigid Link - 2 Links |
|--|--|---|--|---|
| <p>Number and location of Rigid Links:</p> <ul style="list-style-type: none"> - Minimum of 2 rigid links per rolling shutter. - Do not exceed 33 lbs (15 kg) hanging load per rigid link. | <ul style="list-style-type: none"> - Maximum torque stopping load: 14 Nm - Slat Size: .32 in. (9 mm) | <ul style="list-style-type: none"> - Maximum torque stopping load: 14 Nm - Slat Size: .55 in. (14 mm) | <ul style="list-style-type: none"> - Maximum torque stopping load: 10 Nm - Slat Size: .32 in. (9 mm) | <ul style="list-style-type: none"> - Maximum torque stopping load: 10 Nm - Slat Size: .55 in. (14 mm) |
| | Part # 9019327 | Part # 9019328 | Part # 9019329 | Part # 9019330 |

500 SERIES MECHANICAL ACCESSORIES











500 SERIES MISCELLANEOUS
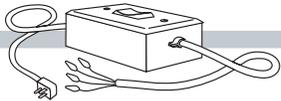
| | | | | |
|---|--|---|---|---|
| LT50 Motor Mounting Screws-Flat Head, Self Tapping Tri lobe 5 mm Dia. (13 mm Deep) | Spring Ring with Loop | Spring Ring | Locking Spring Ring | |
|  <p>Part # 9670013</p> <p>LT50 RH Motor Mounting Screws- Flat Head, Self Tapping Tri lobe 4 mm Dia. (9 mm Deep)</p> <p>Part # 100405B</p> |  <ul style="list-style-type: none"> - Used with brackets and motors rated up to 80 Nm maximum - Allows for easy hand removal from the bracket - Spring type stainless steel <p>Part # 9685025</p> |  <ul style="list-style-type: none"> - Used with brackets and motors rated up to 80 Nm maximum - Stainless steel spring type <p>Part # 9206033</p> |  <ul style="list-style-type: none"> - Must be used with all brackets in combination with the 6100R2 motor or installations where flexing of the tube is abnormally high - Used with brackets and motors rated up to 100 Nm - Spring type stainless steel - Locking screw must be secured to prevent motor from disengaging from the universal bracket <p>Part # 9910002</p> | |
| Pull-off Tool for Spring Ring | Cotter Pin | Fabric Fastening Clip | LT50 Stop Wheel | Tester Cable - 4 Wire |
|  <ul style="list-style-type: none"> - Black finished steel <p>Part # 9206015</p> |  <ul style="list-style-type: none"> - 3.5 mm x 45 mm <p>Part # 43500020</p> |  <ul style="list-style-type: none"> - for 2" (50 mm) O.D. Tube - Made out of spring steel <p>Part # 9138028</p> <p>Fabric Fastener</p> <ul style="list-style-type: none"> - for 2.5" (63 mm) O.D. Tube <p>Part # 9012201</p> |  <ul style="list-style-type: none"> - Screws into the motor output shaft to prevent drive from coming off shaft - Black composite stop <p>Part # 9910004</p> <p>LT60 Stop Wheel</p> <ul style="list-style-type: none"> - Same as above but with a screw adaptable to the LT60 operator <p>Part # 9012194</p> |  <ul style="list-style-type: none"> - Allows easy setting of the LT motor limit switches before connecting the motor to the controlling device <p>Part # 9012116</p> |
| 50 x 1.5 mm Tube Cord Take-up Reel | 2" Tube Take-up Reel | Anti-Blocking System (ABS) | | |
|  <ul style="list-style-type: none"> - Material - Cast aluminum alloy - Shipped unassembled 4in pieces - Adjustable tape width <p>Part # 9146035</p> <p>63 x 1.5 mm Tube Cord Take-up Reel</p> <p>Part # 9146071</p> |  <ul style="list-style-type: none"> - Outside dia. 89 mm - Material ABS - Maximum tape width - 9 mm <p>Part # 1781151</p> |  <p>ABS Wheel - Left Rotation - Maximum motor torque - 30 Nm ABS Wheel - Right Rotation - Maximum motor torque - 30 Nm The input of the ABS wheel fits the LT50 motor shaft. The output shaft will accept any of the LT50 drive wheels. Drive retaining washer is included. In the up direction, 30 Nm can be lifted. If an obstacle is detected in the down direction then the motor will spin freely and not damage the product. A momentary switch or Somfy controls having 3 min. time out are required</p> <p>Left Rotation Part # 9705415 Right Rotation Part # 9705414</p> <p>Same as above but with greater torque threshold which is required to activate the ABS</p> <ul style="list-style-type: none"> - CMO ABS left rotation - maximum motor torque - 30 Nm - CMO ABS right rotation - maximum motor torque - 30 Nm <p>Left Rotation Part # 9706003 Right Rotation Part # 9706004</p> | | |

* Note: Maximum system load will vary depending on application. SOMFY recommends testing of component in actual application to determine its suitability.

500 SERIES MECHANICAL ACCESSORIES














CMO MECHANICAL ACCESSORIES
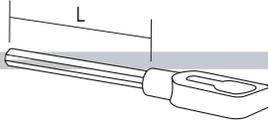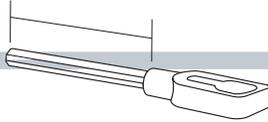
| | | | |
|--|---|---|--|
| <p>CMO Motor Bracket</p>  <ul style="list-style-type: none"> - Converts a CMO motor head to be compatible with standard LT brackets - Allows the motor to be rotated in 60° increments - Delivered with two motor mounting screws - Black composite - Maximum motor torque - 80 Nm - Maximum system load- See note below* <p>Part # 9910051</p> | <p>CMO Awning Eye with 6.5" (165 mm) Long 7 mm Hex Shaft</p>  <p>Part # 9685136</p> <p>CMO Awning Eye with 4" (100 mm) Long 7 mm Hex Shaft</p> <p>Part # 9685148</p> | <p>Sunea Awning Eye with 2.36" (60 mm) Long 7 mm Hex Shaft</p>  <p>Part # 9016332</p> | <p>LT CMO Awning Eye Compatible with Geiger Crank Handles</p>  <ul style="list-style-type: none"> - Length of the shaft is (100 mm) 4" - Stainless steel pin for eyepiece mounting to 7 mm Hex shaft - Stainless steel stop washer & socket head screw (also sold separately) - Zinc plated steel shaft <p>Part # 9707287</p> |
| <p>CMO Motor Limit Setting Tool</p>  <ul style="list-style-type: none"> - Allows setting the travel limits of the motor when the limit switch buttons are hard to access - Zinc plated steel <p>Part # 9910019</p> | <p>Sunea RTS CMO Universal Bracket</p>  <p>DIA. 95</p> <ul style="list-style-type: none"> - U.S. thread 1/4 - 20, 5/16 - 18 threads - Delivered without motor mounting screws - Zamak aluminum alloy material - Maximum motor torque - 50 Nm - Maximum system load - See note below* <p>Part # 9015802</p> | <p>CMO Round Awning Motor Bracket</p>  <p>DIA. 100</p> <ul style="list-style-type: none"> - U.S. thread 1/4 - 20, 5/16 - 18 threads - Delivered without motor mounting screws - Black finished aluminum alloy - Maximum motor torque - 100 Nm (must be used with 5/16 - 18 bolts at maximum torque) - Maximum system load - See note below* <p>Part # 9420648</p> | <p>CMO ME Square Awning Motor Bracket</p>  <p>77</p> <ul style="list-style-type: none"> - U.S. thread 1/4 - 20, 5/16 - 18 threads - Delivered with two motor mounting screws (3/16" Socket Head) - Black finished aluminum alloy - Maximum motor torque - 100 Nm (must be used with 5/16 - 18 bolts at max. torque) - Maximum system load - See note below* <p>Part # 9910041</p> |
| <p>Standard LT and LT CMO Motor Mounting Plate</p>  <p>156 105</p> <ul style="list-style-type: none"> - Allows for different orientation of the LT CMO motor head in 15 increments - Zinc plated steel - Maximum motor torque - 100 Nm - Maximum system load - See note below* <p>Part # 9012293</p> | | <p>LT50 Differential Torque Tube Connectors</p>  <p>16</p> <ul style="list-style-type: none"> - For square link bars (16 x 1 mm) - Zinc plated steel <p>Part # 9012778</p> <ul style="list-style-type: none"> - For round link bars (Dia. 16 x 1 mm) <p>Part # 9910045</p> | |

* Note: Maximum system load will vary depending on application. SOMFY recommends testing of component in actual application to determine its suitability.

500 SERIES MECHANICAL ACCESSORIES














CROWNS AND DRIVES

| TUBE PROFILE | CROWN | DRIVE | SET |
|--|--|--|--|
|  <p>ø 2 in. / 50 mm</p> | <p>No adaptor crown is required but 2 in. tube must be notched according to the dimensions shown below</p>  |  <p>2.0" Round LT50 Drive (50 mm x 1.5 mm) - Soft clip Part # 9206089</p> <p>2.0" Round LT50 Drive (50 mm x 1.5 mm) - Hard clip Part # 9206088</p> | |
|  <p>ø 2 in. / 50 mm</p> | <p>No adaptor crown is required but 2 in. tube must be notched according to the dimensions shown below</p>  |  <p>Sonesse 50 Drive Wheel (50 mm x 1.5 mm) - Soft clip Part # 9018455</p> <p>Sonesse 50 Drive Wheel (50 mm x 1.5 mm) - Hard clip Part # 9016630</p> | |
|  <p>ø 60 mm Octagonal IMBAC</p> |  <p>60 mm Octagonal LT50 Crown Part # 9707025</p> |  <p>60 mm Octagonal LT Drive Part # 9751001</p> |  <p>60 mm Octagonal LT50 Set Part # 9012233</p> |
|  <p>ø 2.5 in. / 63 mm</p> |  <p>2.5" Round LT50 Crown Part # 9707026</p> |  <p>2.5" Round LT Drive (63 mm x 1.5 mm) - Soft clip Part # 9206041</p> <p>2.5" Round LT Drive (63 mm x 1.5 mm) - Hard clip Part # 9206019</p> |  <p>2.5" Round LT50 Set "Hard Clip" Part # 9012231</p> |
|  <p>ø 65 mm MADOPRON Sun Master</p> |  <p>SM 65 LT50 Crown - 3 Grooves Part # 9707030</p> |  <p>SM 65 LT Drive Part # 9751002</p> | |
|  <p>ø 65 mm IMBAC</p> |  <p>165 LT50 Crown Part # 9707024</p> |  <p>165 LT50 Drive Part # 9751004</p> |  <p>165 LT50 Set Part # 9012240</p> |

* Note: Maximum system load will vary depending on application. SOMFY recommends testing of component in actual application to determine its suitability.

500 SERIES MECHANICAL ACCESSORIES

















CROWNS AND DRIVES

| TUBE PROFILE | CROWN | DRIVE | SET |
|--|---|---|---|
|  <p>ø 2.75 in. / 70 mm</p> |  <p>2.75" Round LT50 Crown Part # 9707031</p>  <p>2.75" Round LT60 Crown Part # 9420342</p> |  <p>2.75" Round LT Drive (70 mm x 1.5 mm) - Soft clip Part # 9206026</p>  <p>2.75" Round LT Drive (70 mm x 1.5 mm) - Hard clip Part # 9206028</p> |  <p>2.75" Round LT50 Set Part # 9012232</p>  <p>2.75" Round LT60 Set Part # 9012246</p> |
|  <p>ø 70 mm Octagonal IMBAC</p> |  <p>70 mm Octagonal LT60 Crown Part # 9705340</p> |  <p>70 mm Octagonal LT Drive Part # 9761002</p> |  <p>70 mm Octagonal LT60 Set Part # 9012247</p>  |
|  <p>ø 70 mm Octagonal IMBAC</p> |  <p>70 mm Octagonal LT60 Crown Part # 9705340</p> |  <p>70 mm Octagonal Aluminum LT50/60 Drive Part # 9011878</p> |  <p>70 mm Octagonal Aluminum LT50/60 Drive Wheel Kit (crown not included) Part # 9012227</p>  |
|  <p>ø 70 mm Octagonal IMBAC</p> |  <p>70 mm Octagonal LT50 Crown (includes 2.5" LT50 Step-up Adaptor #9707026) Part # 9012328</p> |  <p>70 mm Octagonal LT Drive Part # 9761002</p> |  <p>70 mm Octagonal LT50 Set Part # 9012234</p>  |
|  <p>ø 70 mm DOHNER</p> |  <p>DS 70 LT50 Crown (3 mm offset) Part # 9707034</p> |  <p>DS 70 LT Drive (0.8 - 1 mm wall thickness) (3 mm offset) Part # 9751005</p> |  <p>DS 70 LT50 Set (3 mm offset) Part # 9012237</p>  |
|  <p>ø 71 mm AMA</p> |  <p>AMA/P71 LT50 Crown Part # 9997118</p> |  <p>AMA/P71 LT50 Drive Part # 9751015</p> | |

* Note: Maximum system load will vary depending on application. SOMFY recommends testing of component in actual application to determine its suitability.

500 SERIES MECHANICAL ACCESSORIES











CROWNS AND DRIVES

| TUBE PROFILE | CROWN | DRIVE | SET |
|--|--|--|---|
|  <p>ø 72 mm PERMA</p> |  <p>P72 LT60 Crown (4 mm offset) Part # 9277167 P72 LT50 Set (4 mm offset) Part # 9012329</p> |  <p>P72 LT Drive (4 mm offset) Part # 9761011</p> |  <p>P72 LT50 Crown Set (4 mm offset) Part # 9012235</p> |
|  <p>ø 74 mm DOHNER</p> |  <p>DS 74 LT50 Crown Part # 9707037</p> |  <p>DS 74 LT50 Drive Part # 9751009</p> |  <p>DS 74 LT50 Set Part # 9012238</p> |
|  <p>ø 78 mm IMBAC</p> |  <p>DS 78 LT50 Crown Part # 9707027 DS 78 LT60 Crown Part # 9705341</p> |  <p>DS 78 LT50/60 Drive Part # 9761001</p> |  <p>DS 78 LT50 Set Part # 9012239</p> |
|  <p>ø 78 mm MITSAVILA</p> |  <p>DS 78/R LT50 Crown (4.4 mm offset) Part # 9707640* + Part # 9707026* * Both parts required for LT50 compatibility DS 78/R LT60 Crown (4.4 mm offset) Part # 9707640</p> |  <p>DS 78/R LT Drive (4.4 mm offset) Part # 9761005</p> | |
|  <p>ø 78 mm IMBAC</p> |  <p>DS 78/D LT50 Crown (2.5 mm offset) * Both parts required for LT50 compatibility Part # 9707639* + Part # 9707026* DS 78/D LT60 Crown (2.5 mm offset) Part # 9707639</p> |  <p>DS 78/D LT Drive (2.5 mm offset) Part # 9761004</p> | |
|  <p>ø 78 mm MHZ</p> |  <p>LT60 Crown (78 mm) Part # 9762012</p> |  <p>LT60 Drive (78 mm) Part # 9761012</p> | |

* Note: Maximum system load will vary depending on application. SOMFY recommends testing of component in actual application to determine its suitability.

500 SERIES MECHANICAL ACCESSORIES

CROWNS AND DRIVES

| TUBE PROFILE | CROWN | DRIVE | SET |
|--|---|---|---|
|  <p>ø 85 mm DOHNER</p> |  <p>DS 85 LT50 Crown Part # 9707035 DS 85 LT60 Crown Part # 9705776</p> |  <p>DS 85 LT Drive Part # 9761003</p> | |
|  <p>ø 85 mm IMBAC</p> |  <p>185 LT60 Crown Part # 9690085</p> |  <p>185 LT Drive Part # 9420300</p> |  <p>185 LT60 Set Part # 9012222</p> |
|  <p>ø 3.5" / 89 mm</p> |  <p>3.5" Round LT50 Crown (81 mm x 1 mm) Part # 9012656 3.5" Round LT60 Crown (89 mm x 2 mm) Part # 9520312</p> |  <p>3.5" Round LT Drive (89 mm x 2 mm) Part # 9420303</p> |  <p>3.5" Round LT50 Set Part # 9012236 3.5" Round LT60 Set Part # 9012248</p> |
|  <p>ø 4" / 102 mm</p> |  <p>4.0" Round LT60 Crown Part # 9420370</p> |  <p>4.0" Round LT Drive (102 mm x 2 mm) Part # 9420304 4.0" Round LT Drive (101.6 mm x 3.6 mm) Part # 9420309</p> |  <p>4.0" Round LT60 Set Part # 9012221</p> |

* Note: Maximum system load will vary depending on application. SOMFY recommends testing of component in actual application to determine its suitability.

500 SERIES MECHANICAL ACCESSORIES

500 SERIES STANDARD AND CMO PRODUCT KITS

| U.S. 3/4" SS Hardware Kit | U.S. 1" SS Hardware Kit | U.S. 1.25" SS Hardware Kit |
|--|---|---|
| <p>1/4 - 20 x 3/4 hex head SS 18-8 bolt 1/4 flat washer SS 18-8 1/4 split lock washer 18-8</p> <p>Qty. in package - 2 each</p> <p>Part # 9012297</p> | <p>1/4 - 20 x 1 hex head SS 18-8 bolt 1/4 flat washer SS 18-8 1/4 split lock washer 18-8</p> <p>Qty. in package - 2 each</p> <p>Part # 9012298</p> | <p>1/4 - 20 x 1.25 hex head SS 18-8 bolt 1/4 flat washer SS 18-8 1/4 split lock washer 18-8</p> <p>Qty. in package - 2 each</p> <p>Part # 9012299</p> |
| Metric 20 mm SS Hardware Kit | Metric 25 mm SS Hardware Kit | Metric 30 mm SS Hardware Kit |
| <p>M6 x 20 mm hex head cap screw SS Lock washer split M6 SS A2 M6 flat washer SS A2</p> <p>Qty. in package - 2 each</p> <p>Part # 9012300</p> | <p>M6 x 25 mm hex head cap screw SS Lock washer split M6 SS A2 M6 flat washer SS A2</p> <p>Qty. in package - 2 each</p> <p>Part # 9012301</p> | <p>M6 x 30 mm hex head cap screw SS Lock washer split M6 SS A2 M6 flat washer SS A2</p> <p>Qty. in package - 2 each</p> <p>Part # 9012302</p> |
| CMO Round Awning Override Kit | | CMO ME Square Awning Override Kit |
| <p>1/4 - 20 x 1.25 hex head SS 18-8 bolt 1/4 - 20 x 7/8 socket head cap screw Nut hex 1/4 - 20 18-8 SS 1/4 flat washer SS 18-8 1/4 split lock washer 18-8 CMO awning bracket with US thread CMO awning override short shaft Plastic bag 5 x 6 x .04</p> <p>Qty. in package - 2 each</p> <p>Part # 9012348</p> | | <p>1/4 - 20 x 3/4 hex head SS 18-8 bolt 1/4 - 20 x 1.25 hex head SS 18-8 bolt Nut hex 1/4 - 20 18-8 SS 1/4 flat washer SS 18-8 1/4 split lock washer 18-8 CMO awning bracket with ME US thread CMO awning override short shaft Plastic bag 5 x 6 x .04</p> <p>Qty. in package - 2 each</p> <p>Part # 9012349</p> |
| CMO Awning Kit without Awning Eye | CMO ME Awning Kit without Awning Eye | |
| <p>1/4 - 20 x 1.25 hex head SS 18-8 bolt 1/4 - 20 x 7/8 socket head cap screw Nut hex 1/4 - 20 18-8 SS 1/4 flat washer SS 18-8 1/4 split lock washer 18-8 CMO awning bracket with US thread Plastic bag 5 x 6 x .04</p> <p>Qty. in package - 2 each</p> <p>Part # 9012362</p> | <p>1/4 - 20 x 3/4 hex head SS 18-8 bolt 1/4 - 20 x 1.25 hex head SS 18-8 bolt Nut hex 1/4 - 20 18-8 SS 1/4 flat washer SS 18-8 1/4 split lock washer 18-8 CMO ME awning bracket with US thread Plastic bag 5 x 6 x .04</p> <p>Qty. in package - 2 each</p> <p>Part # 9012363</p> | |

* Note: Maximum system load will vary depending on application. SOMFY recommends testing of component in actual application to determine its suitability.

DECOFLEX KEYPAD BUTTON ENGRAVING FORM

<https://www.somfypro.com/decoflex-custom-button>

<https://www.somfypro.ca/decoflex-custom-button>

Customer Name: _____ Customer #: _____

| | | |
|-----------------|---|-------------------------------|
| SHIPPING | Shipping Information | Project Information |
| | Ship to: Default Shipping Address <input type="checkbox"/> Drop Ship <input type="checkbox"/> | Project Name: _____ |
| | Name: _____ | Installer Name/Company: _____ |
| | Address: _____ | P/O #: _____ Order #: _____ |
| | City: _____ State: _____ Zip: _____ | Area: _____ |
| | Phone: _____ | Room: _____ |

| | | |
|--------------|---|--|
| STYLE | Button Color | Switch Type |
| | WHITE <input type="checkbox"/> #9018259 | RTS <input type="checkbox"/> Somfy Digital Network (SDN) RS485 <input type="checkbox"/> Dry Contact <input type="checkbox"/> |
| | IVORY <input type="checkbox"/> #9018260 | <i>Including the SDN Group Keypad Available in White only</i> |
| | BLACK <input type="checkbox"/> #9018261 | <i>Available in White only</i> |

| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------------------------|---|---|--|--|--|--|--|--|--|--|--|---|--|--|--|--|--|--|--|--|--|---|--|--|--|--|--|--|--|--|--|---|--|--|--|--|--|--|--|--|--|---|--|--|--|--|--|--|--|--|--|----|--|--|--|--|--|--|--|--|--|---|--|--|--|--|--|--|--|--|--|---|--|--|--|--|--|--|--|--|--|----------------------------|---|
| ENGRAVING OPTIONS | <p>Buttons (A-F) 9 Characters Maximum (including spaces) QTY.</p> <table border="1"> <tr><td>A</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>B</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>C</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>D</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>E</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>F*</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>G</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>H</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> </table> | A | | | | | | | | | | B | | | | | | | | | | C | | | | | | | | | | D | | | | | | | | | | E | | | | | | | | | | F* | | | | | | | | | | G | | | | | | | | | | H | | | | | | | | | | <p>DecoFlex RTS</p> | <p>DecoFlex SDN (Standalone or Group)</p> <p>(A-H) Programmable buttons for individual or groups of SDN RS485 motors</p> <p>Note: pre-labelled with STOP, UP and DOWN arrows</p> |
| | A | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | B | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | C | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | D | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | E | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | F* | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | G | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | H | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | NOTE: | <p>* (F): Command Button by default is labeled STOP on the DecoFlex Range of keypads. G and H buttons by default are labeled as follows: (G = down ▼ icon) WHITE - #9018263 IVORY - #9018264 BLACK - #9018265 (H = up ▲ icon): WHITE - #9018267 IVORY - #9018268 BLACK - #9018269</p> <p>If you prefer they can be substituted with an associated command NAME (UP, DOWN, LOWER, etc.) up to 5 characters.</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

Engraving Options - Default option will be used if nothing is selected.
Character Types: (choose one)

ALL LETTERS CAPITALIZED (Default) First Letters Capitalized As written in above section

Payment terms of your account will apply.
All engraved switches are custom made and are non-cancellable.
Please send form to: Fax # 609-495-8117 or e-mail to: Ordering_us@somfy.com

| | | | |
|---|---|---|---|
| <p>SOMFY SYSTEMS INC 121 Herrod Blvd. Dayton, NJ 08810 Phone: (800) 22-SOMFY NJ: (609) 395-1300 Fax: (609) 495-8118 somfypro.com</p> | <p>Florida 1200 SW 35th Ave. Boynton Beach, FL 33426 Phone: (877) 227-6639 Fax: (561) 995-7502</p> | <p>California 15301 Barranca Parkway Irvine, CA 92618-2201 Phone: (877) 727-6639 Fax: (949) 727-3775</p> | <p>SOMFY ULC SOMFY Canada Division 6411 Edwards Blvd Mississauga, ON L5T 2P7 CN: (905) 564-6446 Fax: (905) 238-1491 somfypro.ca</p> |
|---|---|---|---|



SMOOVE® WALL SWITCH RANGE

Smoove Plate Engraving Order Form

Available for Pure frames only

Customer Name: _____ Customer #: _____

| | | |
|-----------------|---|-------------------------------|
| SHIPPING | Shipping Information | Project Information |
| | Ship to: Default Shipping Address <input type="checkbox"/> Drop Ship <input type="checkbox"/> | Project Name: _____ |
| | Name: _____ | Installer Name/Company: _____ |
| | Address: _____ | P/O #: _____ Order #: _____ |
| | City: _____ State: _____ Zip: _____ | Area: _____ |
| Phone: _____ | Room: _____ | |

| | | | |
|--------------|---|---|---|
| STYLE | Switch Plate Type | Assembled Switch | Stacking (Double Frame only) |
| | SINGLE-GANG <input type="checkbox"/> #9027376 | DOUBLE-GANG <input type="checkbox"/> #9027377 | 1-CHANNEL <input type="checkbox"/> #1871191 (Switch + Plate included) |
| | | 4-CHANNEL <input type="checkbox"/> #1871192 (Switch + Plate included) | VERTICAL <input type="checkbox"/> HORIZONTAL <input type="checkbox"/> |

SEE EXAMPLES ON NEXT PAGE

| | Wall Plate Positions | Custom Text Positions | Maximum Characters | Text** | Characters | | | | | | | | | | Qty. | |
|---|----------------------|-----------------------|--------------------|--------|------------|---|---|---|---|---|---|---|---|----|------|--|
| | | | | | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | | |
| 1 | A | 5 | TEXT ONLY | | | | | | | | | | | | | |
| | B | | | | | | | | | | | | | | | |
| | C | | | | | | | | | | | | | | | |
| | D | | | | | | | | | | | | | | | |
| 2 | | 16 | Text or Your Logo* | | | | | | | | | | | | | |
| 3 | E | 5 | TEXT ONLY | | | | | | | | | | | | | |
| | F | | | | | | | | | | | | | | | |
| | G | | | | | | | | | | | | | | | |
| | H | | | | | | | | | | | | | | | |
| 4 | | 16 | Text or Your Logo* | | | | | | | | | | | | | |
| 5 | | 16 | Text or Your Logo* | | | | | | | | | | | | | |
| 6 | I | 5 | TEXT ONLY | | | | | | | | | | | | | |
| | J | | | | | | | | | | | | | | | |
| | K | | | | | | | | | | | | | | | |
| | L | | | | | | | | | | | | | | | |
| 7 | | 16 | Text or Your Logo* | | | | | | | | | | | | | |
| 8 | M | 5 | TEXT ONLY | | | | | | | | | | | | | |
| | N | | | | | | | | | | | | | | | |
| | O | | | | | | | | | | | | | | | |
| | P | | | | | | | | | | | | | | | |

*Company logo may be used on this side of the wall plate. **Logo specs: Maximum dimension: 1.97 in (5cm) wide x .39 in. (1cm) high File format (type): .dxf files only

Engraving Options - Default option will be used if nothing is selected.
Character Types: (choose one)
 ALL LETTERS CAPITALIZED (Default)
 First Letters Capitalized
 As written in above section




SMOOVE® WALL SWITCH RANGE


Smooove Plate Engraving Order Form

ENGRAVING OPTIONS (cont.)


Single Frame

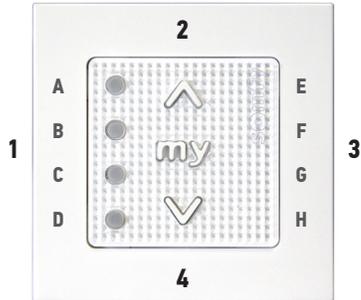

Dual Frame - Horizontal

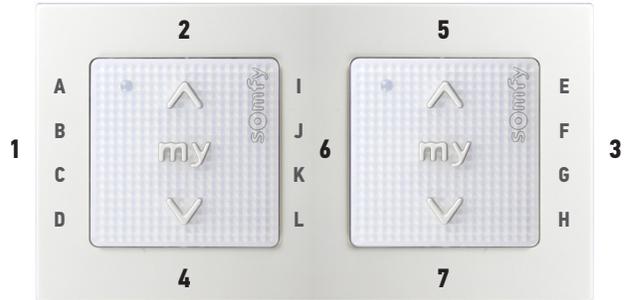


Dual Frame - Vertical*

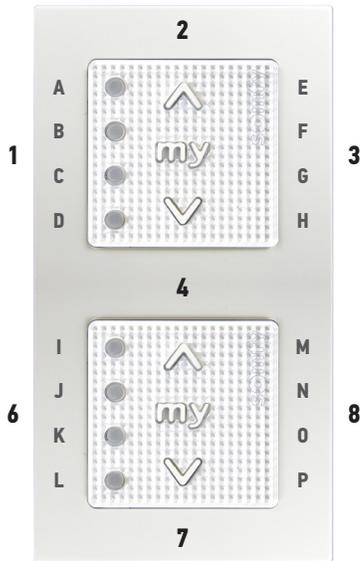

*NOTE: #5 intentionally omitted

Example:

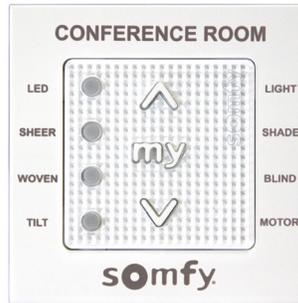

Payment terms of your account will apply.

All engraved wall plates are custom made and are non-cancellable.

Please send form to: Fax # 609-495-8117 or e-mail to: Ordering_us@somfy.com

SOMFY SYSTEMS INC
121 Herrod Blvd.
Dayton, NJ 08810
Phone: (800) 22-SOMFY
NJ: (609) 395-1300
Fax: (609) 495-8118
somfypro.com

Florida
1200 SW 35th Ave.
Boynton Beach, FL 33426
Phone: (877) 227-6639
Fax: (561) 995-7502

California
15301 Barranca Parkway
Irvine, CA 92618-2201
Phone: (877) 727-6639
Fax: (949) 727-3775

SOMFY ULC
SOMFY Canada Division
6411 Edwards Blvd
Mississauga, ON L5T 2P7
CN: (905) 564-6446
Fax: (905) 238-1491

About Somfy®

Somfy has been improving everyday life for more than 270 million people by designing and manufacturing intelligent motorization solutions for interior window coverings and exterior solar protections. Somfy innovates to automate and connect shades, blinds, draperies, awnings, rolling shutters, exterior screens & pergolas for commercial and residential buildings in 58 countries across the globe. With 170+ million motors produced over the last half century, Somfy is committed to creating reliable and sustainable solutions that promote the best way of living and well-being for all.

SOMFY SYSTEMS INC **SOMFY NORTH AMERICAN HEADQUARTERS**

121 Herrod Blvd.
Dayton, NJ 08810
T: (800) 22-SOMFY (76639)
NJ: (609) 395-1300
F: (609) 395-1776

FLORIDA

1200 SW 35th Ave.
Boynton Beach, FL 33426
T: (800) 22-SOMFY (76639)
F: (561) 995-7502

CALIFORNIA

15301 Barranca Parkway
Irvine, CA 92618-2201
T: (800) 22-SOMFY (76639)
F: (949) 727-3775

SOMFY ULC

SOMFY Canada Division

6411 Edwards Blvd
Mississauga, ON L5T 2P7
T: 1-800-66-SOMFY (76639)
CN: (905) 564-6446
F: (905) 238-1491

www.somfypro.com

A BRAND OF **SOMFY** GROUP

© Somfy Systems, Inc. 5/2022
Images: © SAS/Childeric