


GROUND RODS



RYMCO Ground Rods are copper-bonded and engineered to provide ideal electrical grounding in residential, commercial, and industrial applications. Our ground rods are designed to improve safety and system reliability, with outstanding conductivity and corrosion resistance for long-lasting performance—even in the most demanding environments. Whether for utility projects, renewable energy systems, or large-scale infrastructure, RYMCO USA Ground Rods offer the durability, compliance, and dependable performance required for successful grounding solutions.

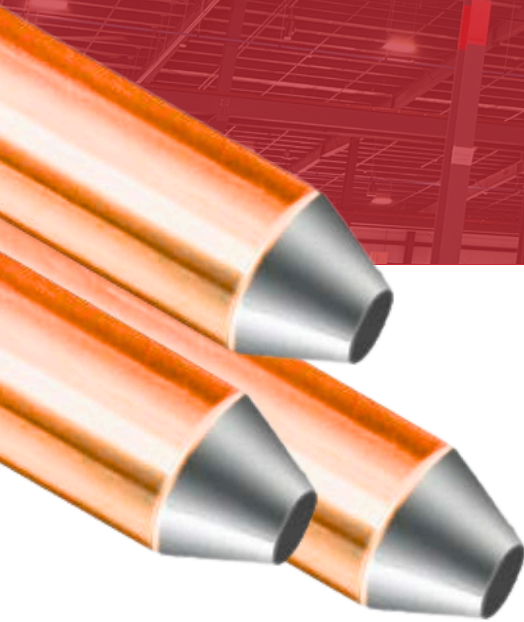

Codes & Standards Compliance:

- ANSI/UL 467
- E111217



www.rymcousa.com
1-833-RYMCO-US

Size Inch	OD (IN)	Cu Coating	Weight /Rod (lb)	Pcs/Su b-Bundle	Pcs/Master Bundle	UL Listed
5/8" x 8'	0.555	10 mils	6.7	10	100	UL
3/4 x 10'	0.680	10 mils	12.35	5	50	UL

GROUND ROD CLAMP



KRC34H (3/4" Heavy Finish Part)

Dimensions:

Chamfer Edges: 0.660, 1/0.8, 0.980

Cavity No: 1.150, 0.810

Thread Specification: 3/8"-16 UNC-2B

Additional Dimensions: 0.125, 0.815

cQus D.B.: 1,620

Hardware: 3/8"-16 SS-304 Bolt

Tolerances:

Angular: $\pm 2^{\circ}$

Fractional: $\pm 1/16$

General: ± 0.030

Finish Requirements: All edges are finished dimensions; part must be free of burrs, oil, grease, dirt & chips



KRC58 (5/8" Finish Part)

Dimensions:

Chamfer Edge: 0.600, 0.610

Cavity No.: 1.320, 0.920, 0.670

Thread Specification: 3/8"-16 UNC-2B

Additional Dimensions: 0.125, 0.12, 0.8

Tolerances:

Angular: $\pm 2^{\circ}$

Fractional: $\pm 1/16$

General: ± 0.030

Finish Requirements: All edges are finished dimensions; part must be free of burrs, oil, grease, dirt & chips



KRC58H (Heavy Duty-5/8" Finish Part)

Dimensions:

1.430, 1.034, 0.660

Thread Specification: 3/8"-16 UNC-2B

Gauge Requirement: GO & NO GO GAUGE TO BE MAINTAINED

Tolerances:

Angular: $\pm 2^{\circ}$

Fractional: $\pm 1/16$

General: ± 0.030

Finish Requirements: All edges are finished dimensions; part must be free of burrs, oil, grease, dirt & chips



KRCU (Universal Rod Clamp Finish Part)

Dimensions:

Cavity No.: KRCU 1/0-10, KRCU 0.650

Thread Specification: 3/8"-16 UNC-2B

Gauge Requirement: GO & NO GO GAUGE TO BE MAINTAINED

Additional Dimensions: 0.125, 0.822

Hardware: 3/8"-16 SS-304 Bolt

Tolerances:

Angular: $\pm 2^{\circ}$

Fractional: $\pm 1/16$

General: ± 0.030

Finish Requirements: All edges are finished dimensions; part must be free of burrs, oil, grease, dirt & chips

RYMCO USA makes no warranties expressed or implied including warranty of merchantability or fitness for a particular purpose. The specifications, descriptions, information and illustrated materials herein are submitted solely for evaluation by others and since the use of its information is not within its control, RYMCO USA assumes no obligation or liability for such information and does not guarantee result from the use of said products or the information herein. Reference should be made to the original or primary source data along with standard accepted industry practice. The material herein is as of the date of publication and is subject to change without notice. Please consult manufacturer for proper warehousing, storing, handling and installation



4801 Gasmer Dr, Houston, TX 77035

Toll Free: 1-833-RYMCO-US

www.rymcousa.com