




PVC SCHEDULE 40



RYMCO (PVC) Nonmetallic Rigid Conduit is designed for various applications, making it suitable for underground and above-ground installations. Whether covered in concrete or immediately buried, our conduit provides durability and safety for electrical wire. It performs reliably and consistently under severe situations, making it suitable for various industrial, commercial, and residential applications.

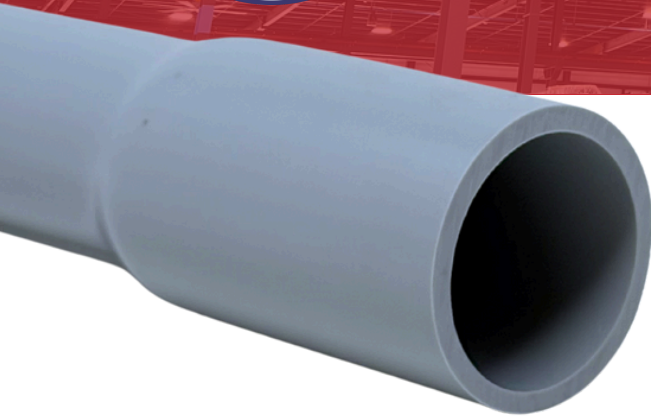

**RATED FOR USE
WITH 90° C WIRE**

Codes & Standards Compliance:

- Nonmetallic PVC Conduit
- NEMA TC-2
- Conforms to UL 651
- ETL Certified 5031382
- Sunlight Resistant per UL 651
- Above Ground and Underground
- 10' Lengths
- 20' Lengths available
- Custom sizes upon request




www.rymcousa.com
1-833-RYMCO-US
SALES@RYMCOUSA.COM

Size Inch	Std. Crate Qty		Weight Per lbs.
	10 ft	20 ft	100 ft
1/2	6000	12000	17
3/4	4400	8800	23
1	3600	7200	34
1-1/4	3300	6600	46
1-1/2	2250	4500	55
2	1400	2800	73
2-1/2	930	1860	124
3	880	1760	163
3-1/2	630	1260	196
4	570	1140	232
5	380	760	315
6	260	520	409

PVC SCHEDULE 40

Weights & Specifications (10' Lengths)

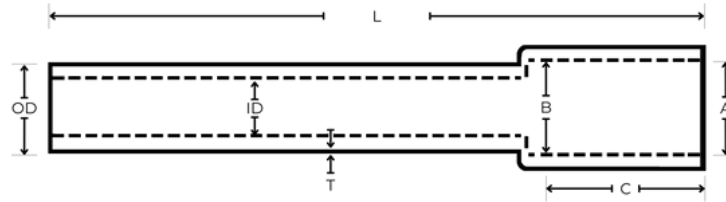

Size Inch	Minimum Wall Thickness	OD (in)	ID (in)	Bell Entrance A (in)	Bell Bottom B (in)	Bell Length C (in)	FEET PER PACK
1/2	0.109	0.84	0.578	0.852	0.836	1.75	6,000
3/4	0.113	1.05	0.78	1.064	1.046	2.25	4,400
1	0.133	1.315	1.004	1.33	1.31	2.25	3,600
1-1/4	0.14	1.66	1.335	1.677	1.655	2.25	3,300
1-1/2	0.145	1.9	1.564	1.918	1.894	2.75	2,250
2	0.154	2.375	2.021	2.393	2.369	4.00	1,400
2-1/2	0.203	2.875	2.414	2.89	2.868	4.00	930
3	0.216	3.5	3.008	3.515	3.492	4.00	880
3-1/2	0.226	4	3.486	4.015	3.992	4.00	630
4	0.237	4.5	3.961	4.515	4.491	5.00	570
5	0.258	5.563	4.975	5.593	5.553	5.75	380
6	0.28	6.625	5.986	6.658	6.614	6.50	260

RYMCO USA makes no warranties expressed or implied including warranty of merchantability or fitness for a particular purpose. The specifications, descriptions, information and illustrated materials herein are submitted solely for evaluation by others and since the use of its information is not within its control, RYMCO USA assumes no obligation or liability for such information and does not guarantee result from the use of said products or the information herein. Reference should be made to the original or primary source data along with standard accepted industry practice. The material herein is as of the date of publication and is subject to change without notice. Please consult manufacturer for proper warehousing, storing, handling and installation



4801 Gasmer Dr, Houston, TX 77035
Toll Free: 1-833-RYMCO-US
www.rymcousa.com

