



# PVC SCHEDULE 80

## RIGID NONMETALLIC CONDUIT



**RYMCO (PVC)** Rigid Nonmetallic Conduit is designed for a wide range of applications, making it suitable for both underground and above-ground installations. Whether covered in concrete or immediately buried, this conduit provides durability and safety for electrical wire. It performs reliably and consistently even under severe situations, making it suitable for a wide range of industrial, commercial, and residential projects.



**RATED FOR USE  
WITH 90° C WIRE \***

### Codes & Standards Compliance:

- Made in USA
- Nonmetallic PVC Conduit
- Conforms to UL 651
- ETL Certified 5031382
- Sunlight Resistant per UL 651
- Above Ground and Underground
- 10' Lengths
- 20' Lengths available




[www.rymcousa.com](http://www.rymcousa.com)

1-833-RYMCO-US

Size Inch	Std. Crate Qty.		Weight Per
	10'	20'	100'
1/2	6000'	12000'	21
3/4	4400'	8800'	30
1	3600'	7200'	44
1-1/4	3300'	6600'	60
1-1/2	2250'	4500'	72
2	1400'	2800'	101
2-1/2	930'	1860'	154
3	880'	1760'	210
4	570'	1140'	308
5	380'	760'	428
6	260	520'	588

# PVC SCHEDULE 80

## Weights & Specifications (10' Lengths)

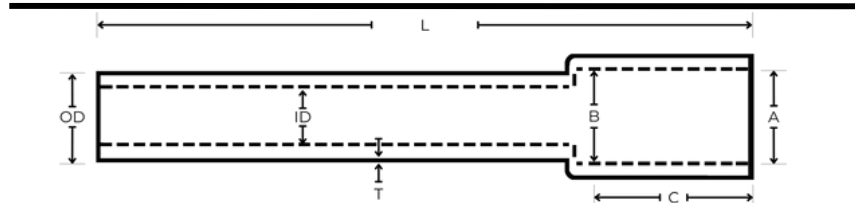

Size Inch	Minimum Wall Thickness	OD (IN)	ID (IN)	Bell Entrance A (IN)	Bell Bottom B (IN)	Bell Length C (IN)	FEET PER PACK
1/2	0.147	0.84	0.502	0.852	0.836	1.77	6,000
3/4	0.154	1.05	0.698	1.064	1.046	2.16	4,400
1	0.179	1.315	0.91	1.33	1.31	2.56	3,600
1-1/4	0.191	1.66	1.227	1.677	1.655	3.15	3,300
1-1/2	0.2	1.9	1.446	1.918	1.894	3.15	2,250
2	0.218	2.375	1.881	2.393	2.369	3.15	1,400
2-1/2	0.276	2.875	2.25	2.89	2.868	3.15	930
3	0.3	3.5	2.82	3.515	3.492	3.94	880
3-1/2	0.318	4	3.486	4.015	3.992	3.94	630
4	0.337	4.5	3.737	4.515	4.491	3.94	570
5	0.375	5.563	4.713	5.593	5.553	3.94	380
6	0.432	6.625	5.646	6.658	6.614	5.9	260

RYMCO USA makes no warranties expressed or implied including warranty of merchantability or fitness for a particular purpose. The specifications, descriptions, information and illustrated materials herein are submitted solely for evaluation by others and since the use of its information is not within its control, RYMCO USA assumes no obligation or liability for such information and does not guarantee result from the use of said products or the information herein. Reference should be made to the original or primary source data along with standard accepted industry practice. The material herein is as of the date of publication and is subject to change without notice. Please consult manufacturer for proper warehousing, storing, handling and installation



4801 Gasmer Dr, Houston, TX 77035

Toll Free: 1-833-RYMCO-US

[www.rymcousa.com](http://www.rymcousa.com)