

# CASTERS & WHEELS

## STAINLESS STEEL CASTERS

- Swivel rig with double ball bearing in the swivel head
- Minimal swivel head play and smooth rolling characteristics
- Medium heavy duty rigs, with top plate fitting
- Low rolling and swivel resistance for smooth running performance

- High operational comfort and low-noise operation
- Operating temperature: -4° F to +140° F
- Wheel Material: Thermoplastic Rubber-Elastomer
- Frame Material: Stainless Steel



Model No.	Wheel Diameter" (mm)	Capacity	Tread Width (mm)	Bolt Hole Spacing (mm)	Bolt Hole Size (mm)	Plate Size (mm)	Bearing Type	Height	Price/Ea
<b>SWIVEL</b>									
M0622	2" (51)	110 lbs. (50 kg.)	3/4" (19)	1-1/2" x 1-1/2" (38 x 38) - 1-7/8" x 1-7/8" (48 x 48)	1/2" (6.35)	2-3/8" x 2-3/8" (60 x 60)	Plain Bore	2-13/16"	
M0623	2" (51)	110 lbs. (50 kg.)	3/4" (19)	1-1/2" x 1-1/2" (38 x 38) - 1-7/8" x 1-7/8" (48 x 48)	1/2" (6.35)	2-3/8" x 2-3/8" (60 x 60)	Ball Bearing	2-13/16"	
M0624	3" (76)	165 lbs. (75 kg.)	1" (25.4)	1-1/2" x 1-1/2" (38 x 38) - 1-7/8" x 1-7/8" (48 x 48)	1/2" (6.35)	2-3/8" x 2-3/8" (60 x 60)	Plain Bore	4"	
M0625	3" (76)	165 lbs. (75 kg.)	1" (25.4)	1-1/2" x 1-1/2" (38 x 38) - 1-7/8" x 1-7/8" (48 x 48)	1/2" (6.35)	2-3/8" x 2-3/8" (60 x 60)	Ball Bearing	4"	
M0626	3-1/8" (79.5)	220 lbs. (100 kg.)	1-1/4" (31.8)	1-3/4" x 2-13/16" (44 x 71) - 1-3/4" x 3-1/16" (44 x 78)	5/16" (7.93)	2-1/2" x 3-5/8" (64 x 92)	Plain Bore	4-3/8"	
M0627	3-1/8" (79.5)	220 lbs. (100 kg.)	1-1/4" (31.8)	1-3/4" x 2-13/16" (44 x 71) - 1-3/4" x 3-1/16" (44 x 78)	5/16" (7.93)	2-1/2" x 3-5/8" (64 x 92)	Ball Bearing	4-3/8"	
M0628	4" (102)	240 lbs. (108 kg.)	1-1/4" (31.8)	1-3/4" x 2-13/16" (44 x 71) - 1-3/4" x 3-1/16" (44 x 78)	5/16" (7.93)	2-1/2" x 3-5/8" (64 x 92)	Plain Bore	5-3/8"	
M0629	4" (102)	240 lbs. (108 kg.)	1-1/4" (31.8)	1-3/4" x 2-13/16" (44 x 71) - 1-3/4" x 3-1/16" (44 x 78)	5/16" (7.93)	2-1/2" x 3-5/8" (64 x 92)	Ball Bearing	5-3/8"	
M0630	5" (127)	265 lbs. (120 kg.)	1-1/4" (31.8)	1-3/4" x 2-13/16" (44 x 71) - 1-3/4" x 3-1/16" (44 x 78)	5/16" (7.93)	2-1/2" x 3-5/8" (64 x 92)	Plain Bore	6-5/16"	
M0631	5" (127)	265 lbs. (120 kg.)	1-1/4" (31.8)	1-3/4" x 2-13/16" (44 x 71) - 1-3/4" x 3-1/16" (44 x 78)	5/16" (7.93)	2-1/2" x 3-5/8" (64 x 92)	Ball Bearing	6-5/16"	
<b>RIGID</b>									
M0632	2" (51)	110 lbs. (50 kg.)	3/4" (19)	1-1/2" x 1-1/2" (38 x 38) - 1-7/8" x 1-7/8" (48 x 48)	1/2" (6.35)	2-3/8" x 2-3/8" (60 x 60)	Plain Bore	2-13/16"	
M0633	2" (51)	110 lbs. (50 kg.)	3/4" (19)	1-1/2" x 1-1/2" (38 x 38) - 1-7/8" x 1-7/8" (48 x 48)	1/2" (6.35)	2-3/8" x 2-3/8" (60 x 60)	Ball Bearing	2-13/16"	
M0634	3" (76)	165 lbs. (75 kg.)	1" (25.4)	1-1/2" x 1-1/2" (38 x 38) - 1-7/8" x 1-7/8" (48 x 48)	1/2" (6.35)	2-3/8" x 2-3/8" (60 x 60)	Plain Bore	4"	
M0635	3" (76)	165 lbs. (75 kg.)	1" (25.4)	1-1/2" x 1-1/2" (38 x 38) - 1-7/8" x 1-7/8" (48 x 48)	1/2" (6.35)	2-3/8" x 2-3/8" (60 x 60)	Ball Bearing	4"	
M0636	3-1/8" (79.5)	220 lbs. (100 kg.)	1-1/4" (31.8)	1-3/4" x 2-13/16" (44 x 71) - 1-3/4" x 3-1/16" (44 x 78)	5/16" (7.93)	2-1/2" x 3-5/8" (64 x 92)	Plain Bore	4-3/8"	
M0637	3-1/8" (79.5)	220 lbs. (100 kg.)	1-1/4" (31.8)	1-3/4" x 2-13/16" (44 x 71) - 1-3/4" x 3-1/16" (44 x 78)	5/16" (7.93)	2-1/2" x 3-5/8" (64 x 92)	Ball Bearing	4-3/8"	
M0638	4" (102)	240 lbs. (108 kg.)	1-1/4" (31.8)	1-3/4" x 2-13/16" (44 x 71) - 1-3/4" x 3-1/16" (44 x 78)	5/16" (7.93)	2-1/2" x 3-5/8" (64 x 92)	Plain Bore	5-3/8"	
M0639	4" (102)	240 lbs. (108 kg.)	1-1/4" (31.8)	1-3/4" x 2-13/16" (44 x 71) - 1-3/4" x 3-1/16" (44 x 78)	5/16" (7.93)	2-1/2" x 3-5/8" (64 x 92)	Ball Bearing	5-3/8"	
M0640	5" (127)	265 lbs. (120 kg.)	1-1/4" (31.8)	1-3/4" x 2-13/16" (44 x 71) - 1-3/4" x 3-1/16" (44 x 78)	5/16" (7.93)	2-1/2" x 3-5/8" (64 x 92)	Plain Bore	6-5/16"	
M0641	5" (127)	265 lbs. (120 kg.)	1-1/4" (31.8)	1-3/4" x 2-13/16" (44 x 71) - 1-3/4" x 3-1/16" (44 x 78)	5/16" (7.93)	2-1/2" x 3-5/8" (64 x 92)	Ball Bearing	6-5/16"	
<b>SWIVEL W/BRAKE</b>									
M0642	2" (51)	110 lbs. (50 kg.)	3/4" (19)	1-1/2" x 1-1/2" (38 x 38) - 1-7/8" x 1-7/8" (48 x 48)	1/2" (6.35)	2-3/8" x 2-3/8" (60 x 60)	Plain Bore	2-13/16"	
M0643	2" (51)	110 lbs. (50 kg.)	3/4" (19)	1-1/2" x 1-1/2" (38 x 38) - 1-7/8" x 1-7/8" (48 x 48)	1/2" (6.35)	2-3/8" x 2-3/8" (60 x 60)	Ball Bearing	2-13/16"	
M0644	3" (76)	165 lbs. (75 kg.)	1" (25.4)	1-1/2" x 1-1/2" (38 x 38) - 1-7/8" x 1-7/8" (48 x 48)	1/2" (6.35)	2-3/8" x 2-3/8" (60 x 60)	Plain Bore	4"	
M0645	3" (76)	165 lbs. (75 kg.)	1" (25.4)	1-1/2" x 1-1/2" (38 x 38) - 1-7/8" x 1-7/8" (48 x 48)	1/2" (6.35)	2-3/8" x 2-3/8" (60 x 60)	Ball Bearing	4"	
M0646	3-1/8" (79.5)	220 lbs. (100 kg.)	1-1/4" (31.8)	1-3/4" x 2-13/16" (44 x 71) - 1-3/4" x 3-1/16" (44 x 78)	5/16" (7.93)	2-1/2" x 3-5/8" (64 x 92)	Plain Bore	4-3/8"	
M0647	3-1/8" (79.5)	220 lbs. (100 kg.)	1-1/4" (31.8)	1-3/4" x 2-13/16" (44 x 71) - 1-3/4" x 3-1/16" (44 x 78)	5/16" (7.93)	2-1/2" x 3-5/8" (64 x 92)	Ball Bearing	4-3/8"	
M0648	4" (102)	240 lbs. (108 kg.)	1-1/4" (31.8)	1-3/4" x 2-13/16" (44 x 71) - 1-3/4" x 3-1/16" (44 x 78)	5/16" (7.93)	2-1/2" x 3-5/8" (64 x 92)	Plain Bore	5-3/8"	
M0649	4" (102)	240 lbs. (108 kg.)	1-1/4" (31.8)	1-3/4" x 2-13/16" (44 x 71) - 1-3/4" x 3-1/16" (44 x 78)	5/16" (7.93)	2-1/2" x 3-5/8" (64 x 92)	Ball Bearing	5-3/8"	
M0650	5" (127)	265 lbs. (120 kg.)	1-1/4" (31.8)	1-3/4" x 2-13/16" (44 x 71) - 1-3/4" x 3-1/16" (44 x 78)	5/16" (7.93)	2-1/2" x 3-5/8" (64 x 92)	Plain Bore	6-5/16"	
M0651	5" (127)	265 lbs. (120 kg.)	1-1/4" (31.8)	1-3/4" x 2-13/16" (44 x 71) - 1-3/4" x 3-1/16" (44 x 78)	5/16" (7.93)	2-1/2" x 3-5/8" (64 x 92)	Ball Bearing	6-5/16"	

## STAINLESS STEEL CASTERS

- Medium heavy duty rigs, with top plate fitting
- Low rolling and swivel resistance for smooth running performance
- High operational comfort and low-noise operation
- Frame Material: Stainless Steel
- Bearing Type: Ball Bearing

**Bolt Hole Spacing:** 2-5/8" x 3-5/8"  
(67 mm x 92 mm) - 3" x 3" (76 mm x 76 mm)  
**Bolt Hole Size:** 3/8" (9.52 mm)  
**Plate Size:** 4" x 4-1/2" (102 mm x 114 mm)




Model No.	Wheel Diameter (mm)	Capacity	Tread Width (mm)	Caster Type	Operating Temperature	Wheel Material	Height	Price/Ea
M0704	4" (127)	660 lbs. (300 kg.)	1-3/8" (35)	Swivel	-15° F to +160° F	Thermoplastic Polyurethane	5-1/8"	
M0705	5" (127)	770 lbs. (350 kg.)	1-9/16" (40)	Swivel	-15° F to +160° F	Thermoplastic Polyurethane	6-1/8"	
M0706	4" (102)	330 lbs. (150 kg.)	1-1/2" (38)	Swivel	-15° F to +175° F	Rubber	5-1/8"	
M0707	5" (127)	330 lbs. (150 kg.)	1-9/16" (40)	Swivel	-15° F to +175° F	Rubber	6-1/8"	
M0708	4" (102)	660 lbs. (300 kg.)	1-3/8" (35)	Rigid	-15° F to +160° F	Thermoplastic Polyurethane	5-1/8"	
M0709	5" (127)	770 lbs. (350 kg.)	1-9/16" (40)	Rigid	-15° F to +160° F	Thermoplastic Polyurethane	6-1/8"	
M0710	4" (102)	330 lbs. (150 kg.)	1-1/2" (38)	Rigid	-15° F to +175° F	Rubber	5-1/8"	
M0711	5" (127)	330 lbs. (150 kg.)	1-9/16" (40)	Rigid	-15° F to +175° F	Rubber	6-1/8"	
M0712	4" (102)	660 lbs. (300 kg.)	1-3/8" (35)	Swivel w/ Brake	-15° F to +160° F	Thermoplastic Polyurethane	5-1/8"	
M0713	5" (127)	770 lbs. (350 kg.)	1-9/16" (40)	Swivel w/ Brake	-15° F to +160° F	Thermoplastic Polyurethane	6-1/8"	
M0714	4" (102)	330 lbs. (150 kg.)	1-1/2" (38)	Swivel w/ Brake	-15° F to +175° F	Rubber	5-1/8"	
M0715	5" (127)	330 lbs. (150 kg.)	1-9/16" (40)	Swivel w/ Brake	-15° F to +175° F	Rubber	6-1/8"	

## FLOOR LOCK BRAKES

### STANDARD-DUTY

- Economical floor locks to stabilize mobile equipment
- Spring-loaded with non-skid rubber pad
- Steel construction with bright zinc-plated finish

**Plate size:** 4 1/2" x 4"  
**Bolt hole centres:** 3 5/8" x 3"  
**Bolt hole size:** 3/8"

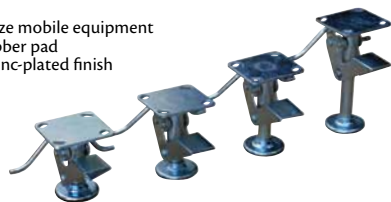

Model No.	Use w/ wheel Diameter"	Extended Height"	Retracted Height"	Price /Each
ML630	4	6	5 1/8	
ML631	5	6 7/8	5 3/4	
ML632	6	7 7/8	6 13/16	
ML633	8	9 1/2	8 1/2	

### HEAVY-DUTY

- Heavy-duty industrial strength construction
- Foot pedal easily activates lock with foot pressure
- Non-slip, non-skid rubber brake pad holds securely on smooth or irregular floor
- Designed for use on level surfaces
- Durable, high compression spring for heavy loads
- Conveniently located release bar retracts brake instantly with slight toe pressure to either side of the bar
- 8" w floor lock profile

**Plate size:** 2 1/2" x 3 5/8"  
**Holes slotted for:** 1 3/4" x 2 7/8" to 3"  
**Bolt hole size:** 5/16"

Model No.	Extended Height"	Retracted Height"	Price /Each
MD795	4 3/4	3 11/16	
MD796	5 17/32	4 1/2	
MD797	6 7/32	5 11/64	



**Plate size:** 4" x 4 1/2"  
**Holes slotted for:** 2 5/8" to 3" x 3" to 3 5/8"  
**Bolt hole size:** 3/8"

Model No.	Extended Height"	Retracted Height"	Price /Each
MD798	5 7/8	4 15/16	
MD799	6 43/64	5 35/64	
MD800	7 3/4	6 21/32	
MD801	9 23/32	8 5/8	