



Omni-
Directional
Coverage



Maintenance
Free Design



Model 40V2T

If your application requires the most powerful warning siren in production today, look no further than the 40V2T. Producing a mind-boggling 131dB(C) Siren Tone, the 40V2T is the most powerful non-directional siren available.

This siren stands alone at the top of the warning siren industry - the *King of Sirens!*

FEATURES

Coverage Radius

Rated at 131dB(C) at 100ft*
6,200ft. estimated coverage
radius / effective range*
580/875hz Dual-Tone
Broadcast Frequency

*Based on Sentry Siren Field Testing



Maintenance Free Continuous Duty Design

The omni-directional,
maintenance free design
ensures this siren has the
lowest operating cost in the
industry. Sentry Sirens are
rated for continuous-duty
operation in emergencies.




All Sentry Sirens are proudly
manufactured in the United
States at our Colorado
facility. Each siren is hand
built, assembled, and
thoroughly tested before
leaving our facility.

Since 1905, Sentry Siren has proudly set the standard for hand-made warning sirens in the United States and around the world.

SENTRY SIREN Inc.

Model 40V2T

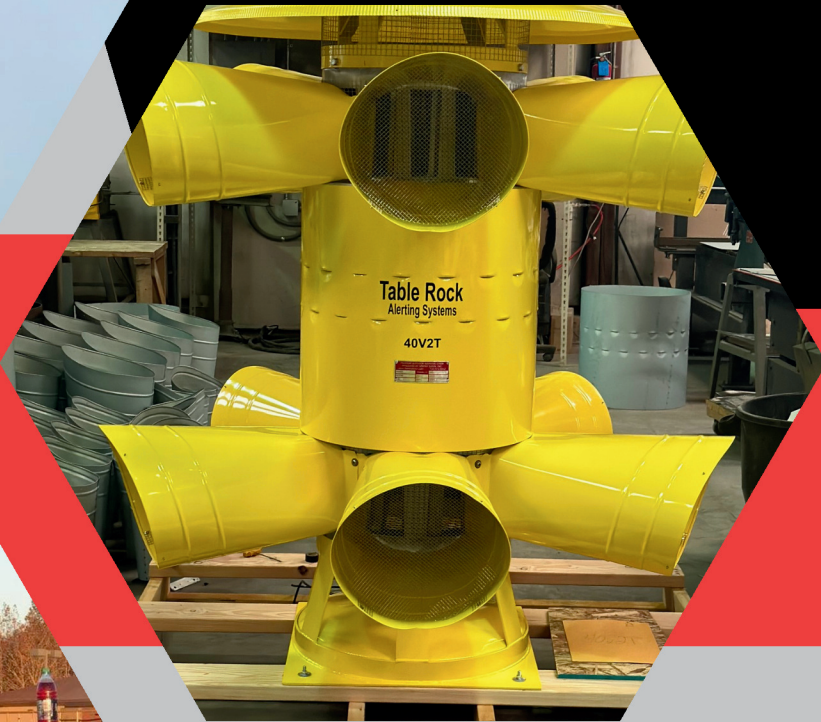

"We are so pleased with our selection of *Sentry Siren, Inc.* as our warning system supplier. The Performance of our Sentry Siren is impressive; they are very reliable and loud. And the customer service they provided is second to none. We would highly recommend Sentry to anyone looking to invest in their community with a warning siren system."

Roger Swint - Fire Chief
City of Morrow Fire Dept. Morrow, GA

Dealer Info

 **Table Rock**
Alerting Systems
(877)-ALERT-01

KEY FEATURES

- 131dB(C) at 100' Output*
- 6,200ft estimated coverage radius at 70dB(C)*
- 40-Horsepower, Continuous-Duty AC Motor
- Three-Phase 208-230/460VAC
- Omni-Directional Design with True 360-Degree Coverage
- 100% Maintenance Free Design
- Electro-Mechanically Generated Sound
- 5-Year Factory Warranty
- Powder-Coated Steel Construction
- Stainless Steel Upgrade Available
- Custom Colors & Designs Available

Electrical Requirements

- **Three Phase Siren:** 40 HP: 208/230 (460V-special order), 60 Hz
NEC FLA (230V)-91.0 / 104.0 Uses Starter # S40W