





RENAISSANCE COLLECTION	4
<i>RIFT & QUARTERED WHITE OAK</i>	
Prime Grade	6
Natural Grade	8
<i>WHITE OAK</i>	
Prime Grade	10
Natural Plus Grade	12
Natural Grade	14
<i>EUROPEAN WHITE OAK</i>	
Character Grade	16
Character Grade Color Treated	18
<i>RED OAK</i>	
Prime Grade	20
Natural Plus Grade	22
Natural Grade	24
<i>HICKORY</i>	
Natural Grade	26
<i>WALNUT</i>	
Prime Grade	28
Natural Grade	30
<i>ANTIQUE HEART PINE</i>	
Natural Grade	32
 IMPRESSIONIST COLLECTION	 34
½" Euro White Oak Character Grade	36
½" Hickory Natural Grade	38
½" Red Oak Natural Plus Grade	40
½" Walnut Prime Grade	42
½" Walnut Natural Grade	44
<i>GRADING CHART</i>	
White Oak	46
Red Oak	47

RENAISSANCE collection


Our unfinished engineered flooring gives you a canvas to create a unique floor for your customers. Available in white oak, hickory, red oak, walnut, and antique heart pine.



Bedroom and hallway of an Atlanta home featuring our 6" Natural White Oak with a custom dark stain and satin finish.

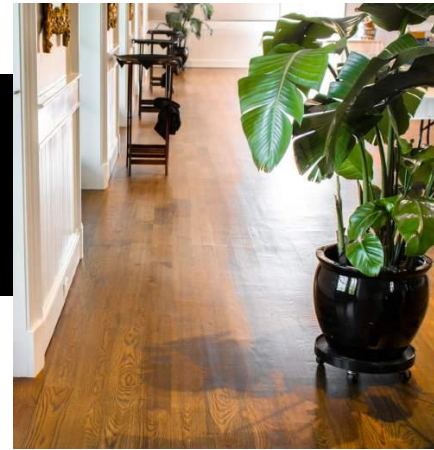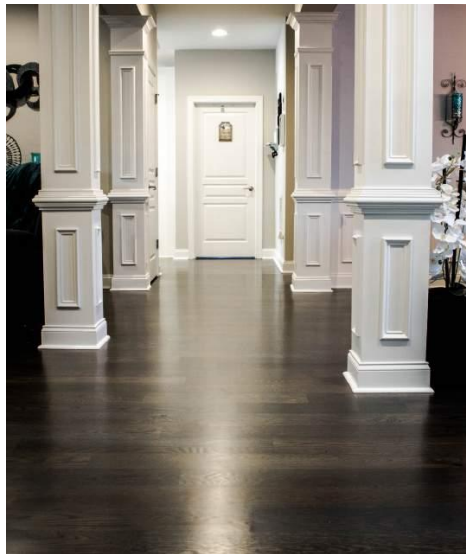

Dining space in Charleston, South Carolina, with 6" Natural White Oak with a chestnut stain and satin matte finish.

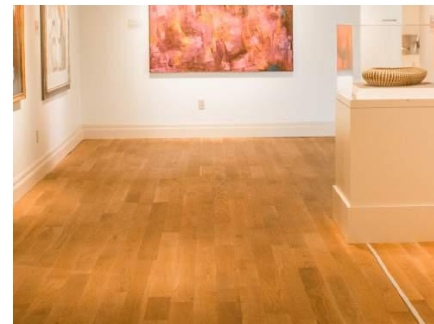

Charleston museum installed our 5" Natural White Oak using a natural ultra-matte finish.





RIFT & QUARTERED WHITE OAK Prime Grade

Teckton Prime White Oak comes from the Appalachian region of the United States and is a mixture of 25% Clear and 75% Select. Boards are pre-sanded with 100 grit sandpaper.

Our pre-sanded flooring will save you time.

We pre-sand our floors with 100 grit sandpaper to save you time on the job.

A floor that will last as long as the home.

Our 5/8" thick engineered flooring is designed for many installation options. A 4.5mm wear layer allows for multiple re-sandings.

Consistent grading you can count on.

Long 1 - 7' lengths, and consistent grading give you the canvas you need to create a floor you are proud of.

Superior milling gives you peace of mind.

Our plywood and precision milling provides stability and lay-flat installation every time.




*Adverse effects are possible during the sanding process for floating floor installation methods. Please take necessary steps to avoid separation at seams between planks. Planks for floating floor installation method must be 4" or wider.

Warranty & installation guides are available for download at:

www.teckton.com/support

LIFETIME STRUCTURAL WARRANTY:

Teckton offers a limited structural integrity warranty for the life of the product as long as the product is installed in accordance with our installation guidelines and the product is kept in a controlled environment as outlined in the installation guidelines. Teckton also has a limited structural warranty for installations over radiant heat. There are special considerations and requirements for this warranty to be in effect. Please download and read the full radiant heat warranty document before beginning an installation over a radiant heat system.

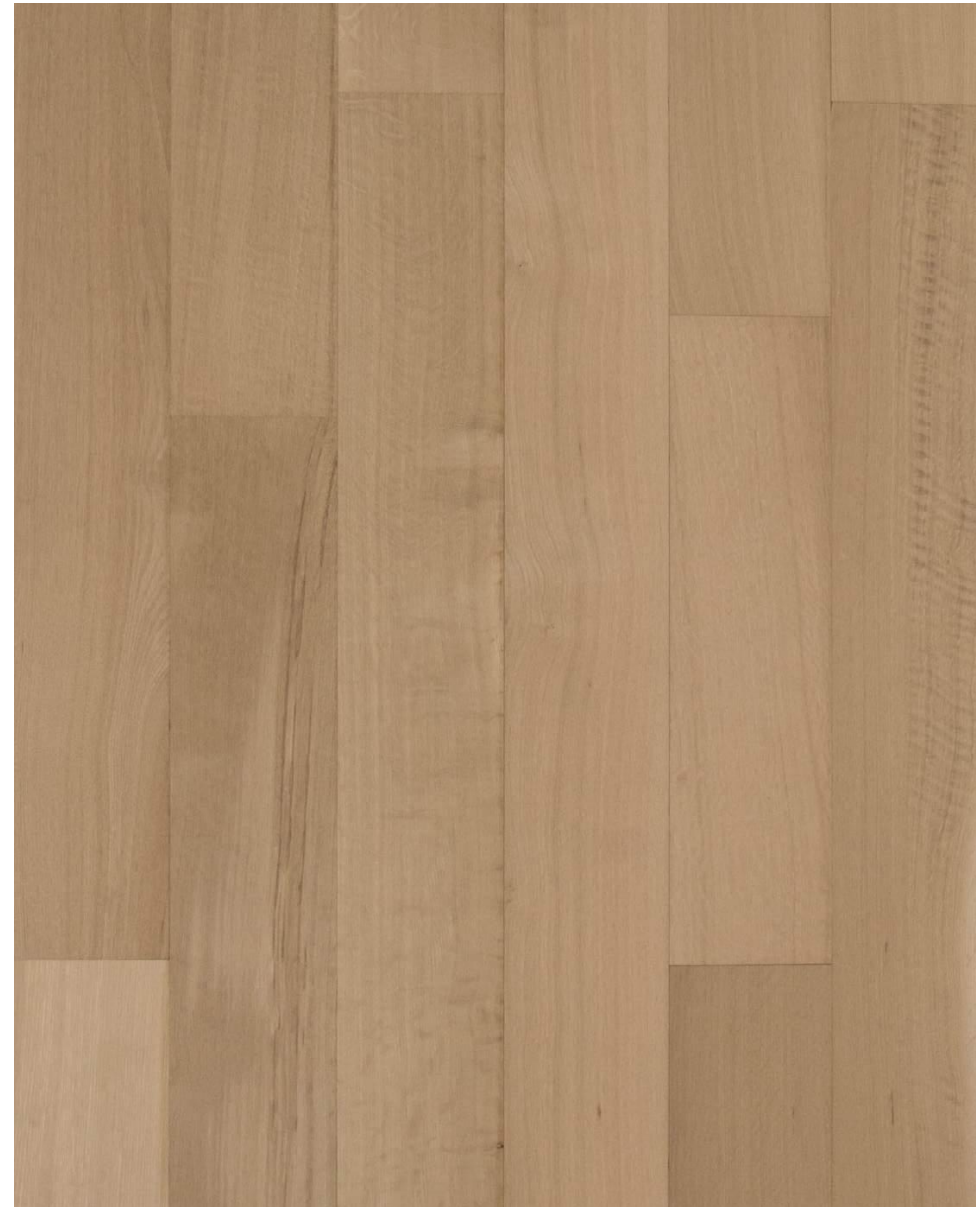

Rift & Quartered White Oak Prime Grade



RIFT & QUARTERED WHITE OAK Natural Grade

Teckton Prime White Oak comes from the Appalachian region of the United States and is a mixture of 25% Clear and 75% Select. Boards are pre-sanded with 100 grit sandpaper.

Our pre-sanded flooring will save you time.

We pre-sand our floors with 100 grit sandpaper to save you time on the job.

A floor that will last as long as the home.

Our 5/8" thick engineered flooring is designed for many installation options. A 4.5mm wear layer allows for multiple re-sandings.

Consistent grading you can count on.

Long 1 - 7' lengths, and consistent grading give you the canvas you need to create a floor you are proud of.

Superior milling gives you peace of mind.

Our plywood and precision milling provides stability and lay-flat installation every time.




*Adverse effects are possible during the sanding process for floating floor installation methods. Please take necessary steps to avoid separation at seams between planks. Planks for floating floor installation method must be 4" or wider.

Warranty & installation guides are available for download at:
www.teckton.com/support

LIFETIME STRUCTURAL WARRANTY:

Teckton offers a limited structural integrity warranty for the life of the product as long as the product is installed in accordance with our installation guidelines and the product is kept in a controlled environment as outlined in the installation guidelines. Teckton also has a limited structural warranty for installations over radiant heat. There are special considerations and requirements for this warranty to be in effect. Please download and read the full radiant heat warranty document before beginning an installation over a radiant heat system.

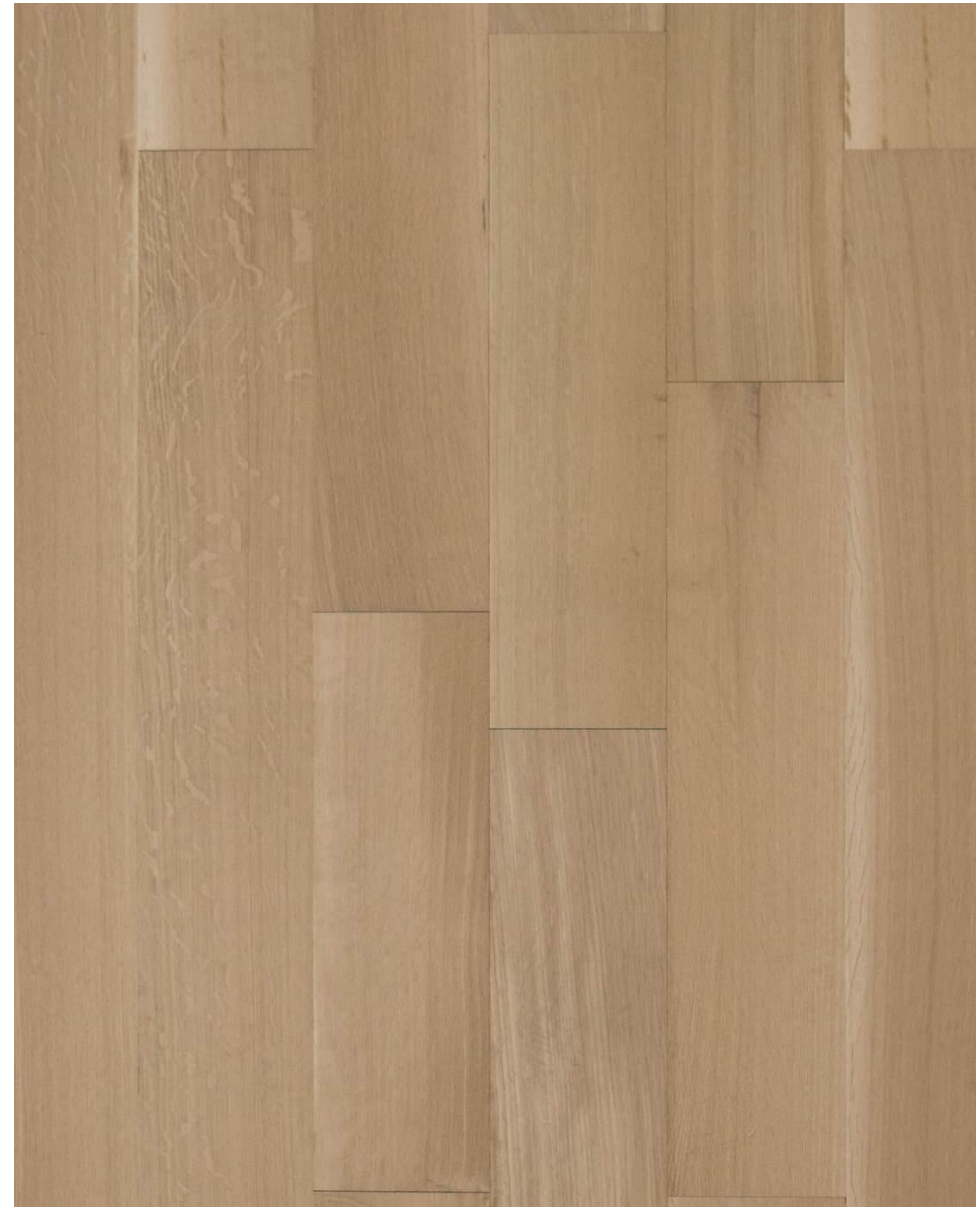

Rift & Quartered White Oak Natural Grade



White Oak Prime Grade

Teckton Prime White Oak comes from the Appalachian region of the United States and is a mixture of 25% Clear and 75% Select. Boards are pre-sanded with 100 grit paper.

Our pre-sanded flooring will save you time.

We pre-sand our floors with 100 grit sandpaper to save you time on the job.

A floor that will last as long as the home.

Our 5/8" thick engineered flooring is designed for many installation options. A 4.5mm wear layer allows for multiple re-sandings.

Consistent grading you can count on.

Long 1 - 7' lengths, and consistent grading give you the canvas you need to create a floor you are proud of.

Superior milling gives you peace of mind.

Our plywood and precision milling provides stability and lay-flat installation every time.

Available in the following formats:

THICKNESS:

5/8"

WEAR LAYER:

4.5 M M

WIDTHS:

3-1/4" / 4" / 5" / 6"




*Adverse effects are possible during the sanding process for floating floor installation methods. Please take necessary steps to avoid separation at seams between planks. Planks for floating floor installation method must be 4" or wider.

Warranty & installation guides are available for download at:

www.teckton.com/support

LIFETIME STRUCTURAL WARRANTY:

Teckton offers a limited structural integrity warranty for the life of the product as long as the product is installed in accordance with our installation guidelines and the product is kept in a controlled environment as outlined in the installation guidelines. Teckton also has a limited structural warranty for installations over radiant heat. There are special considerations and requirements for this warranty to be in effect. Please download and read the full radiant heat warranty document before beginning an installation over a radiant heat system.

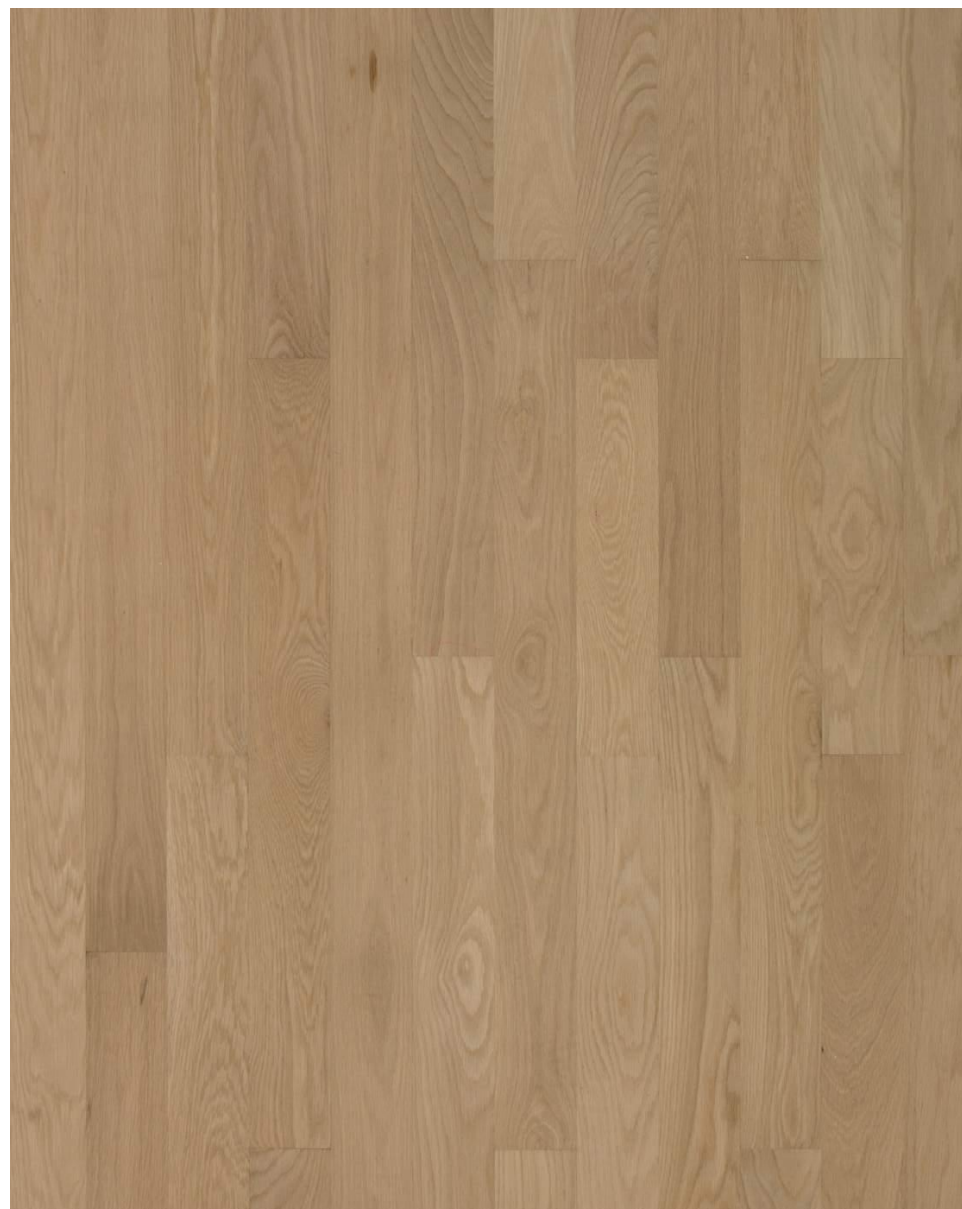

White Oak Prime Grade



White Oak Natural Plus

Teckton White Oak Natural Plus grade is a slightly cleaner grade that falls between Natural and Prime with 20% Clear, 60% Select, and 20% #1 Common. It has consistent overall color with small, infrequent tight knots and minimal gray/dark stain. Boards are pre-sanded with 100 grit sandpaper.

Our pre-sanded flooring will save you time.

We pre-sand our floors with 100 grit sandpaper to save you time on the job.

A floor that will last as long as the home.

Our 5/8" thick engineered flooring is designed for many installation options. A 4.5mm wear layer allows for multiple re-sandings.

Consistent grading you can count on.

Long 1 - 7' lengths, and consistent grading give you the canvas you need to create a floor you are proud of.

Superior milling gives you peace of mind.

Our plywood and precision milling provides stability and lay-flat installation every time.

Available in the following formats:

THICKNESS:

5/8"

WEAR LAYER:

4.5 M
M

WIDTHS:

2-1/4"



Warranty & installation guides are available for download at:

www.teckton.com/support

LIFETIME STRUCTURAL WARRANTY:

Teckton offers a limited structural integrity warranty for the life of the product as long as the product is installed in accordance with our installation guidelines and the product is kept in a controlled environment as outlined in the installation guidelines. Teckton also has a limited structural warranty for installations over radiant heat. There are special considerations and requirements for this warranty to be in effect. Please download and read the full radiant heat warranty document before beginning an installation over a radiant heat system.



White Oak Natural Plus Grade



White Oak Natural Grade

Teckton Natural White Oak comes from the Appalachian region of the United States and is a mixture of 90% #1 Common and 10% Select. Boards are pre-sanded with 100 grit paper.

Our pre-sanded flooring will save you time.

We pre-sand our floors with 100 grit sandpaper to save you time on the job.

A floor that will last as long as the home.

Our 5/8" thick engineered flooring is designed for many installation options. A 4.5mm wear layer allows for multiple re-sandings.

Consistent grading you can count on.

Long 1 - 7' lengths, and consistent grading give you the canvas you need to create a floor you are proud of.

Superior milling gives you peace of mind.

Our plywood and precision milling provides stability and lay-flat installation every time.

Available in the following formats:

THICKNESS:

WEAR LAYER:

5/8" 4.5 M M

WIDTHS:

3-1/4" / 4" / 5" / 6"




*Adverse effects are possible during the sanding process for floating floor installation methods. Please take necessary steps to avoid separation at seams between planks. Planks for floating floor installation method must be 4" or wider.

Warranty & installation guides are available for download at:

www.teckton.com/support

LIFETIME STRUCTURAL WARRANTY:

Teckton offers a limited structural integrity warranty for the life of the product as long as the product is installed in accordance with our installation guidelines and the product is kept in a controlled environment as outlined in the installation guidelines. Teckton also has a limited structural warranty for installations over radiant heat. There are special considerations and requirements for this warranty to be in effect. Please download and read the full radiant heat warranty document before beginning an installation over a radiant heat system.

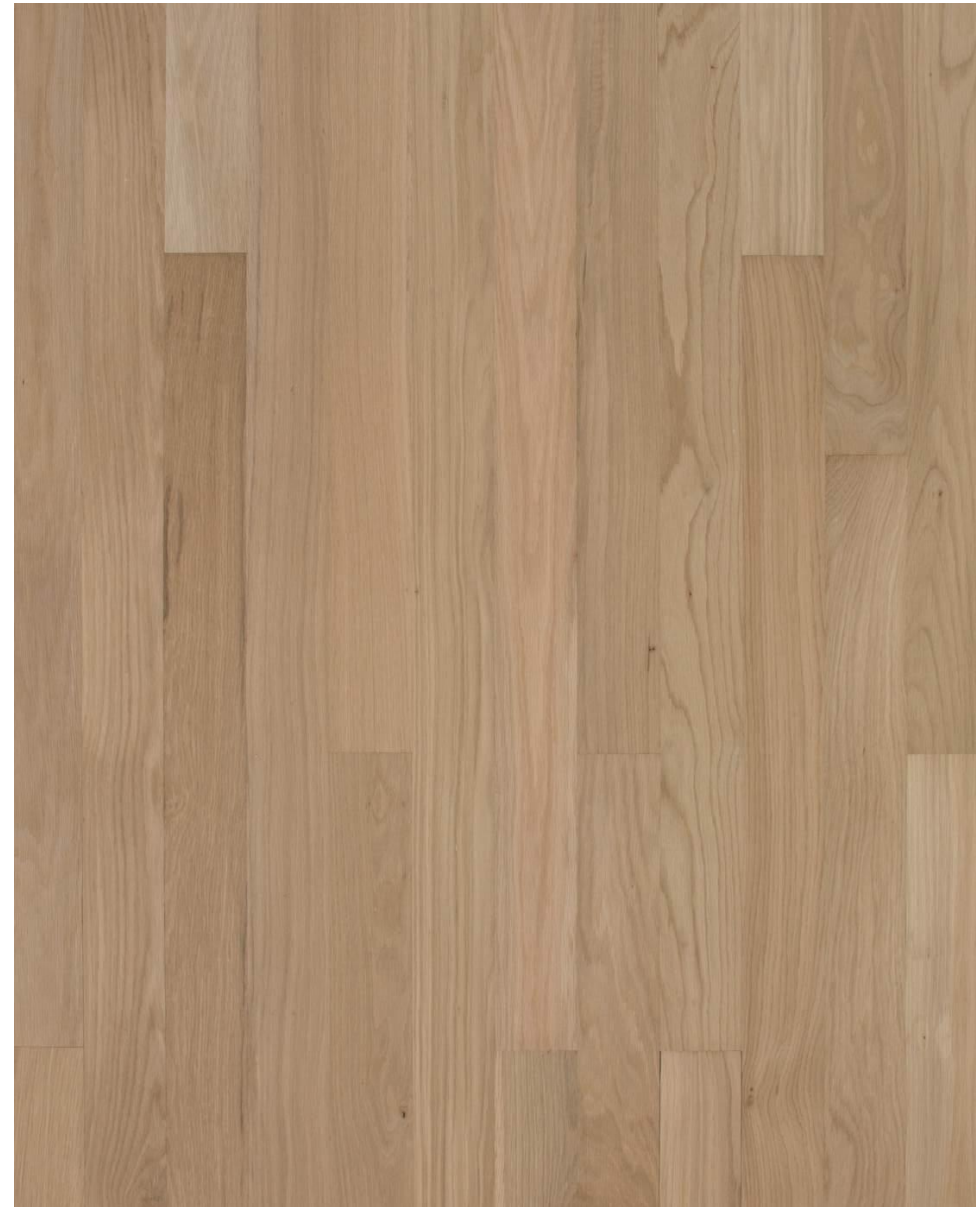

White Oak Natural Grade



White Oak *European Character Grade*

Teckton European White Oak Natural grade is a mill run mixture of #2 Common & Better. Boards are pre-sanded with 100 grit sandpaper.

Our pre-sanded flooring will save you time.

We pre-sand our floors with 100 grit sandpaper to save you time on the job.

A floor that will last as long as the home.

Our 3/4" thick engineered flooring is designed for many installation options. A 4.5mm wear layer allows for multiple re-sandings.

Consistent grading you can count on.

Long 1 - 6-1/4' lengths in 7-1/2" and 2 - 8' lengths in 8-1/2," and consistent grading give you the canvas you need to create a floor you are proud of.

Superior milling gives you peace of mind.

Our plywood and precision milling provides stability and lay-flat installation every time.

Available in the following formats:

THICKNESS:

WEAR LAYER:

9/16"

4.0^M_M

WIDTHS:

7-1/2" / 8-1/2"




*Adverse effects are possible during the sanding process for floating floor installation methods. Please take necessary steps to avoid separation at seams between planks. Planks for floating floor installation method must be 4" or wider.

Warranty & installation guides are available for download at:

www.teckton.com/support

LIFETIME STRUCTURAL WARRANTY:

Teckton offers a limited structural integrity warranty for the life of the product as long as the product is installed in accordance with our installation guidelines and the product is kept in a controlled environment as outlined in the installation guidelines. Teckton also has a limited structural warranty for installations over radiant heat. There are special considerations and requirements for this warranty to be in effect. Please download and read the full radiant heat warranty document before beginning an installation over a radiant heat system.

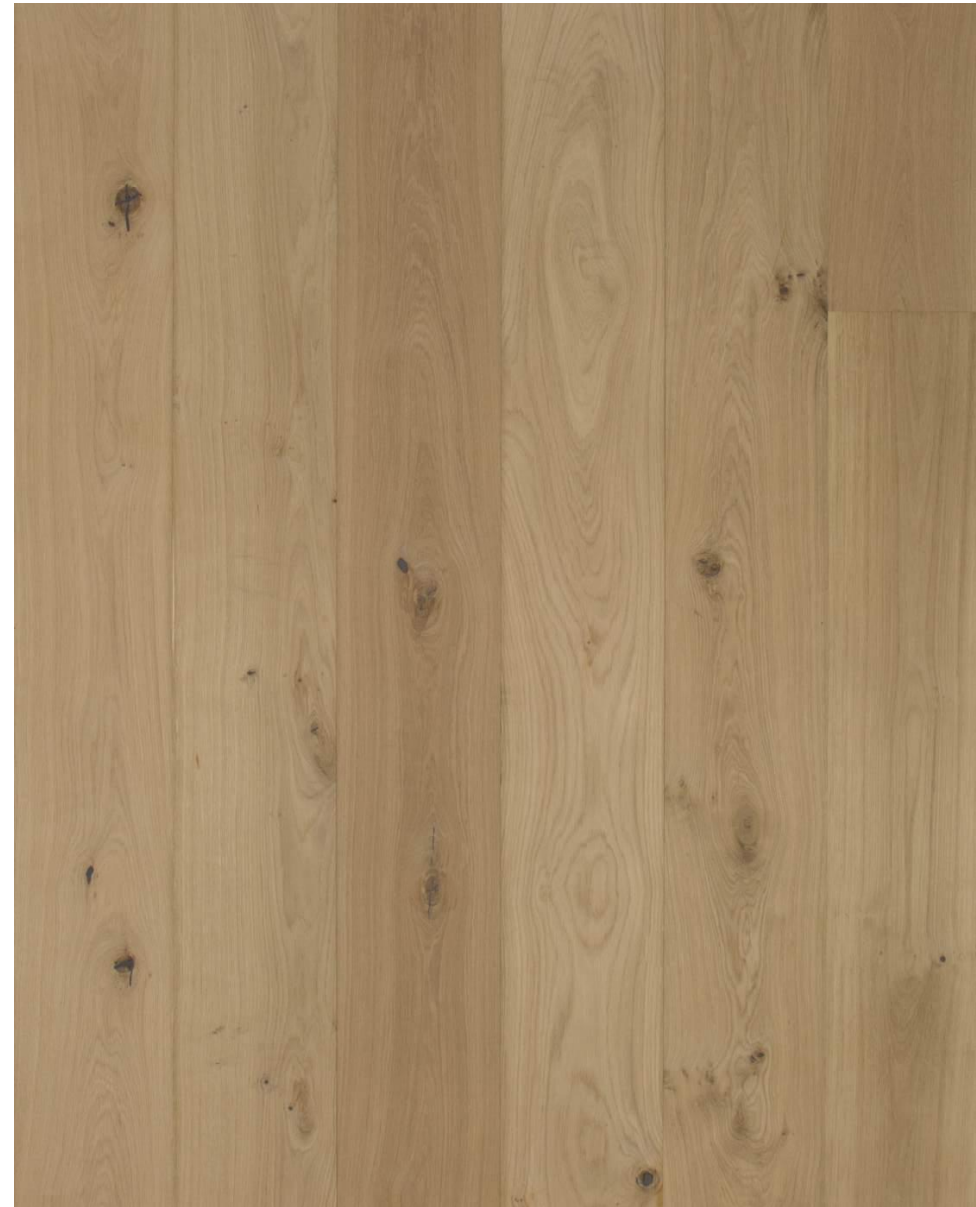

White Oak *European Character Grade*



White Oak COLOR TREATED European Character Grade

Teckton European White Oak Natural grade is a mill run mixture of #2 Common & Better, and a special color treatment is applied to darken the boards without stain. Boards are pre-sanded with 100 grit paper.

Our pre-sanded flooring will save you time.

We pre-sand our floors with 100 grit sandpaper to save you time on the job.

Special color treatments for a unique look.

Our European White Oak flooring is either carbonized or fumed to give a one-of-a-kind look right out of the box.

A floor that will last as long as the home.

Our 5/8" thick engineered flooring is designed for many installation options. A 3mm wear layer allows for multiple re-sandings.

Consistent grading you can count on.

Long 1 - 7' lengths, and consistent grading give you the canvas you need to create a floor you are proud of.

Superior milling gives you peace of mind.

Our plywood and precision milling provides stability and lay-flat installation every time.

Available in the following formats:

THICKNESS:

WEAR LAYER:

5/8"

3.0 ^M/_M

WIDTHS:

8"




*Adverse effects are possible during the sanding process for floating floor installation methods. Please take necessary steps to avoid separation at seams between planks. Planks for floating floor installation method must be 4" or wider.

Warranty & installation guides are available for download at:
www.teckton.com/support

LIFETIME STRUCTURAL WARRANTY:

Teckton offers a limited structural integrity warranty for the life of the product as long as the product is installed in accordance with our installation guidelines and the product is kept in a controlled environment as outlined in the installation guidelines. Teckton also has a limited structural warranty for installations over radiant heat. There are special considerations and requirements for this warranty to be in effect. Please download and read the full radiant heat warranty document before beginning an installation over a radiant heat system.

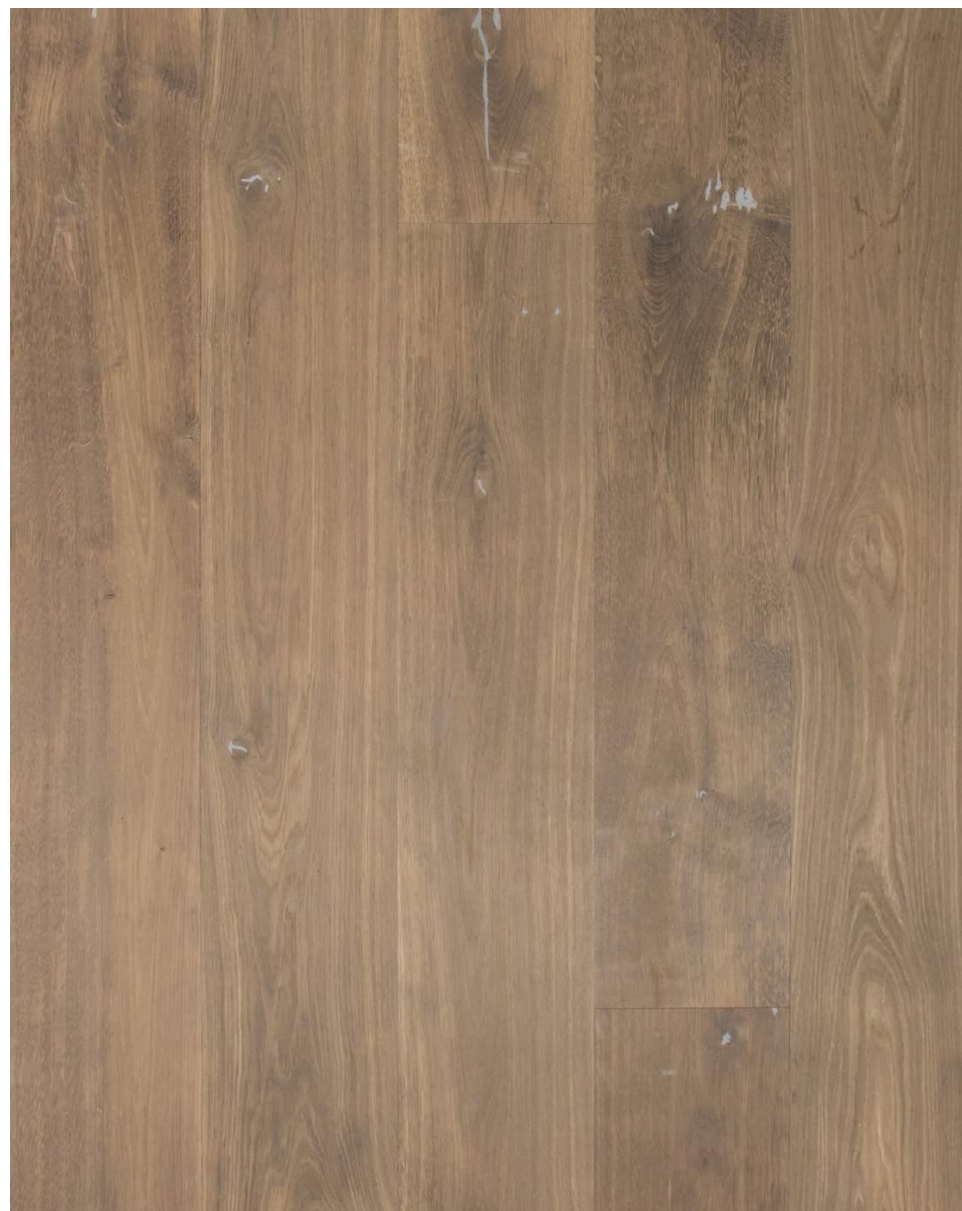

White Oak European Character **FUMED**



Red Oak Prime Grade

Teckton Prime Red Oak comes from the Appalachian region of the United States and is a mixture of 25% Clear and 75% Select. Boards are pre-sanded with 100 grit paper.

Our pre-sanded flooring will save you time.

We pre-sand our floors with 100 grit sandpaper to save you time on the job.

A floor that will last as long as the home.

Our 5/8" thick engineered flooring is designed for many installation options. A 4.5mm wear layer allows for multiple re-sandings.

Consistent grading you can count on.

Long 1 - 7' lengths, and consistent grading give you the canvas you need to create a floor you are proud of.

Superior milling gives you peace of mind.

Our plywood and precision milling provides stability and lay-flat installation every time.

Available in the following formats:

THICKNESS:

WEAR LAYER:

5/8" 4.5 M M

WIDTHS:

3-1/4" / 4" / 5"



*Adverse effects are possible during the sanding process for floating floor installation methods. Please take necessary steps to avoid separation at seams between planks. Planks for floating floor installation method must be 4" or wider.

Warranty & installation guides are available for download at:

www.teckton.com/support

LIFETIME STRUCTURAL WARRANTY:

Teckton offers a limited structural integrity warranty for the life of the product as long as the product is installed in accordance with our installation guidelines and the product is kept in a controlled environment as outlined in the installation guidelines. Teckton also has a limited structural warranty for installations over radiant heat. There are special considerations and requirements for this warranty to be in effect. Please download and read the full radiant heat warranty document before beginning an installation over a radiant heat system.



Red Oak Prime Grade



Red Oak Natural Plus

Teckton Red Oak Natural Plus grade is a slightly cleaner grade that falls between Natural and Prime with 20% Clear, 60% Select, and 20% #1 Common. It has consistent overall color with small, infrequent tight knots and minimal gray/dark stain. Boards are pre-sanded with 100 grit paper.

Our pre-sanded flooring will save you time.

We pre-sand our floors with 100 grit sandpaper to save you time on the job.

A floor that will last as long as the home.

Our 5/8" thick engineered flooring is designed for many installation options. A 4.5mm wear layer allows for multiple re-sandings.

Consistent grading you can count on.

Long 1 - 7' lengths, and consistent grading give you the canvas you need to create a floor you are proud of.

Superior milling gives you peace of mind.

Our plywood and precision milling provides stability and lay-flat installation every time.

Available in the following formats:

THICKNESS: **5/8"** WEAR LAYER: **4.5** ^M/_M

WIDTHS: **2-1/4"**



Warranty & installation guides are available for download at:

www.teckton.com/support

LIFETIME STRUCTURAL WARRANTY:

Teckton offers a limited structural integrity warranty for the life of the product as long as the product is installed in accordance with our installation guidelines and the product is kept in a controlled environment as outlined in the installation guidelines. Teckton also has a limited structural warranty for installations over radiant heat. There are special considerations and requirements for this warranty to be in effect. Please download and read the full radiant heat warranty document before beginning an installation over a radiant heat system.



Red Oak Natural Plus Grade



Red Oak Natural Grade

Teckton Natural Red Oak comes from the Appalachian region of the United States and is a mixture of 90% #1 Common and 10% Select. Boards are pre-sanded with 100 grit paper.

Our pre-sanded flooring will save you time.

We pre-sand our floors with 100 grit sandpaper to save you time on the job.

A floor that will last as long as the home.

Our 5/8" thick engineered flooring is designed for many installation options. A 4.5mm wear layer allows for multiple re-sandings.

Consistent grading you can count on.

Long 1 - 7' lengths, and consistent grading give you the canvas you need to create a floor you are proud of.

Superior milling gives you peace of mind.

Our plywood and precision milling provides stability and lay-flat installation every time.

Available in the following formats:

THICKNESS: **5/8"** WEAR LAYER: **4.5** ^M/_M

WIDTHS: **3-1/4" / 4" / 5"**




*Adverse effects are possible during the sanding process for floating floor installation methods. Please take necessary steps to avoid separation at seams between planks. Planks for floating floor installation method must be 4" or wider.

Warranty & installation guides are available for download at:
www.teckton.com/support

LIFETIME STRUCTURAL WARRANTY:

Teckton offers a limited structural integrity warranty for the life of the product as long as the product is installed in accordance with our installation guidelines and the product is kept in a controlled environment as outlined in the installation guidelines. Teckton also has a limited structural warranty for installations over radiant heat. There are special considerations and requirements for this warranty to be in effect. Please download and read the full radiant heat warranty document before beginning an installation over a radiant heat system.

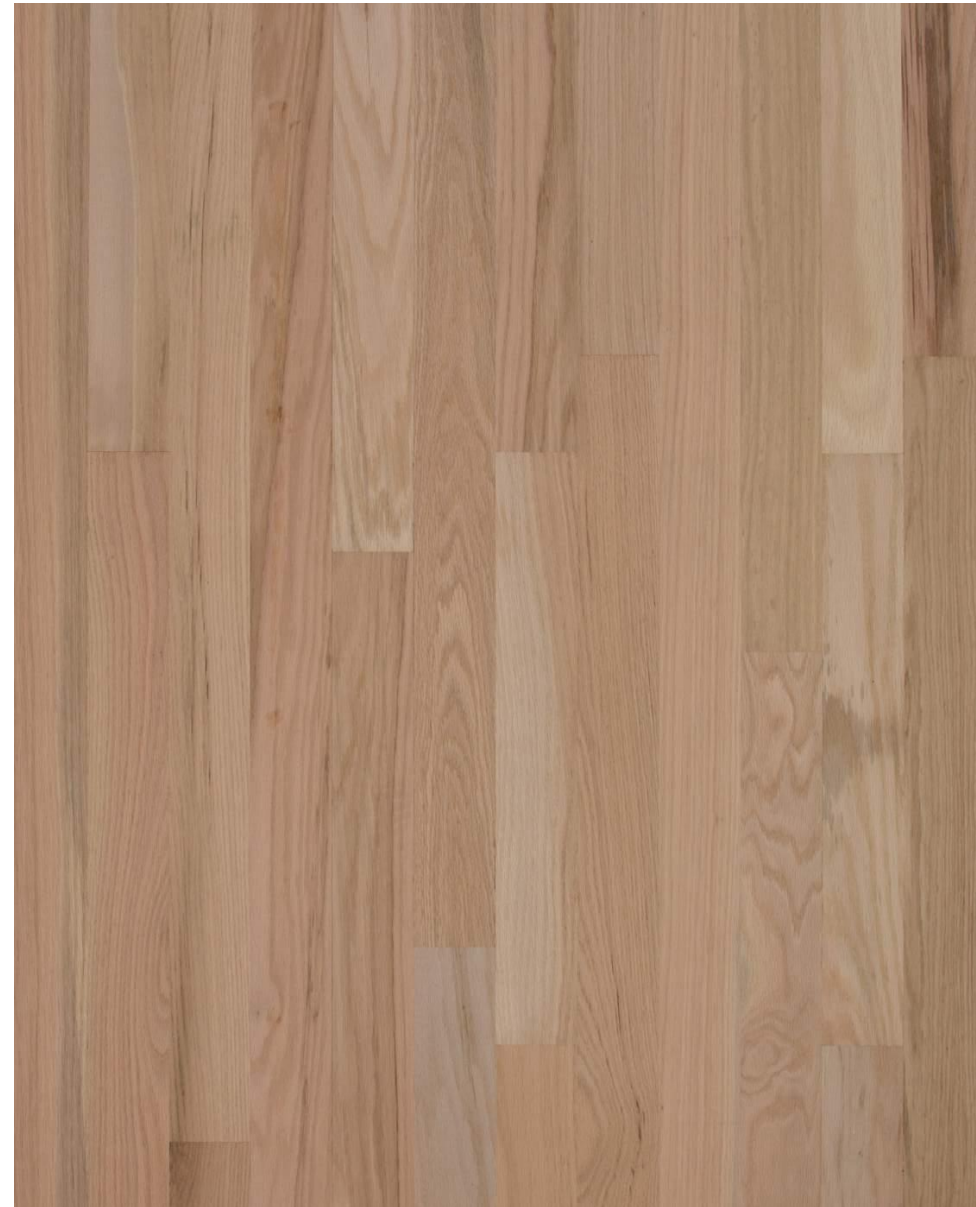

Red Oak Natural Grade



Hickory Natural Grade

Teckton Natural Hickory is a mixture of 30% 1st Grade and 70% 2nd Grade. Color will range from creamy white to dark brown sap with unlimited variation. It will also include knots and filled knots and all natural character variations found in Hickory lumber. Boards are pre-sanded with 100 grit paper.

Our pre-sanded flooring will save you time.

We pre-sand our floors with 100 grit sandpaper to save you time on the job.

A floor that will last as long as the home.

Our 5/8" thick engineered flooring is designed for many installation options. A 4.5mm wear layer allows for multiple re-sandings.

Consistent grading you can count on.

Long 1 - 7' lengths, and consistent grading give you the canvas you need to create a floor you are proud of.

Superior milling gives you peace of mind.

Our plywood and precision milling provides stability and lay-flat installation every time.

Available in the following formats:

THICKNESS:

WEAR LAYER:

5/8"

4.5 M
M

WIDTHS:

5"




*Adverse effects are possible during the sanding process for floating floor installation methods. Please take necessary steps to avoid separation at seams between planks. Planks for floating floor installation method must be 4" or wider.

Warranty & installation guides are available for download at:

www.teckton.com/support

LIFETIME STRUCTURAL WARRANTY:

Teckton offers a limited structural integrity warranty for the life of the product as long as the product is installed in accordance with our installation guidelines and the product is kept in a controlled environment as outlined in the installation guidelines. Teckton also has a limited structural warranty for installations over radiant heat. There are special considerations and requirements for this warranty to be in effect. Please download and read the full radiant heat warranty document before beginning an installation over a radiant heat system.

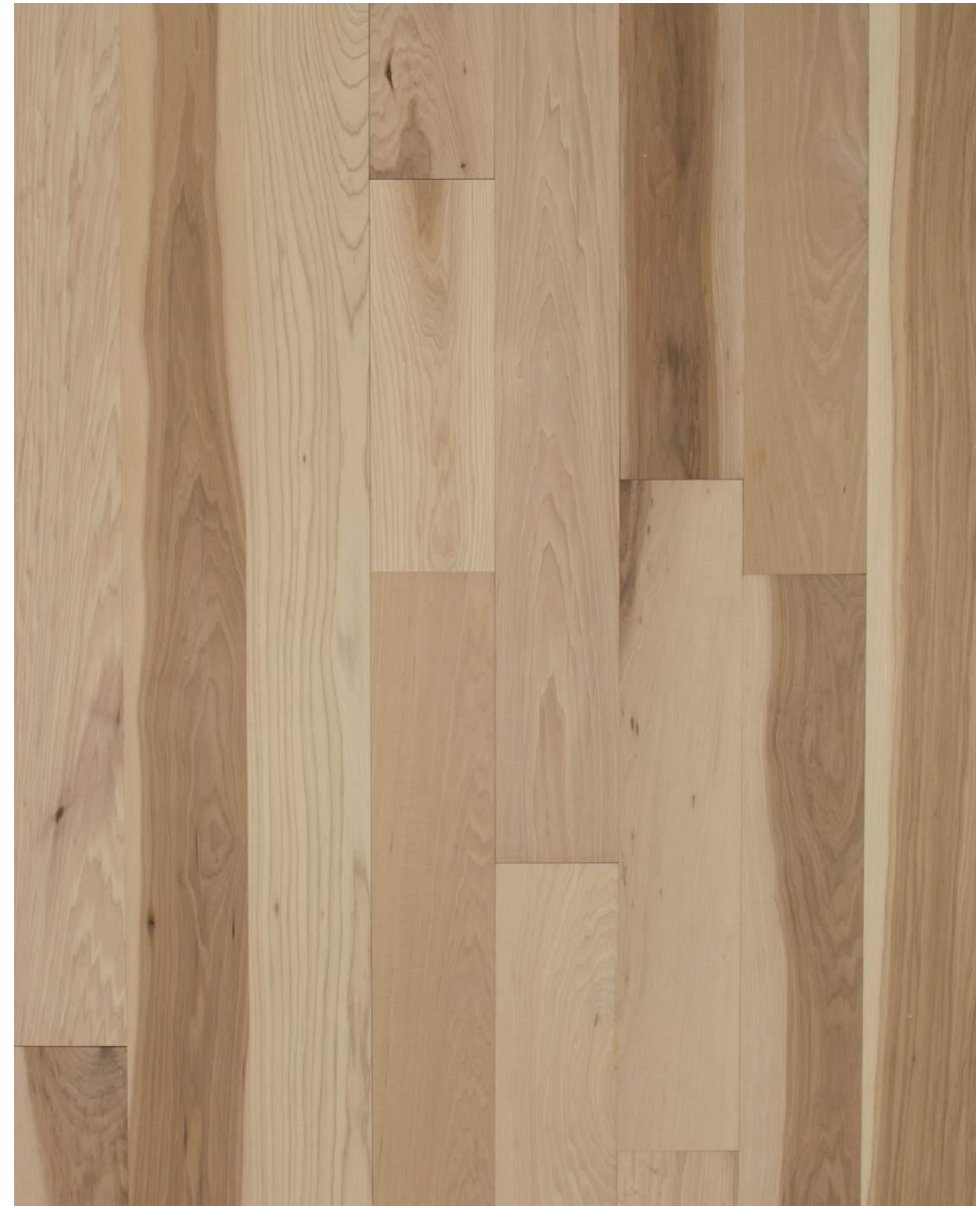

Hickory Natural Grade



Walnut Prime Grade

Teckton Prime Grade Walnut has consistent dark color and small tight knots allowing up to 10% sap content. Boards are pre-sanded with 100 grit paper.

Our pre-sanded flooring will save you time.

We pre-sand our floors with 100 grit sandpaper to save you time on the job.

A floor that will last as long as the home.

Our 5/8" thick engineered flooring is designed for many installation options. A 4.5mm wear layer allows for multiple re-sandings.

Consistent grading you can count on.

Long 1 - 7' lengths, and consistent grading give you the canvas you need to create a floor you are proud of.

Superior milling gives you peace of mind.

Our plywood and precision milling provides stability and lay-flat installation every time.

Available in the following formats:

THICKNESS:

5/8"

WEAR LAYER:

4.5 M M

WIDTHS:

5"




*Adverse effects are possible during the sanding process for floating floor installation methods. Please take necessary steps to avoid separation at seams between planks. Planks for floating floor installation method must be 4" or wider.

Warranty & installation guides are available for download at:

www.teckton.com/support

LIFETIME STRUCTURAL WARRANTY:

Teckton offers a limited structural integrity warranty for the life of the product as long as the product is installed in accordance with our installation guidelines and the product is kept in a controlled environment as outlined in the installation guidelines. Teckton also has a limited structural warranty for installations over radiant heat. There are special considerations and requirements for this warranty to be in effect. Please download and read the full radiant heat warranty document before beginning an installation over a radiant heat system.

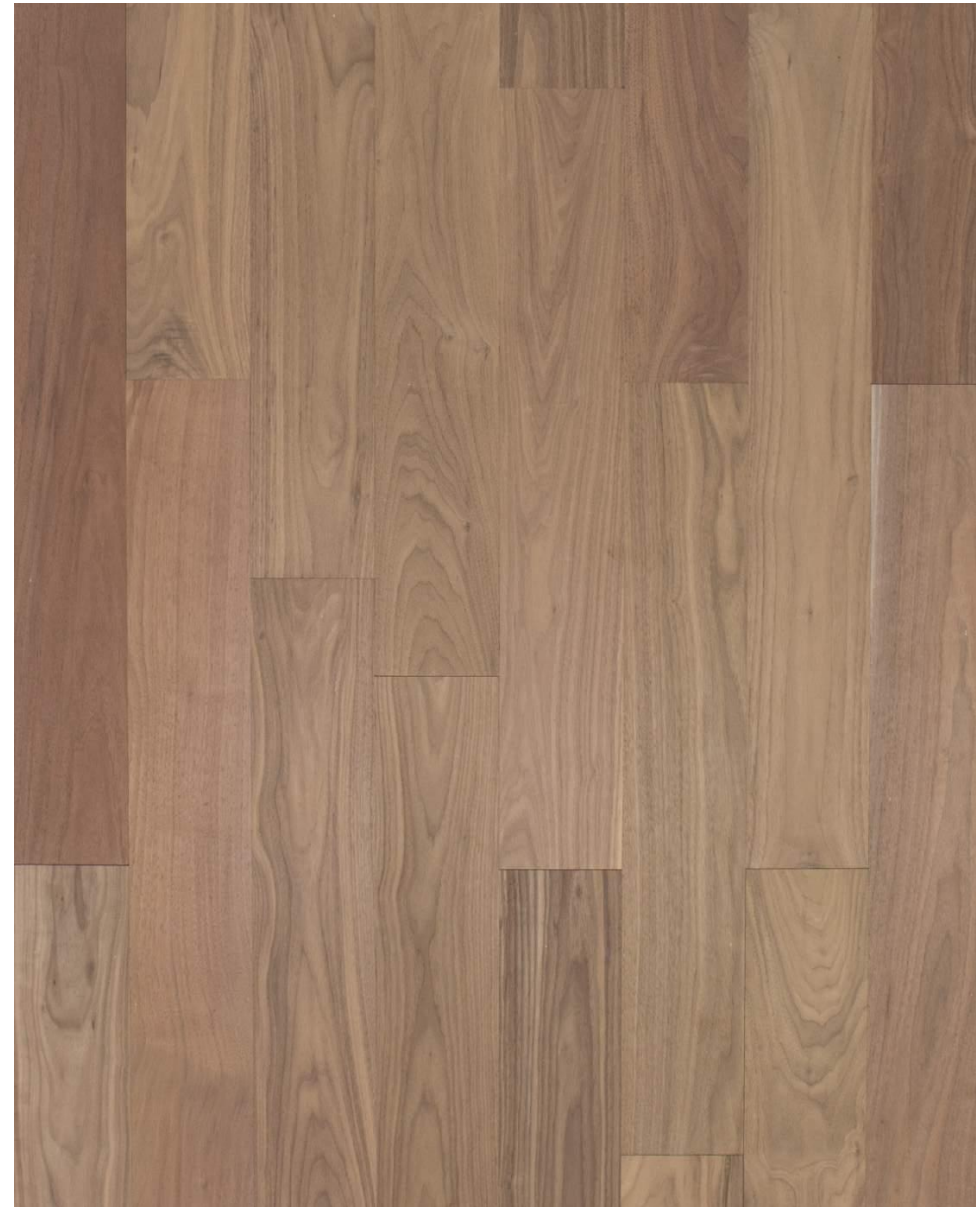

Walnut Prime Grade



Walnut Natural Grade

Teckton Natural Grade Walnut has color ranging from dark heartwood to creamy white sapwood throughout. It will allow knots and filled knots and all sound character marks found in the lumber. Boards are pre-sanded with 100 grit paper.

Our pre-sanded flooring will save you time.

We pre-sand our floors with 100 grit sandpaper to save you time on the job.

A floor that will last as long as the home.

Our 5/8" thick engineered flooring is designed for many installation options. A 4.5mm wear layer allows for multiple re-sandings.

Consistent grading you can count on.

Long 1 - 7' lengths, and consistent grading give you the canvas you need to create a floor you are proud of.

Superior milling gives you peace of mind.

Our plywood and precision milling provides stability and lay-flat installation every time.

Available in the following formats:

THICKNESS:

5/8"

WEAR LAYER:

4.5 M M

WIDTHS:

5"



*Adverse effects are possible during the sanding process for floating floor installation methods. Please take necessary steps to avoid separation at seams between planks. Planks for floating floor installation method must be 4" or wider.

Warranty & installation guides are available for download at:

www.teckton.com/support

LIFETIME STRUCTURAL WARRANTY:

Teckton offers a limited structural integrity warranty for the life of the product as long as the product is installed in accordance with our installation guidelines and the product is kept in a controlled environment as outlined in the installation guidelines. Teckton also has a limited structural warranty for installations over radiant heat. There are special considerations and requirements for this warranty to be in effect. Please download and read the full radiant heat warranty document before beginning an installation over a radiant heat system.



Walnut Natural Grade



RENAISSANCE
collection

Antique Heart Pine

Natural Grade

Teckton Natural Heart Pine is a mixture of 2nd Grade and better. Color will range from dark earthy red to a light whitewashed yellow hue for a very distinct, authentic look. It will also include knots and filled knots and all natural character variations found in Reclaimed Antique Heart Pine lumber. Boards are pre-sanded with 100 grit sandpaper.

Our pre-sanded flooring will save you time.

We pre-sand our floors with 100 grit sandpaper to save you time on the job.

A floor that will last as long as the home.

Our 5/8" thick engineered flooring is designed for many installation options. A 4.5mm wear layer allows for multiple re-sandings.

Consistent grading you can count on.

Long 1 - 7' lengths, and consistent grading give you the canvas you need to create a floor you are proud of.

Superior milling gives you peace of mind.

Our plywood and precision milling provides stability and lay-flat installation every time.

RECOMMENDED INSTALLATION METHODS

GLUE DOWN

NAIL DOWN

FLOAT




*Adverse effects are possible during the sanding process for floating floor installation methods. Please take necessary steps to avoid separation at seams between planks. Planks for floating floor installation method must be 4" or wider.

Warranty & installation guides are available for download at:


www.teckton.com/support

LIFETIME STRUCTURAL WARRANTY:

Teckton offers a limited structural integrity warranty for the life of the product as long as the product is installed in accordance with our installation guidelines and the product is kept in a controlled environment as outlined in the installation guidelines. Teckton also has a limited structural warranty for installations over radiant heat. There are special considerations and requirements for this warranty to be in effect. Please download and read the full radiant heat warranty document before beginning an installation over a radiant heat system.

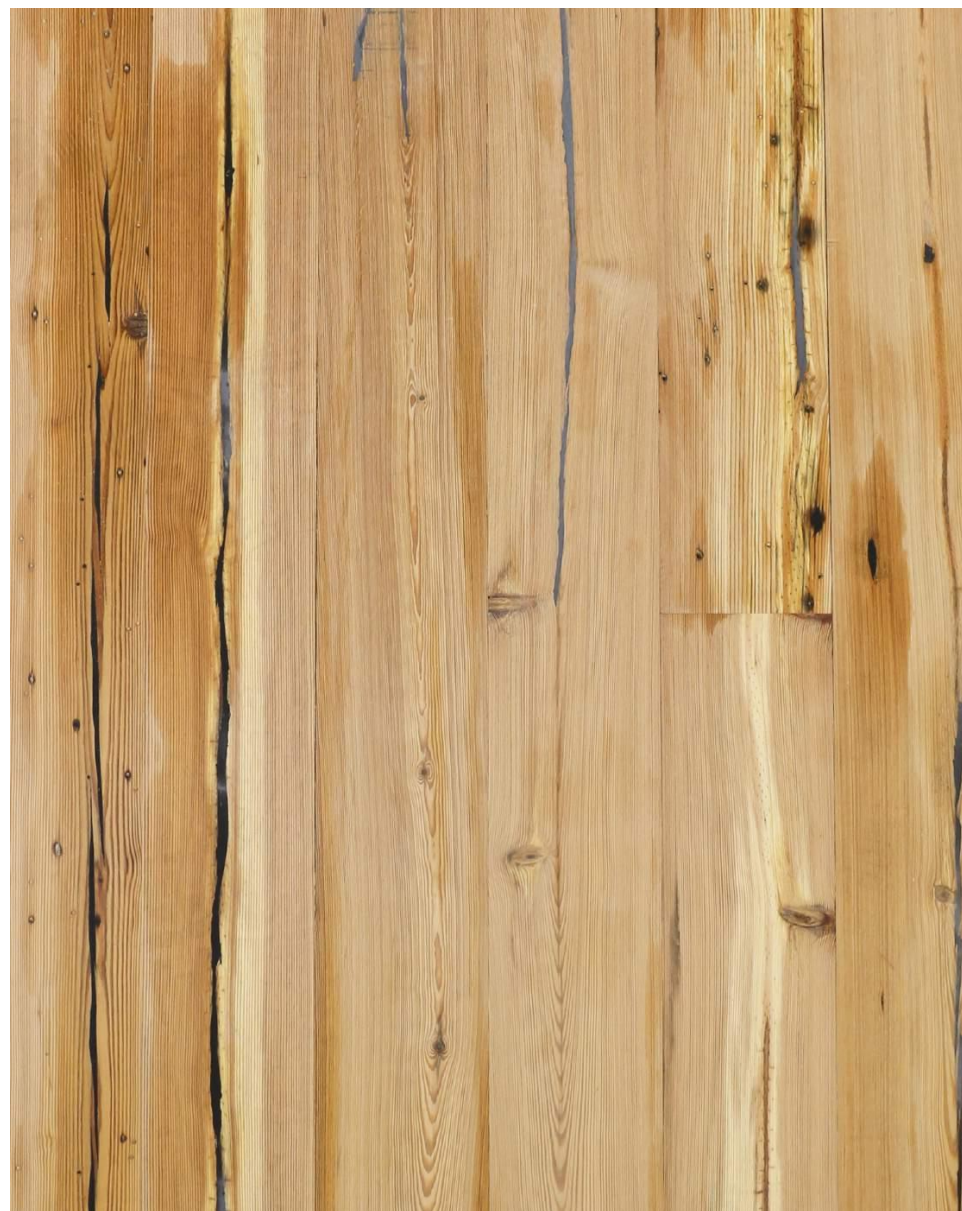

Antique Heart Pine Natural Grade

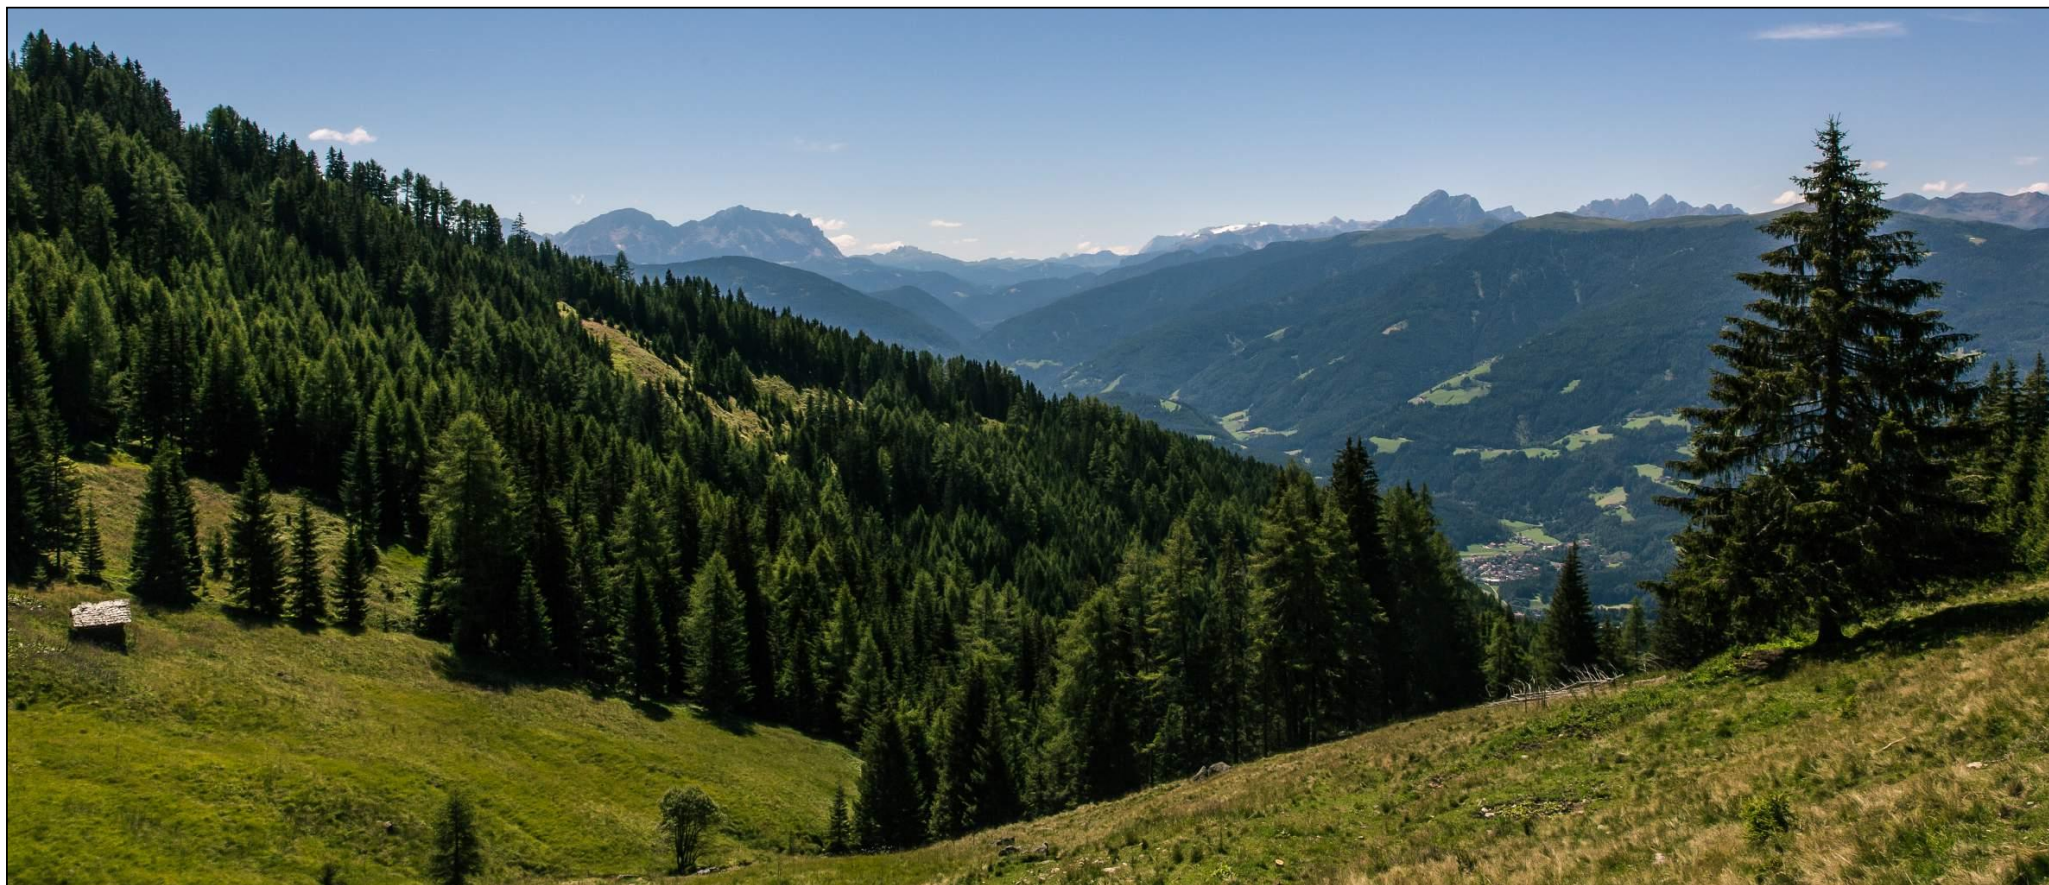

IMPRESSIONIST

collection

New in 2018, our Impressionist Collection features 1/2" unfinished engineered flooring in white oak, red oak, hickory, and walnut.

White Oak *European Character Grade*

Teckton European White Oak Natural grade is a mill run mixture of #2 Common & Better. Boards are pre-sanded with 100 grit paper.

Our pre-sanded flooring will save you time.

We pre-sand our floors with 100 grit sandpaper to save you time on the job.

A floor that will last as long as the home.

Our 1/2" thick engineered flooring is designed for many installation options. A 3mm wear layer allows for multiple re-sandings.

Consistent grading you can count on.

Long 1 - 6' lengths, and consistent grading give you the canvas you need to create a floor you are proud of.

Superior milling gives you peace of mind.

Our plywood and precision milling provides stability and lay-flat installation every time.

Available in the following formats:

THICKNESS:

WEAR LAYER:

1/2"

3.0^M_M

WIDTHS:

5"




*Adverse effects are possible during the sanding process for floating floor installation methods. Please take necessary steps to avoid separation at seams between planks. Planks for floating floor installation method must be 4" or wider.

Warranty & installation guides are available for download at:

www.teckton.com/support

LIFETIME STRUCTURAL WARRANTY:

Teckton offers a limited structural integrity warranty for the life of the product as long as the product is installed in accordance with our installation guidelines and the product is kept in a controlled environment as outlined in the installation guidelines. Teckton also has a limited structural warranty for installations over radiant heat. There are special considerations and requirements for this warranty to be in effect. Please download and read the full radiant heat warranty document before beginning an installation over a radiant heat system.

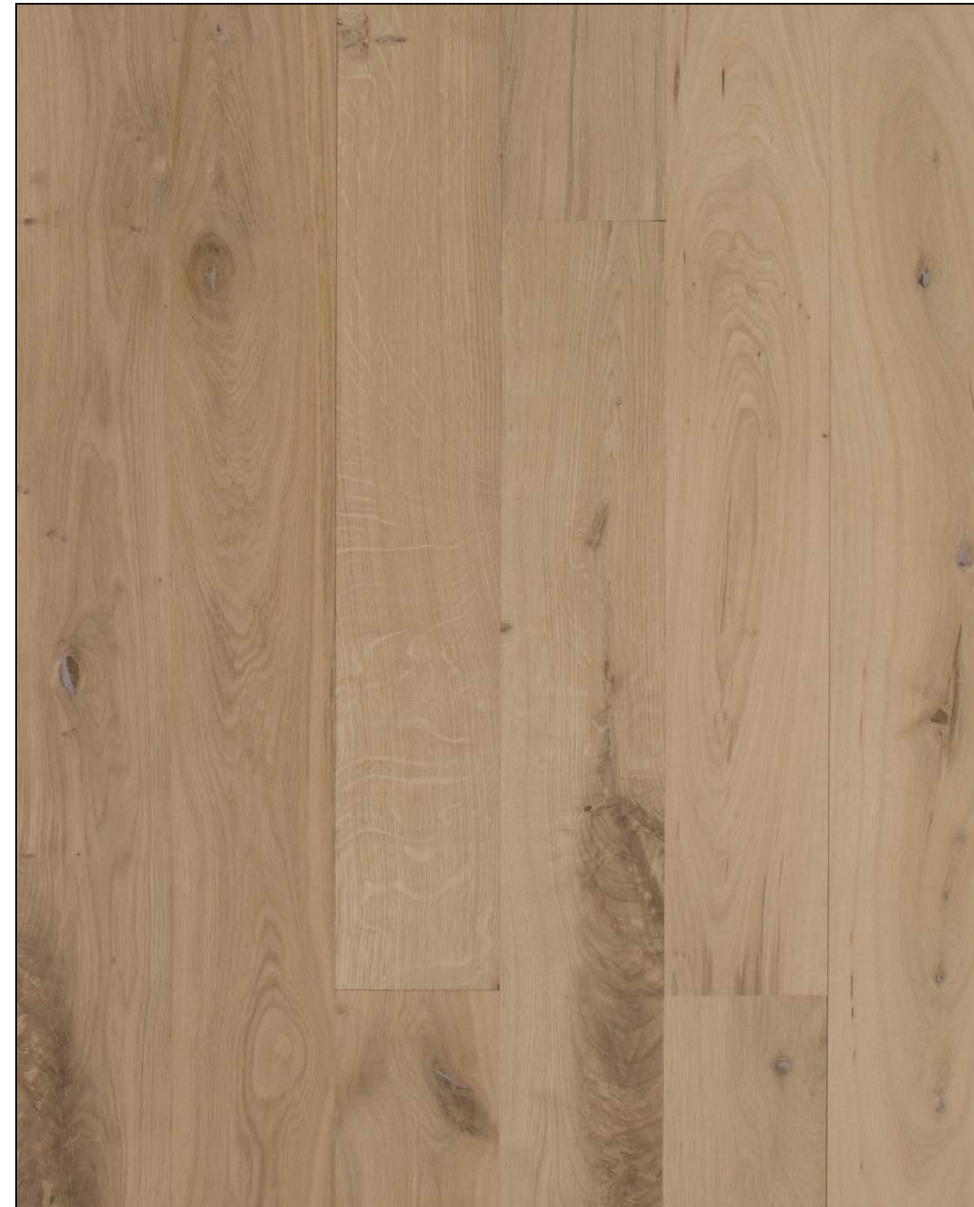

White Oak *European Character Grade*



Hickory Natural Grade

Teckton Natural Hickory is a mixture of 30% 1st Grade and 70% 2nd Grade. Color will range from creamy white to dark brown sap with unlimited variation. It will also include knots and filled knots and all natural character variations found in Hickory lumber. Boards are pre-sanded with 100 grit paper.

Our pre-sanded flooring will save you time.

We pre-sand our floors with 100 grit sandpaper to save you time on the job.

A floor that will last as long as the home.

Our 1/2" thick engineered flooring is designed for many installation options. A 3mm wear layer allows for multiple re-sandings.

Consistent grading you can count on.

Long 1 - 6' lengths, and consistent grading give you the canvas you need to create a floor you are proud of.

Superior milling gives you peace of mind.

Our plywood and precision milling provides stability and lay-flat installation every time.

Available in the following formats:

THICKNESS:

1/2"

WEAR LAYER:

3.0^M_M

WIDTHS:

5"




*Adverse effects are possible during the sanding process for floating floor installation methods. Please take necessary steps to avoid separation at seams between planks. Planks for floating floor installation method must be 4" or wider.

Warranty & installation guides are available for download at:

www.teckton.com/support

LIFETIME STRUCTURAL WARRANTY:

Teckton offers a limited structural integrity warranty for the life of the product as long as the product is installed in accordance with our installation guidelines and the product is kept in a controlled environment as outlined in the installation guidelines. Teckton also has a limited structural warranty for installations over radiant heat. There are special considerations and requirements for this warranty to be in effect. Please download and read the full radiant heat warranty document before beginning an installation over a radiant heat system.

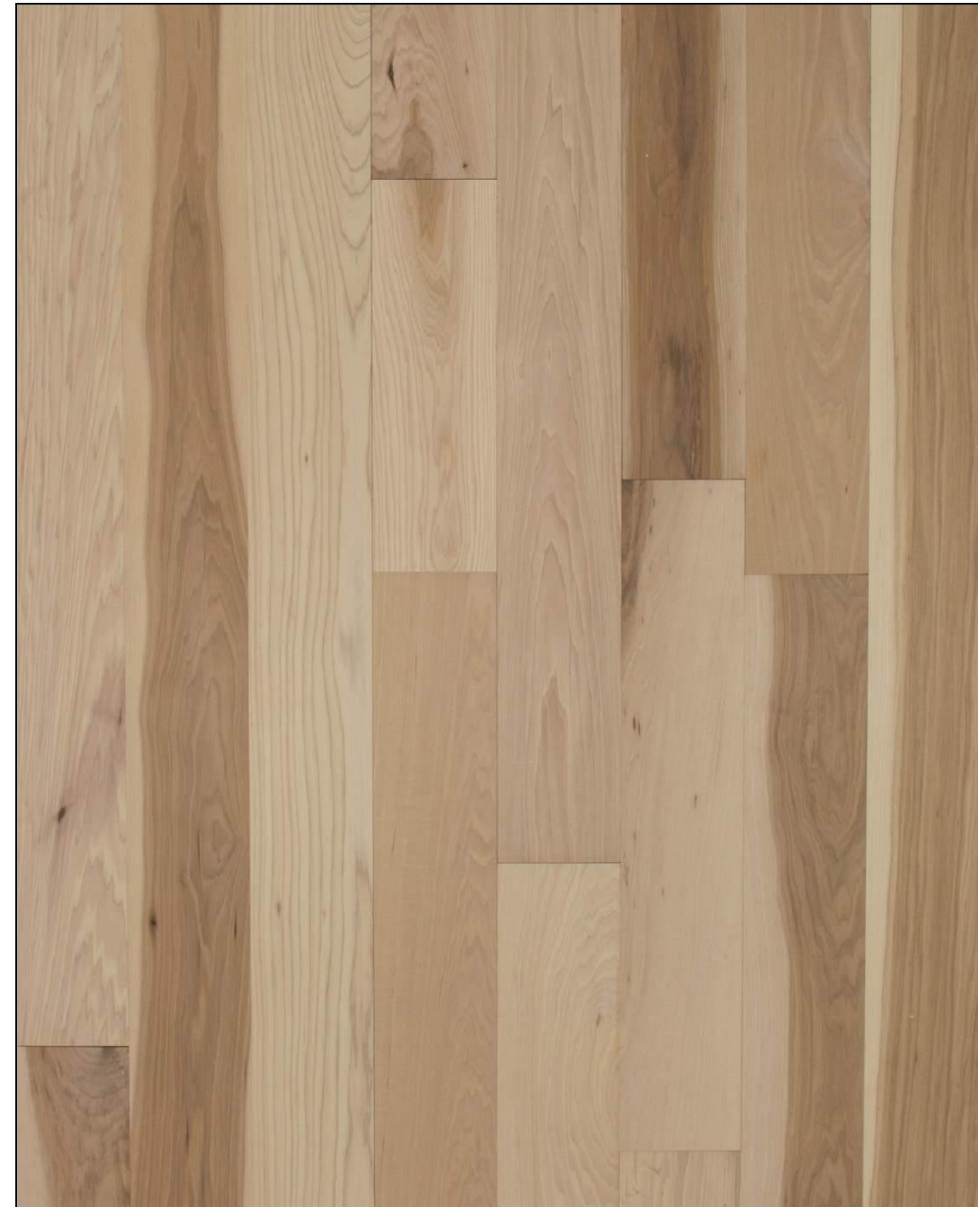

Hickory Natural Grade



Red Oak Natural Plus

Teckton Red Oak Natural Plus grade is a slightly cleaner grade that falls between Natural and Prime. It has consistent overall color with small, infrequent tight knots and minimal gray/dark stain. Boards are pre-sanded with 100 grit paper.

Our pre-sanded flooring will save you time.

We pre-sand our floors with 100 grit sandpaper to save you time on the job.

A floor that will last as long as the home.

Our 1/2" thick engineered flooring is designed for many installation options. A 3mm wear layer allows for multiple re-sandings.

Consistent grading you can count on.

Long 1 - 6' lengths, and consistent grading give you the canvas you need to create a floor you are proud of.

Superior milling gives you peace of mind.

Our plywood and precision milling provides stability and lay-flat installation every time.

Available in the following formats:

THICKNESS:

1/2"

WEAR LAYER:

3.0^M_M

WIDTHS:

5"




*Adverse effects are possible during the sanding process for floating floor installation methods. Please take necessary steps to avoid separation at seams between planks. Planks for floating floor installation method must be 4" or wider.

Warranty & installation guides are available for download at:

www.teckton.com/support

LIFETIME STRUCTURAL WARRANTY:

Teckton offers a limited structural integrity warranty for the life of the product as long as the product is installed in accordance with our installation guidelines and the product is kept in a controlled environment as outlined in the installation guidelines. Teckton also has a limited structural warranty for installations over radiant heat. There are special considerations and requirements for this warranty to be in effect. Please download and read the full radiant heat warranty document before beginning an installation over a radiant heat system.

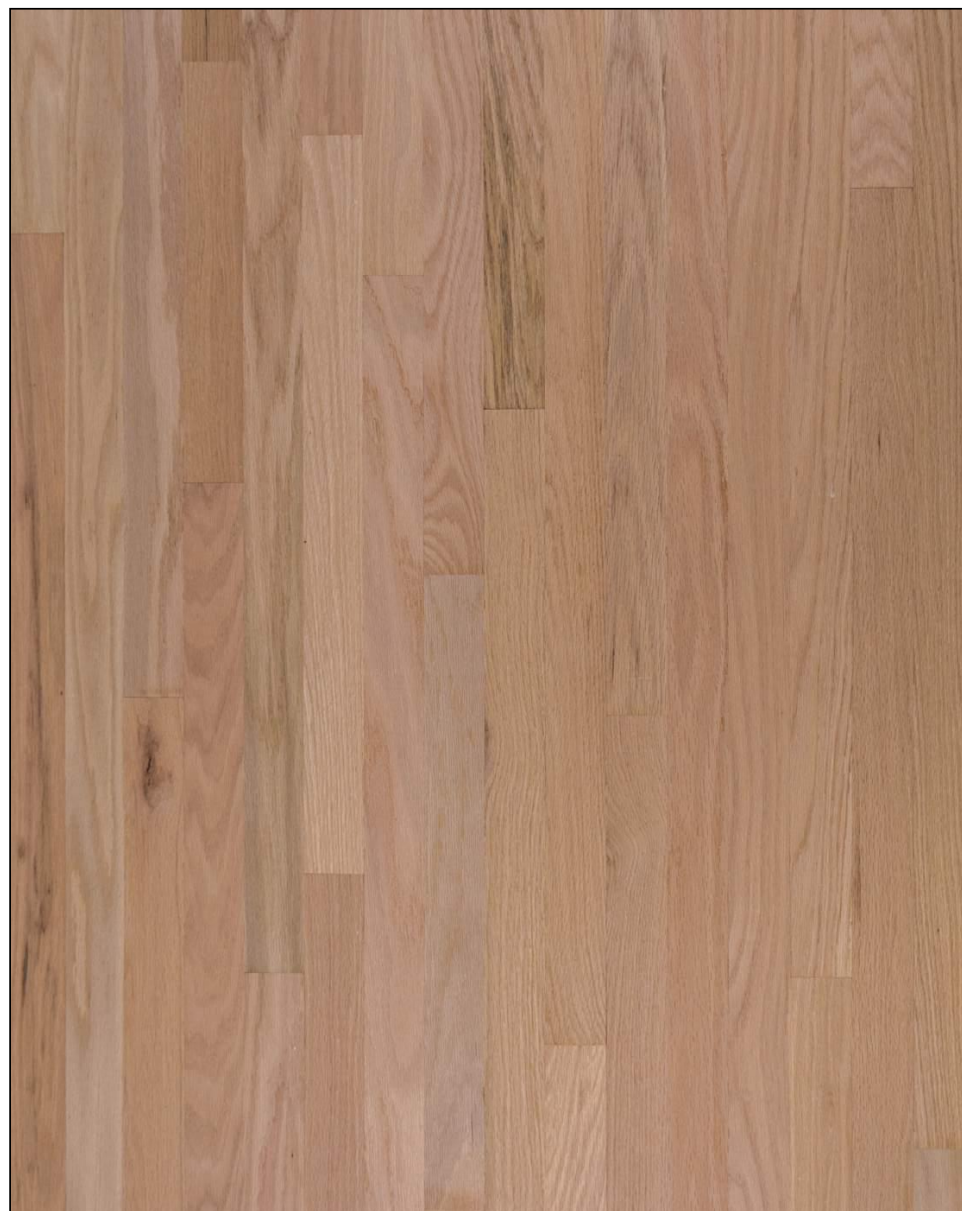

Red Oak Natural Plus Grade



Walnut Prime Grade

Teckton Prime Grade Walnut has consistent dark color and small tight knots allowing up to 10% sap content. Boards are pre-sanded with 100 grit paper.

Our pre-sanded flooring will save you time.

We pre-sand our floors with 100 grit sandpaper to save you time on the job.

A floor that will last as long as the home.

Our 1/2" thick engineered flooring is designed for many installation options. A 3mm wear layer allows for multiple re-sandings.

Consistent grading you can count on.

Long 1 - 6' lengths, and consistent grading give you the canvas you need to create a floor you are proud of.

Superior milling gives you peace of mind.

Our plywood and precision milling provides stability and lay-flat installation every time.

Available in the following formats:

THICKNESS: 1/2" WEAR LAYER: 3.0MM

WIDTHS: 5"



*Adverse effects are possible during the sanding process for floating floor installation methods. Please take necessary steps to avoid separation at seams between planks. Planks for floating floor installation method must be 4" or wider.

Warranty & installation guides are available for download at:
www.teckton.com/support

LIFETIME STRUCTURAL WARRANTY:
 Teckton offers a limited structural integrity warranty for the life of the product as long as the product is installed in accordance with our installation guidelines and the product is kept in a controlled environment as outlined in the installation guidelines. Teckton also has a limited structural warranty for installations over radiant heat. There are special considerations and requirements for this warranty to be in effect. Please download and read the full radiant heat warranty document before beginning an installation over a radiant heat system.



Walnut Prime Grade



Walnut Natural Grade

Teckton Natural Grade Walnut has color ranging from dark heartwood to creamy white sapwood throughout. It will allow knots and filled knots and all sound character marks found in the lumber. Boards are pre-sanded with 100 grit paper.

Our pre-sanded flooring will save you time.

We pre-sand our floors with 100 grit sandpaper to save you time on the job.

A floor that will last as long as the home.

Our 1/2" thick engineered flooring is designed for many installation options. A 3mm wear layer allows for multiple re-sandings.

Consistent grading you can count on.

Long 1 - 6' lengths, and consistent grading give you the canvas you need to create a floor you are proud of.

Superior milling gives you peace of mind.

Our plywood and precision milling provides stability and lay-flat installation every time.

Available in the following formats:

THICKNESS:

1/2"

WEAR LAYER:

3.0^M_M

WIDTHS:

5"




*Adverse effects are possible during the sanding process for floating floor installation methods. Please take necessary steps to avoid separation at seams between planks. Planks for floating floor installation method must be 4" or wider.

Warranty & installation guides are available for download at:

www.teckton.com/support

LIFETIME STRUCTURAL WARRANTY:

Teckton offers a limited structural integrity warranty for the life of the product as long as the product is installed in accordance with our installation guidelines and the product is kept in a controlled environment as outlined in the installation guidelines. Teckton also has a limited structural warranty for installations over radiant heat. There are special considerations and requirements for this warranty to be in effect. Please download and read the full radiant heat warranty document before beginning an installation over a radiant heat system.

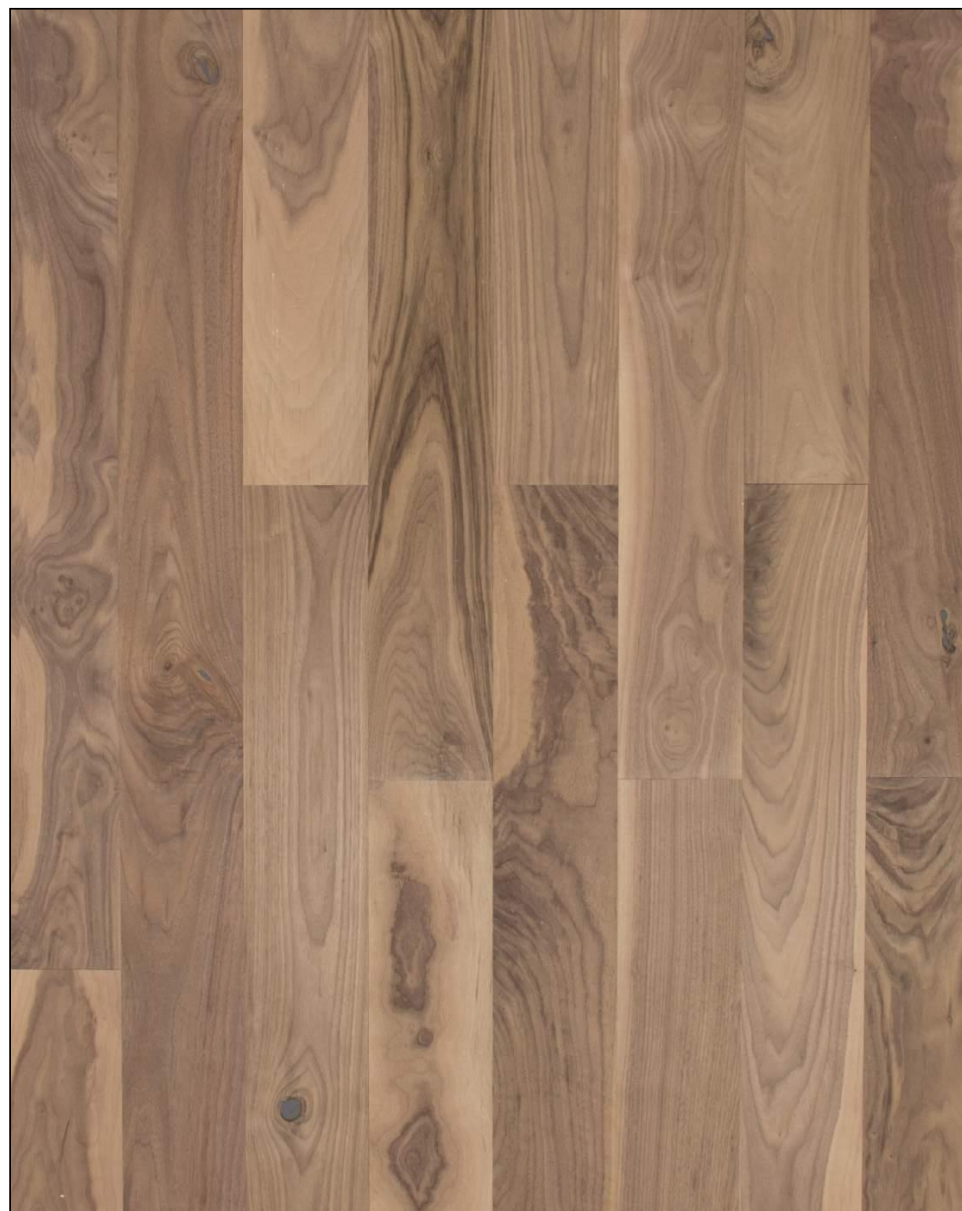

Walnut Natural Grade

White Oak
Prime Grade



Natural Plus Grade



Natural Grade



Red Oak
Prime Grade



Natural Plus Grade



Natural Grade



