


INSTRUCTION SHEET

Fig 1




Start with both people at the front of the vehicle. One person holding the cover and the other person holding the tether. Make sure mirrors are folded in and in some models the antenna is screwed off.

Fig 2

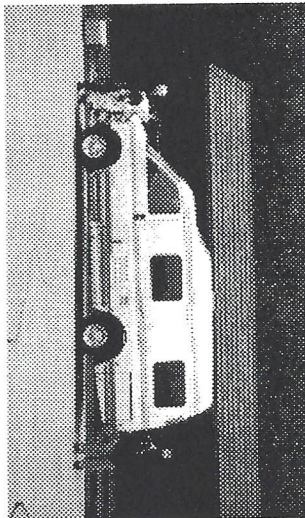


The person holding the tether walks to the back of the vehicle bringing the tether with them.

Fig 3

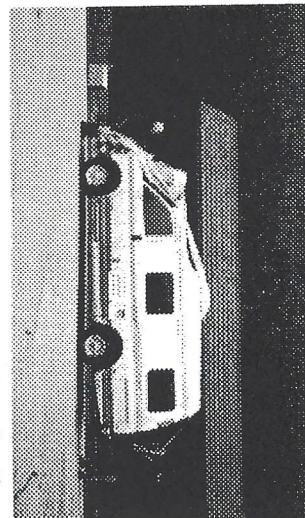


In a jump rope fashion, both people swing the tether to the top of the vehicle as close to the middle as possible. The person at the back starts pulling the tether until they have all of it.

Fig 4

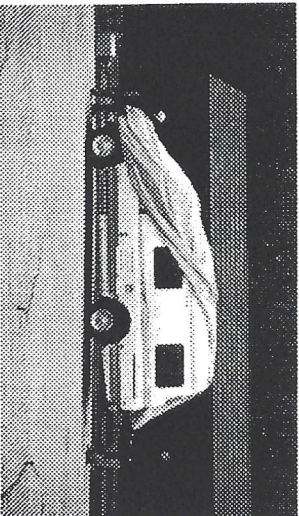

The person at the front simply pulls the cover down over the vehicle while the person holding the tether stands in place.

Fig 5

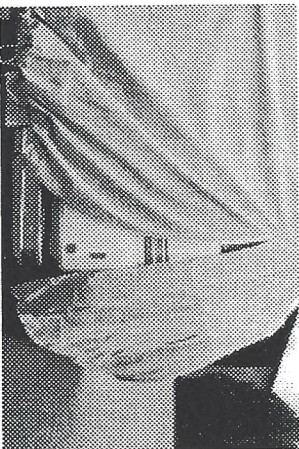


Put the tether back into the pouch in which it was taken out. Once the vehicle is covered fasten all clips and put together all velcro flaps.

Fig 6




The vehicle should be fully covered and protected from the elements. The side door has a zipper opening so it is possible to go inside while covered. (Fig 7)

Fig 7

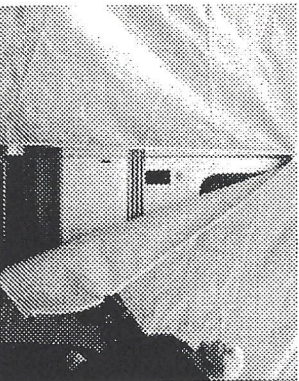

The side door can be opened to have access to the inside of the vehicle. Make sure you park the vehicle in a place where you can get into the side door.

Fig 8

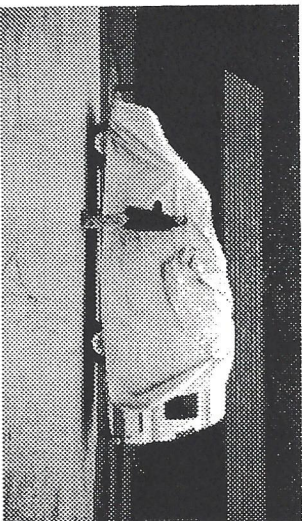

To take off the cover, unfasten all clips and velcro, take out the tether and walk it back over the vehicle. Set the cover down flat on the ground. Fold in the sides and roll it back up.



HUGGER COVERS INC.

365 Healey Road, Unit # 28

Bolton, Ontario, Canada

L7E 5C1

Telephone: 905.857.1800

Fax: 905.857.1805

Email: info@huggercovers.com

www.huggercovers.com