



INTROVERT 145_5 REFLECTOR / INTROVERT 145_5 REFLECTOR S

INSTALLATION, OPERATION, MAINTENANCE & SAFETY MANUAL. EDITION 2024 : STEEL COUTURE

I.

PRODUCT SPECIFICATIONS:

BASE MODELS
&
EDITION 2024 : *STEEL COUTURE* VARIATIONS*

*The *STEEL COUTURE* lamps are derived from the INTROVERT 145_5 REFLECTOR base models.

Overall dimensions and typical structure of the lampshades remain identical to the base models.


EDITION 2024 adds a special feature - steel clip-on bows in various sizes and arrangements.

Multiple steel bow sizes and arrangements beyond examples shown here are possible on request.


For extended photography of lamps specified here, please see EDITION 2024 CATALOG or visit www.culturabyrmm.com.

Base models are always available in addition to all current editions.


INTROVERT 145_5 REFLECTOR. BASE MODEL

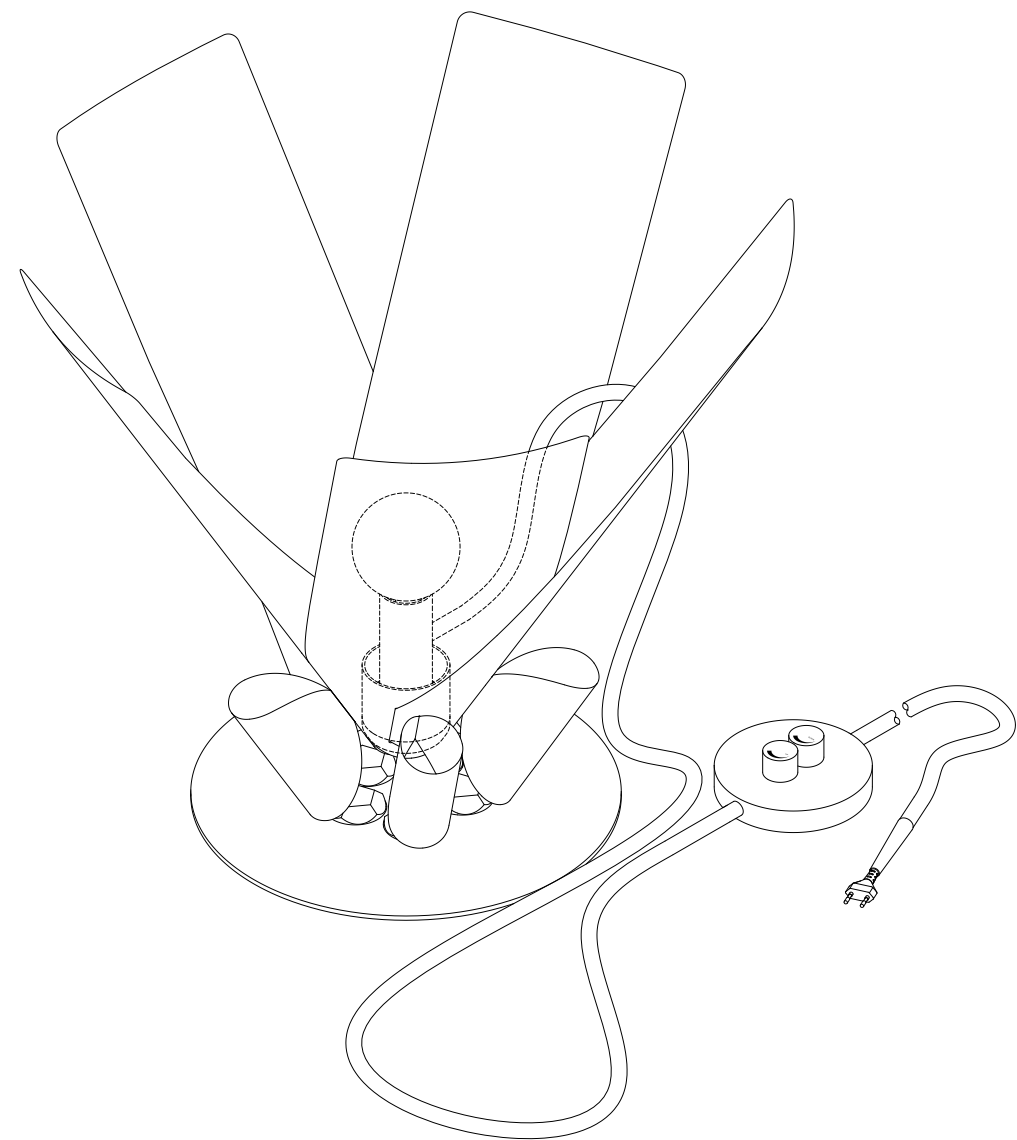


INTROVERT 145_5 REFLECTOR S. BASE MODEL

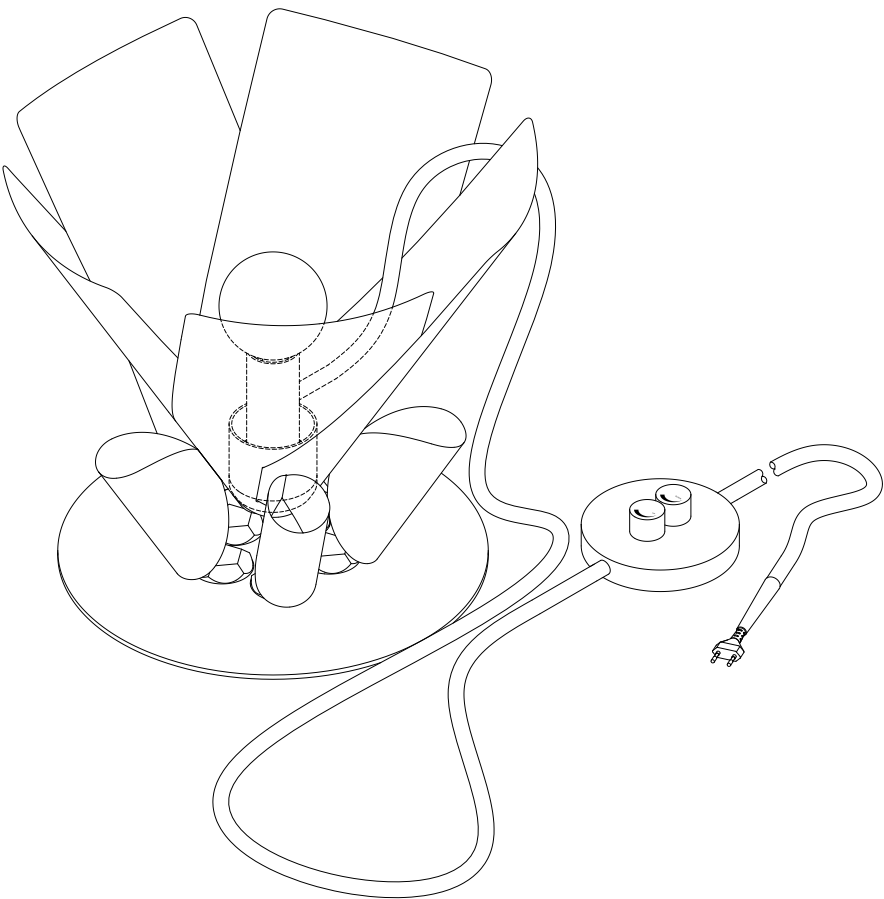



INTROVERT 145_5 REFLECTOR. BASE MODEL

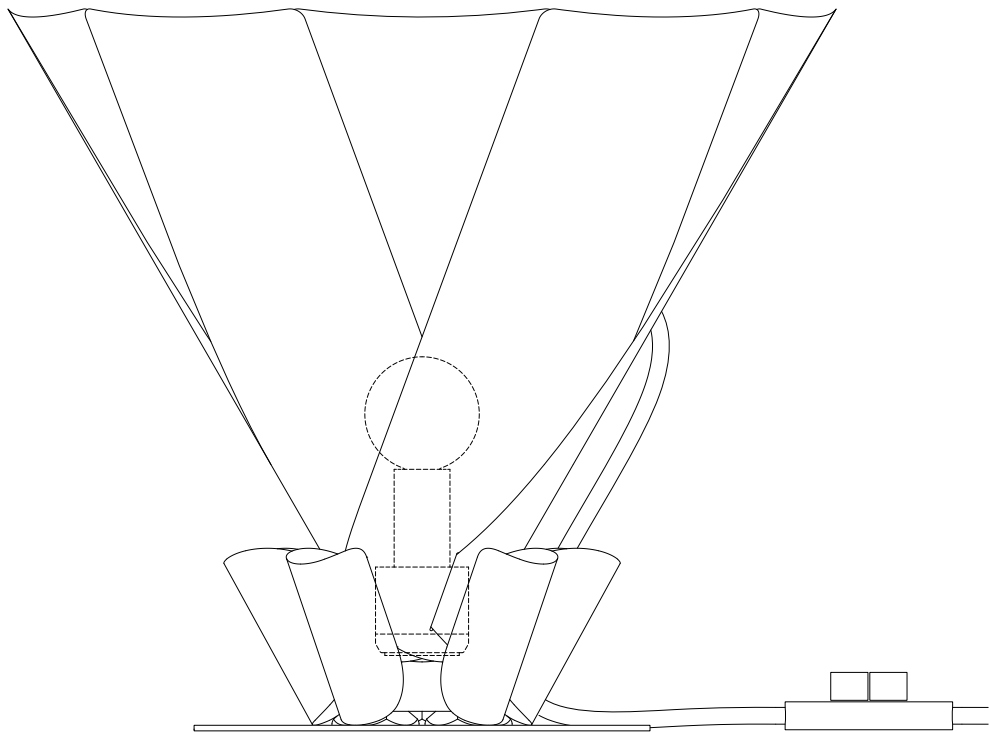

INTROVERT 145_5 REFLECTOR S. BASE MODEL

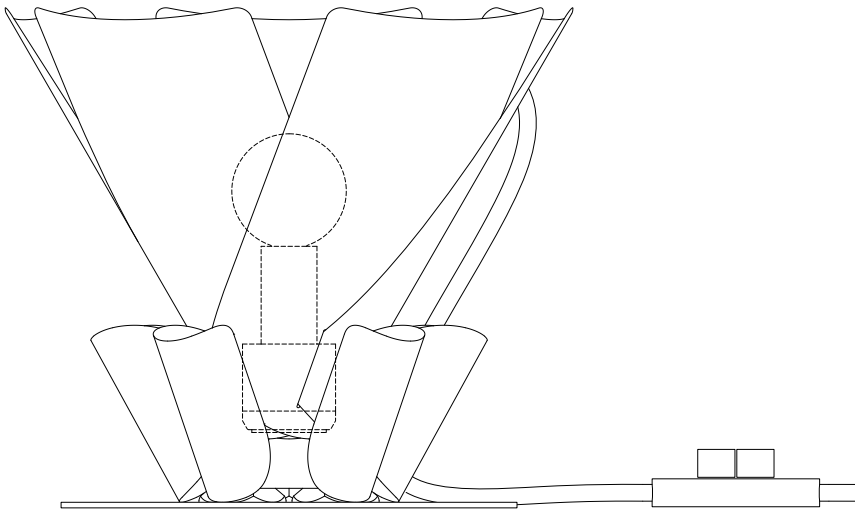



SIDE & TOP VIEWS

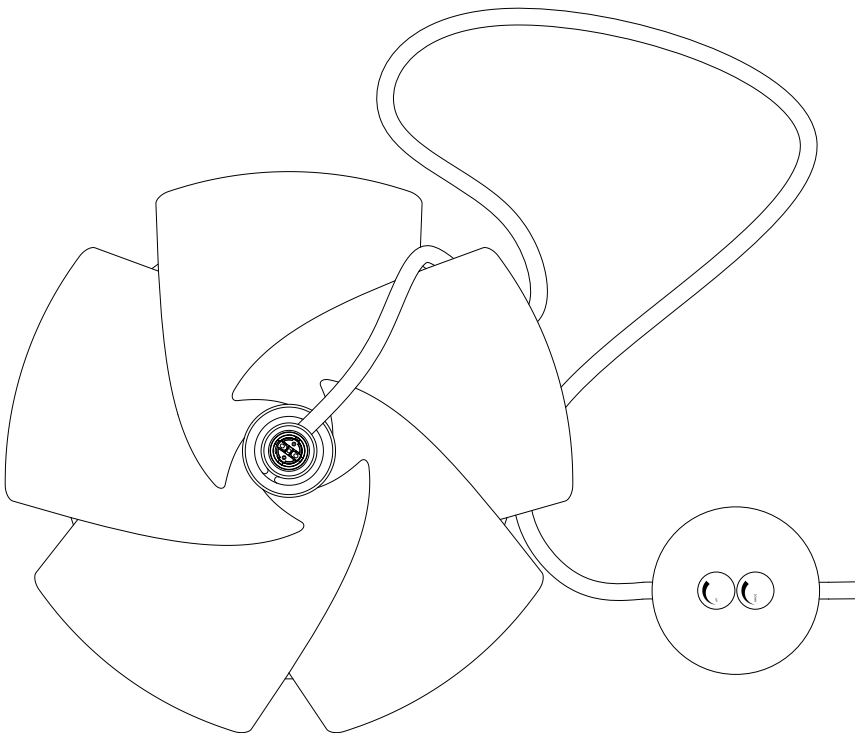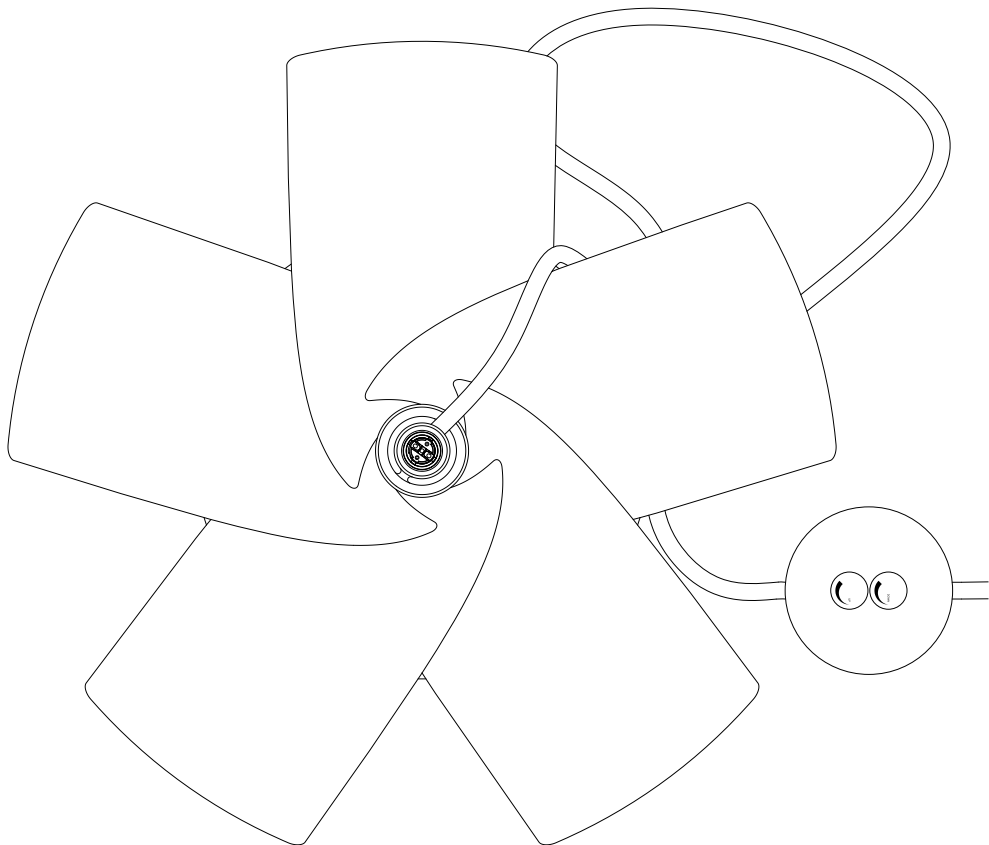

INTROVERT 145_5 REFLECTOR. BASE MODEL


INTROVERT 145_5 REFLECTOR S. BASE MODEL

COMPONENTS

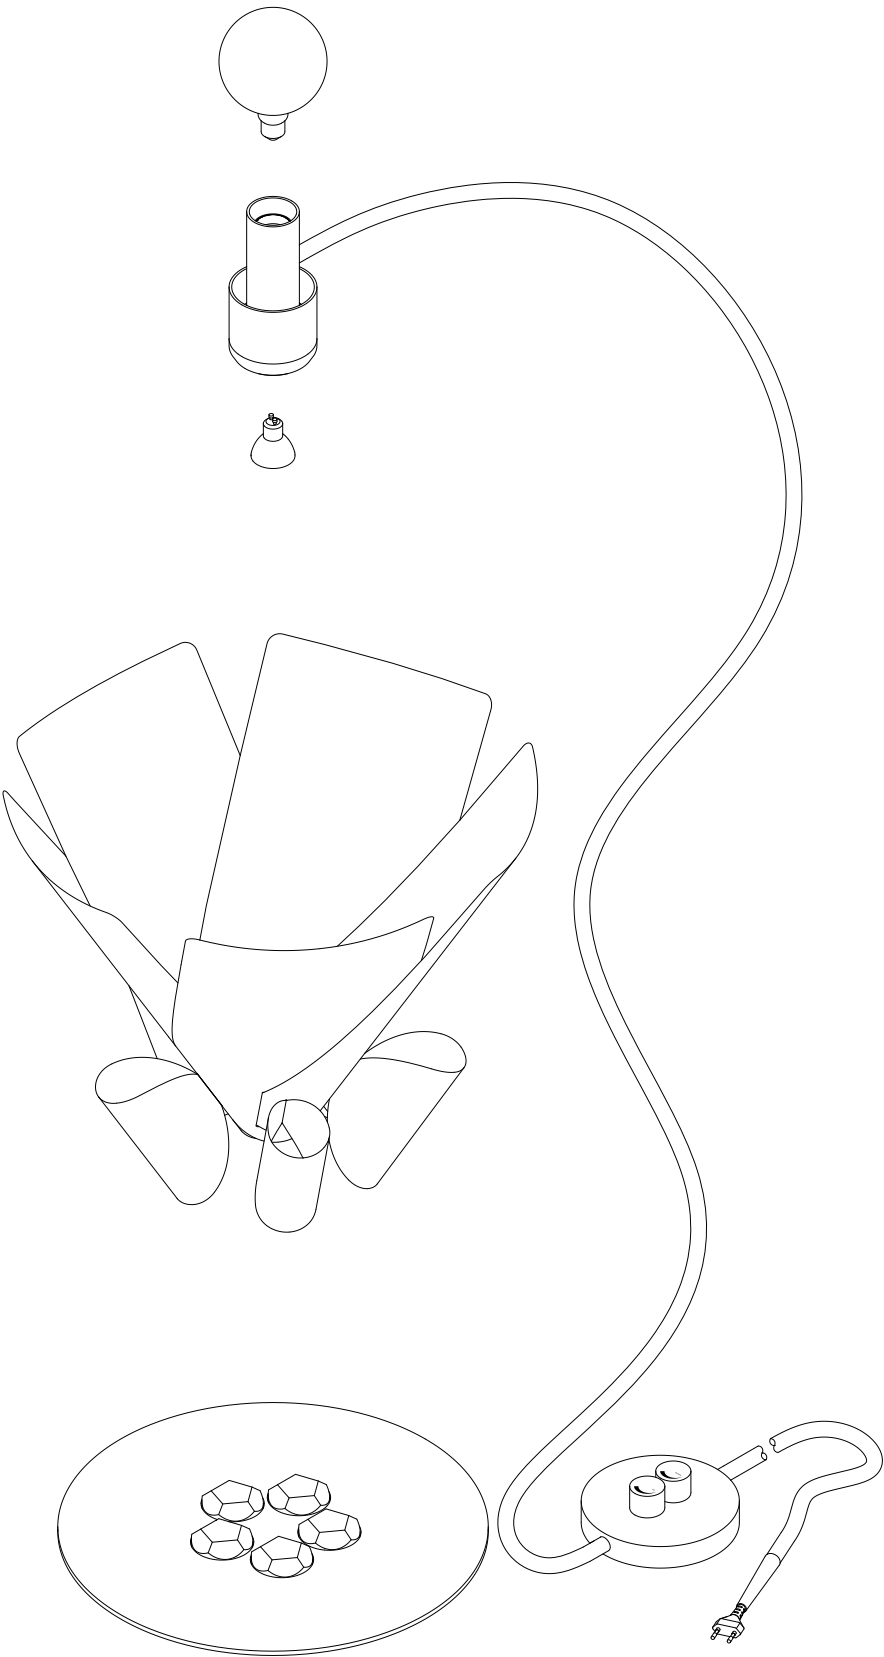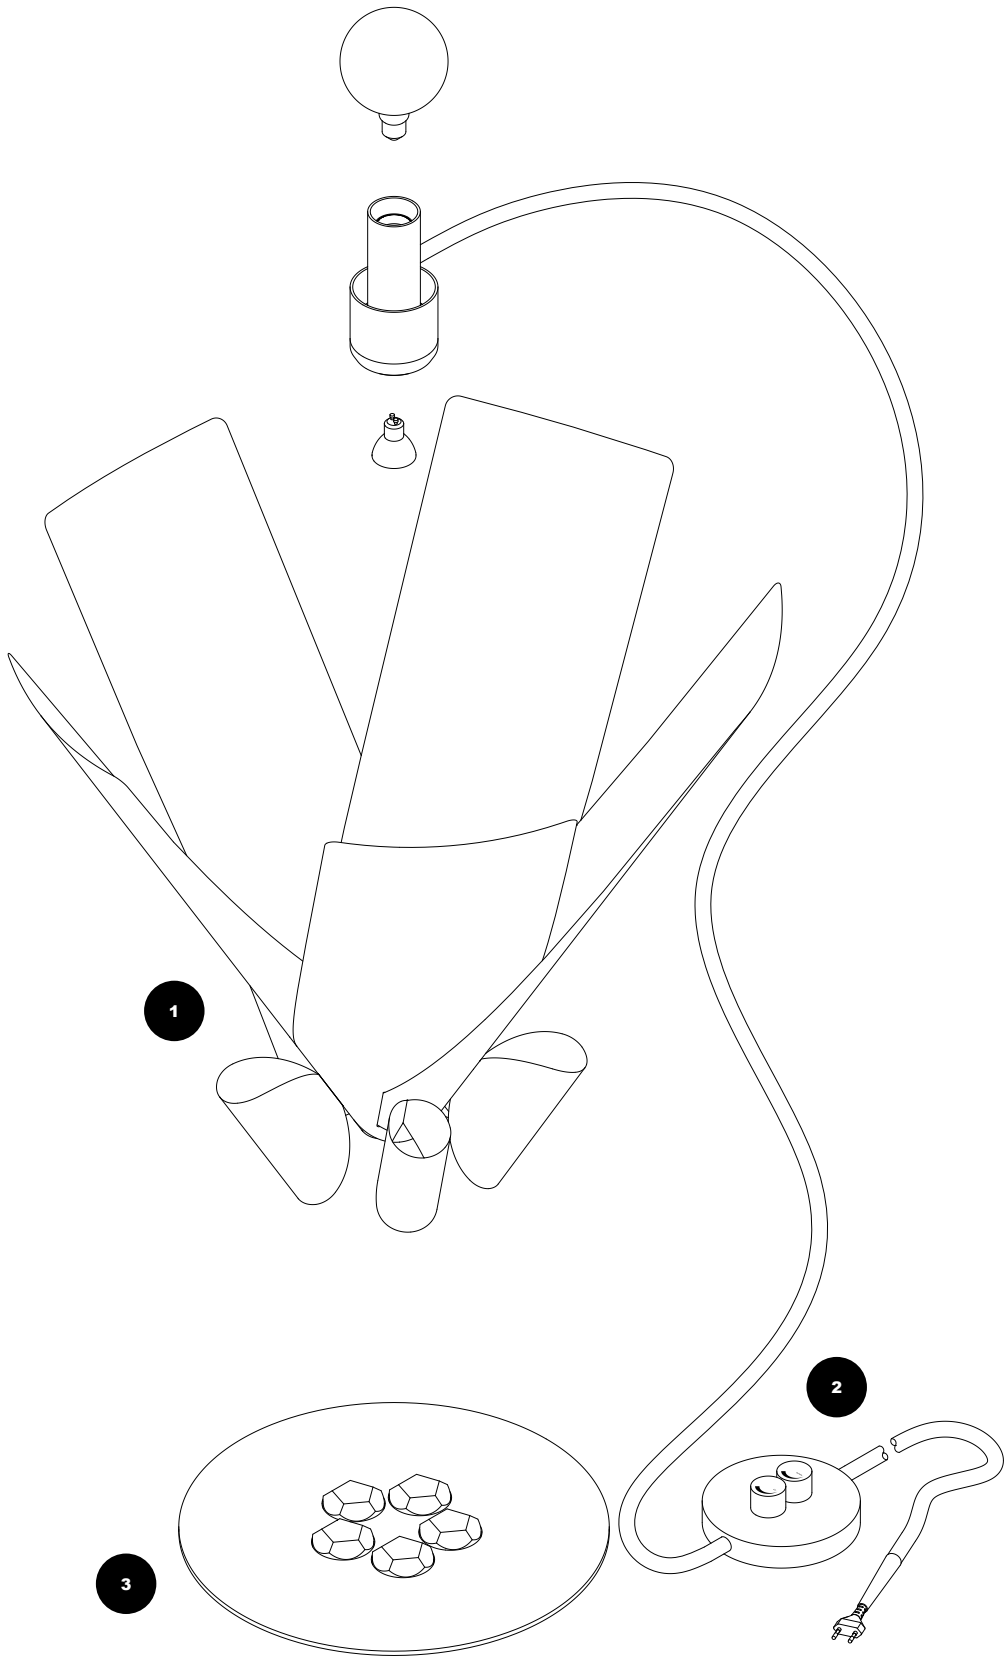


- STEEL LAMPSHADE 1
- LAMPING SET 2
- ANTIPEDESTAL 3

INTROVERT 145_5 REFLECTOR. BASE MODEL

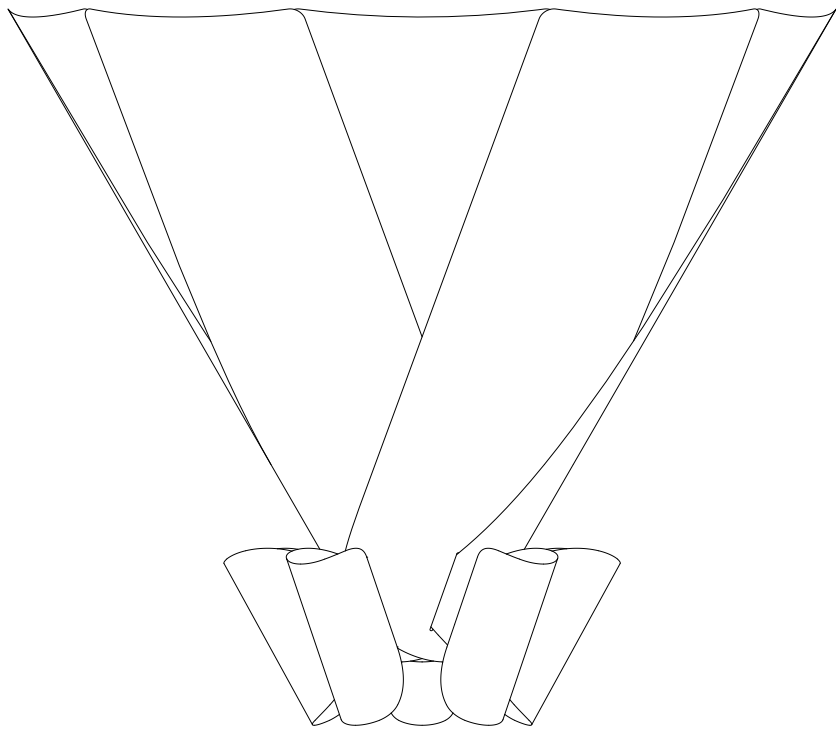

800 mm/ 31.5 in.


INTROVERT 145_5 REFLECTOR S. BASE MODEL

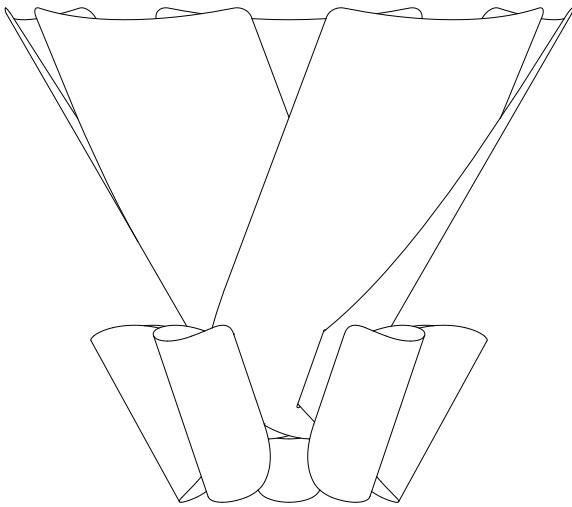


600 mm/ 23.6 in.

1

STEEL LAMPSHADE


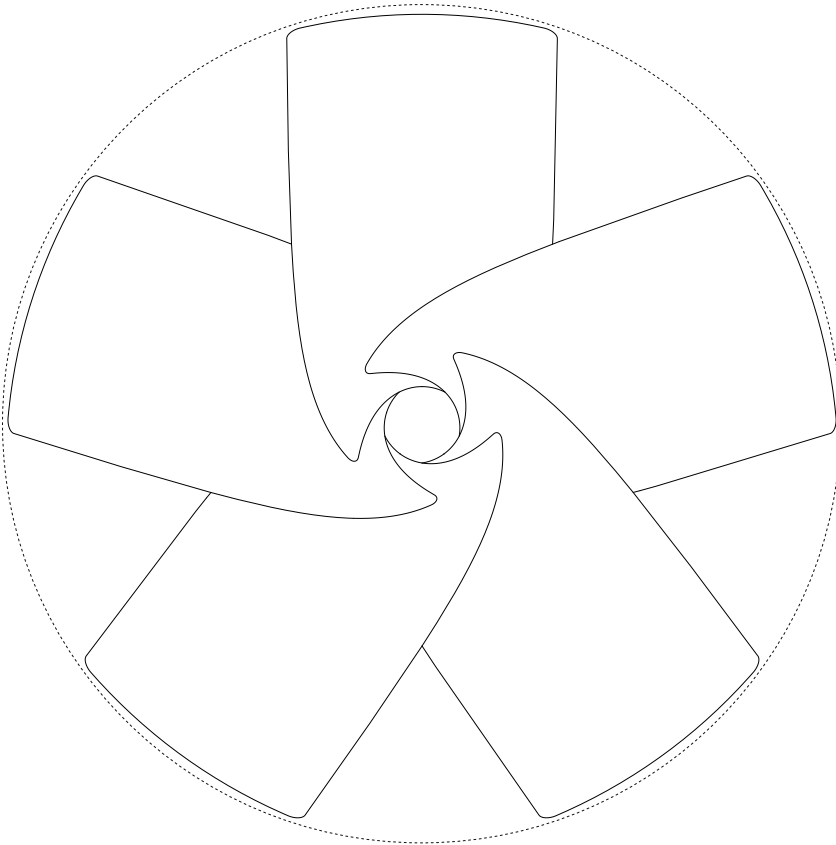


TOP Ø
900 mm/ 35.5 in

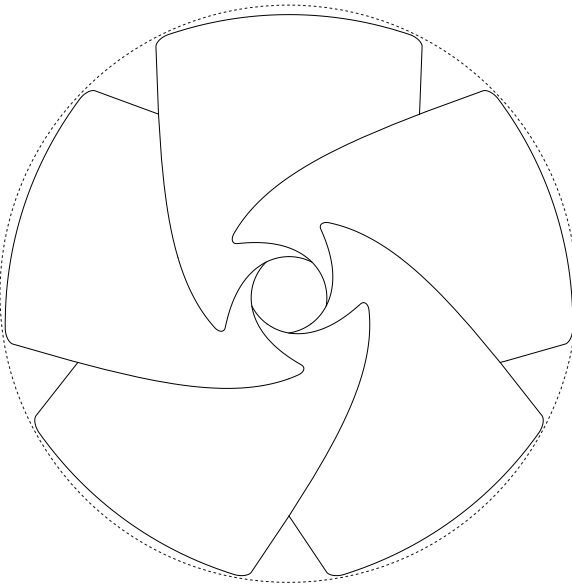


TOP Ø
620 mm/ 24.4 in



INTROVERT 145_5 REFLECTOR - STEEL BOWS S SINGLE-SIDED. EDITION 2024 : *STEEL COUTURE*

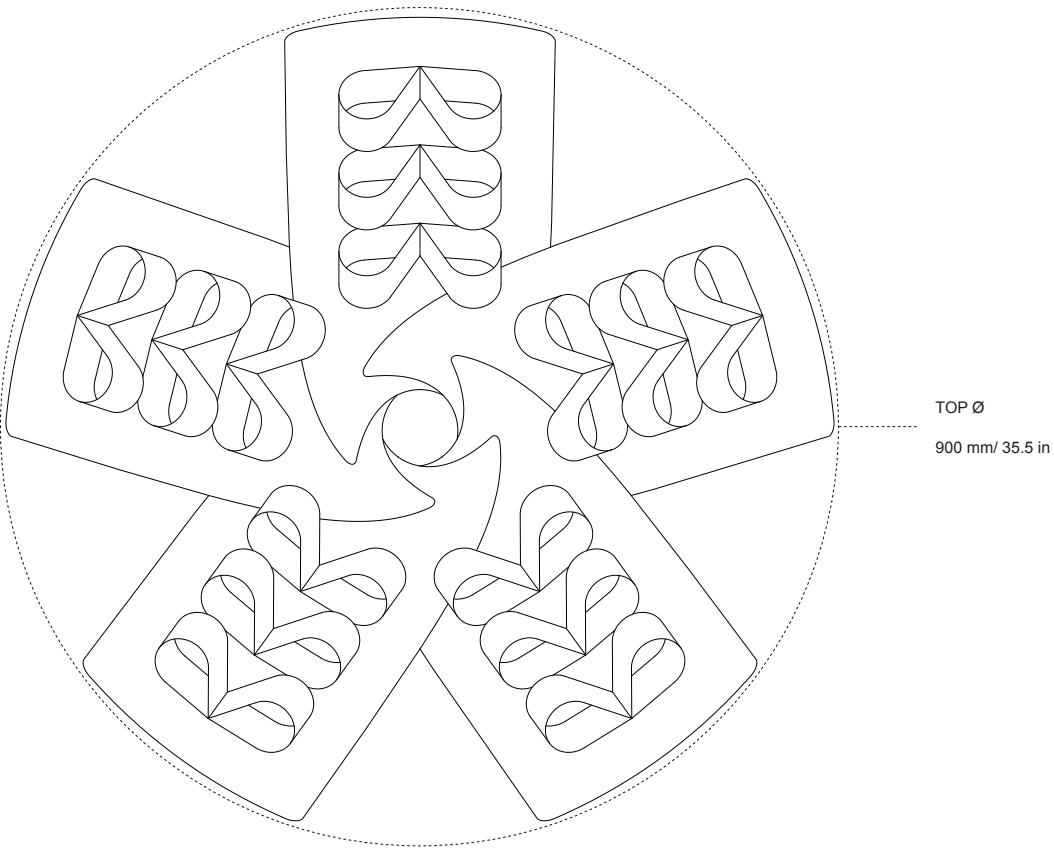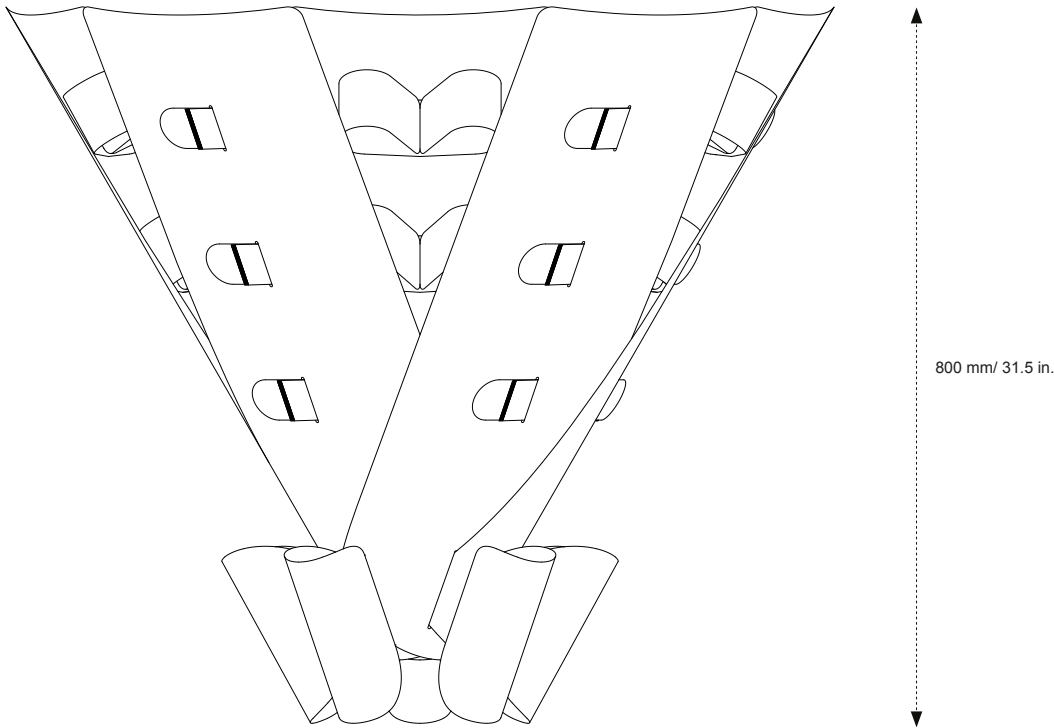


INTROVERT 145_5 REFLECTOR - STEEL BOWS S SINGLE-SIDED. EDITION 2024 : *STEEL COUTURE*

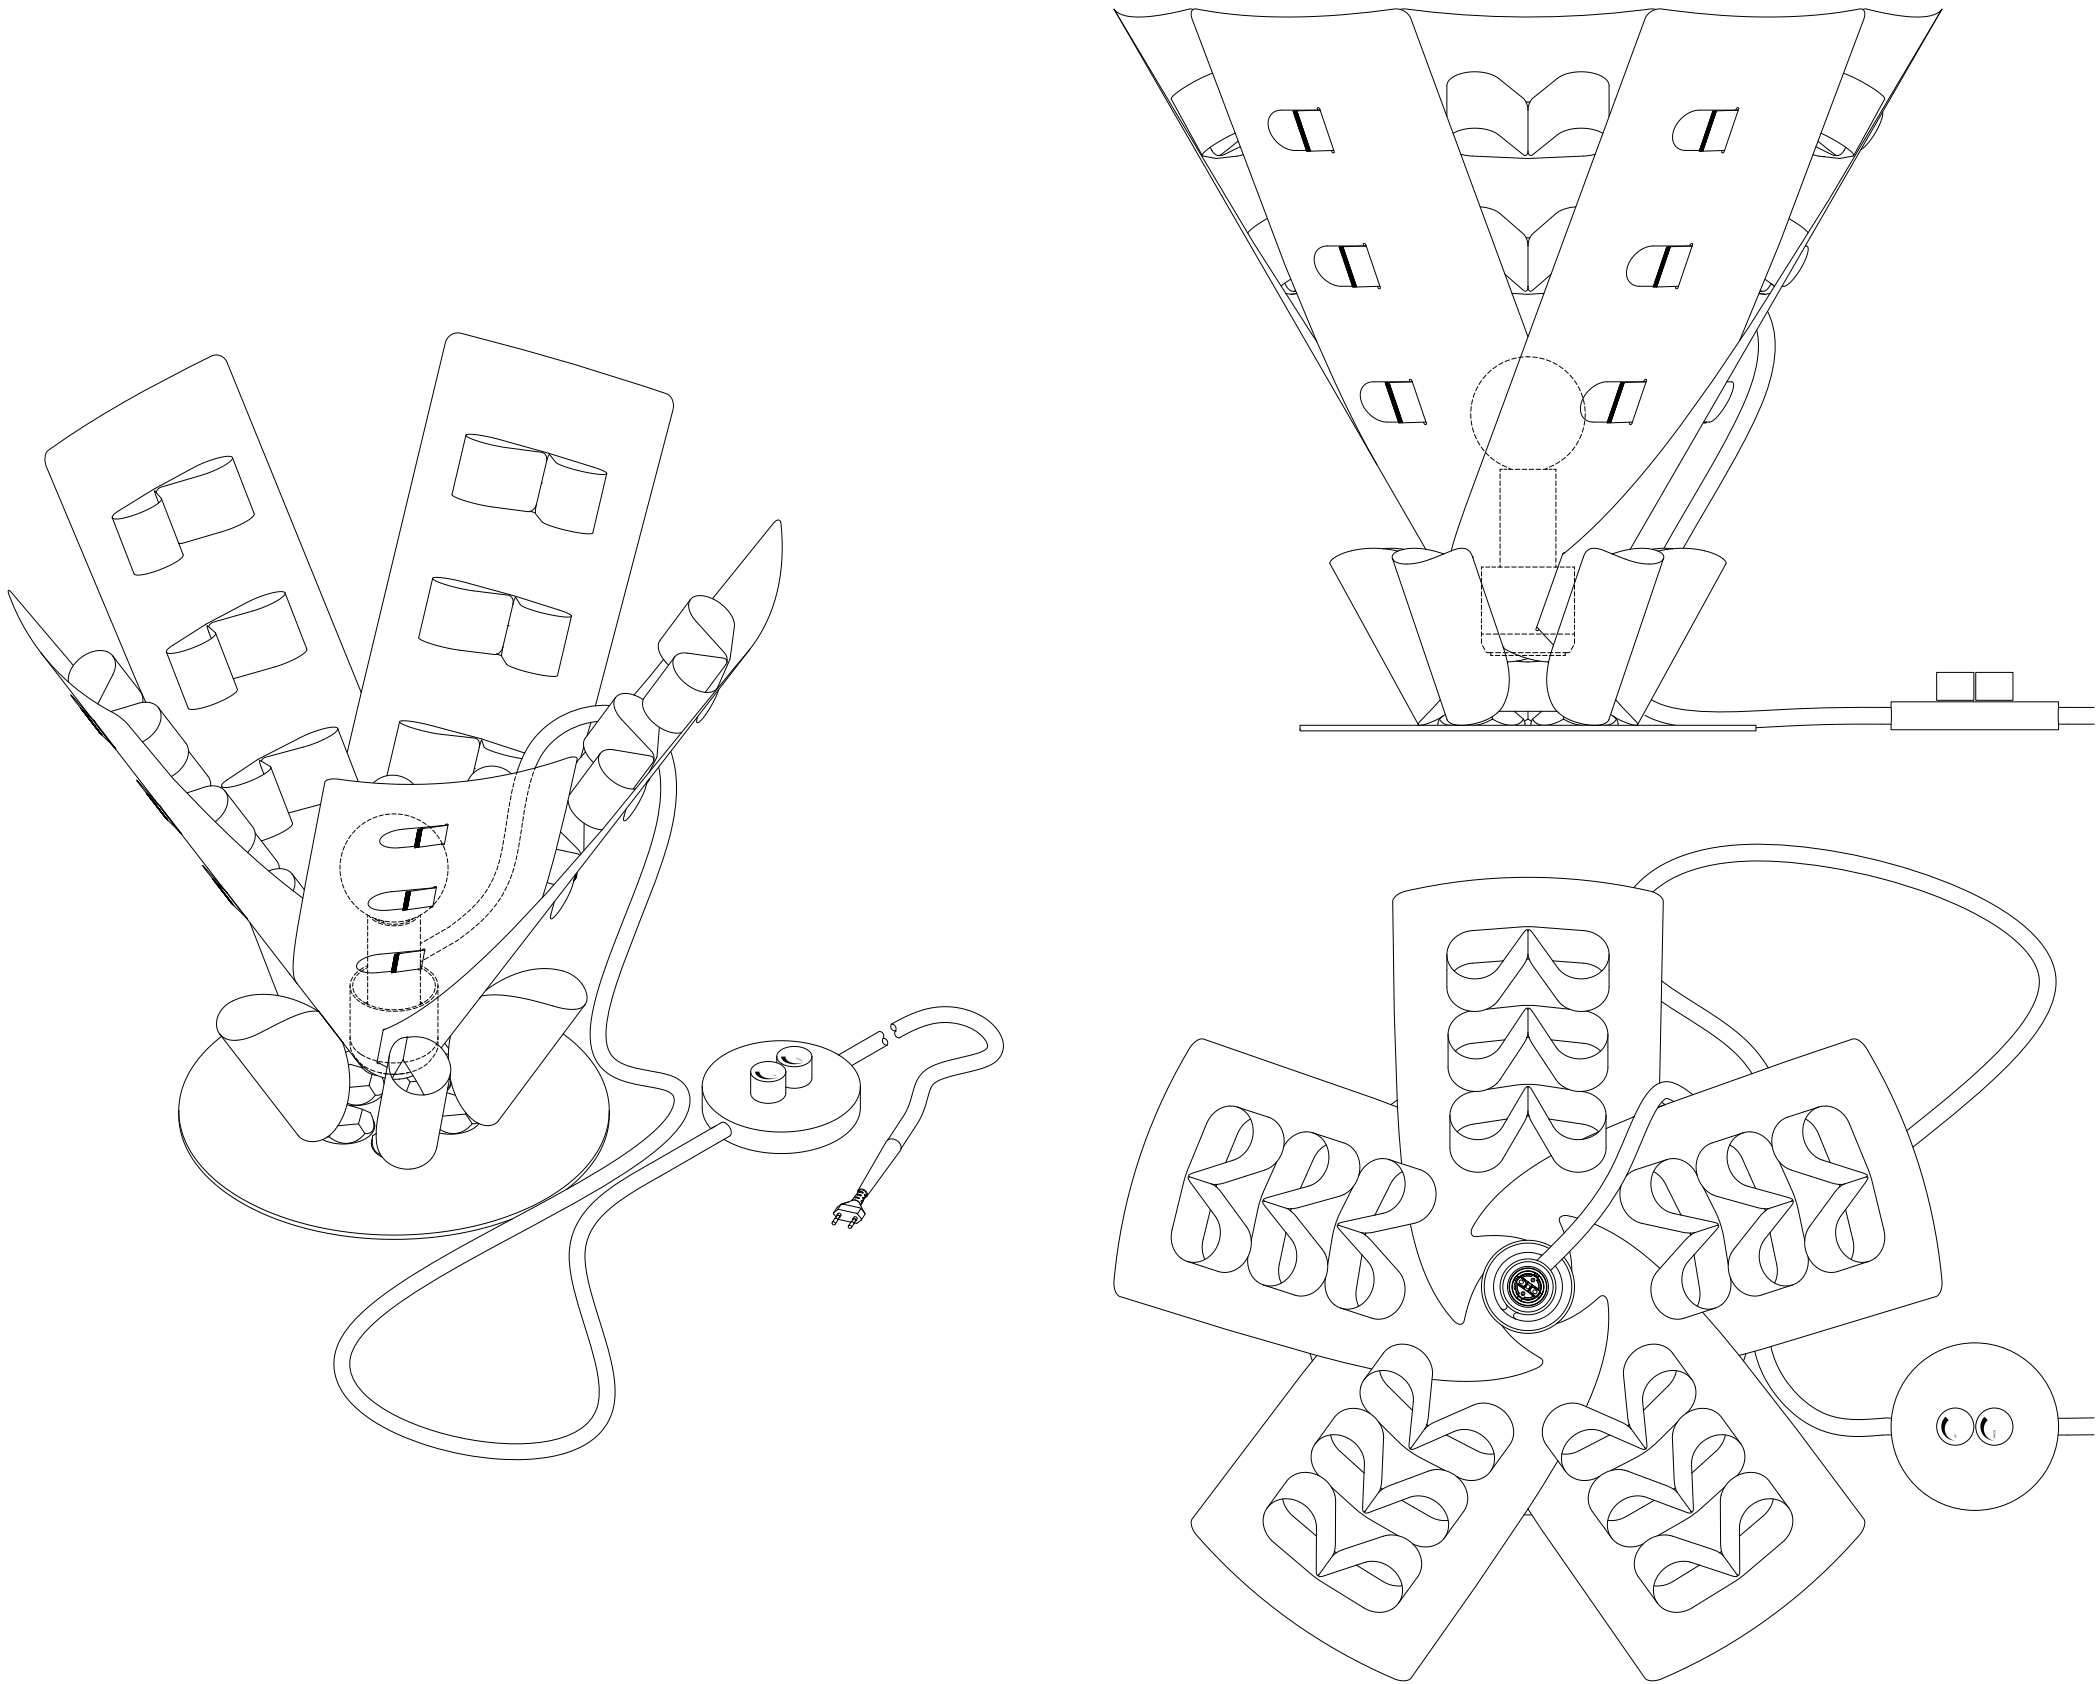



INTROVERT 145_5 REFLECTOR - STEEL BOWS S DOUBLE-SIDED. EDITION 2024 : *STEEL COUTURE*

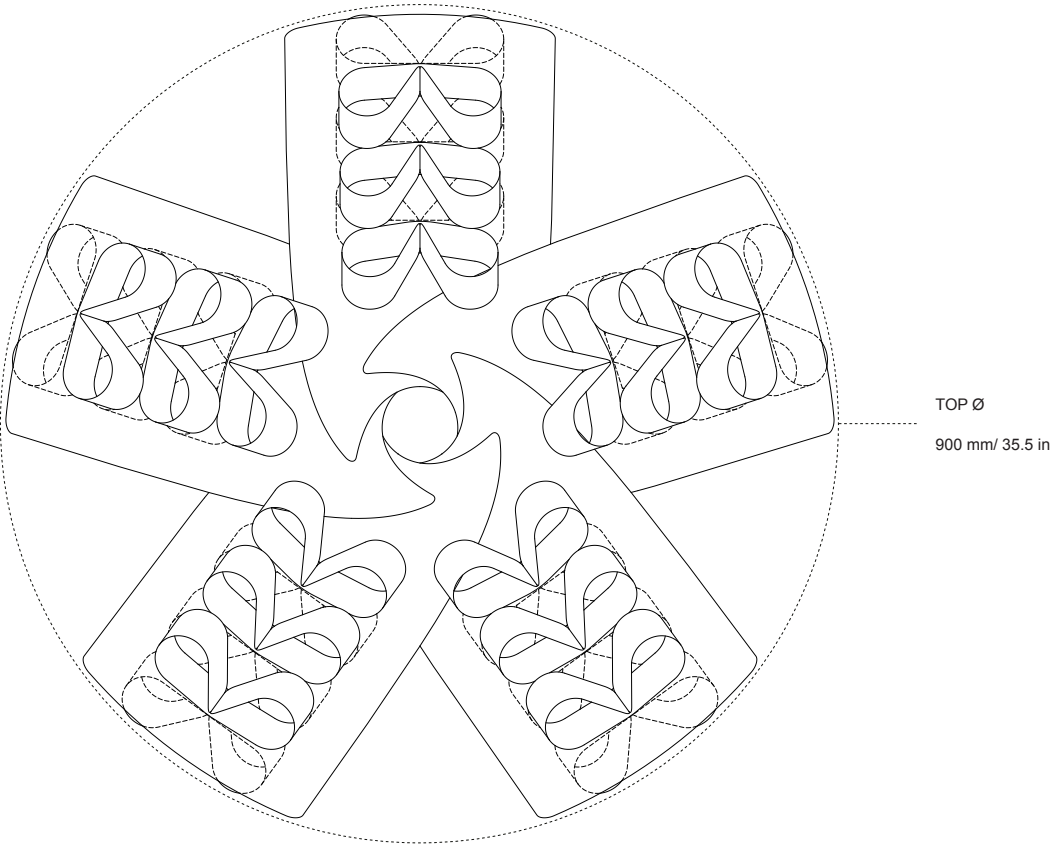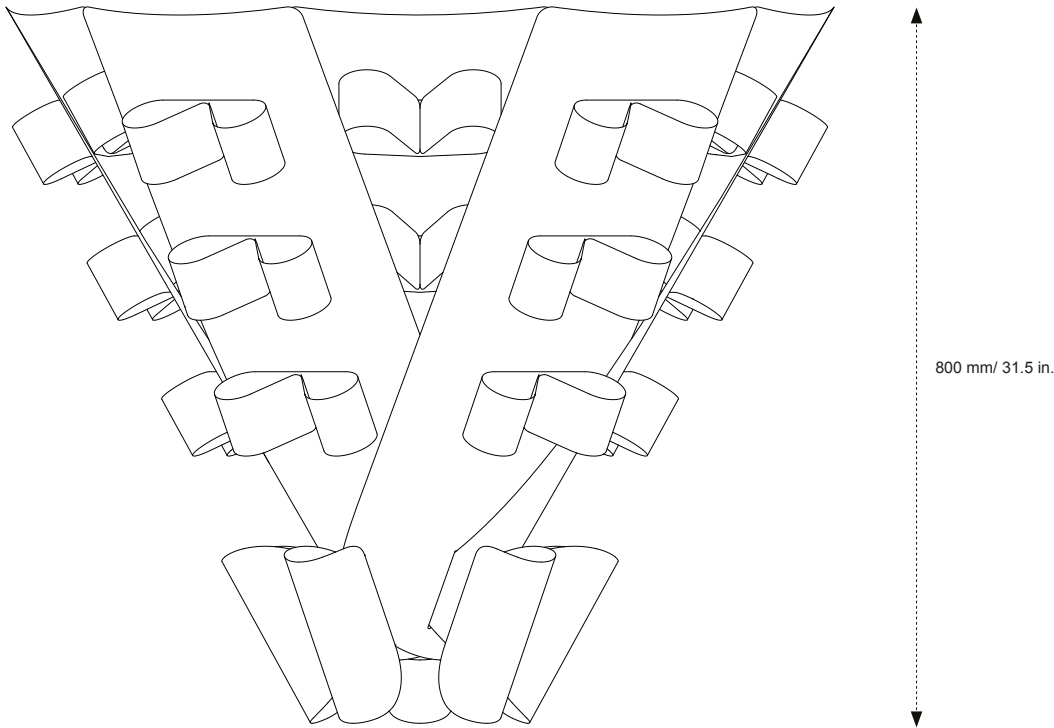


INTROVERT 145_5 REFLECTOR - STEEL BOWS S DOUBLE-SIDED. EDITION 2024 : *STEEL COUTURE*

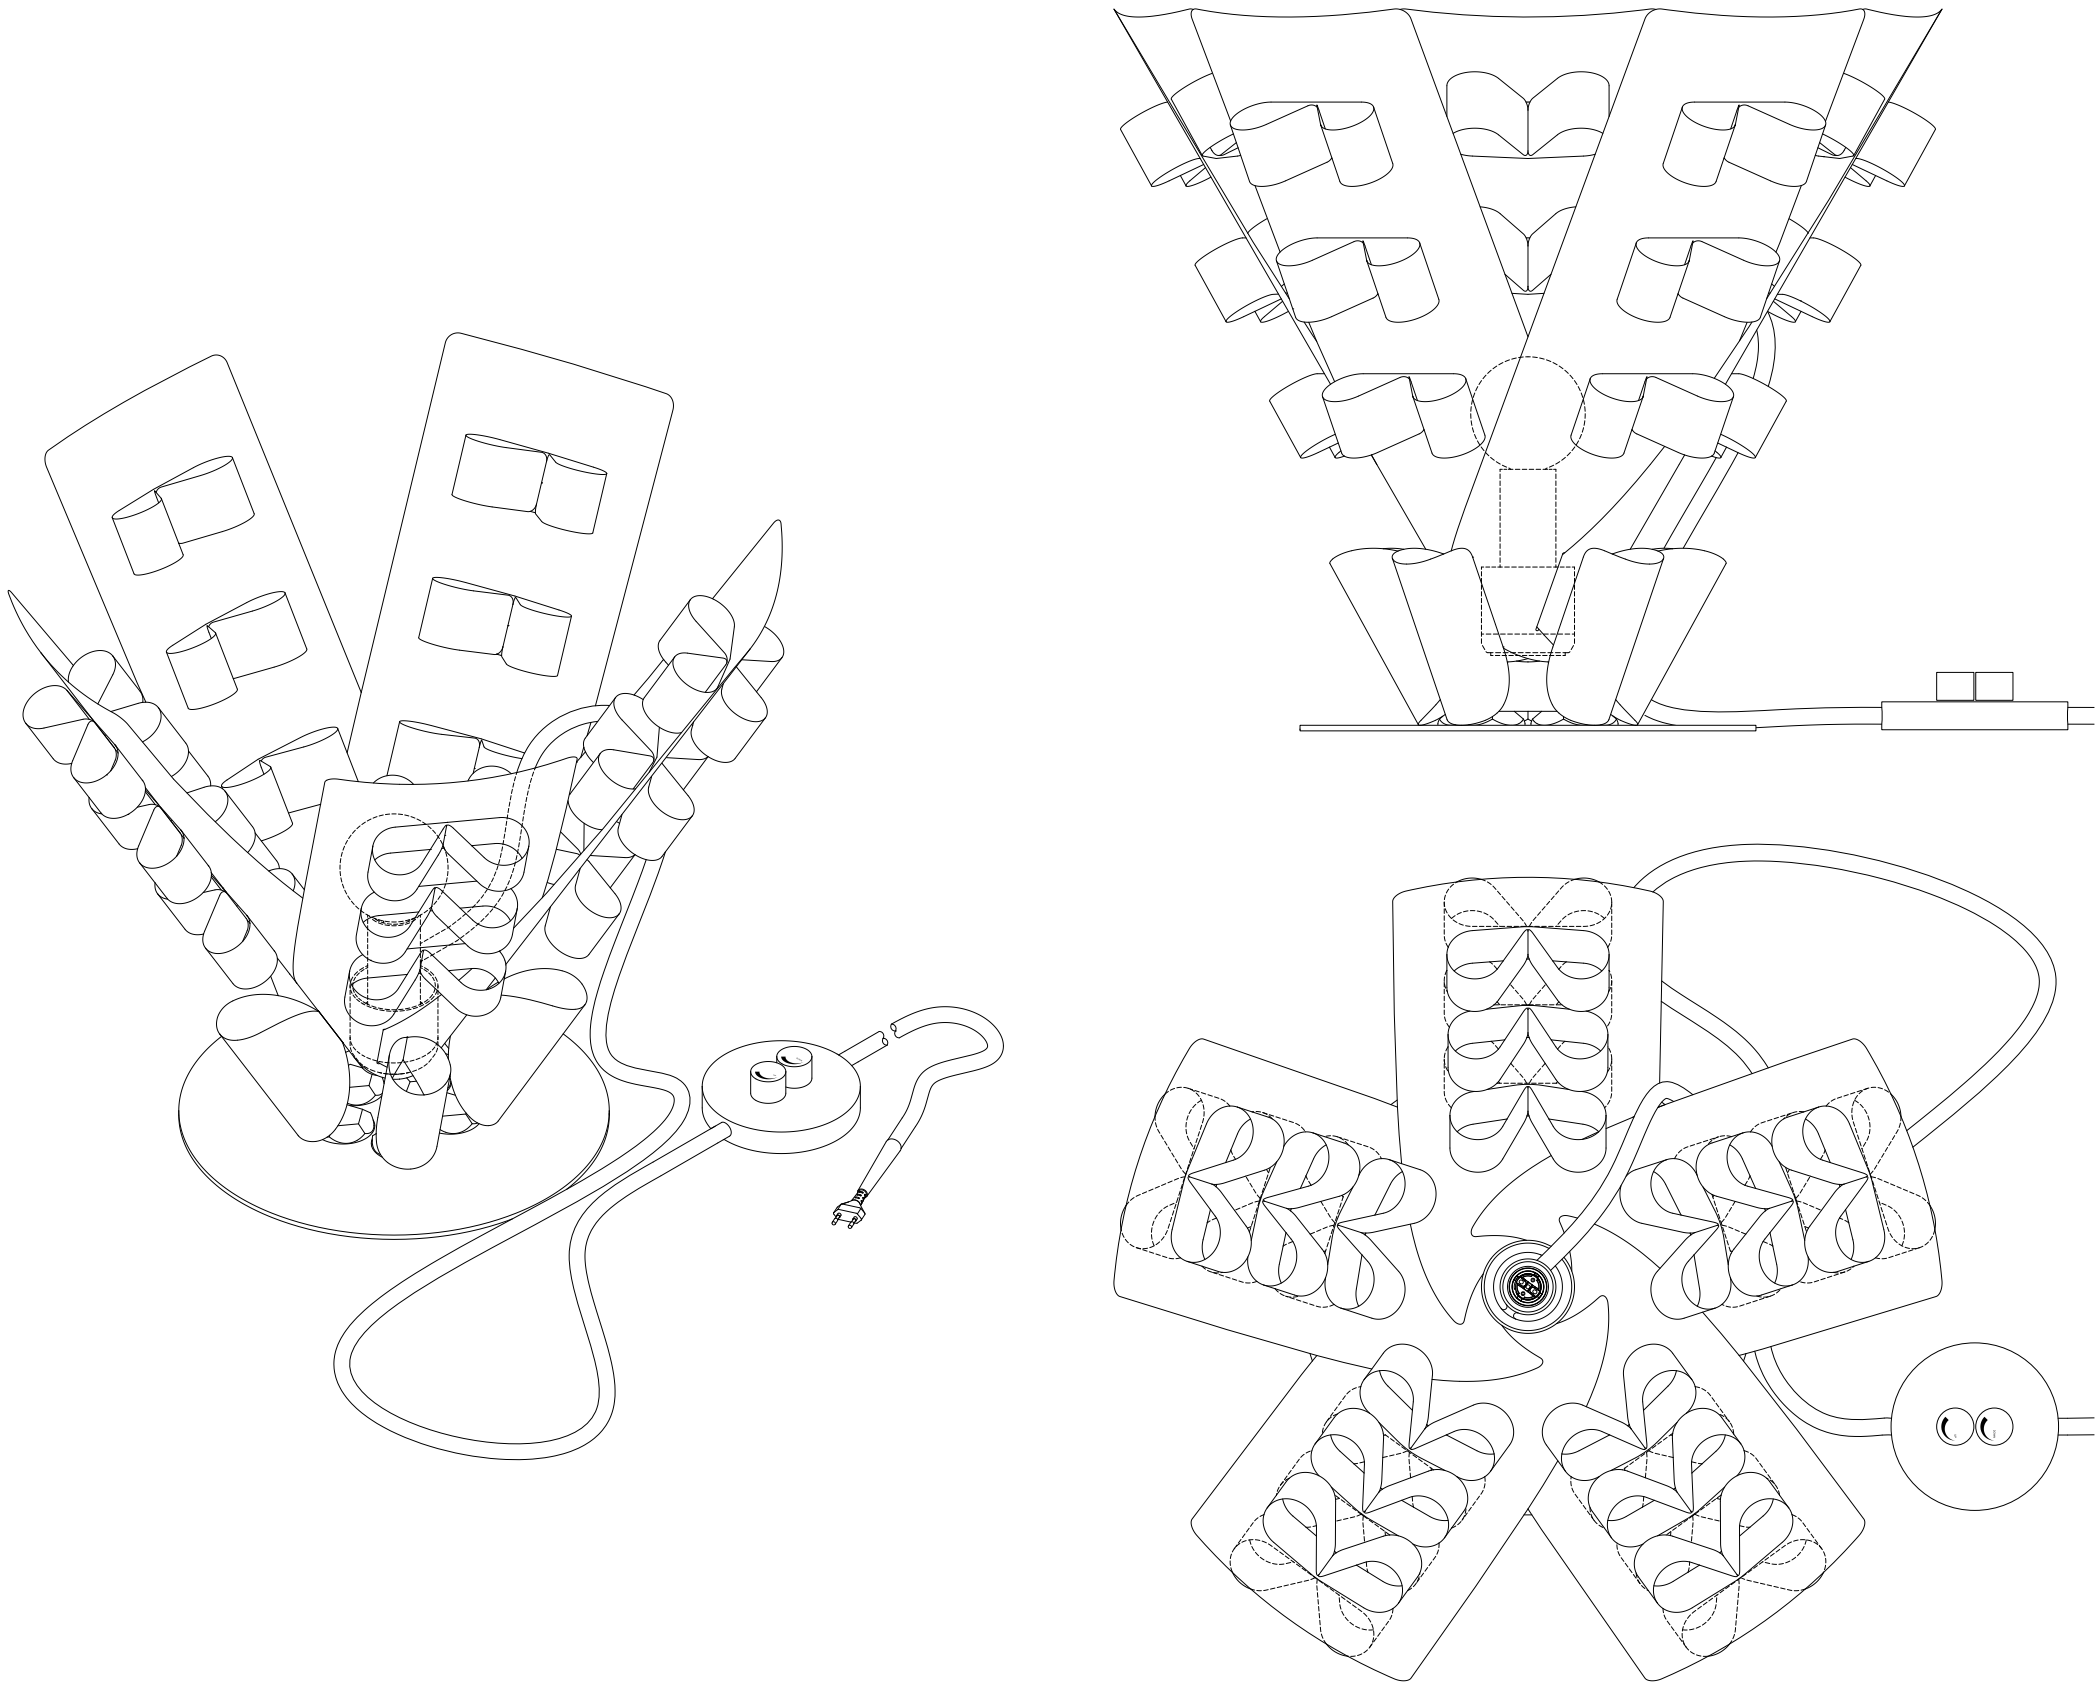


INTROVERT 145_5 REFLECTOR - STEEL BOWS M DOUBLE-SIDED. EDITION 2024 : *STEEL COUTURE*

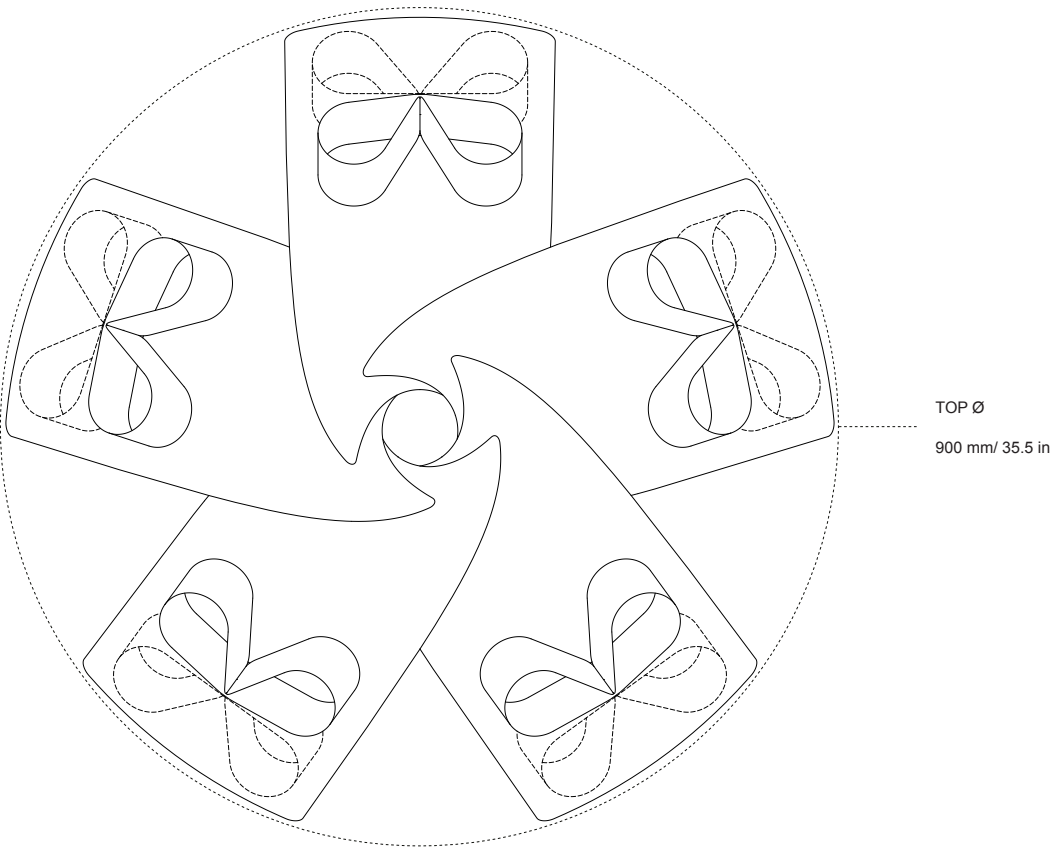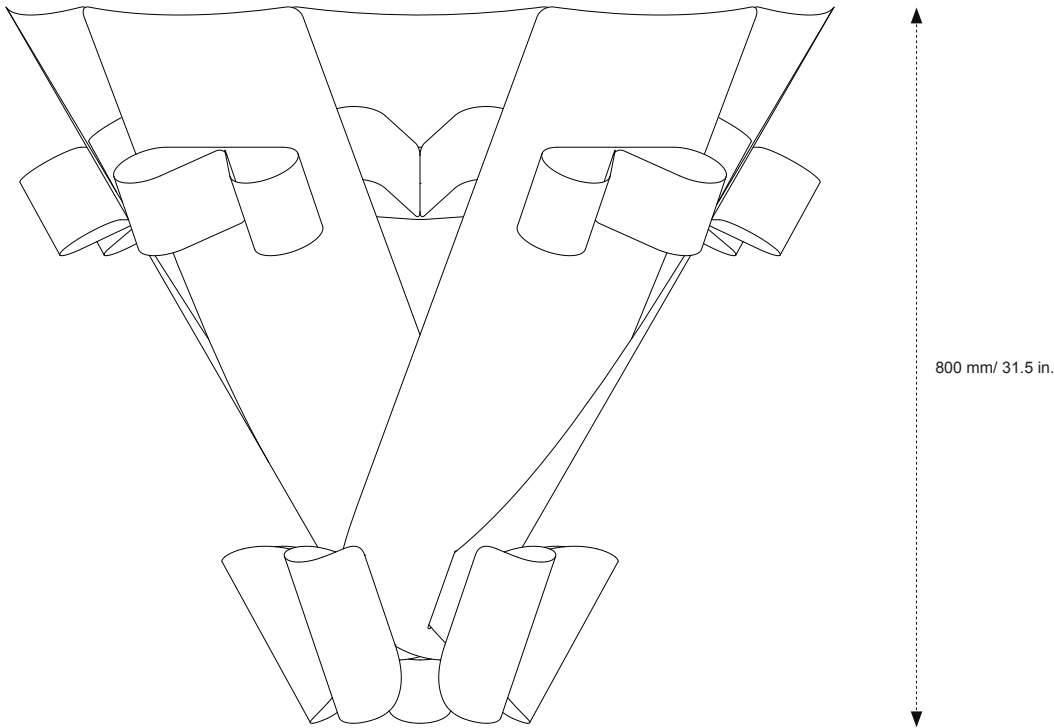


INTROVERT 145_5 REFLECTOR - STEEL BOWS M DOUBLE-SIDED. EDITION 2024 : *STEEL COUTURE*

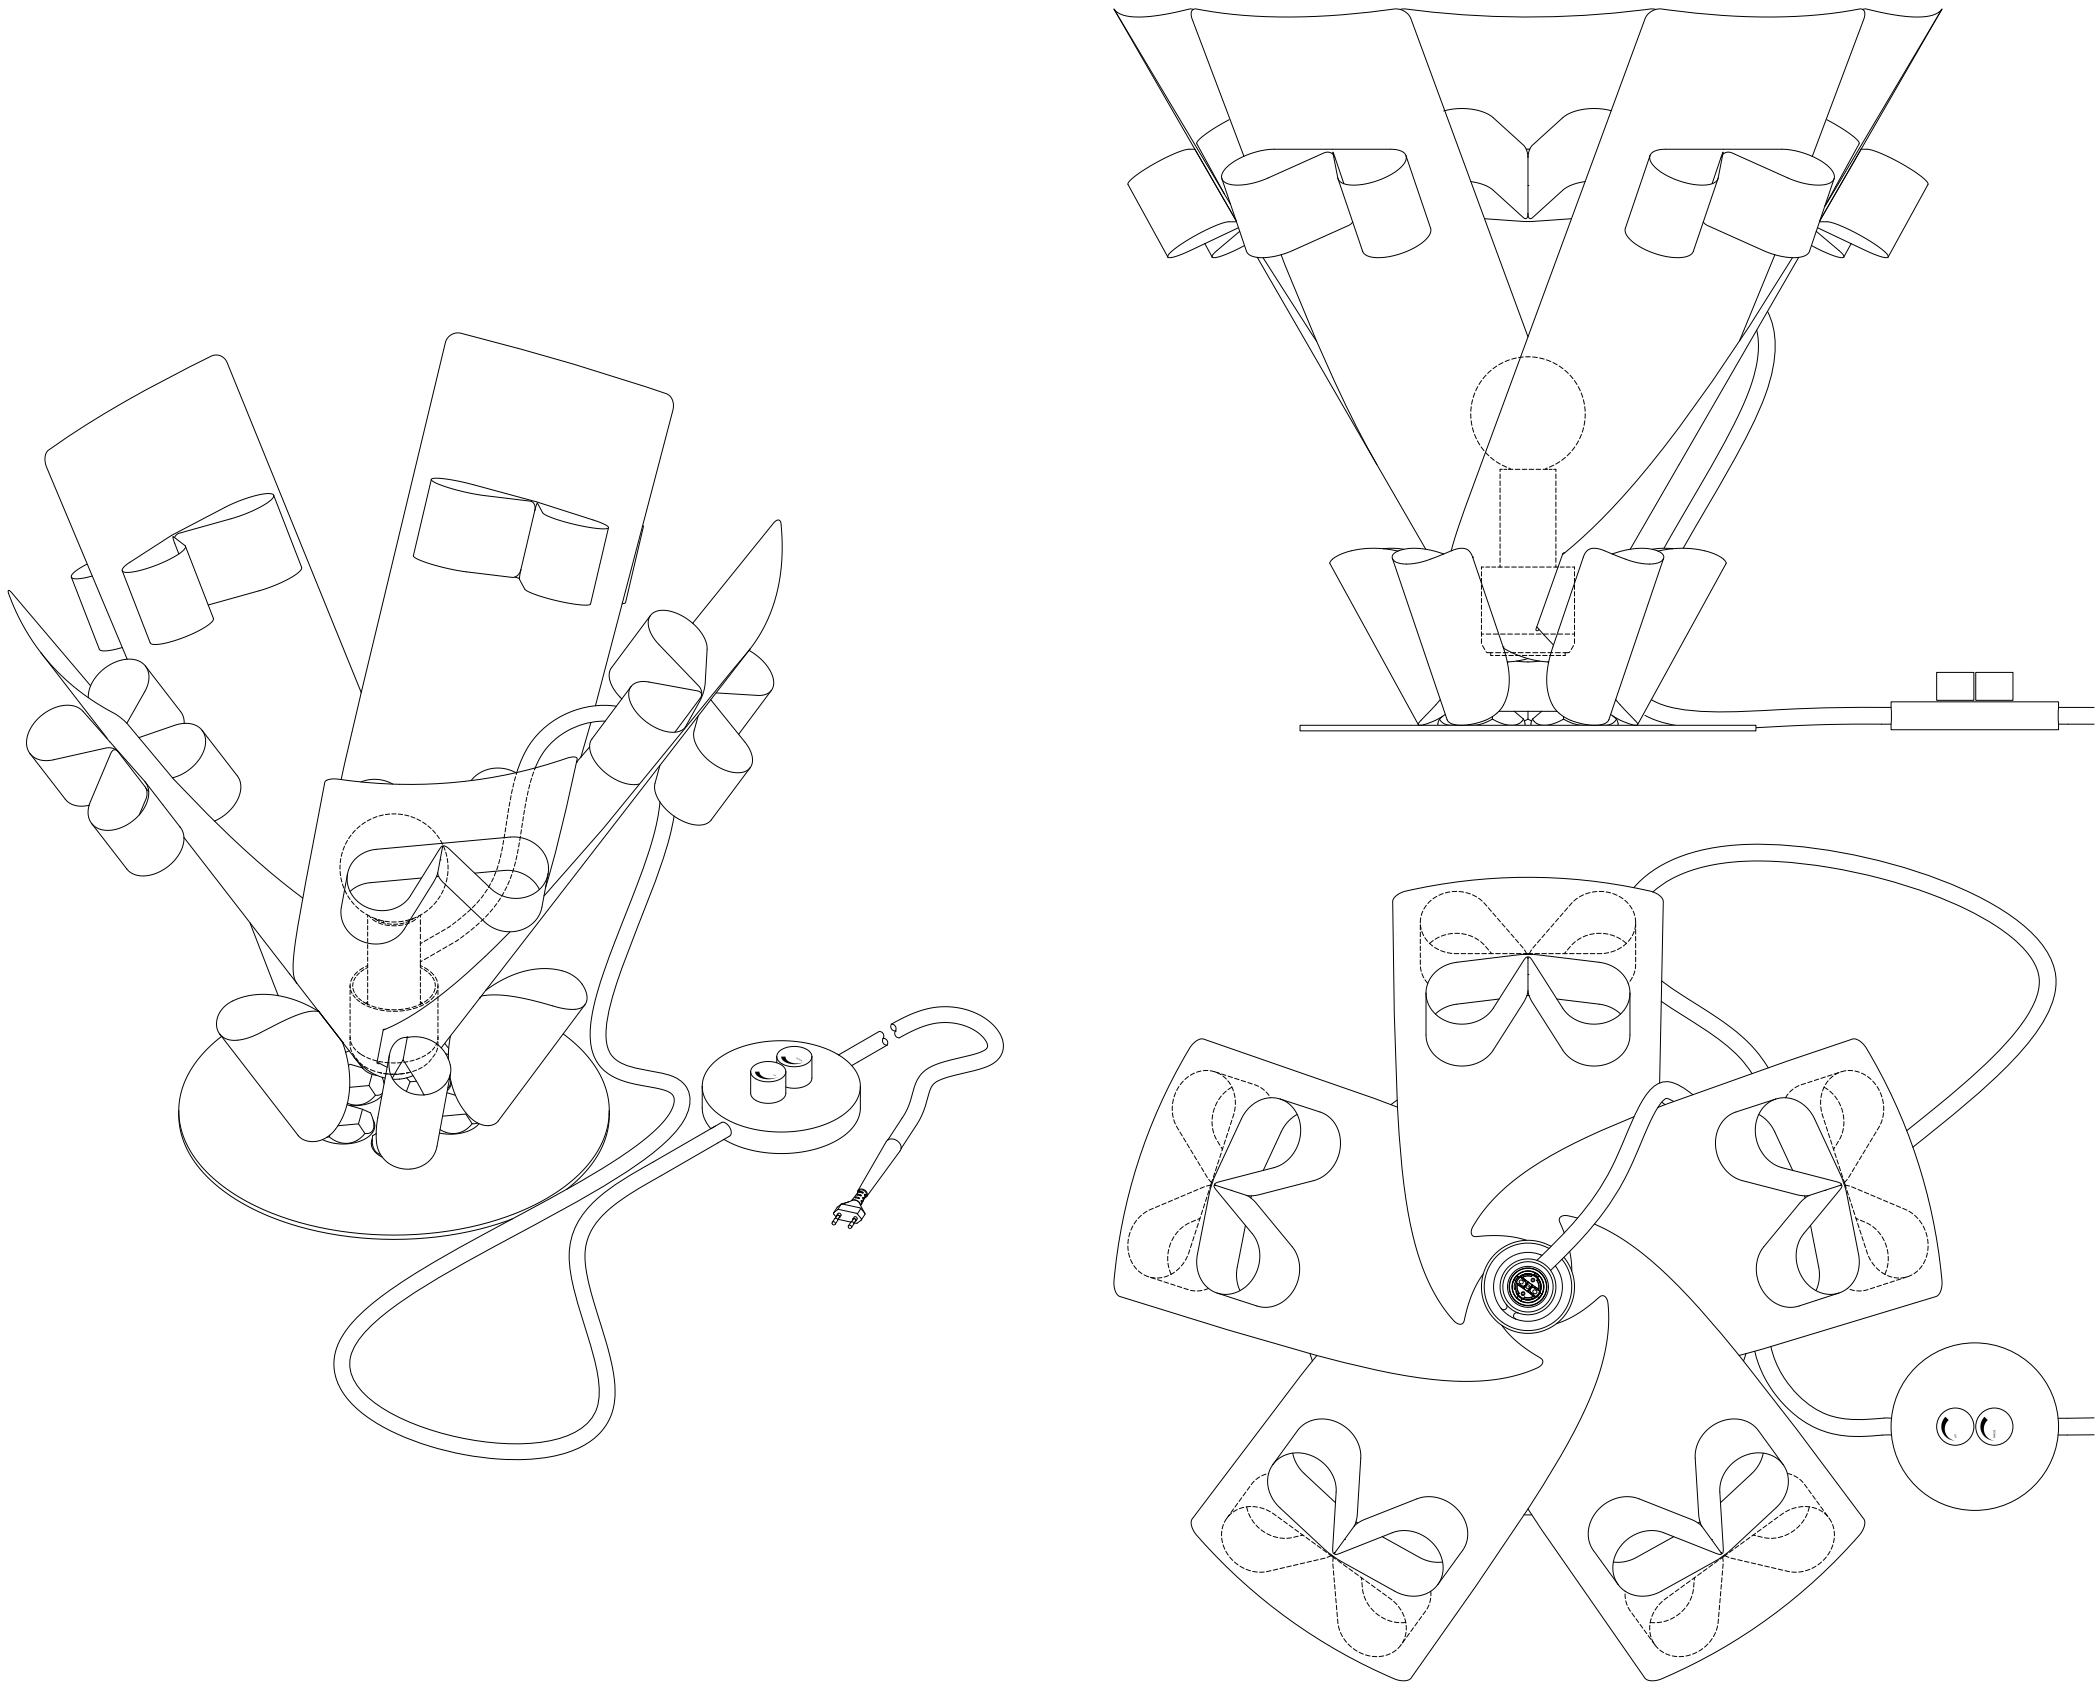

LIGHTCORE

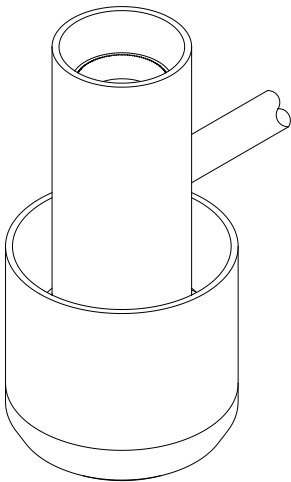


ANCHOR DIMMER / SWITCH BOX

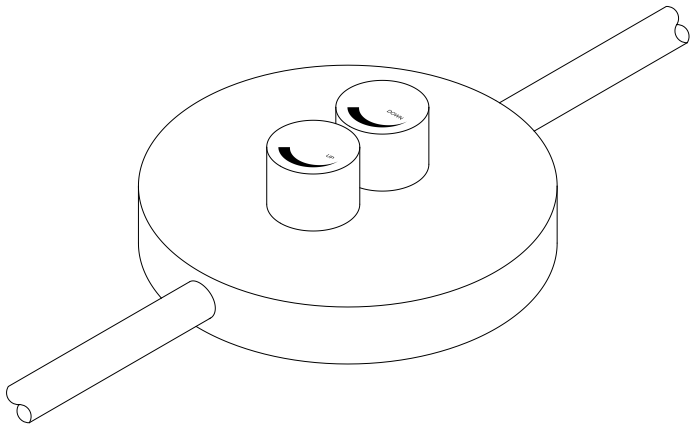


2





LAMPING SET

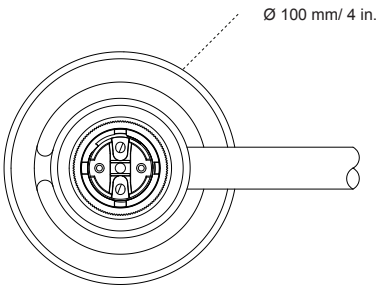

TOP FITTING E27

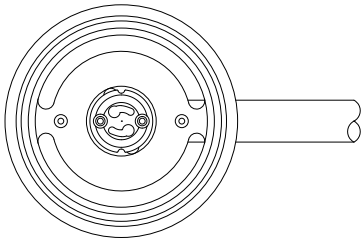


BOTTOM FITTING GU10

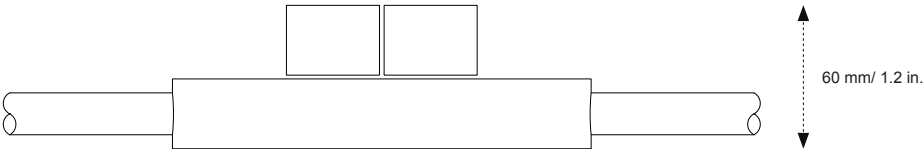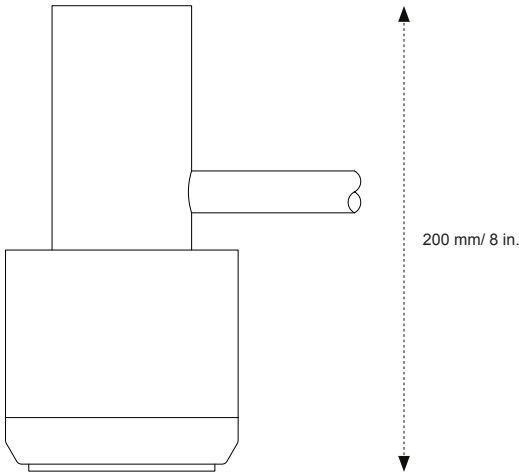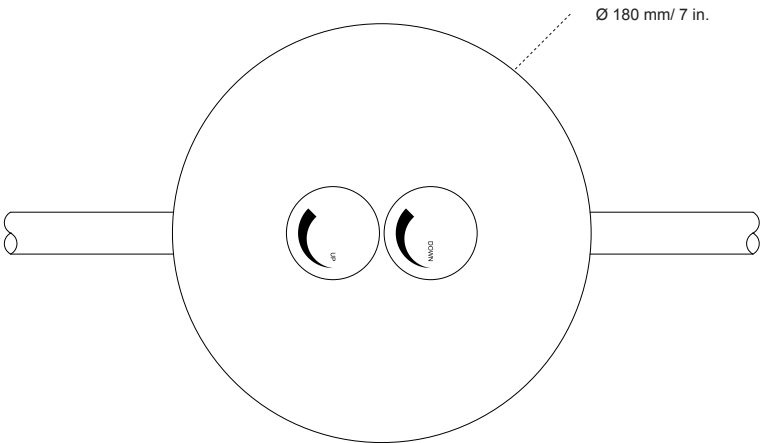


220 - 240V AC 50Hz CEE 7/16 EU PLUG

PAVÉ ANTIPEDESTAL AP05 (STANDARD SIZE)


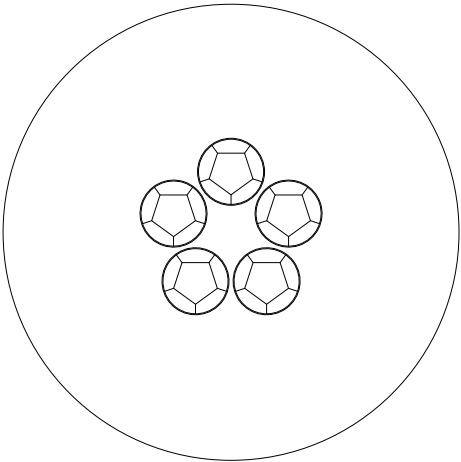


Ø 490 mm/ 19.3 in.

PAVÉ ANTIPEDESTAL AP05S (SMALL SIZE - CUSTOM ORDER)

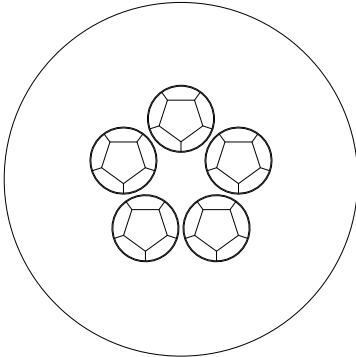

Ø 380 mm/ 14.9 in.

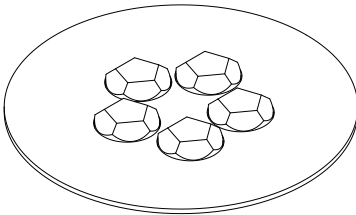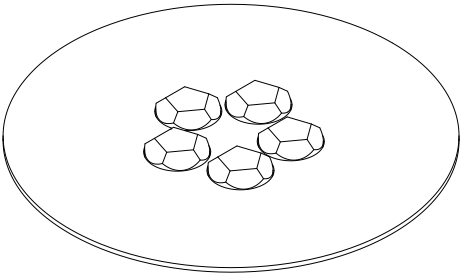

II.


UNCRATING & UNPACKING INSTRUCTIONS

The following instructions include illustrations featuring the INTROVERT 145_5 REFLECTOR base models.

While packaging design may vary slightly, the general unpacking steps remain the same for EDITION 2024 lamps.

Your lamp is not only a functional object but also a piece of sculpture - handle it with care and precision.

Please read these instructions in full before proceeding with unpacking.

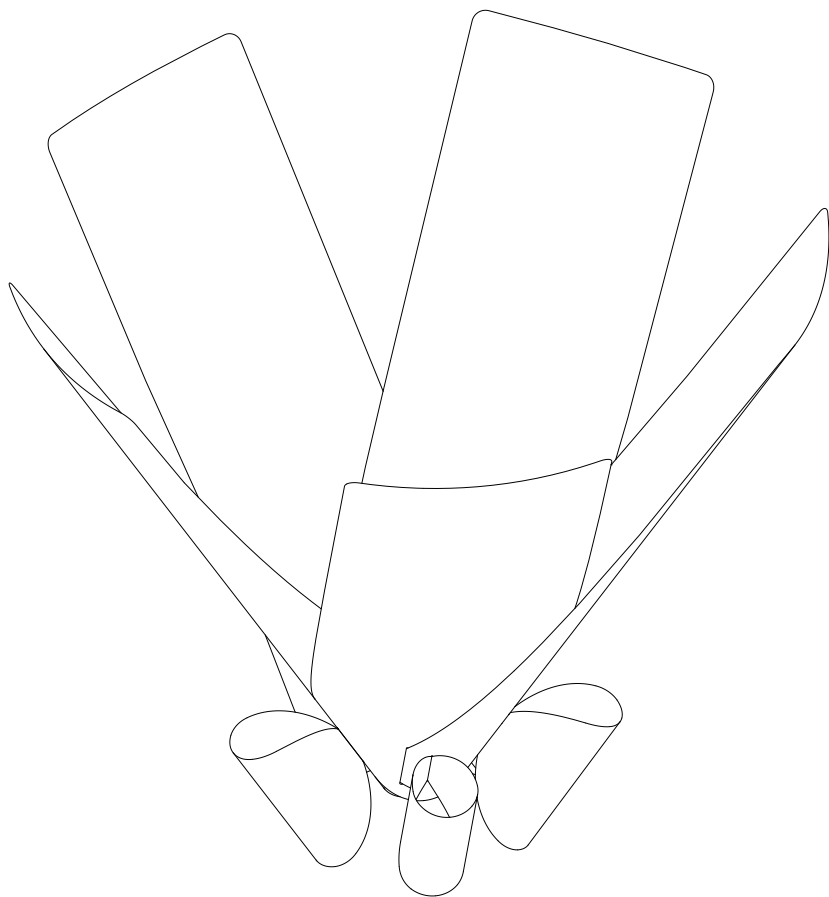

STEEL LAMPSHADE (IN SOFT WRAPPING)

CRATE CONTENTS




ANTIPEDESTAL & ACCESSORIES BOX



LAMPING SET BOX



ARRANGEMENT OF CRATE
CONTENTS

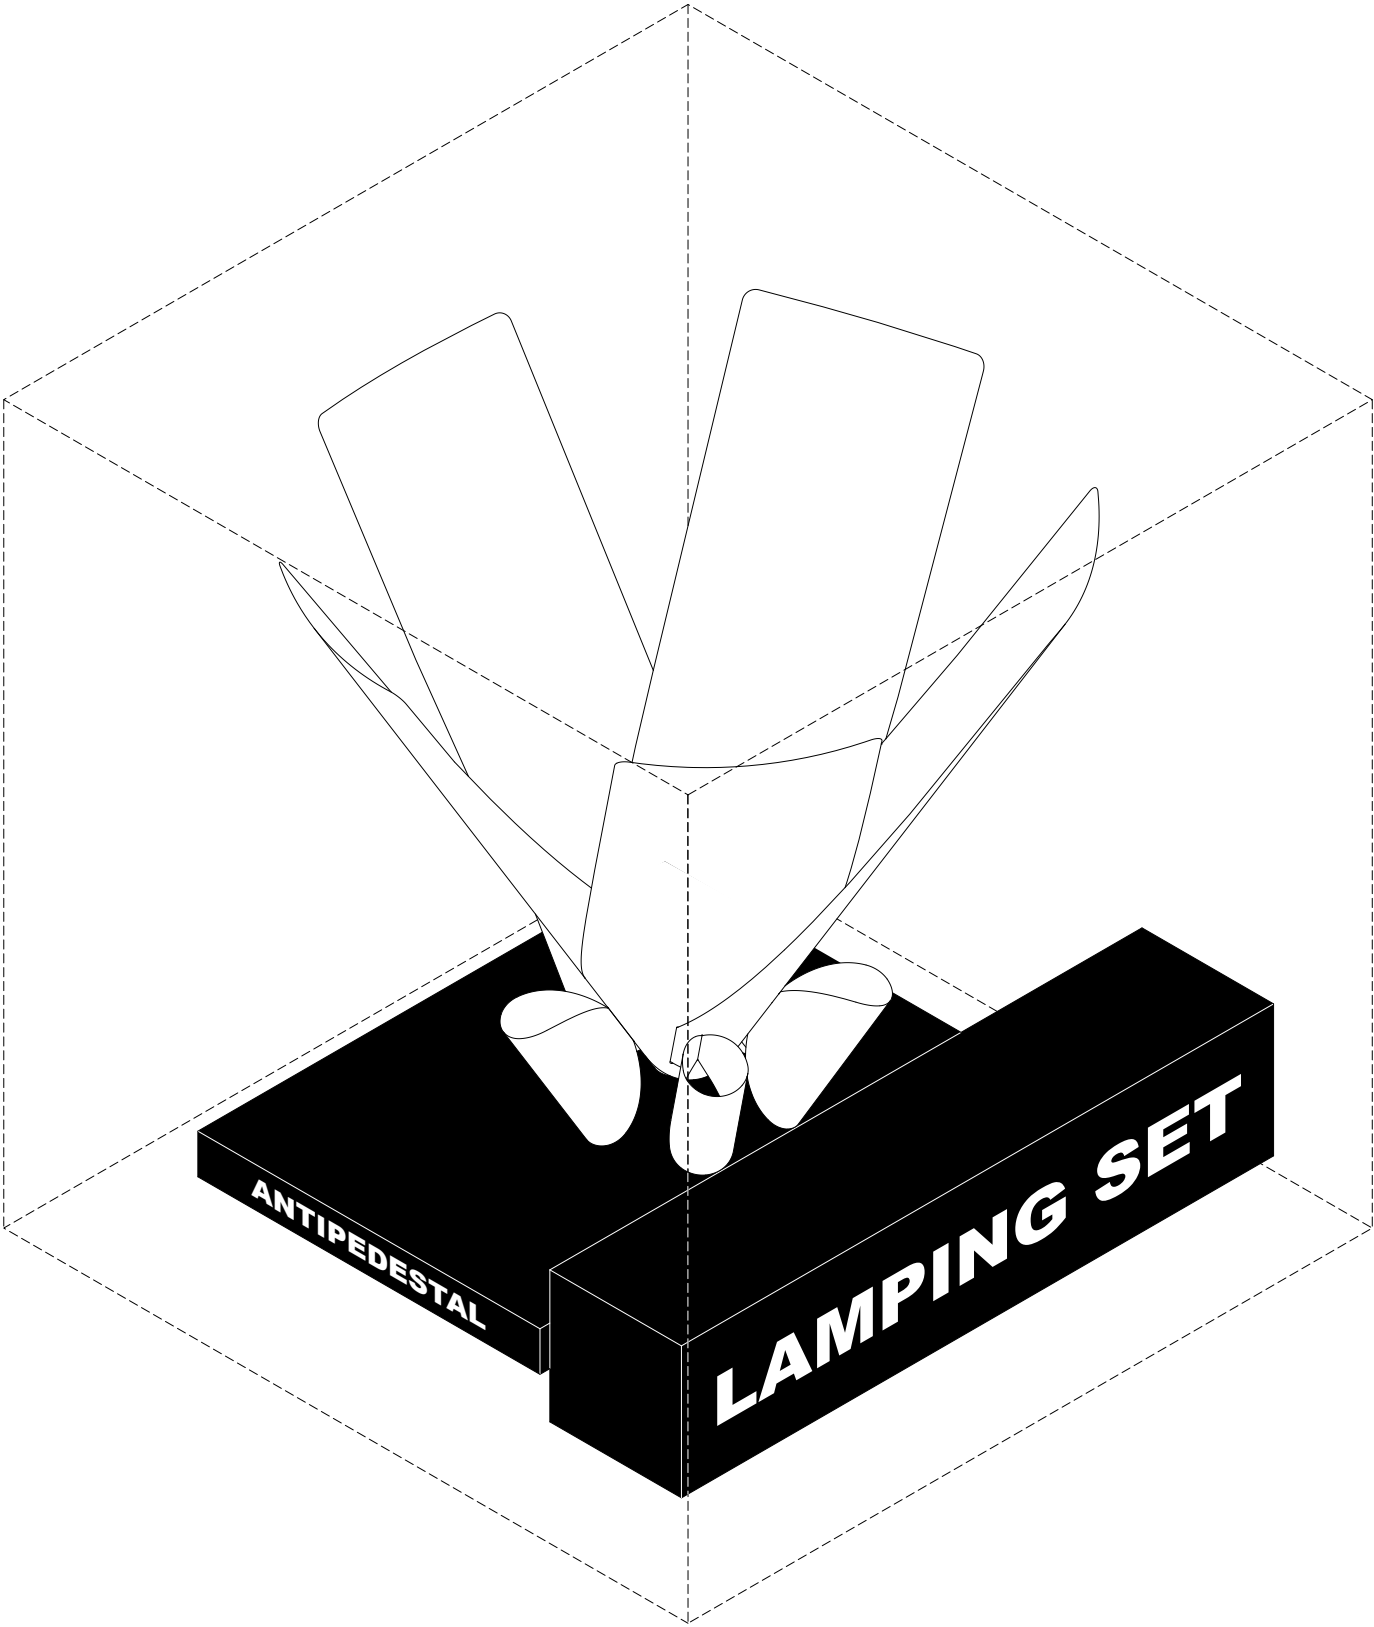

INTROVERT 145_5 REFLECTOR

INTROVERT 145_5 REFLECTOR S

IMPORTANT!
PLEASE READ INSTRUCTIONS
ON THIS PAGE BEFORE
UNPACKING

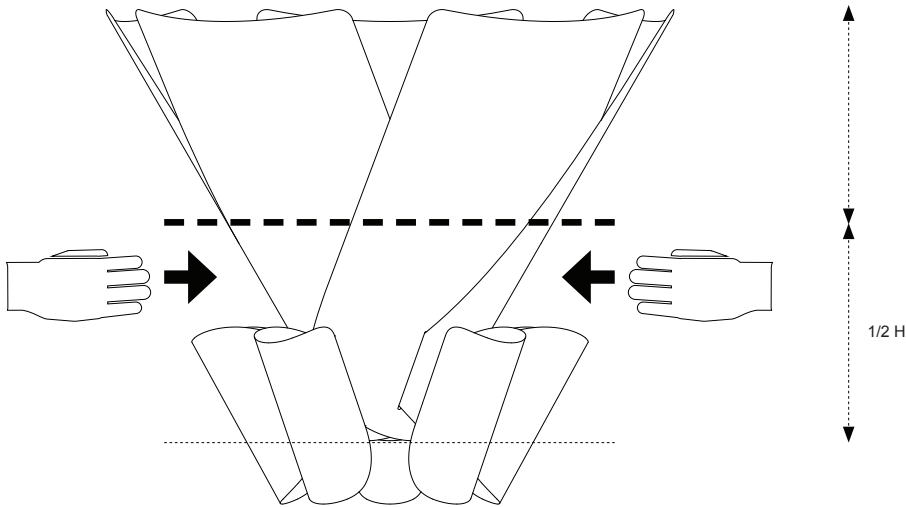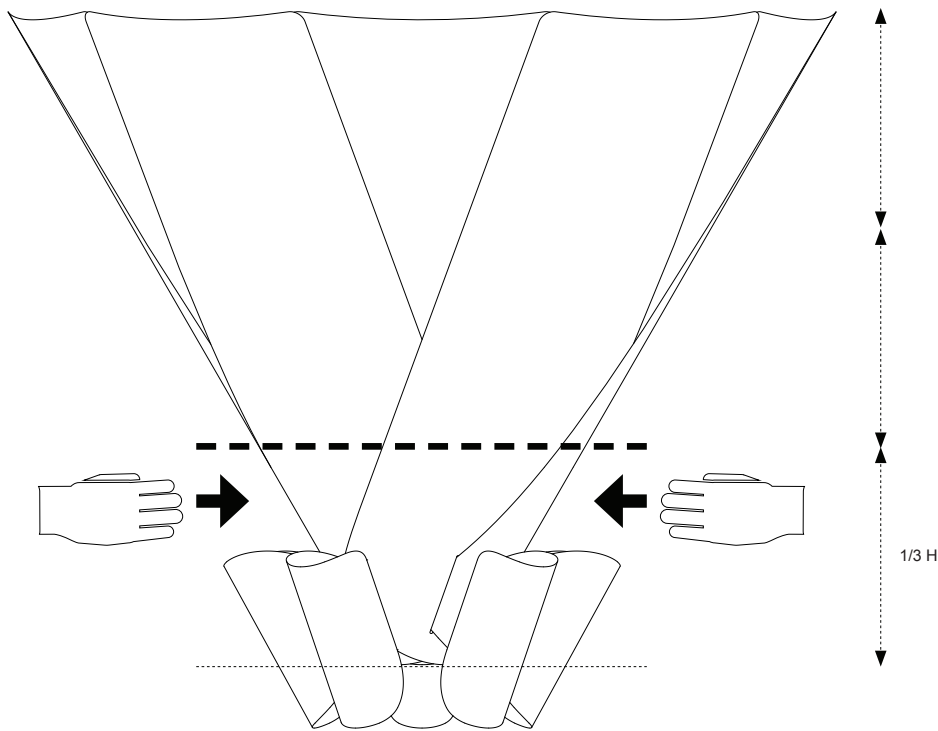

IMPORTANT!

WHEN LIFTING/ MOVING STEEL LAMPSHADE, HOLD GENTLY WITH BOTH HANDS BELOW DASHED LINE. THIS IS WHERE THE STRUCTURE IS STRONGEST.

INTROVERT 145_5 REFLECTOR - HOLD LAMPSHADE IN BOTTOM 1/3 ZONE.

INTROVERT 145_5 REFLECTOR S - HOLD LAMPSHADE IN BOTTOM 1/2 ZONE.



BEST ZONE TO HANDLE LAMPSHADE WHEN REMOVING FROM CRATE IS INDICATED ON FOAM WRAPPING WITH PINK TAPE LINES.

1

UNCRATING STEP-BY-STEP


1

UNSCREW FRONT BOX PANEL AND OPEN CRATE.

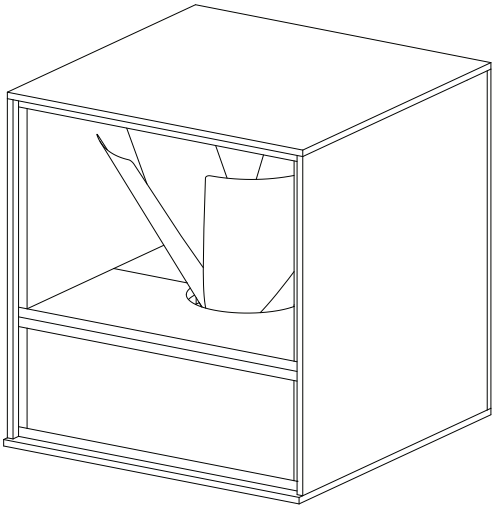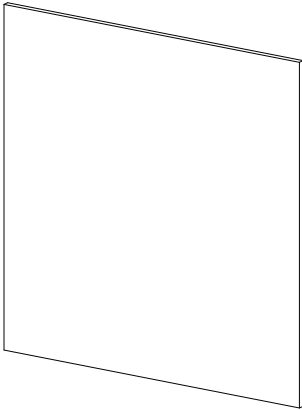


2

UNCRATING STEP-BY-STEP

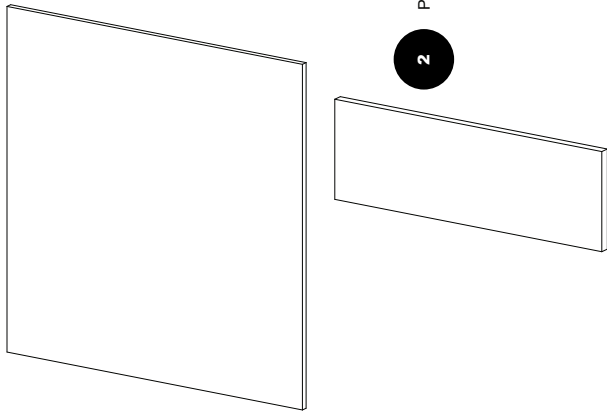


2

PULL OUT FOAM PANEL TO OPEN FRONT COMPARTMENT.

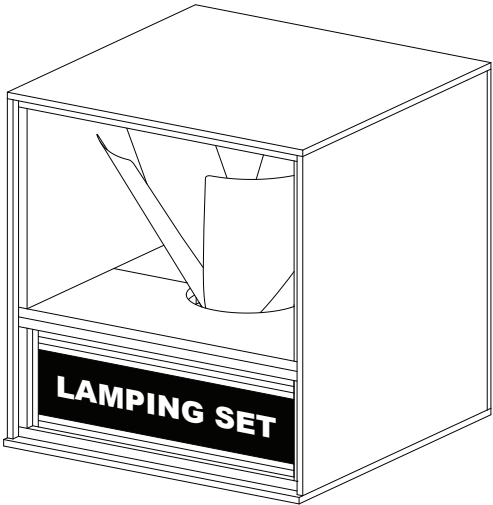


3

UNCRATING STEP-BY-STEP


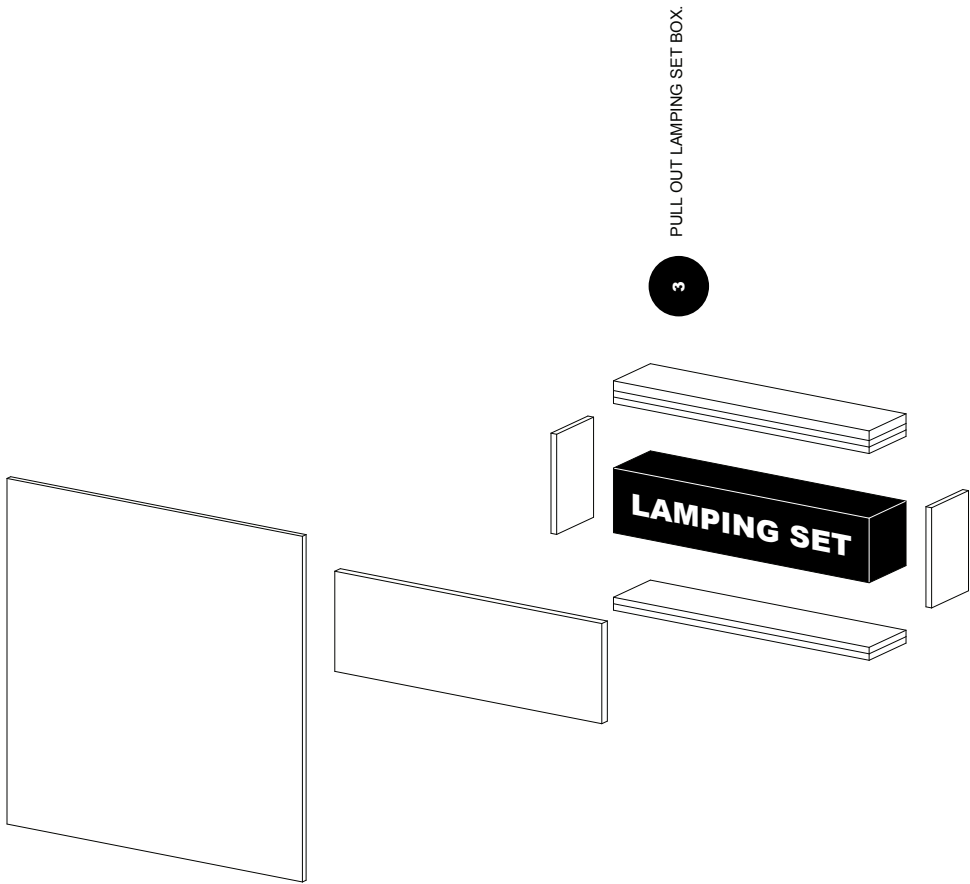


3


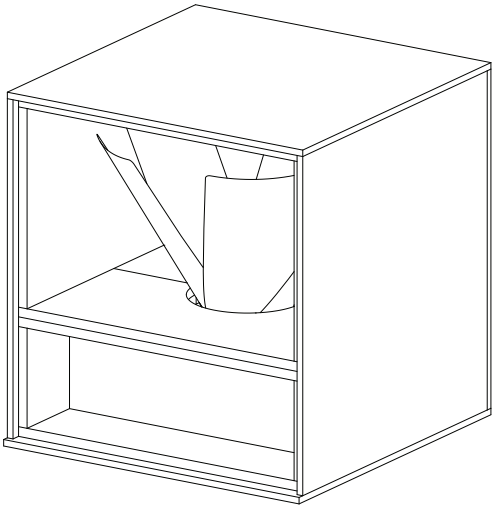


4

UNCRATING STEP-BY-STEP

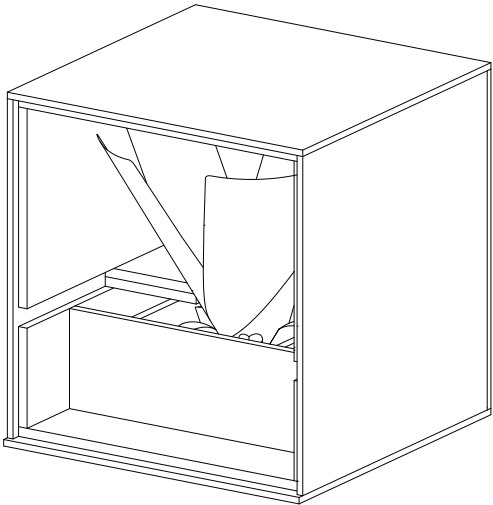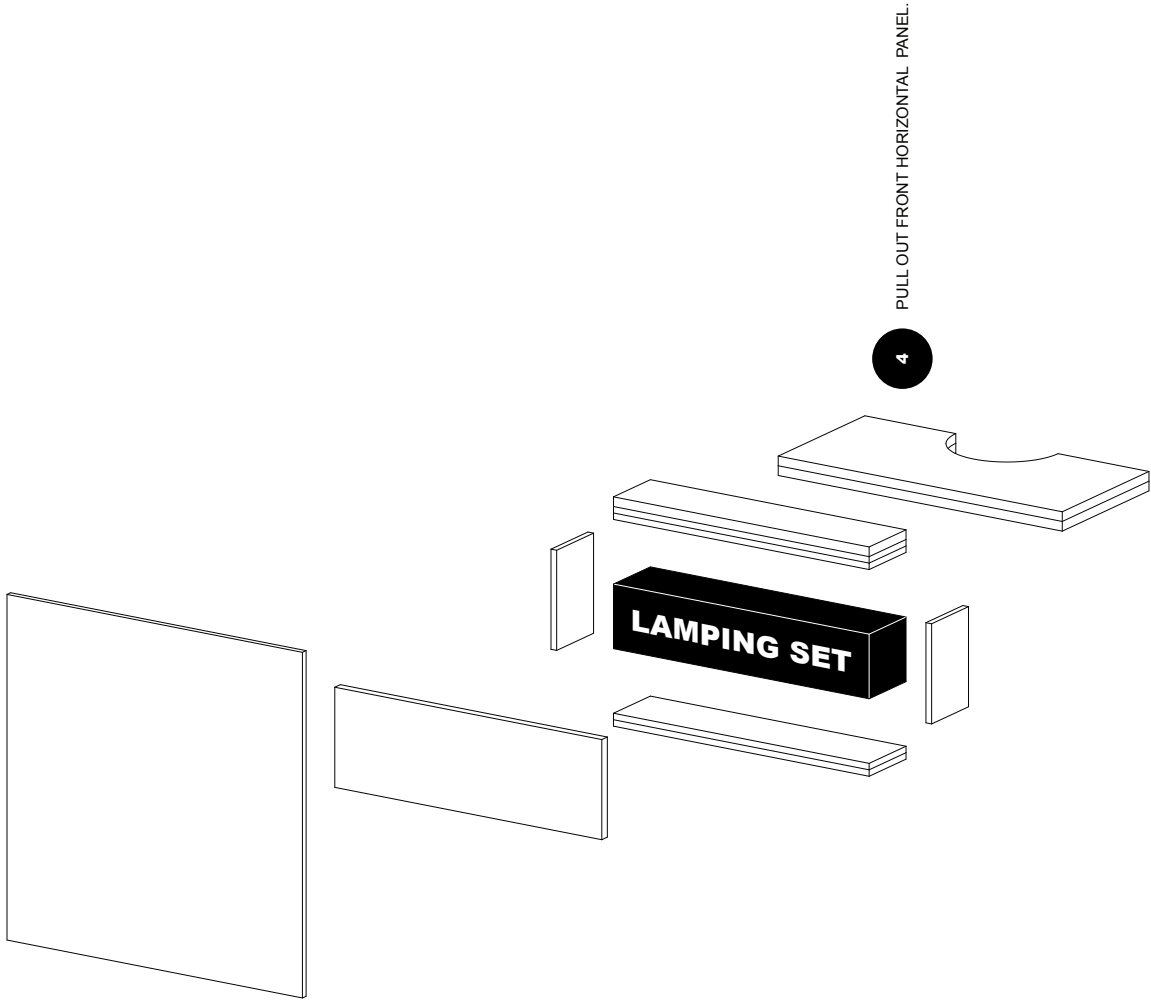


5 UNCRATING STEP-BY-STEP

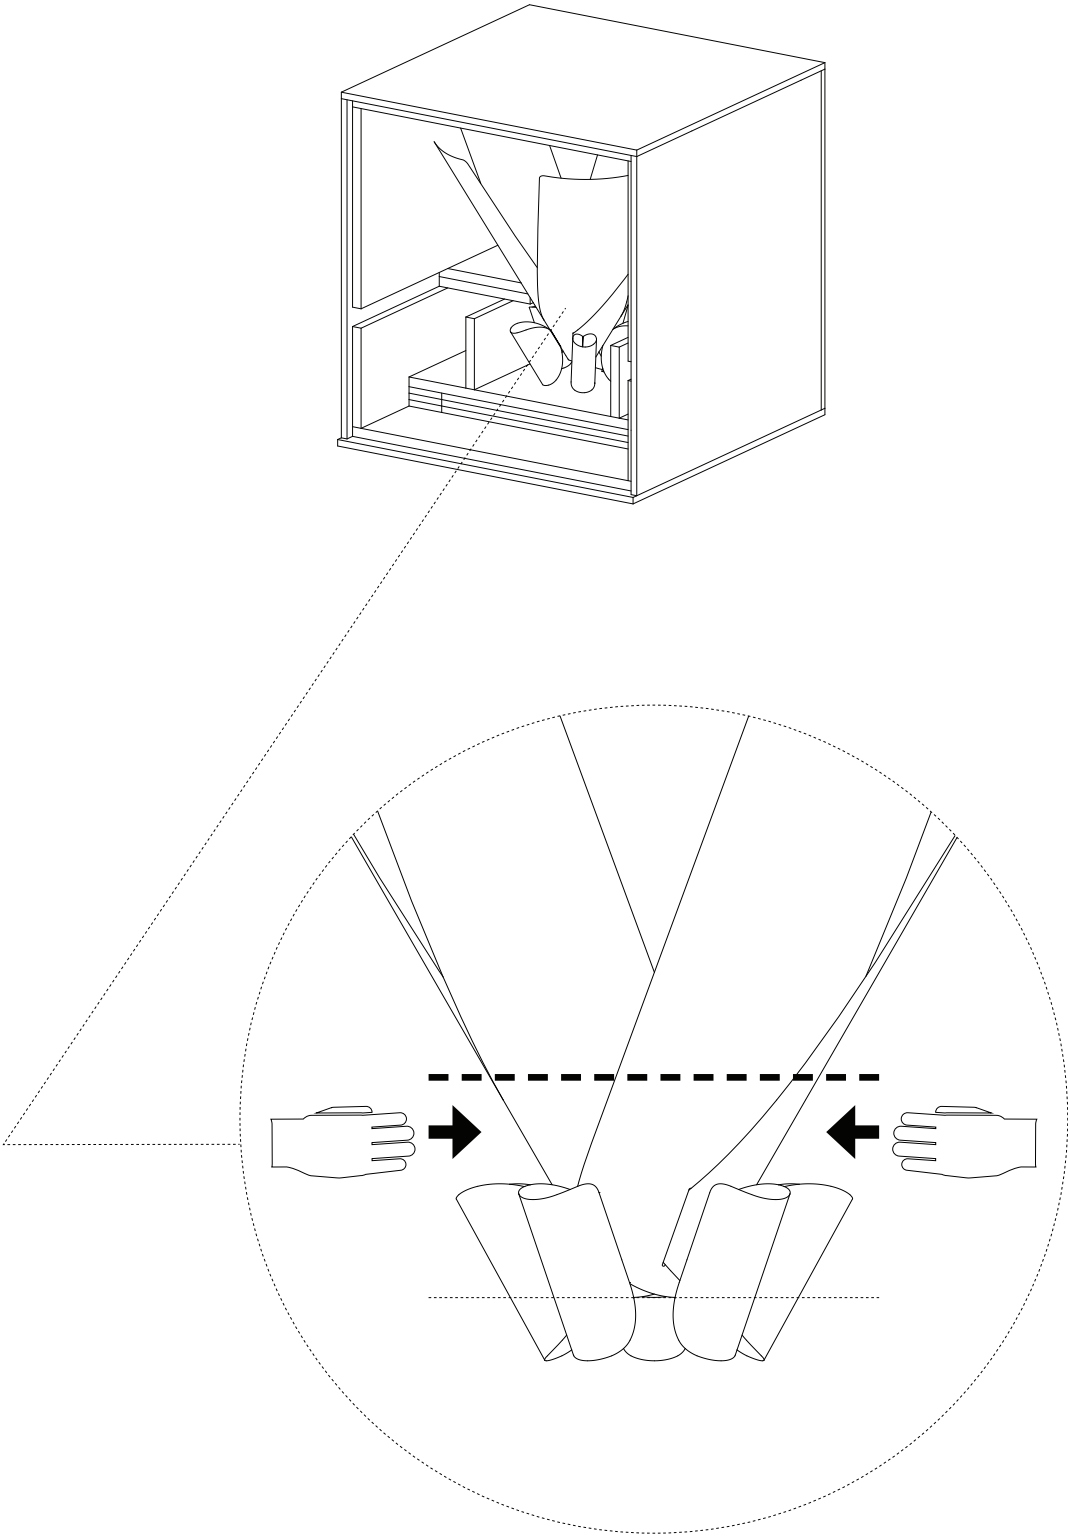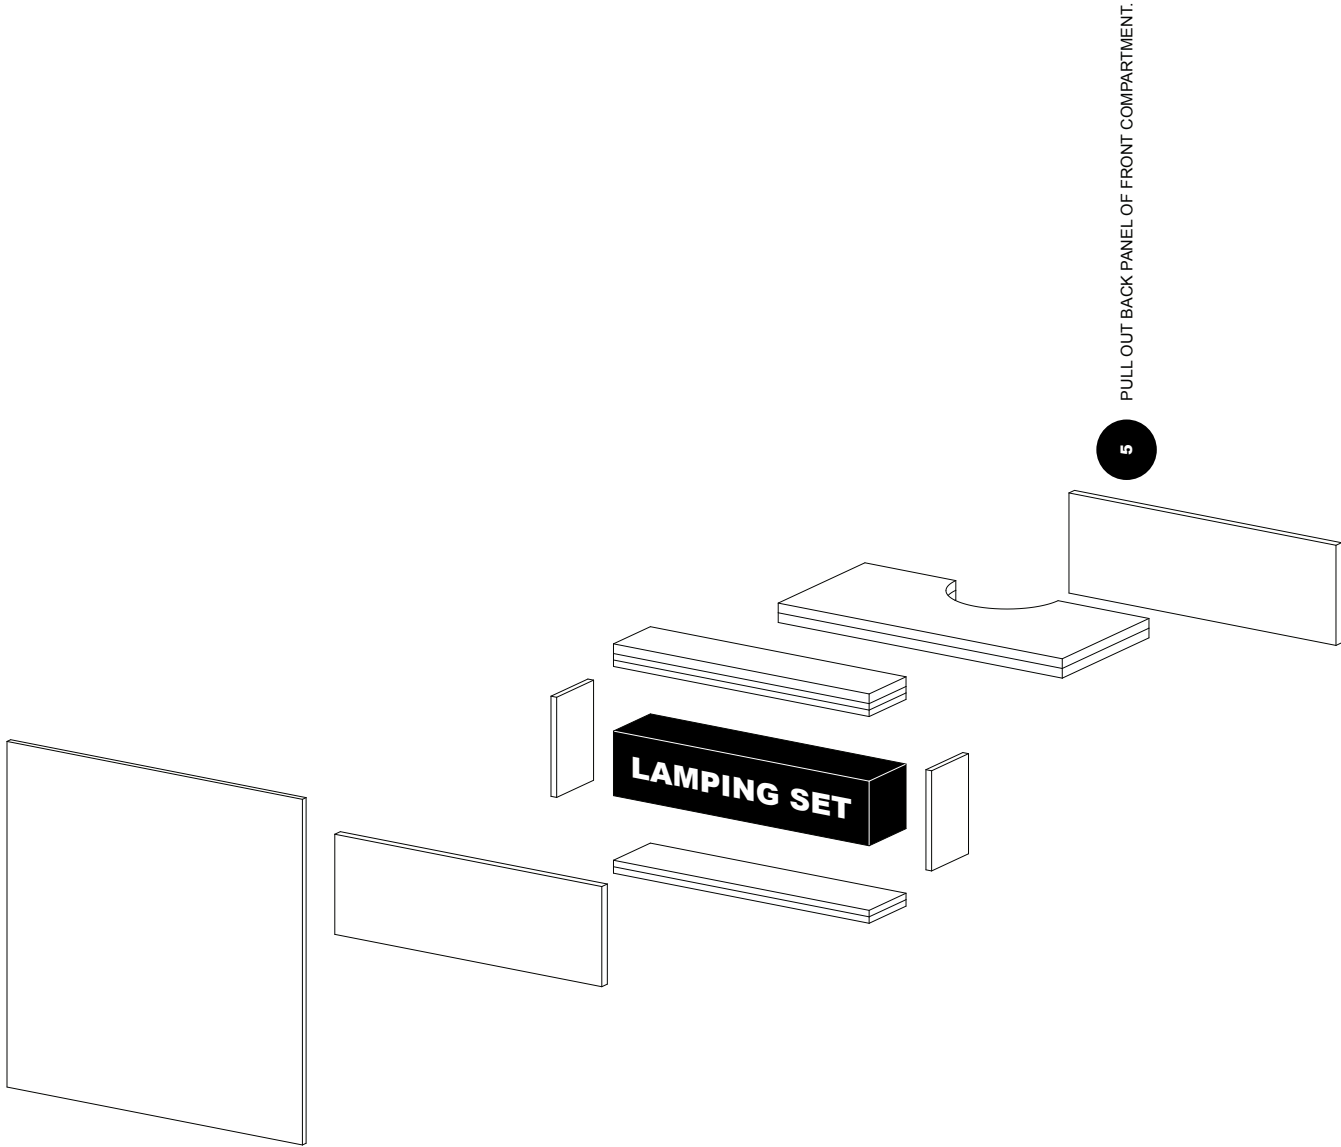

IMPORTANT! PLEASE SEE PAGE 18


6

UNCRATING STEP-BY-STEP

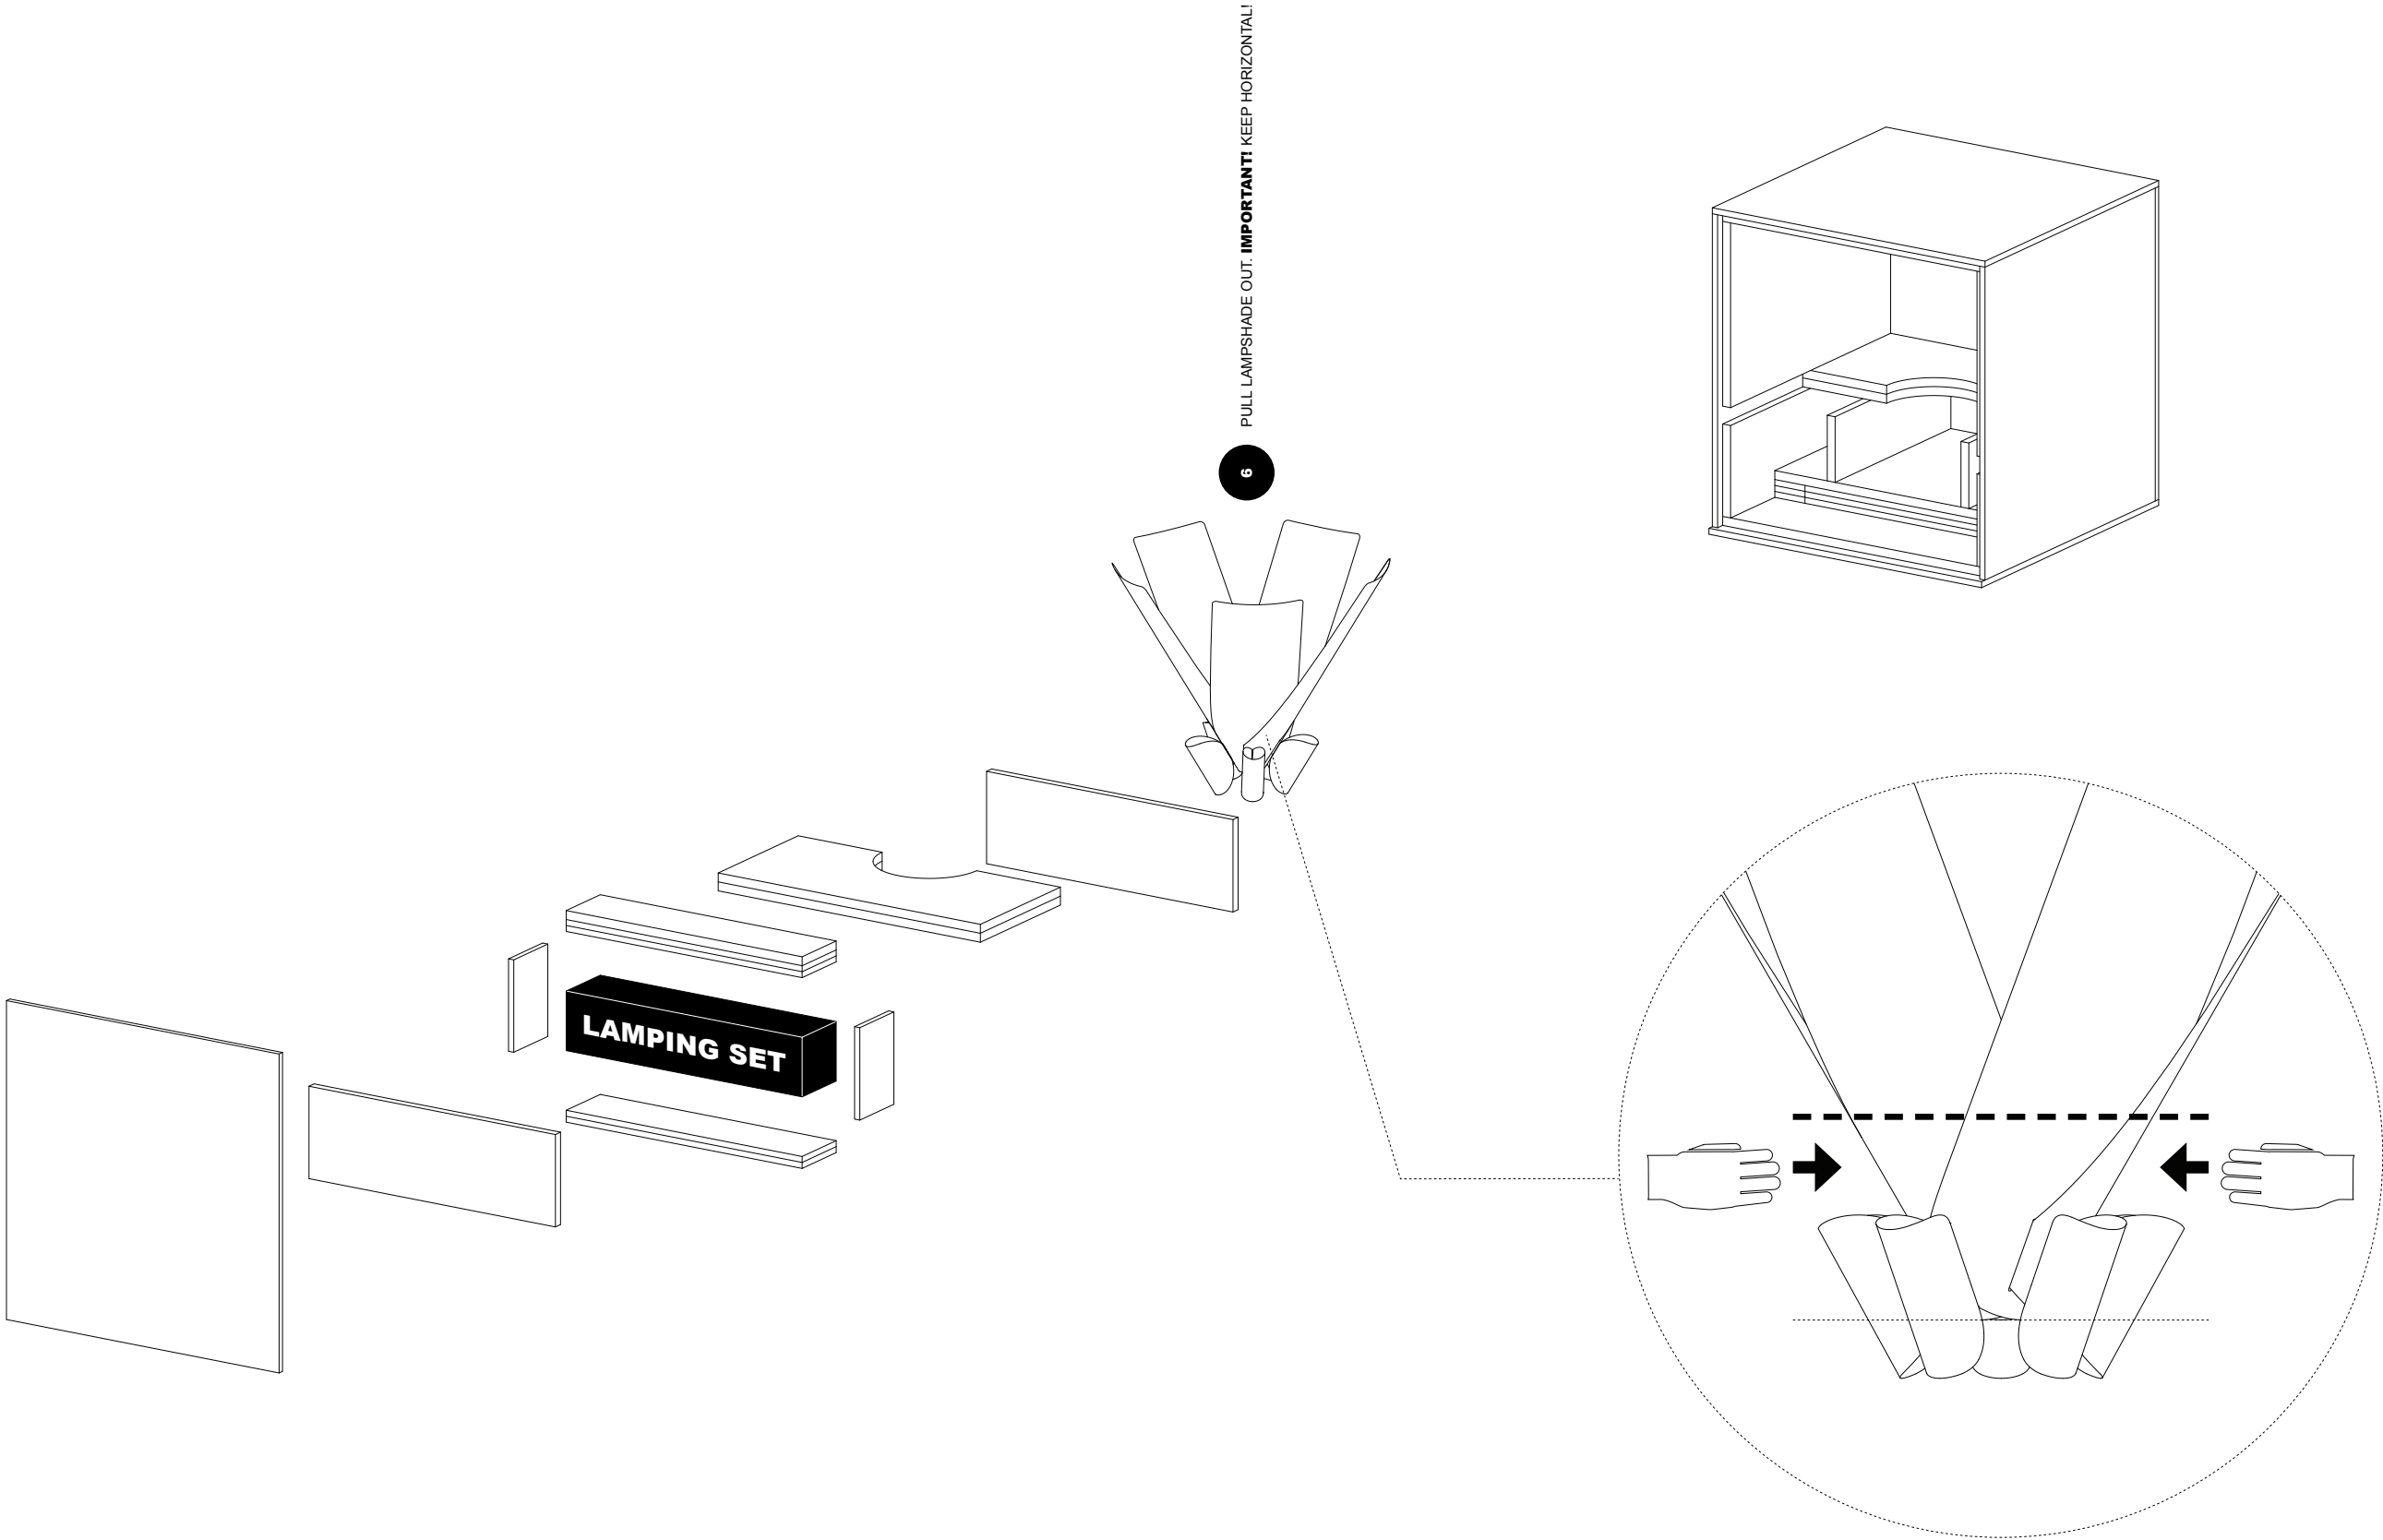


7

UNCRATING STEP-BY-STEP

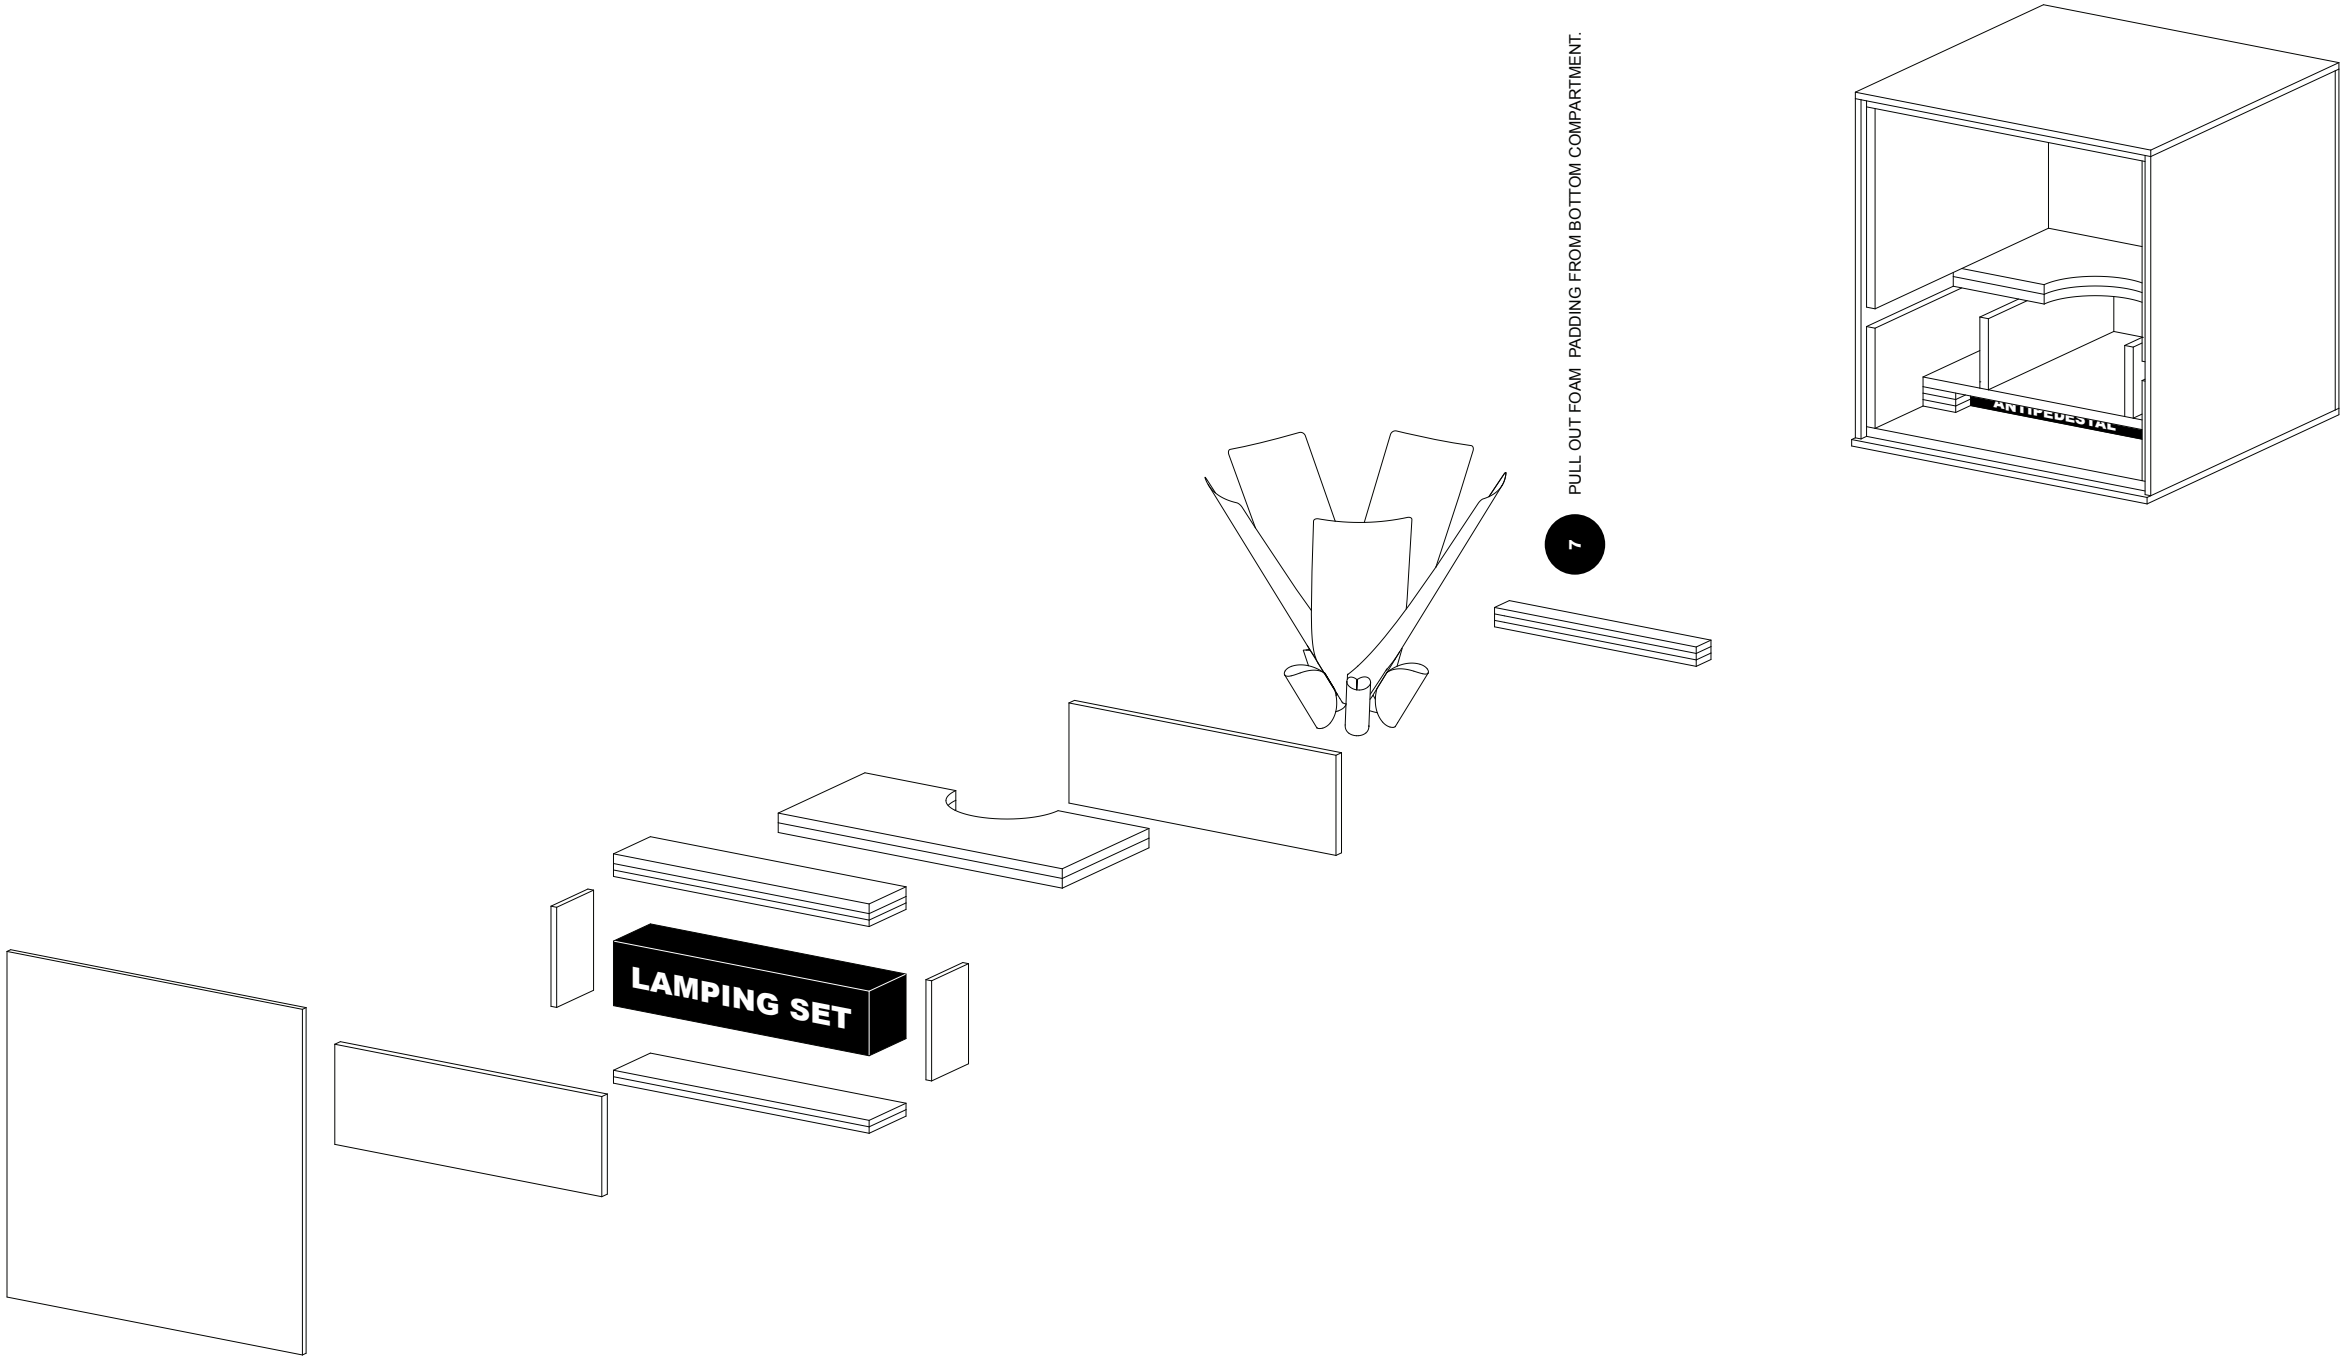

8

UNCRATING STEP-BY-STEP

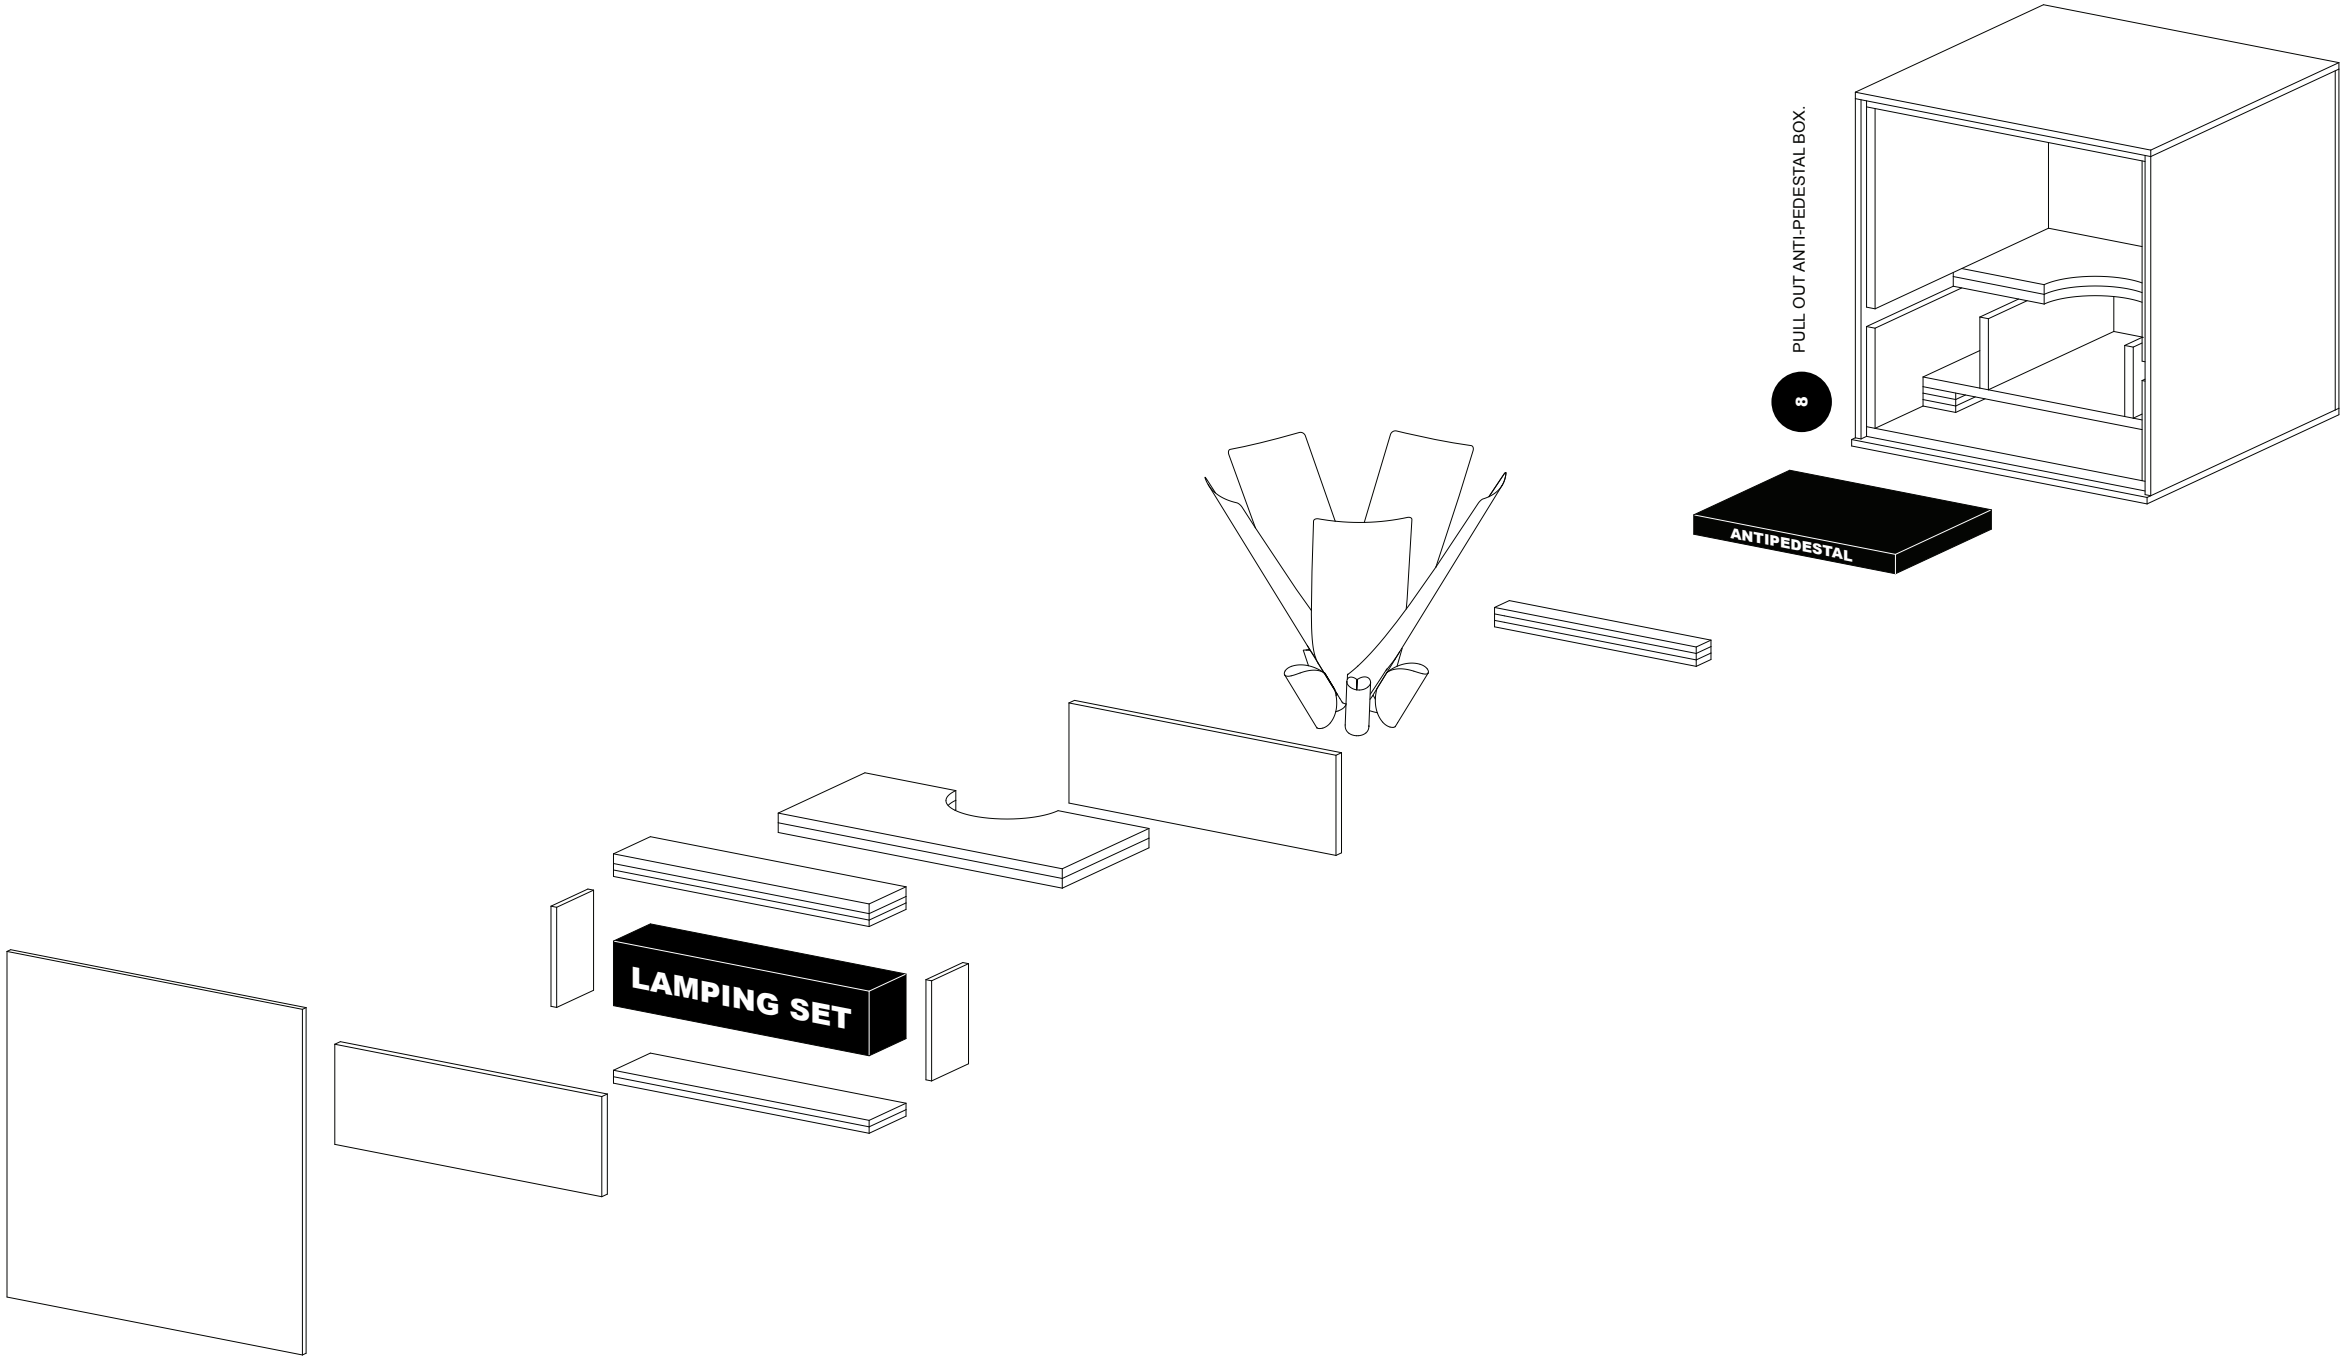

ANTIPEDESTAL

5x CRYSTALS SET


HANDLING GLOVES

ACRYLIC ANTI-SCRATCH BUMPERS
OR
EDITION 2024 MAGNETIC ANTI-SCRATCH STRAPS

LIGHTCORE

ANCHOR DIMMER/ SWITCH BOX

UNBOXING
ANTIPEDESTAL
&
LAMPING SET
BOX CONTENTS

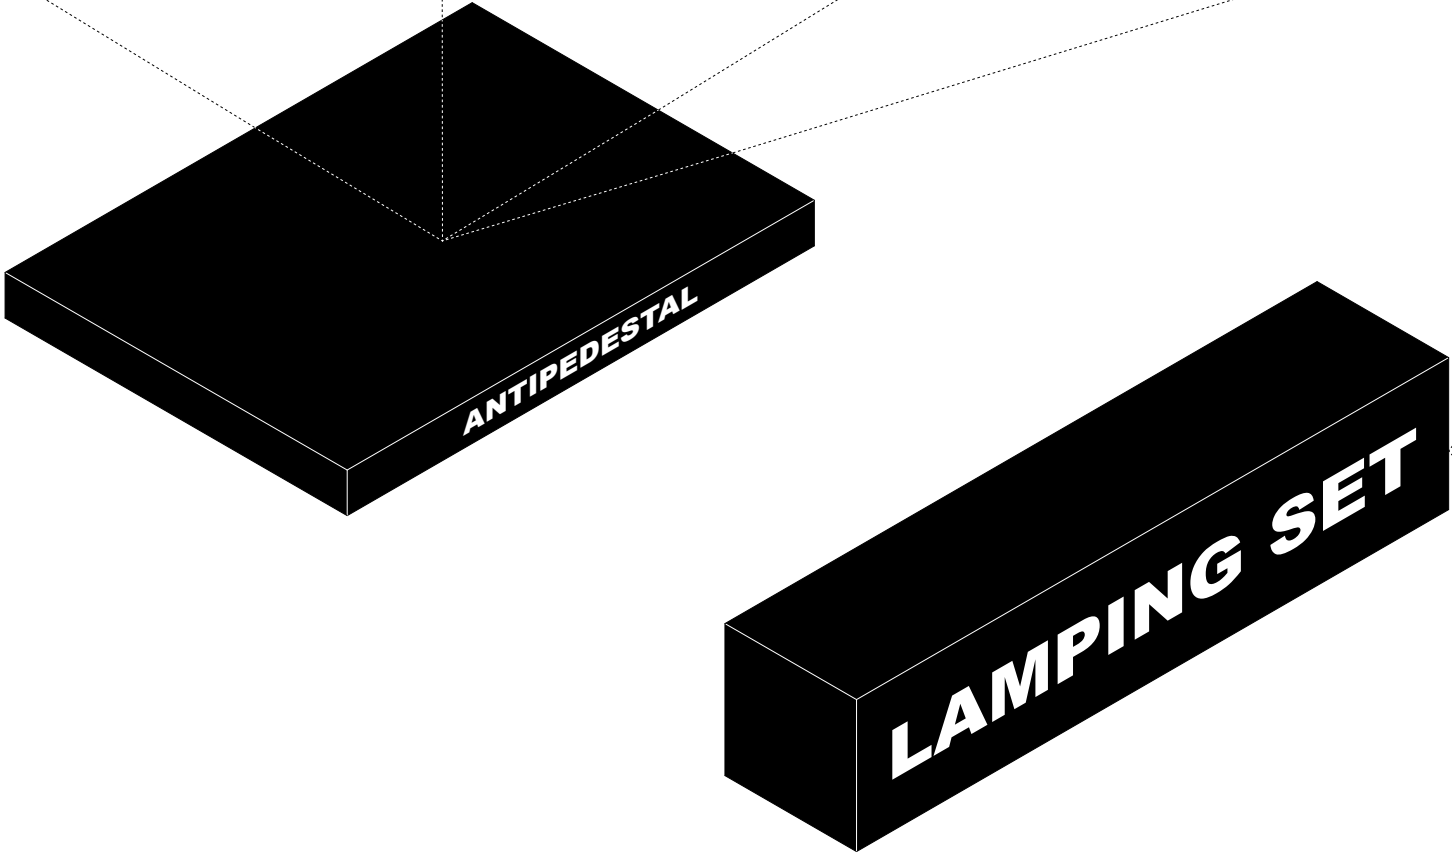

OPEN AND UNPACK ANTI-PEDESTAL AND LAMPING SET BOXES.

USE THE HANDLING GLOVES INCLUDED IN THE ANTIPEDESTAL BOX AS INDICATED IN FOLLOWING STEPS.

IMPORTANT! LAMPING SET COMPONENTS AND ANTIPEDESTAL ARE HEAVY ALUMINIUM OBJECTS. HANDLE WITH CARE.

TAKE LAMPING SET COMPONENTS OUT OF BOX AND PLACE TOGETHER ON FLAT SURFACE BEFORE REMOVING FOAM PROTECTION.

MINIMIZE PULLING ON ROPE WHILE TAKING LAMPING SET OUT OF BOX.

REMOVE FOAM WRAPPING GENTLY.

10

REMOVING
STEEL LAMPSHADE
SOFT WRAPPING




UNWRAP LAMPSHADE GENTLY FROM SOFT WRAPPING.
BEGIN BY REMOVING "FRAGILE" TAPE AND FOLLOW FOAM LAYERS UNTIL LAMPSHADE IS COMPLETELY UNWRAPPED.

IMPORTANT!

WORK WITH GLOVES TO AVOID FINGERPRINTS ON STEEL SURFACES.

III.

STEEL LAMPSHADE & ANTIPEDESTAL INSTALLATION

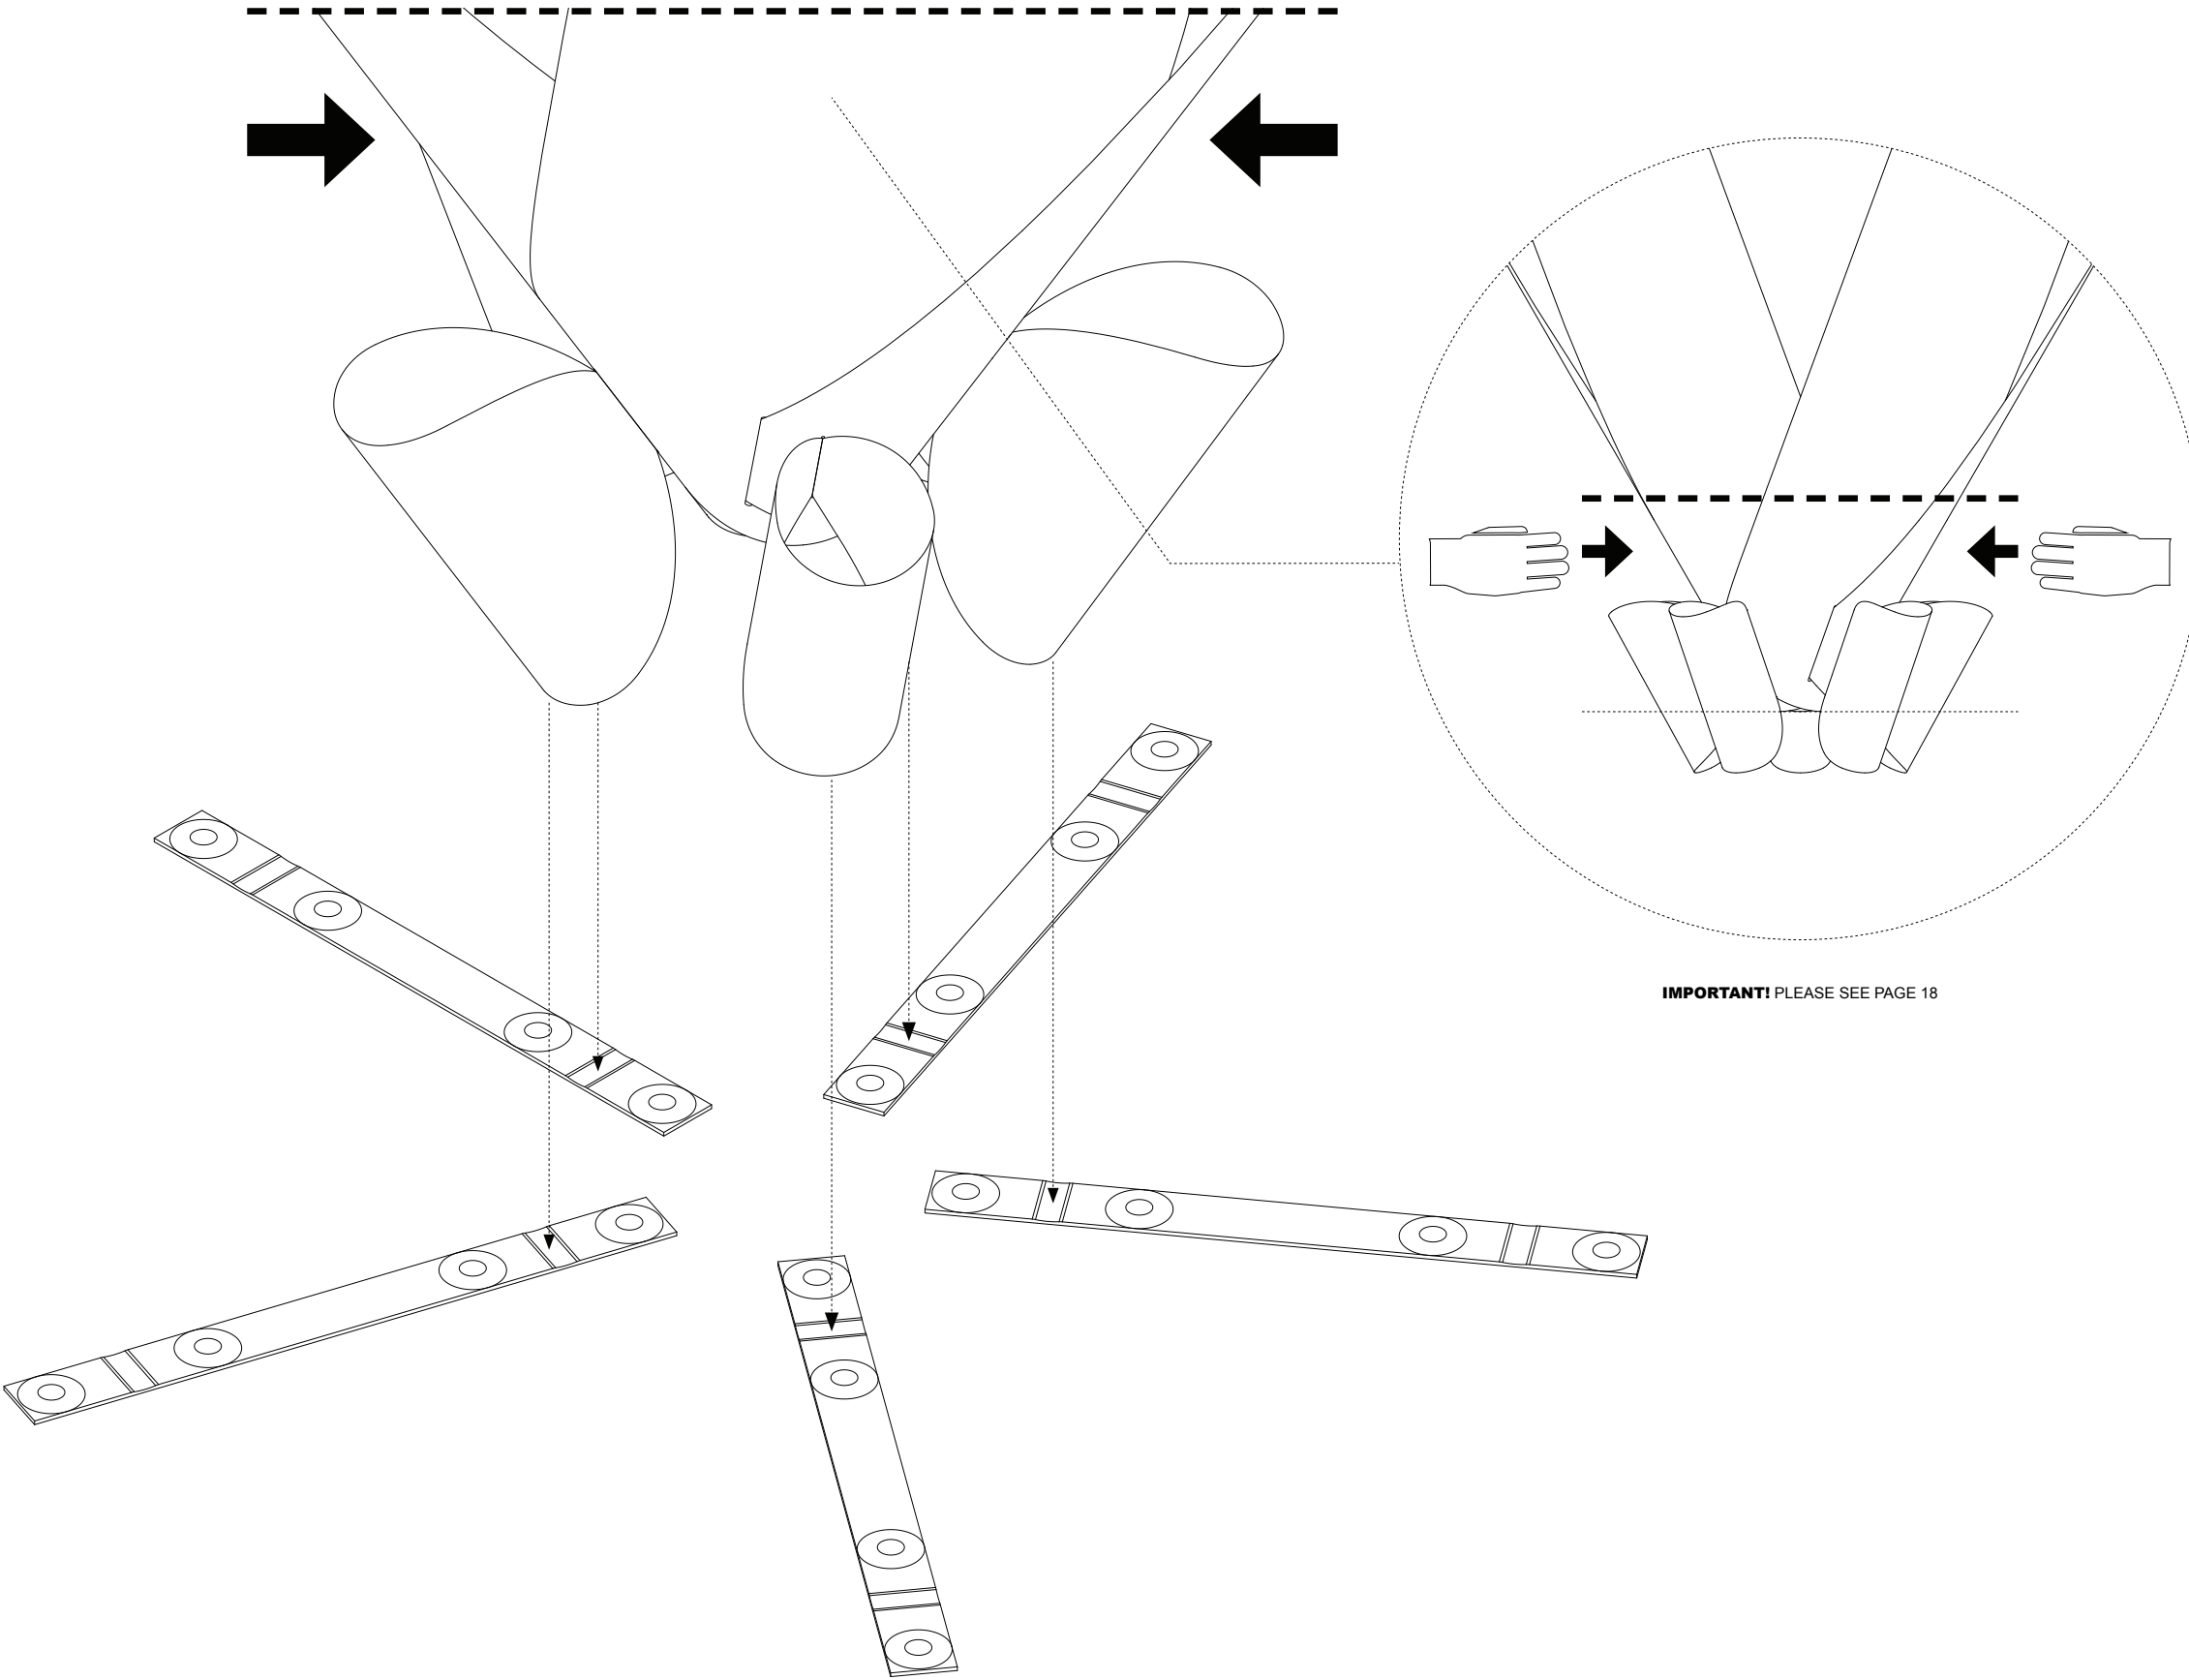

INSTALLING MAGNETIC
ANTI-SCRATCH STRAPS*
ON LAMPSHADE LEGS

*MAGNETIC ANTI-SCARTCH
STRAPS ARE A FEATURE OF
SOME LAMPS FROM EDITION
2024.
OTHER MODELS FEATURE
ACRYLIC ANTI-SCRATCH
BUMPERS.



IMPORTANT! PLEASE SEE PAGE 18

OPEN THE ANTI-SCRATCH MAGNETIC STRAPS AND PLACE ON TABLE OR FLAT SURFACE SUEDE SIDE UP.


CENTER LAMP LEGS CAREFULLY ON FOLDS AS INDICATED IN ILLUSTRATION.

YOU CAN ALSO PLACE LAMPSHADE ON TABLE OR FLAT SURFACE FIRST AND GENTLY LIFT TO SLIDE ANTI-SCRATCH STRAPS UNDER THE LEGS.


WORK WITH GLOVES TO AVOID FINGERPRINTS ON STEEL SURFACES. WHEN HANDLING/ LIFTING LAMP, ALWAYS HOLD IT WITH BOTH HANDS IN LOWER SECTION AS INDICATED.

2

INSTALLING ANTI-SCRATCH
STRAPS ON LAMPSHADE
LEGS

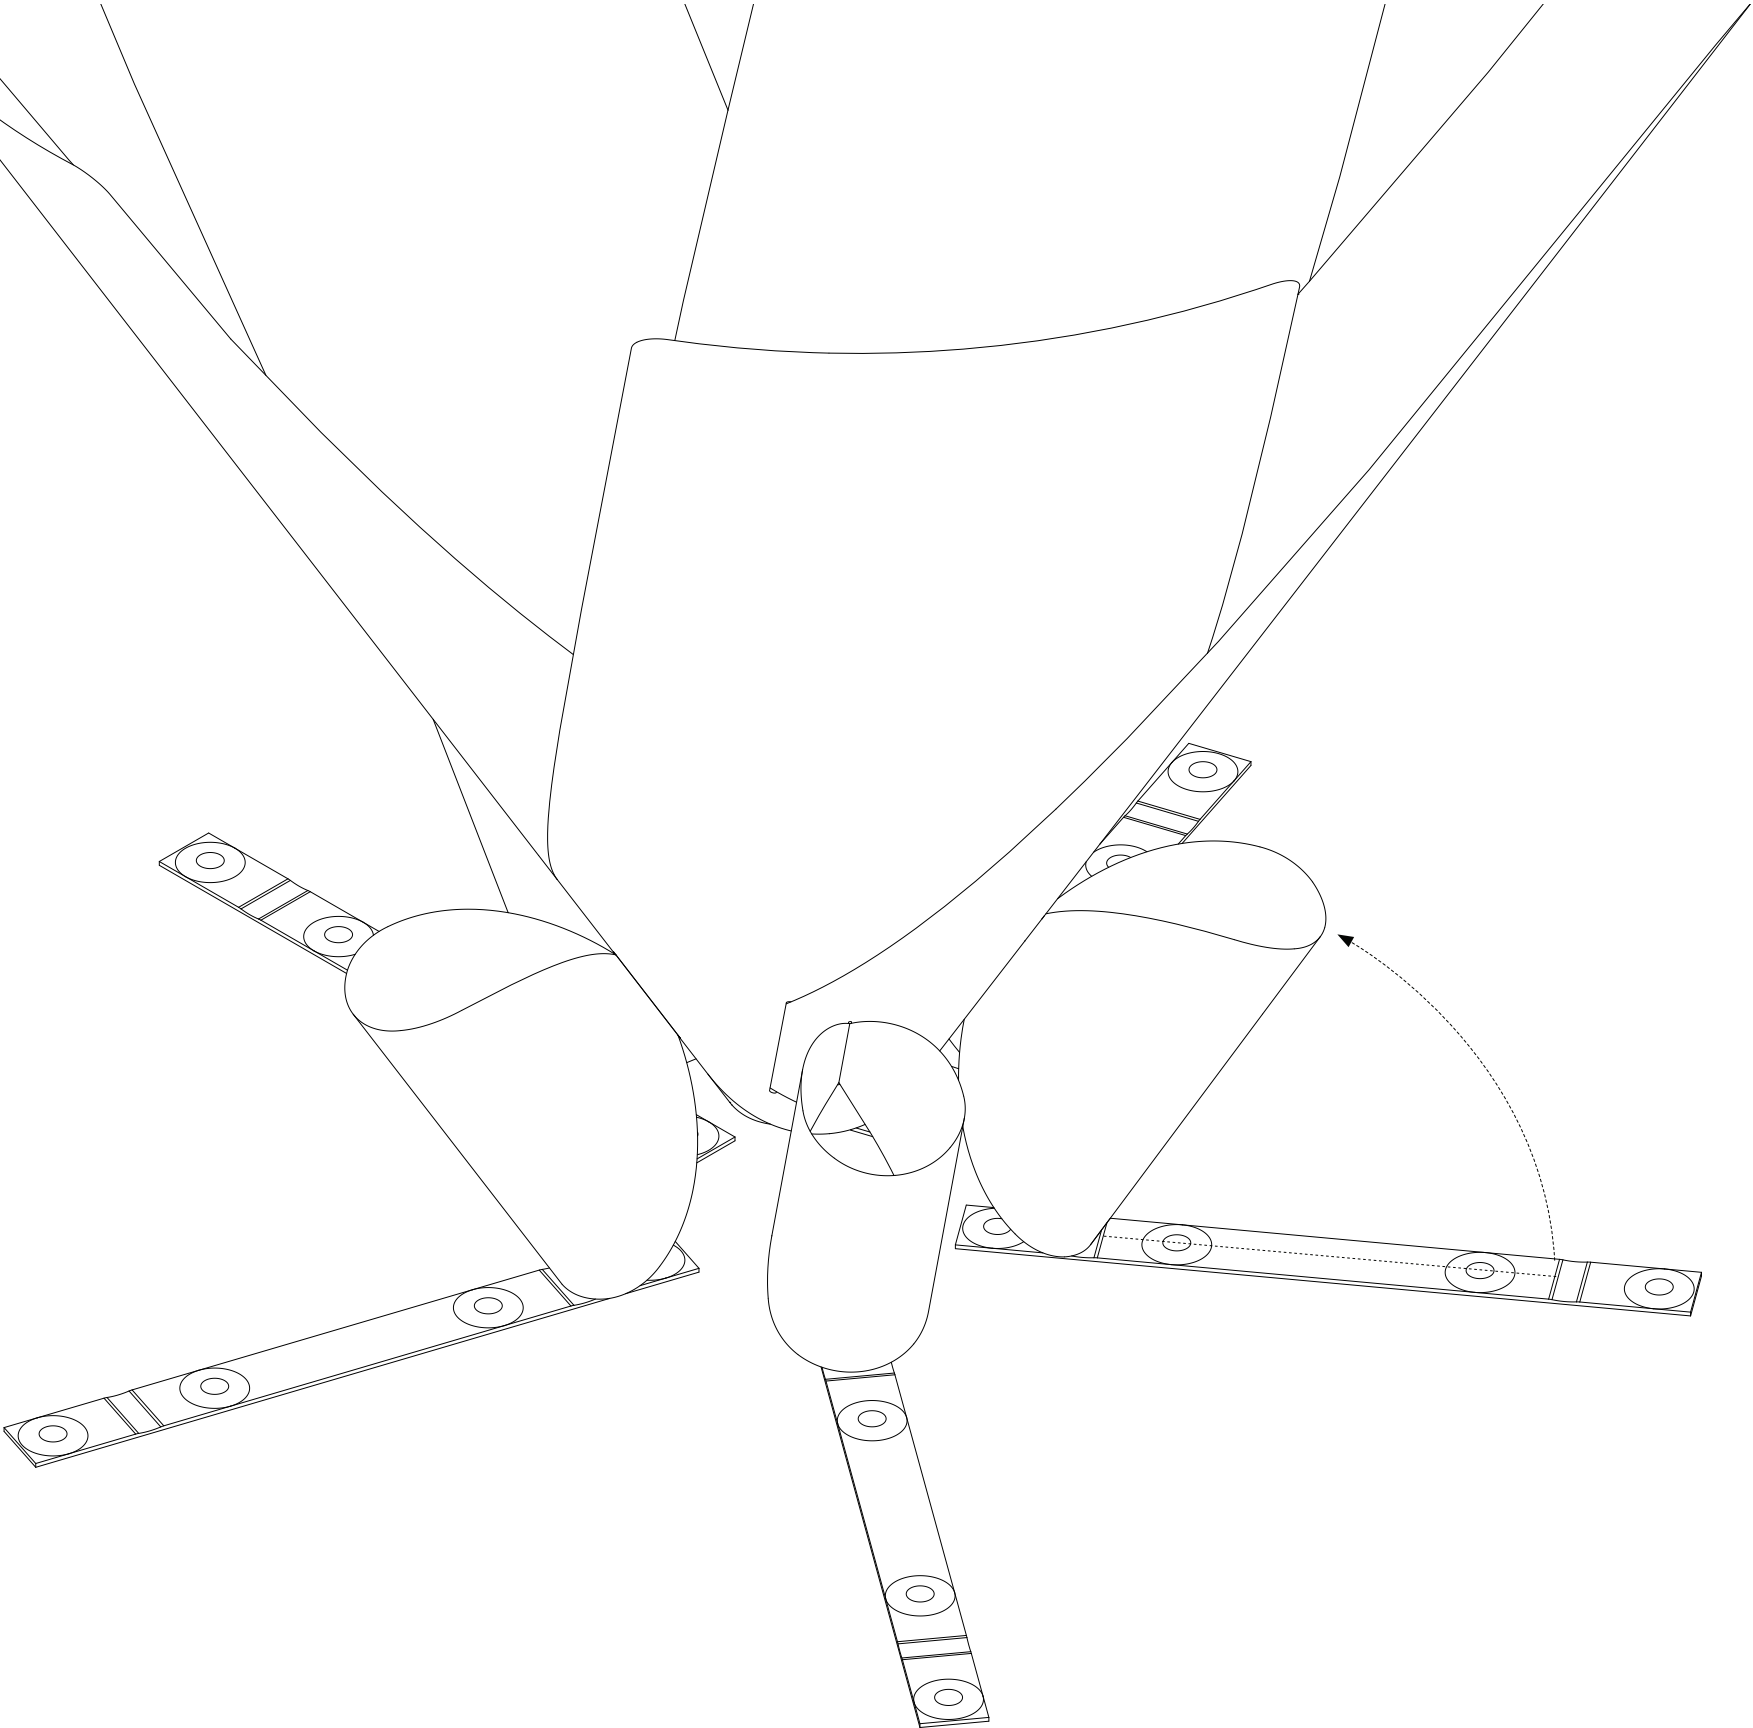

ONCE LAMPSHADE SITS ON FOLDS OF ANTI-SCRATCH STRAPS, FOLD THE LONG PANELS OF THE STRAPS UPWARDS. MAGNETS WILL SNAP THE LONG PANEL OF EACH STRAP TO THE OUTSIDE SURFACE OF THE LEGS.
ADJUST POSITION OF STRAPS UNTIL LONG PANELS ARE WELL-CENTERED ON LAMP LEGS. WORK WITH GLOVES TO AVOID FINGERPRINTS ON STEEL SURFACES.

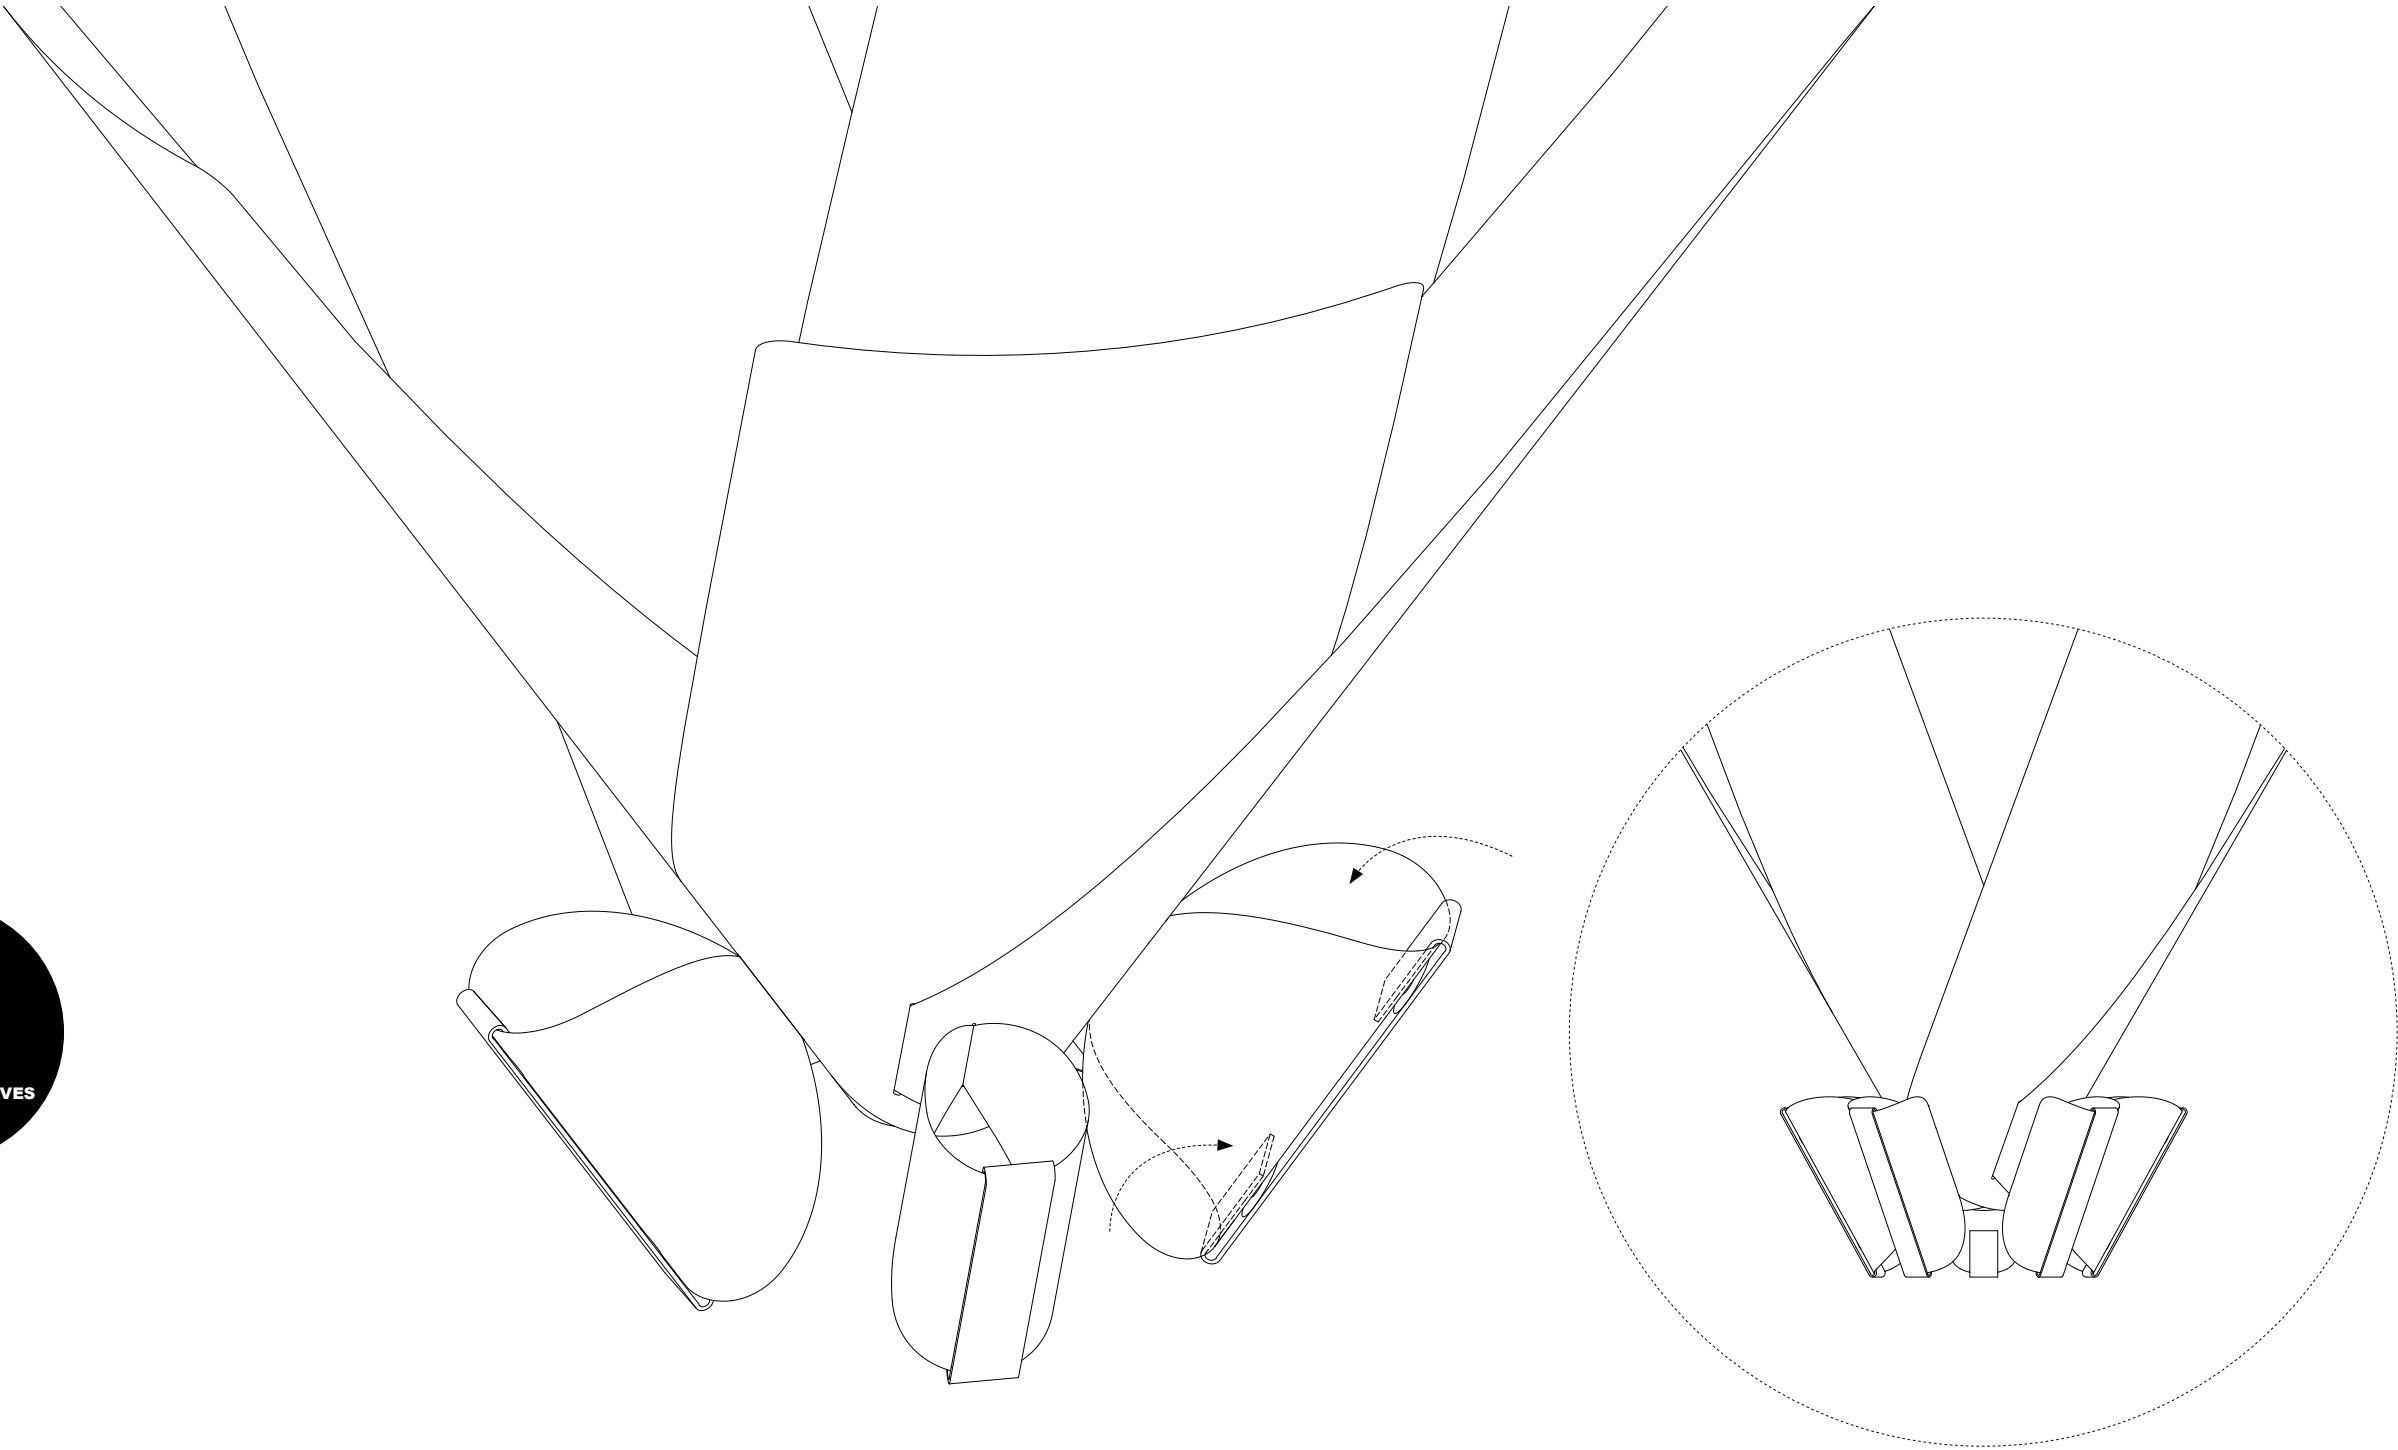

3

INSTALLING ANTI-SCRATCH
STRAPS ON LAMPSHADE
LEGS



GENTLY FLIP THE SHORT PANELS OF THE ANTI-SCRATCH STRAPS TOWARDS THE INSIDE OF THE LAMP LEGS. THE MAGNETS WILL SNAP THEM RIGHT IN PLACE.

WORK WITH GLOVES TO AVOID FINGERPRINTS ON STEEL SURFACES.


THE ANTI-SCRATCH STRAPS ARE NOW INSTALLED AND THE LAMP CAN BE PLACED ON THE ANTIPEDESTAL.

IMPORTANT! ALWAYS REMOVE STRAPS IN CASES WHEN FINGERPRINTS OR STAINING MAY REQUIRE WET CLEANING OF STEEL SURFACES. THE STRAPS ARE MADE OF DRY-CLEAN ONLY MATERIALS AND WILL BE DAMAGED BY LIQUIDS!



SEE MAINTENANCE INSTRUCTIONS IN LAST SECTION OF THIS MANUAL.

4

PLACE CRYSTAL REFLECTORS
IN MILLED RECESSES.

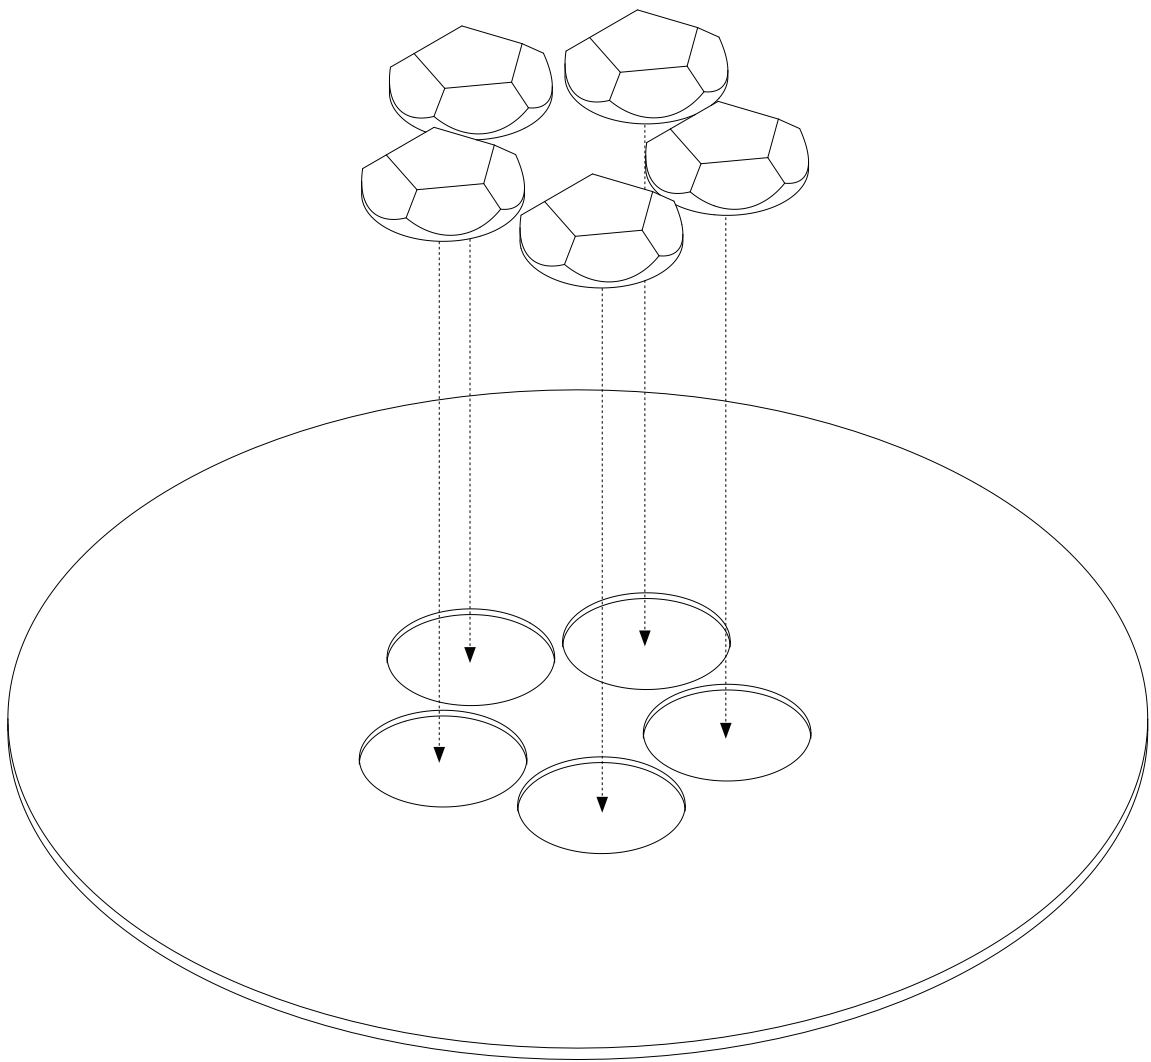

UNWRAP CRYSTAL GLASS REFLECTORS CAREFULLY AND PLACE IN MILLED RECESSES OF PLATE.
WORK WITH GLOVES TO AVOID FINGERPRINTS ON CRYSTAL GLASS REFLECTORS.
READ MAINTENANCE INSTRUCTIONS IN FINAL SECTION OF THIS MANUAL.

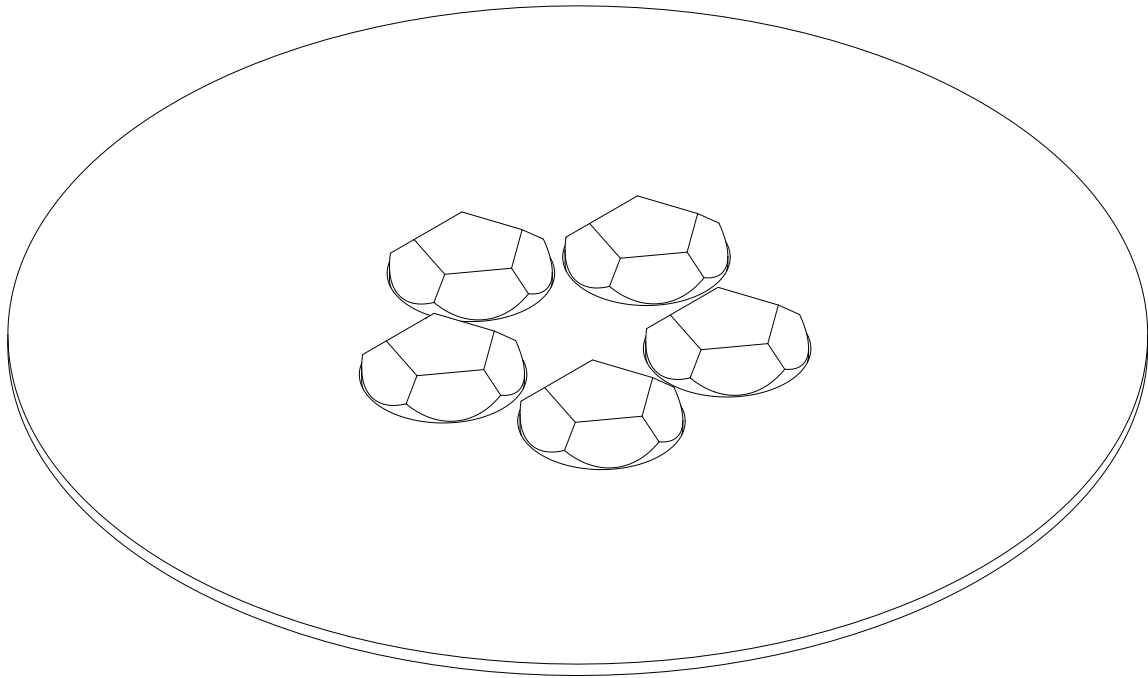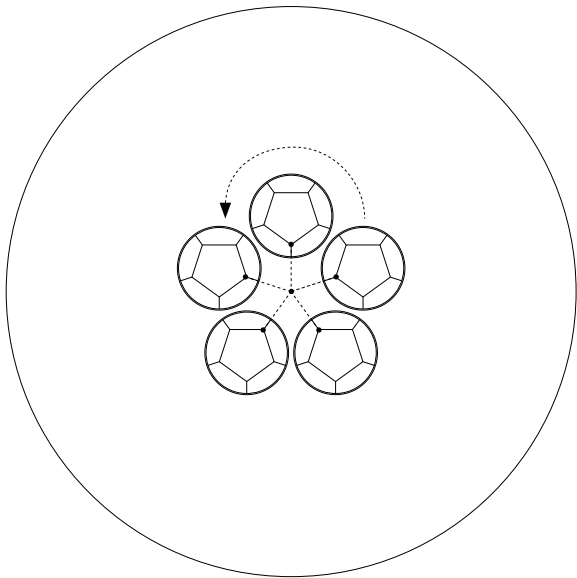

5

ANTIPEDESTAL
&
CRYSTAL REFLECTORS
INSTALLATION COMPLETE





CENTER CRYSTAL REFLECTORS IN MILLED RECESSES.

IF YOU WANT A RADIALLY SYMMETRICAL ARRANGEMENT, ROTATE THE CRYSTALS SO THAT ONE APEX OF EACH OF THE TOP PENTAGONS POINTS TO THE CENTER OF THE PLATE.

IT IS PERFECTLY OK TO HAVE THE CRYSTALS ROTATED RANDOMLY - THESE COLORFUL PRISMS PRODUCE MAGICAL REFLECTIONS NO MATTER WHAT!

WORK WITH GLOVES TO AVOID FINGERPRINTS ON CRYSTAL GLASS REFLECTORS.

YOUR ANTIPEDESTAL PLATE INSTALLATION IS COMPLETE.

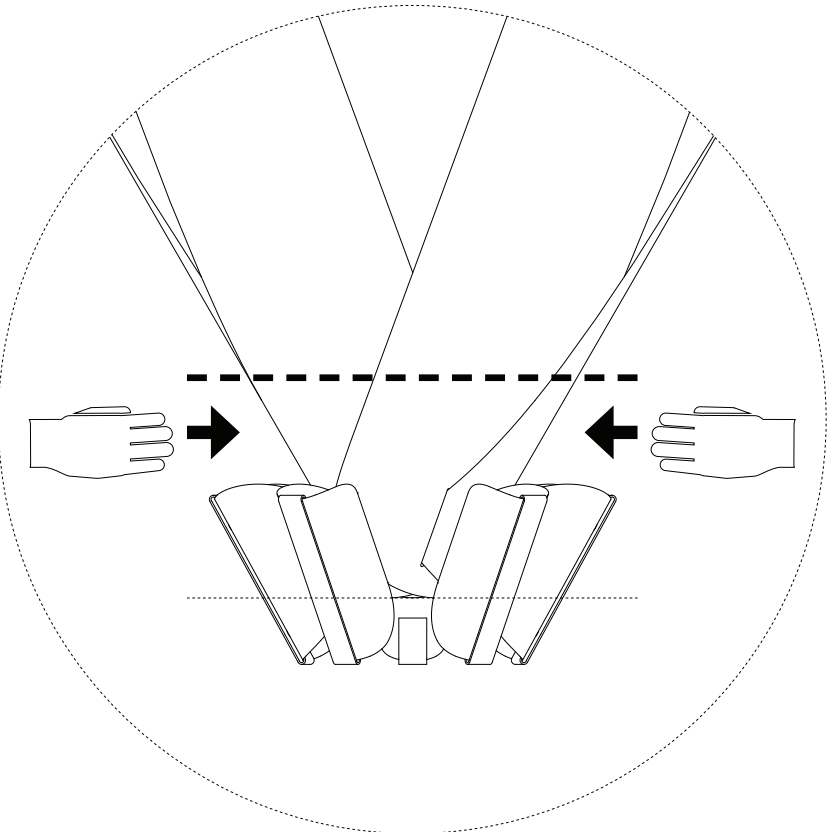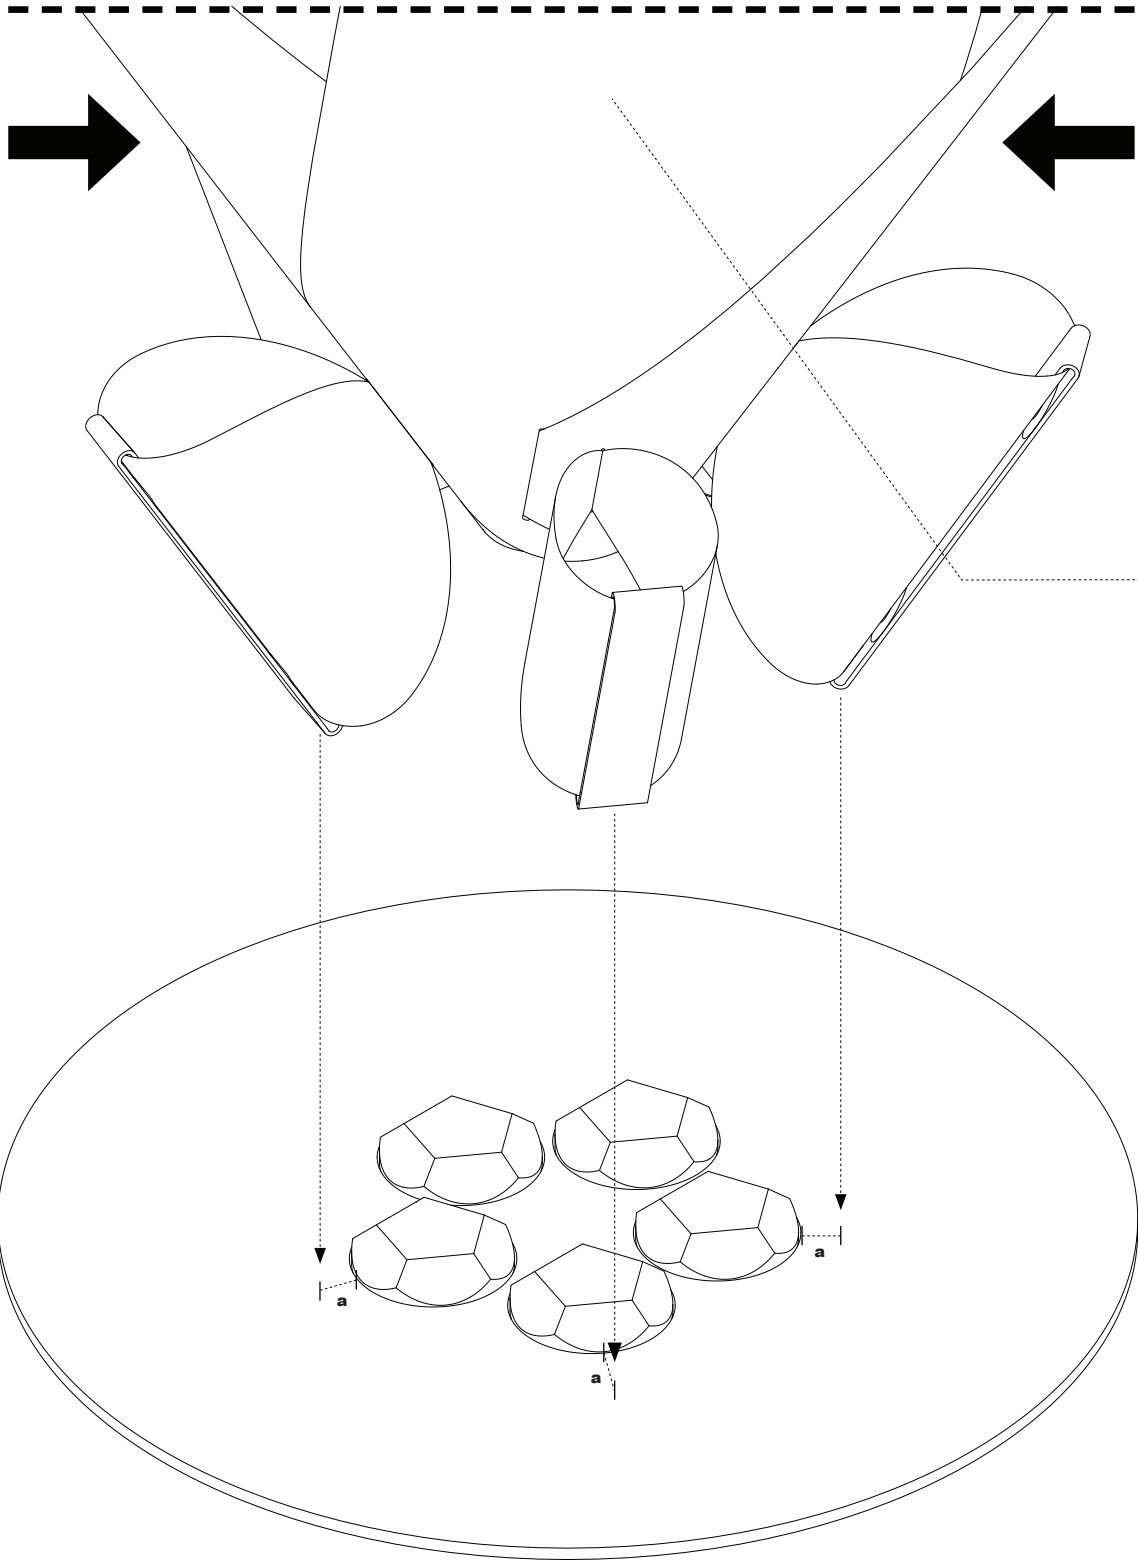

IMPORTANT! PLEASE SEE PAGE 18

6

CENTERING
LAMP SHADE
ON
ANTIPEDESTAL




PLACE LAMP SHADE ON ANTIPEDESTAL SO THAT THREE LEGS STAND AT EQUAL DISTANCE FROM CRYSTAL REFLECTORS.

SOME LAMPS MAY COME WITH ACRYLIC ANTI-SCRATCH BUMPER INSTEAD OF MAGNETIC STRAPS. PLACE AND CENTER EACH BUMPER ON THE LAMP LEGS. THEN PLACE LAMP ON ANTIPEDESTAL AS INDICATED ABOVE.

THE LAMP SHADES ARE HAND-MADE, FLEXIBLE STRUCTURES DESIGNED TO ALLOW FOR SOME MOVEMENT BETWEEN THEIR PARTS. THEREFORE, NOT ALL LEGS WILL SIT AT THE EXACT SAME LOCATION RELATIVE TO THE CRYSTAL REFLECTORS.


IT IS SUFFICIENT TO ALIGN THREE OUT OF FIVE LEGS TO ENSURE LAMP SHADE IS CENTERED ON ANTI-PEDESTAL.

WORK WITH GLOVES TO AVOID FINGERPRINTS ON STEEL LAMP SHADE.

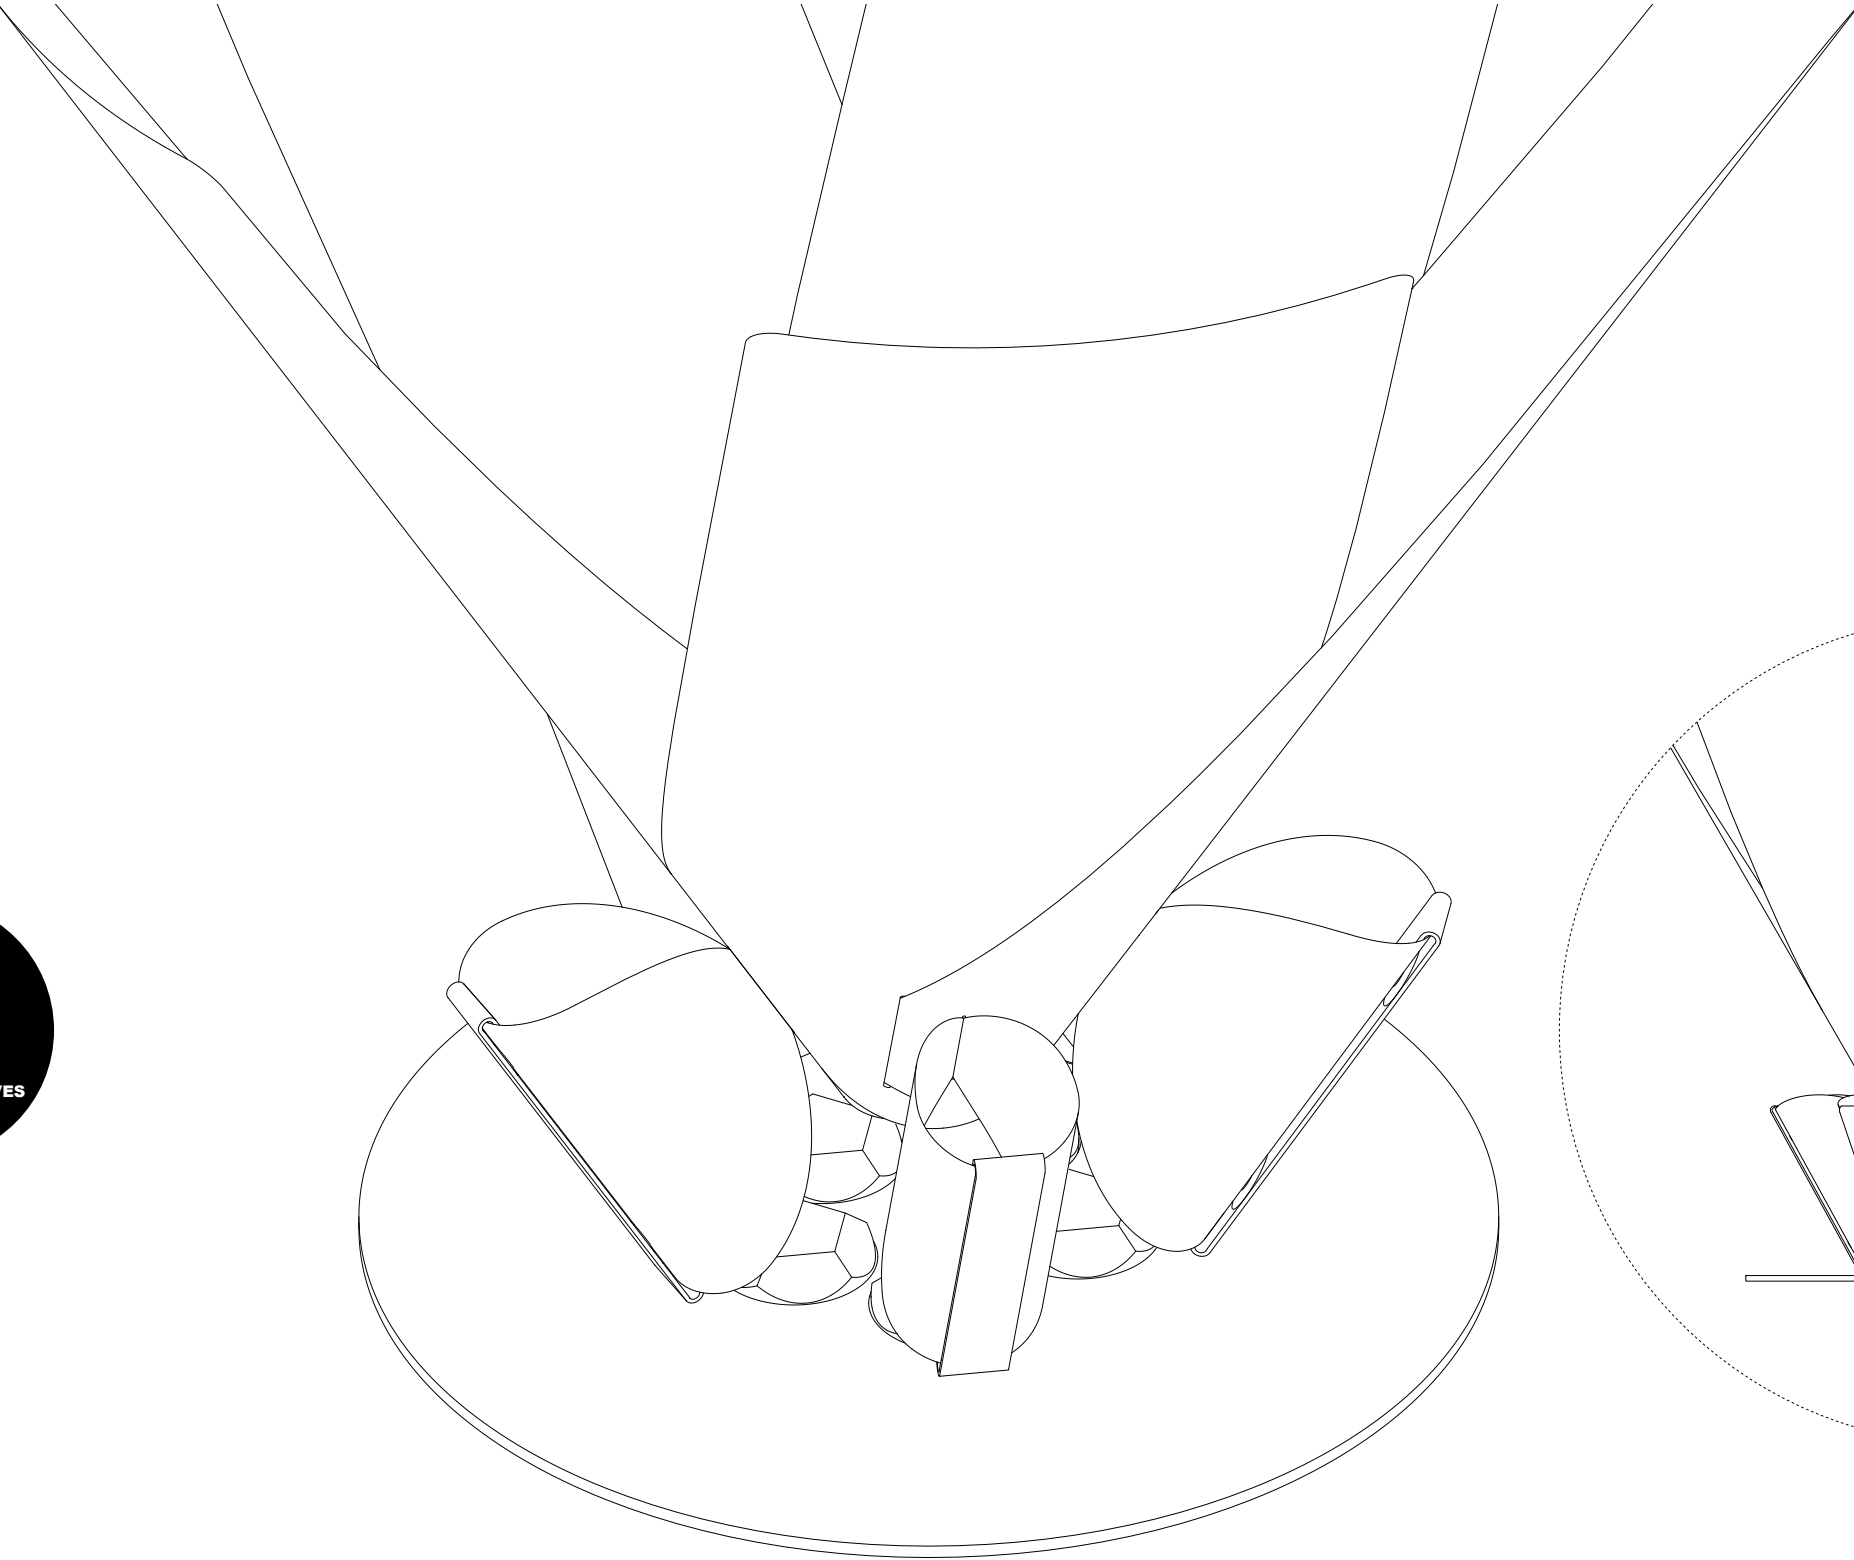

7

LAMPSHADE
&
ANTIPEDESTAL INSTALLATION
COMPLETE

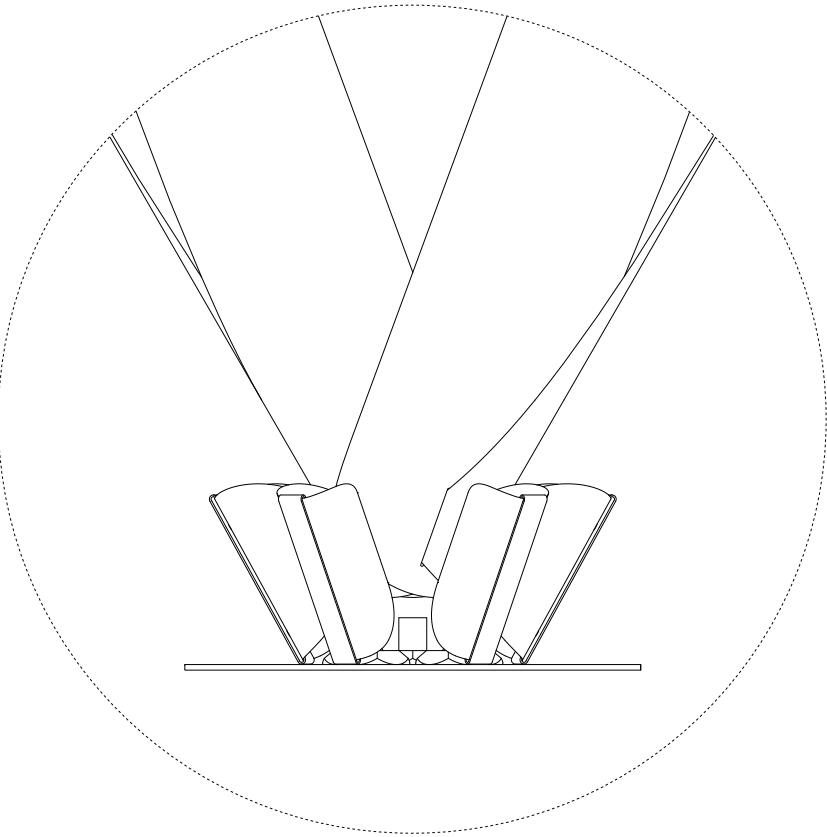


LAMPSHADE IS CENTERED.

WORK WITH GLOVES TO AVOID FINGERPRINTS ON STEEL LAMPSHADE.

IV.
LAMPING SET INSTALLATION

1 FITTING BULBS IN LIGHTCORE

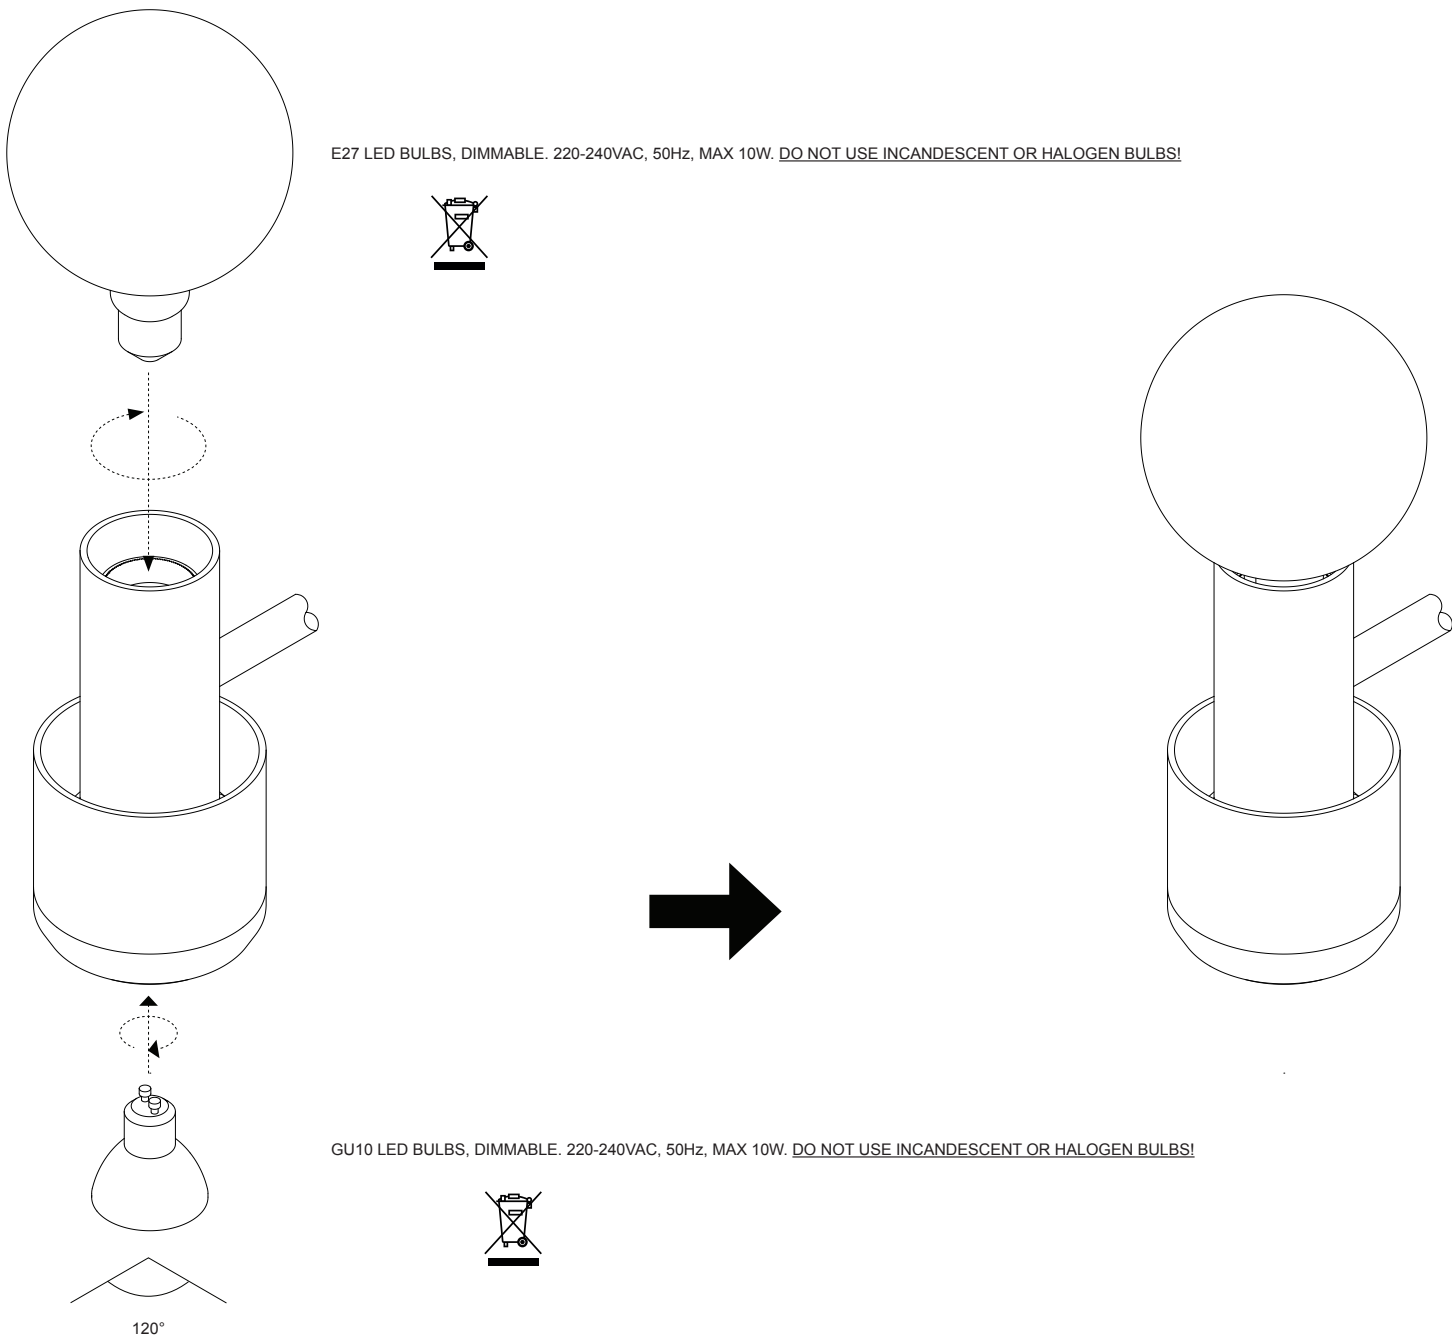

INSTALL BULBS IN LIGHTCORE. BEST WITH BULBS OF HIGH LUMEN COUNTS - 500 LUMEN OR HIGHER. TOP E27 LED BULB SHOWN HERE - G125 GLOBE BULB (Ø 125 MM). BOTTOM GU10 LED BULB BEST WITH 120° BEAM ANGLE.

IMPORTANT! ONLY USE BULBS AS SPECIFIED IN THIS MANUAL.

INTENDED FOR GENERIC LED DIMMABLE BULBS ONLY! LAMP DOES NOT OPERATE WITH SMART LED BULBS.

DO NOT USE INCANDESCENT OR HALOGEN BULBS!

LAMP MUST BE DISCONNECTED FROM MAINS DURING BULB INSTALLATION!

INDOOR USE ONLY. DESIGNED FOR DRY AND CLOSED SPACES.



PLEASE READ COMPREHENSIVE LIST OF USE & OPERATION PRECAUTIONS IN THE *GENERAL MAINTENANCE & SAFETY INSTRUCTIONS* SECTION OF THIS MANUAL.

INTROVERT 145_5 REFLECTOR

INTROVERT 145_5 REFLECTOR S

2

PLACING LIGHTCORE IN
STEEL LAMPSHADE

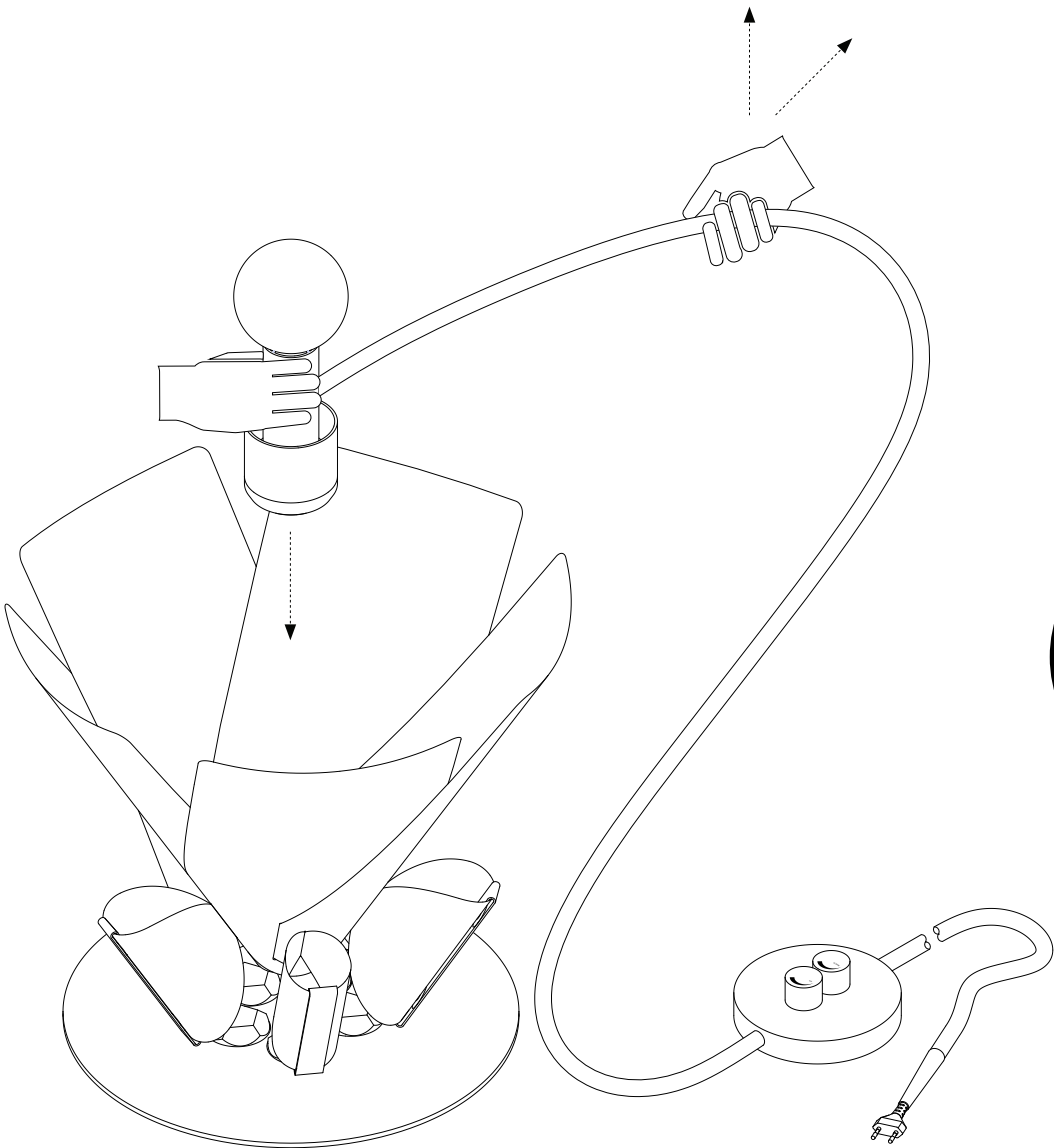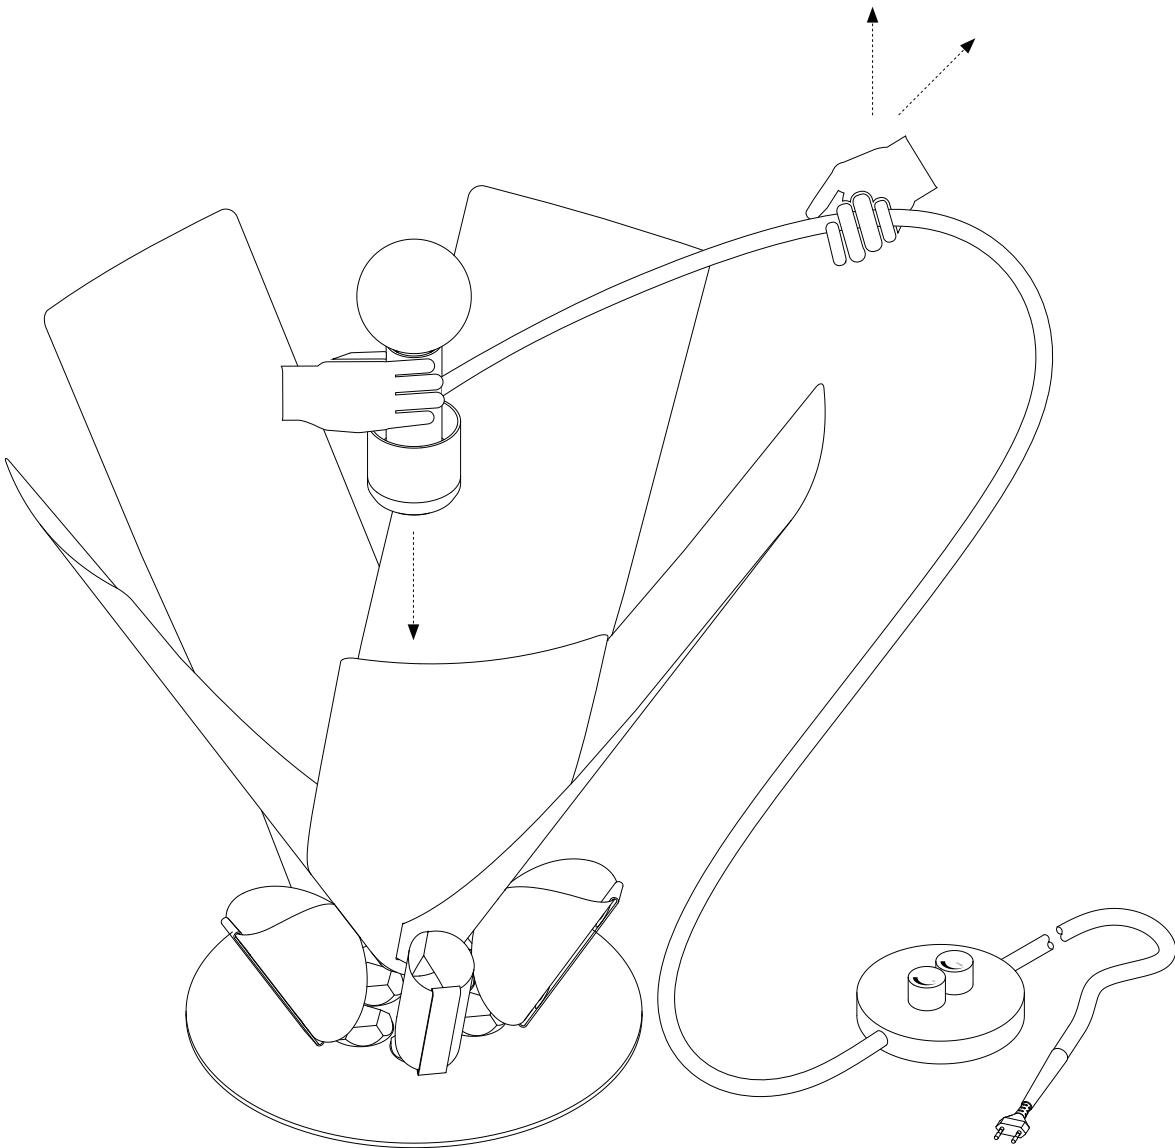

IMPORTANT! LAMP MUST BE DISCONNECTED FROM MAINS DURING LIGHTCORE INSTALLATION!


PLACE LIGHTCORE AT BOTTOM OF STEEL LAMPSHADE.

SUPPORT & LIFT ROPE AWAY FROM LAMPSHADE WHILE LOWERING LIGHTCORE IN TO ENSURE ROPE DOES NOT HIT STEEL STRUCTURE.

ENSURE LIGHTCORE IS CENTERED & VERTICAL. PRESS LIGHTCORE GENTLY AT BOTTOM OF LAMPSHADE UNTIL SILICONE RING FEELS WELL NESTED.

WORK WITH GLOVES TO AVOID FINGERPRINTS ON STEEL LAMPSHADE.

INSTALLATION IS COMPLETE. PLUG ANCHOR AND ENJOY YOUR LAMP!

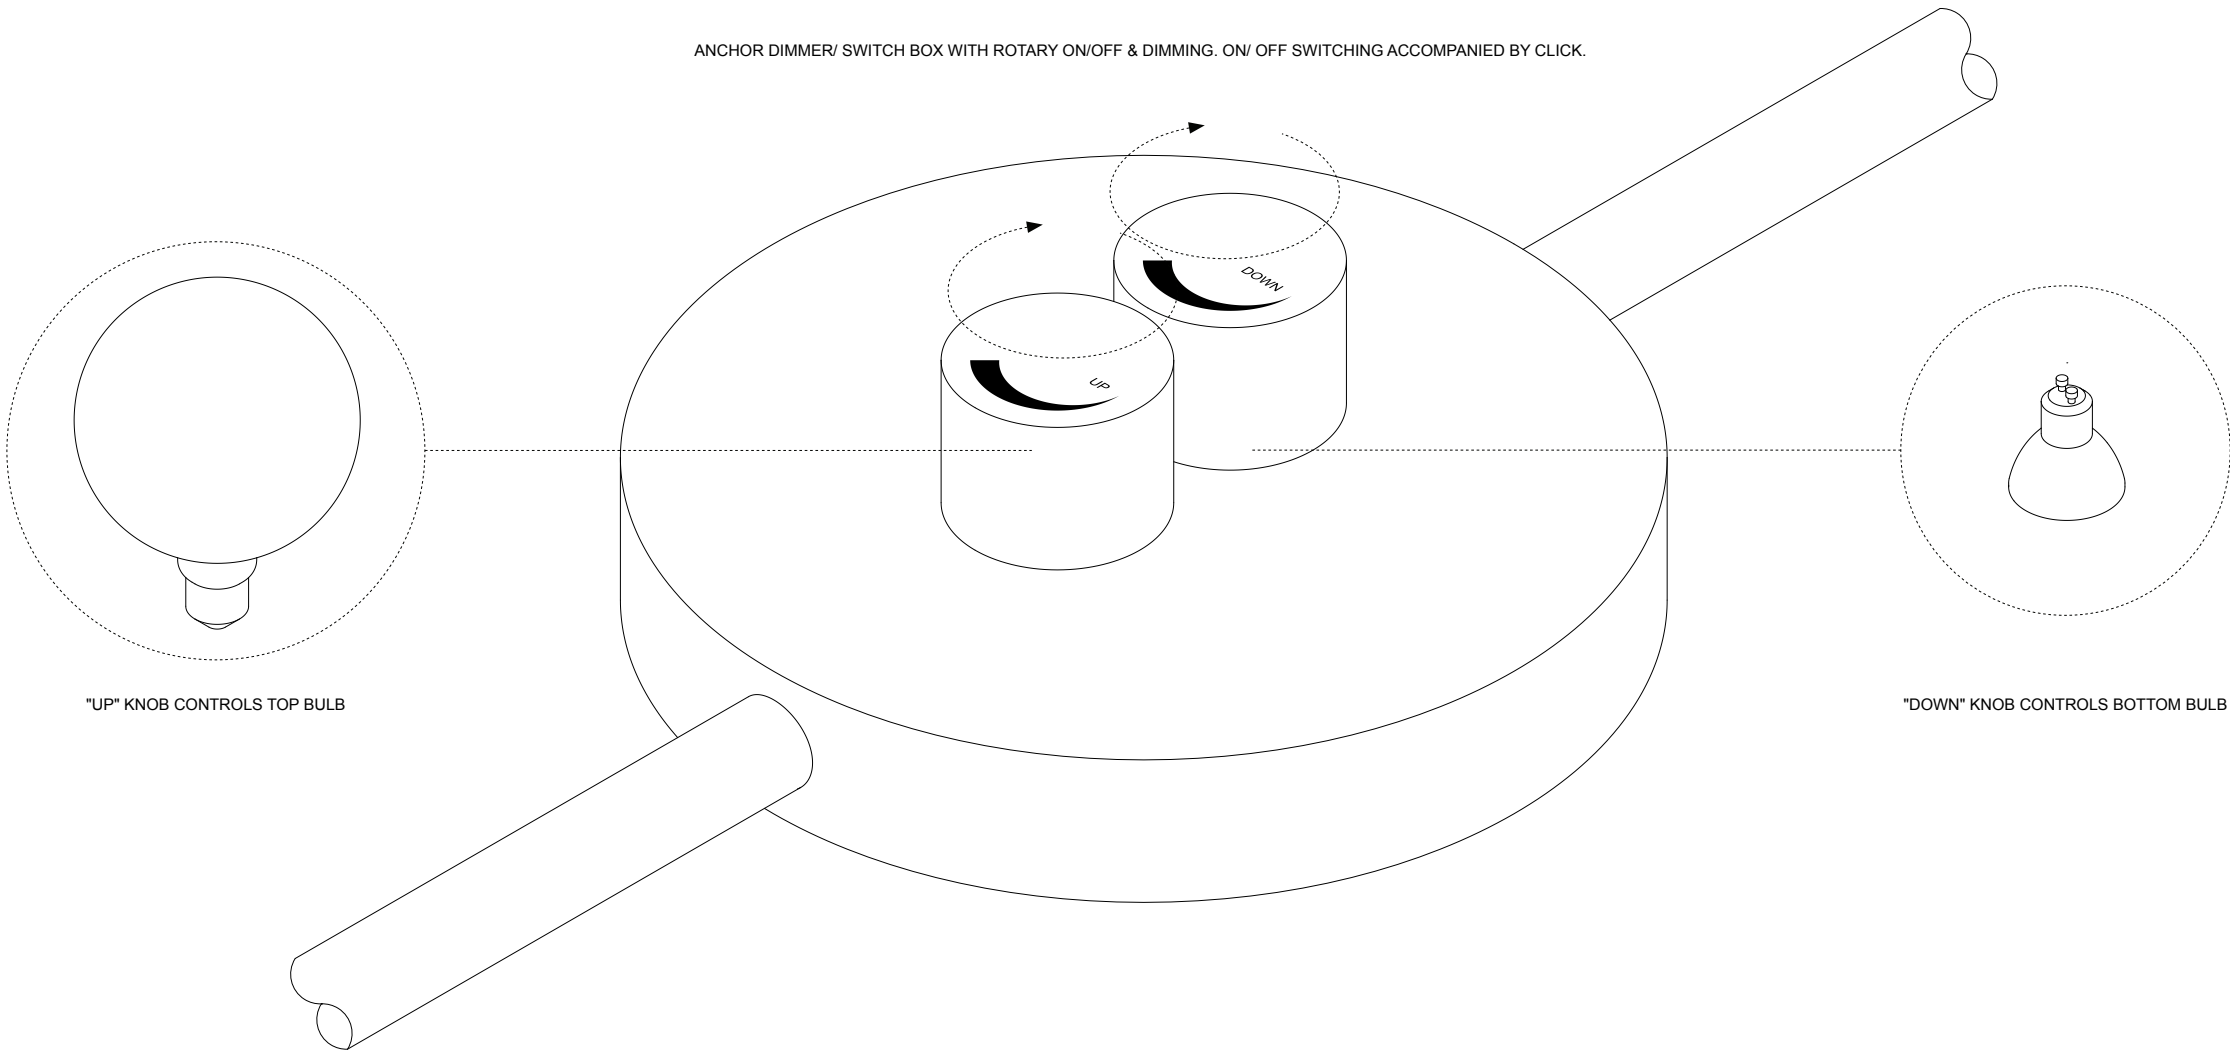

INDEPENDENT ROTARY DIMMING AND ON/ OFF SWITCH FUNCTIONS FOR TOP & BOTTOM BULBS.

TURN & CLICK KNOBS CLOCKWISE/ COUNTER-CLOCKWISE TO SWITCH ON/ OF. TURN KNOBS CLOCKWISE TO INCREASE LIGHT INTENSITY. TURN COUNTER-CLOCKWISE TO DIM.

ANCHOR DIMMERS HAVE ZERO-TO-MAX DIMMING RANGE. BULBS CAN BE DIMMED TO ZERO LIGHT EMISSION WHILE LAMP IS STILL ON. TO ENSURE LAMP IS FULLY SWITCHED OFF, ALWAYS TURN KNOBS UNTIL THEY CLICK.

INDOOR USE ONLY. DESIGNED FOR DRY AND CLOSED SPACES.


PLEASE READ COMPREHENSIVE LIST OF USE & OPERATION PRECAUTIONS IN THE *GENERAL MAINTENANCE & SAFETY INSTRUCTIONS* SECTION OF THIS MANUAL.

V.

GENERAL MAINTENANCE & SAFETY INSTRUCTIONS

1

STEEL BOWS MAINTENANCE:
CLIP ON AND OFF
INSTRUCTIONS FOR
INDIVIDUAL CLEAN UP AND
MAINTENANCE.

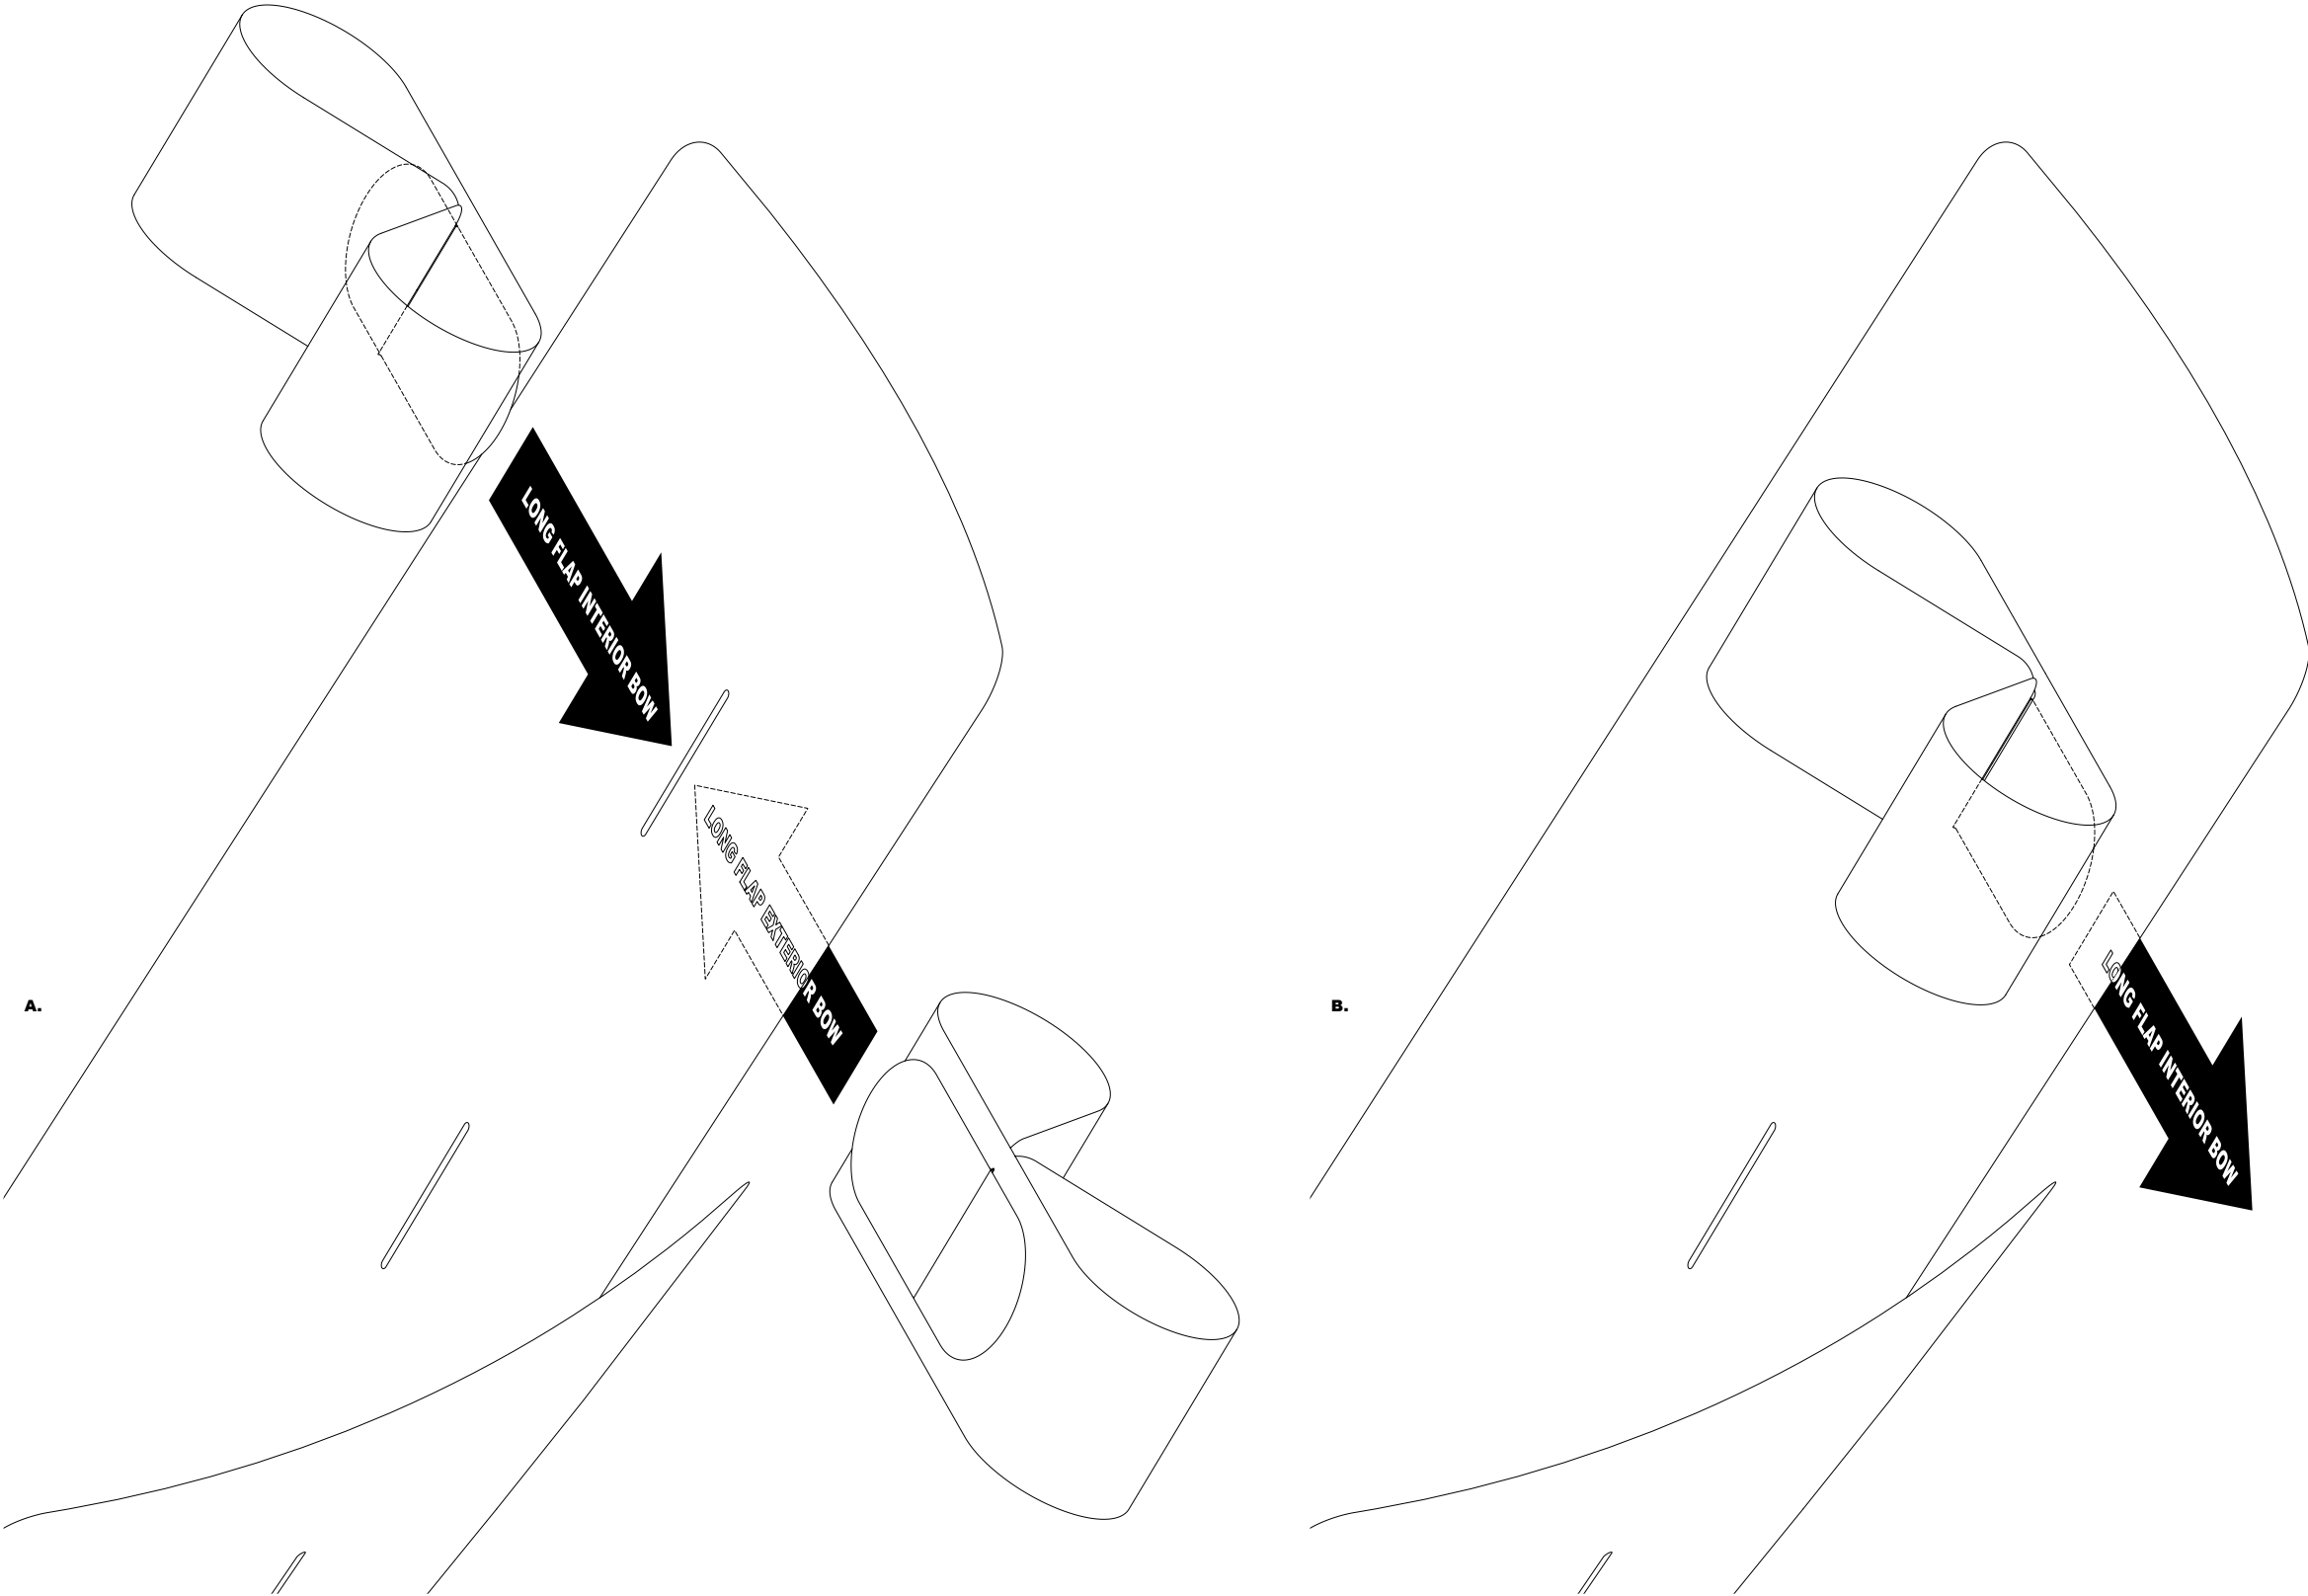

EDITION 2024 LAMPS ARRIVE WITH STEEL BOWS CLIPPED ONTO THE LAMP SHADE. REGULAR LIGHT DUSTING IS SUFFICIENT TO KEEP LAMP CLEAN WITHOUT REMOVING THE BOWS.

IN CASE OF STAINING OR FINGERPRINTS THAT REQUIRE WET CLEANING, BOWS CAN BE REMOVED AND CLEANED SEPARATELY TO PROTECT THE SILK LINING FROM ACCIDENTAL DAMAGE BY CLEANING LIQUIDS.

IMPORTANT! SILK LINING IS DRY-CLEAN ONLY! KEEP AWAY FROM LIQUIDS AT ALL TIME! SEE MAINTENANCE INSTRUCTIONS IN FINAL SECTION OF THIS MANUAL.



A. EACH BOW IS CONSTRUCTED WITH TWO BACK FLAPS - LONG AND SHORT. TO REMOVE, SLIDE BOW OUT BY GENTLY PULLING HORIZONTALLY. TO CLIP BOWS ON, SLIDE LONG FLAPS THROUGH SLITS IN LAMP SHADE.

B. INTERIOR BOWS CLIP ON BY RUNNING LONG FLAPS THROUGH SLITS TO EXTERIOR SIDE OF LAMP. TO CLIP ON, PUSH LONG FLAP THROUGH SLIT UNTIL BOW FEELS CENTERED AND SECURELY CLIPPED TO THE LAMP.

WORK WITH GLOVES TO AVOID FINGERPRINTS ON STEEL SURFACES.

2

STEEL BOWS MAINTENANCE:
CLIP ON AND OFF
INSTRUCTIONS FOR
INDIVIDUAL CLEAN UP AND
MAINTENANCE.

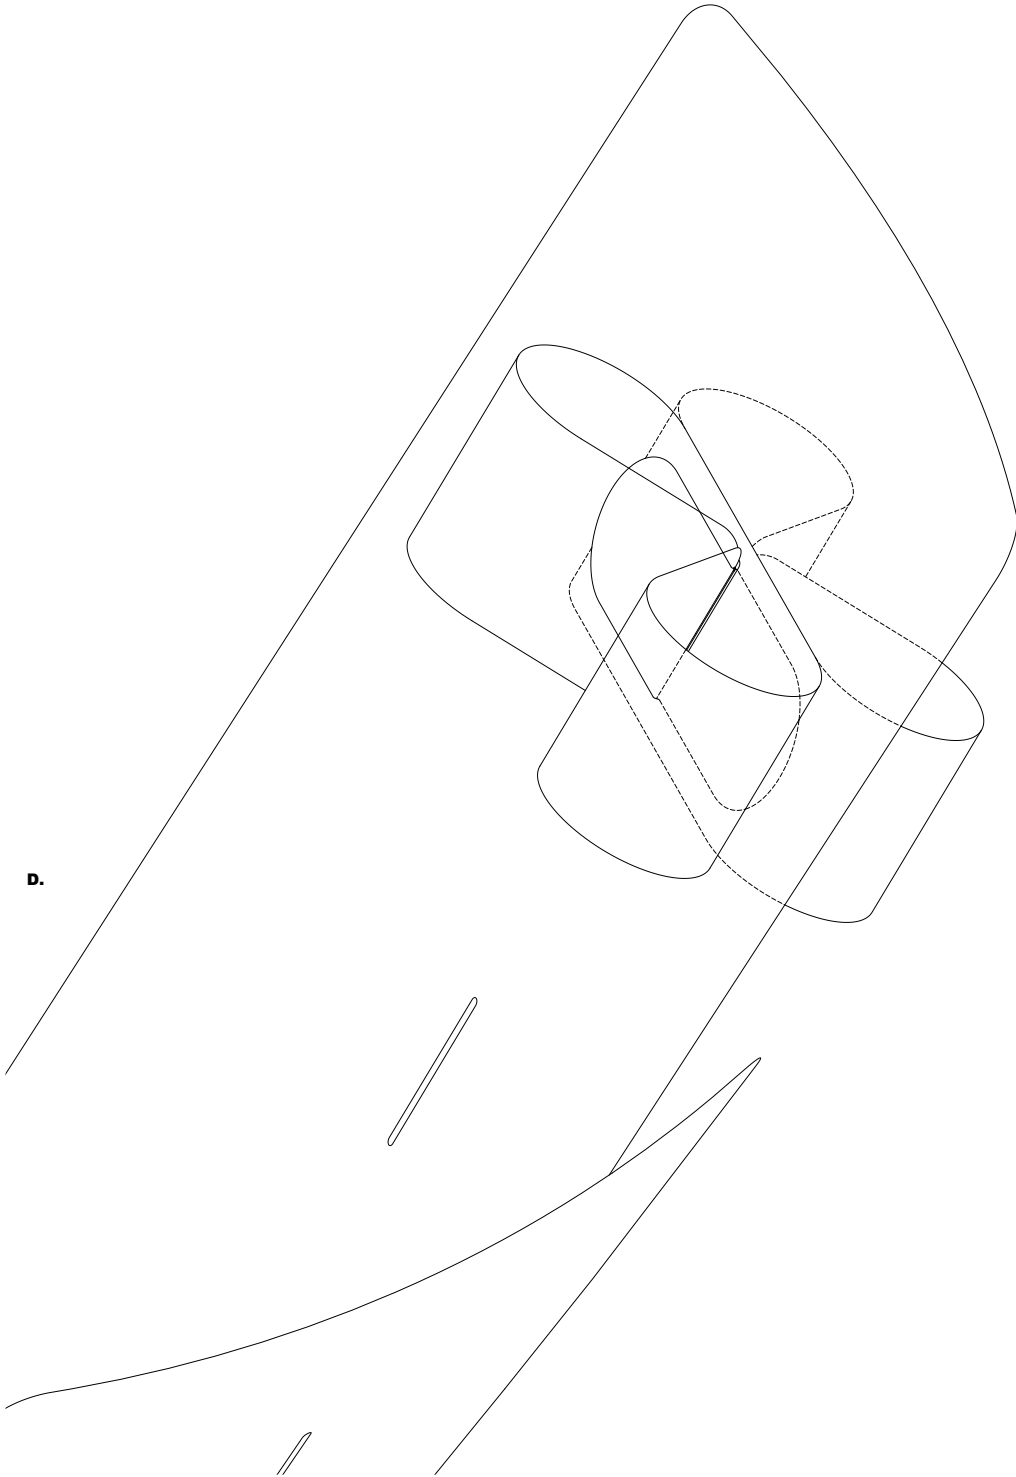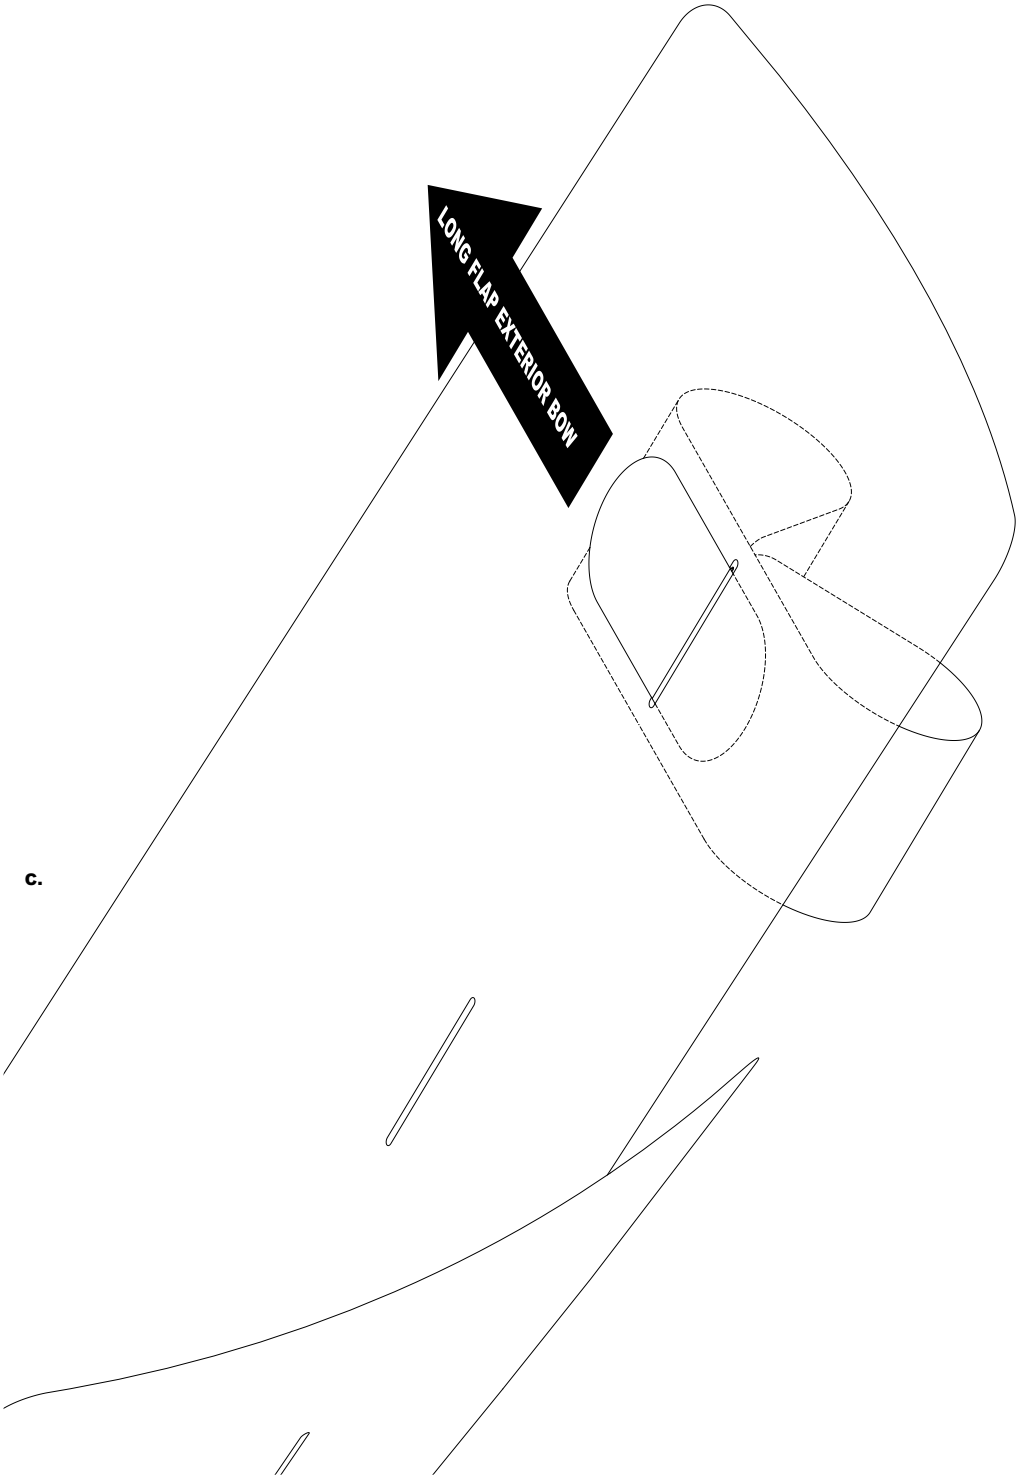


C. EXTERIOR BOWS CLIP ON BY RUNNING LONG FLAPS THROUGH SLITS TO INTERIOR SIDE OF LAMP. TO CLIP ON, PUSH LONG FLAP THROUGH SLIT UNTIL BOW FEELS CENTERED AND SECURELY CLIPPED TO THE LAMP.

D. BOWS PROPERLY CLIPPED ON IN DOUBLE-SIDED DESIGN - LONG FLAP OF EACH BOW RUNS THROUGH SLIT AND SITS BEHIND BOW ON REVERSE SIDE. THE BOWS ARE EFFECTIVELY MIRRORED.

WORK WITH GLOVES TO AVOID FINGERPRINTS ON STEEL SURFACES.

3 ANCHOR BOX KNOBS
REMOVAL IN CASE OF
MAINTENANCE.

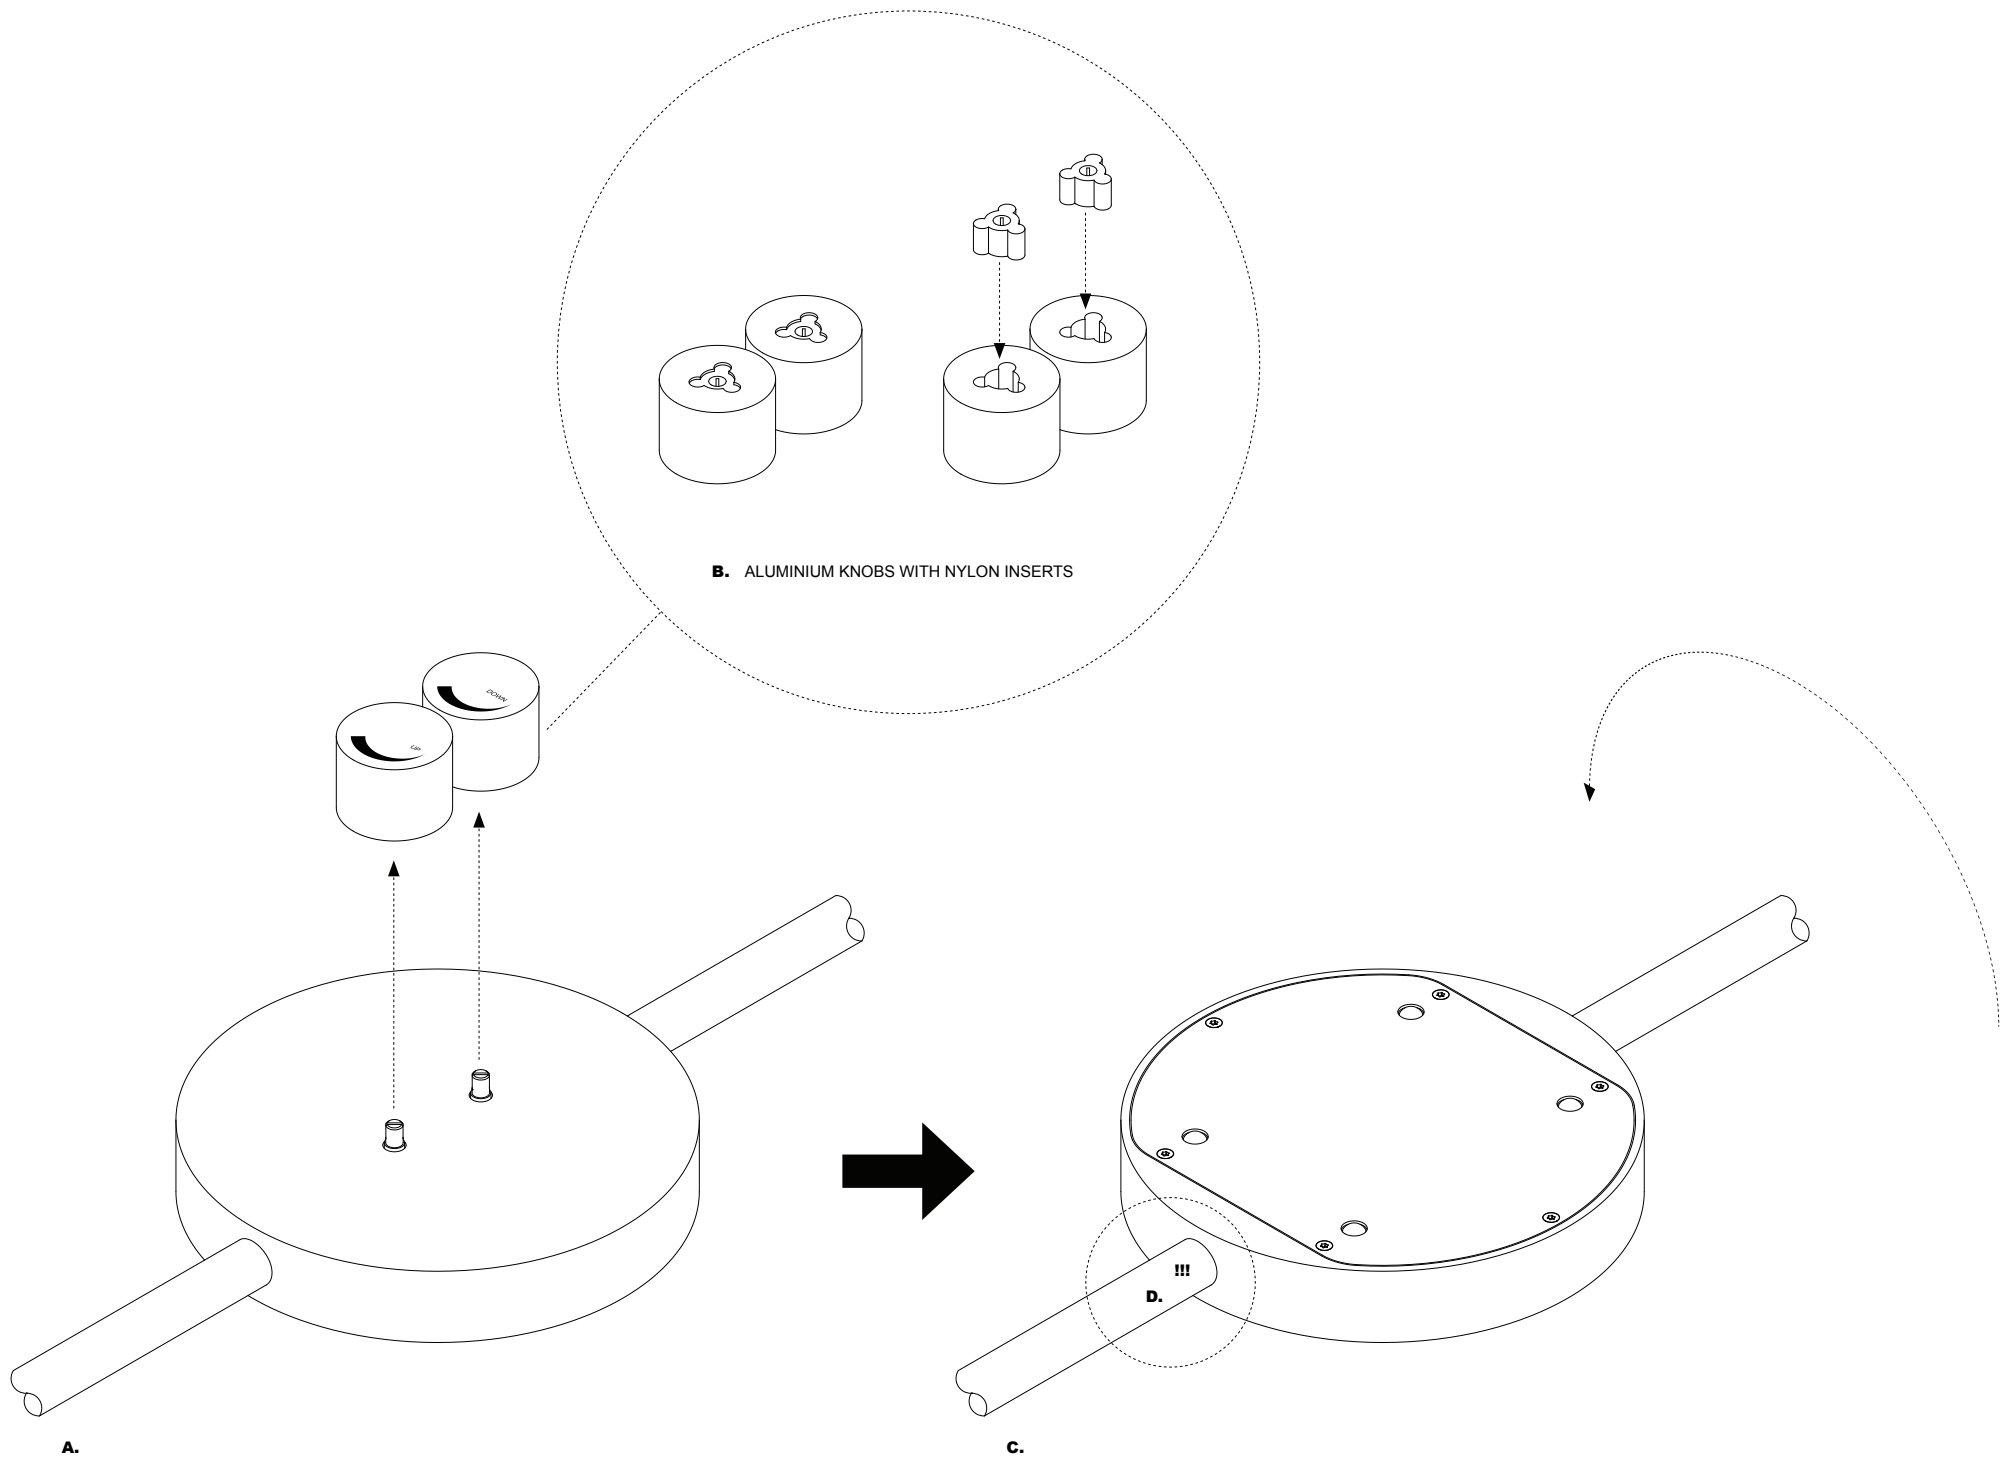

IN CASE OF MAINTENANCE OR TRANSPORT THAT REQUIRE FLIPPING THE ANCHOR DIMMER/SWITCH BOX 180°, REMOVE KNOBS FIRST TO PREVENT DAMAGE.

IMPORTANT! THE KNOBS ARE HEAVY MONOLITHIC MILLED ALUMINIUM OBJECTS. IF SWITCH BOX IS TURNED OVER, THEY CAN FALL OFF AND BECOME DENTED/ DAMAGED.

A. TO REMOVE THE KNOBS, SWITCH OFF & UNPLUG THE LAMP. PULL THE KNOBS UPWARDS TO RELEASE THEM FROM THE ROTARY DIMMER GRIPS.

B. WHEN REMOVING THE KNOBS, ENSURE THEY COME OFF WITH NYLON INSERTS THAT CLIP ON TO ROTARY DIMMER GRIPS.

C. FLIP THE BOX 180° AFTER THE KNOBS HAVE BEEN REMOVED.

D. ENSURE ROPE IS TWISTED GENTLY WHEN ROTATING THE BOX. TAKE CARE TO NOT OVER-STRESS THE ROPE AT POINTS OF ENTRY INTO THE ALUMINIUM HOUSINGS OF THE ANCHOR BOX AND THE LIGHTCORE.



GENERAL SAFETY INSTRUCTIONS

Dear User,

Please read these instructions before using your lamp and keep this manual for later use. Please remember that the descriptions offered in it apply for several different lamp-types. On this information sheet, all symbols are explained.

- PLEASE, CAREFULLY READ ALL INCLUDED OPERATING INSTRUCTIONS!
- PLEASE, FOLLOW ALL WARNINGS INDICATED IN THE DOCUMENTATION AND ON THE DEVICE!
- ONLY USE LUMINAIRE WHEN NO TECHNICAL DEFECTS ARE CLEAR, BE AWARE OF DANGERS AND RISKS!
- FOR INSTALLATIONS AND USE OF THE LUMINAIRES, NATIONAL REGULATIONS NEED TO BE FOLLOWED!
- THIS LUMINAIRE IS INTENDED FOR INDOOR USE AND SHOULD ONLY BE INSTALLED IN DRY AND CLOSED SPACES!
- THE USE OF THE LUMINAIRE IN POTENTIALLY EXPLOSIVE ATMOSPHERES CAN LEAD TO EXPLOSIONS AND CAN RESULT IN DEATH OR SERIOUS INJURY. DO NOT USE IN POTENTIALLY EXPLOSIVE ATMOSPHERES!
- REPAIR OF THE LUMINAIRE SHOULD ONLY BE EXECUTED BY A SKILLED ELECTRICIAN!
- COMPARE THE AVAILABLE MAINS VOLTAGE WITH THE MAINS VOLTAGE AND FREQUENCY SPECIFIED FOR THE PRODUCTS IN THIS MANUAL AND ENSURE THEY ARE IDENTICAL!
- DAMAGED LUMINAIRES MAY NO LONGER BE USED.
- ALWAYS DISCONNECT THE LAMP FROM THE MAINS AND ALLOW TO COOL BEFORE WORKING ON IT!
- THE LUMINAIRE MAY NOT BE ALTERED OR MODIFIED!
- PLEASE DO NOT HANG ANYTHING FROM THE LAMPSHADE AND ENSURE THAT IT IS STABLE AND PLACED ON A LEVEL SURFACE AT ALL TIMES.
- DO NOT COVER THE LUMINAIRE!
- DO NOT LEAVE CHILDREN UNATTENDED WITH THE LUMINAIRE. IT IS NOT SUITABLE FOR CHILDREN.
- DISPOSE OF THE PACKAGING ACCORDING TO THE LOCAL REGULATIONS OF YOUR REGION OR COUNTRY
- IF THE EXTERNAL FLEXIBLE ROPE-SHEATHED CORD OF THE LAMP IS DAMAGED, IT SHALL BE EXCLUSIVELY REPLACED BY THE MANUFACTURER.



ELECTRICAL PROTECTION CLASS II, NO PROTECTIVE EARTHING CONDUCTOR, AS THERE IS SUFFICIENT INSULATION BETWEEN LIVE AND TANGIBLE PARTS.



LAMPS SUITABLE FOR DIRECT ASSEMBLY ON NORMAL FLAMMABLE SURFACES.



LAMP SHOULD ONLY BE USED INSIDE IN DRY AREAS.



DO NOT DISPOSE OF LAMP IN THE RUBBISH BIN! THIS ITEM CONTAINS PARTS THAT CAN BE REUSED. YOUR LOCAL COUNCIL CAN INFORM YOU WHERE ELECTRICAL DEVICES ARE COLLECTED. BULBS SHOULD NOT BE DISPOSED OF IN THE RUBBISH BIN. RETURN DEFECTIVE BULBS TO THE SALES PERSON OR DISPOSE OF THEM IN THE ALLOCATED COLLECTION POINT IN YOUR AREA.



CULTURAxRMM DECLARES THAT THESE LAMPS CONFORM TO THE EUROPEAN DIRECTIVES AND TO THE PRODUCT-SPECIFIC DIRECTIVES.

COPYRIGHT © 2022 CULTURAxRMM - ALL RIGHTS RESERVED

PHOTOGRAPHY : COPYRIGHT © 2024 PAOLO BARBI - ALL RIGHTS RESERVED

HANDLING & MAINTENANCE OF THE STEEL LAMPSHADE

- AVOID HANDLING AND MOVING LAMP EXCESSIVELY. MOVE & HANDLE ACCORDING TO INSTRUCTIONS IN THIS MANUAL.
- ALWAYS DISCONNECT THE LAMP FROM THE MAINS AND ALLOW TO COOL BEFORE CLEANING THE LAMP!
- DUST REGULARLY & LIGHTLY WITH AN ANTI-STATIC SWIFFER OR FEATHER DUSTER, OR A CONTACT-LESS PRESSURIZED AIR DUSTER.
- STEEL BOWS HAVE CHROME INTERIOR LININGS - FILM OR LACQUER - THAT ARE SCRATCH-SENSITIVE. DUST GENTLY TO AVOID DAMAGE.
- UNCOATED STAINLESS STEEL SURFACES ARE NOT FINGERPRINT PROTECTED. ANTI-FINGERPRINT COATINGS DULL THE NATURAL SATIN FINISH OF THE STAINLESS STEEL MATERIAL. UNCOATED SURFACES ARE VULNERABLE TO FINGERPRINTS AND OIL/ GREASE ABSORPTION. EACH LAMP IS DELIVERED WITH HANDLING GLOVES TO HELP PROTECT PRODUCT DURING INSTALLATION OR ANY FUTURE HANDLING. PLEASE HANDLE WITH GLOVES PER INSTRUCTIONS IN THIS MANUAL.
- TO REMOVE FINGERPRINTS OR LIGHT STAINS FROM UNCOATED STEEL SURFACES, WIPE GENTLY WITH HOUSEHOLD DE-GREASER LIQUIDS. SOME MODELS ARE DELIVERED WITH A SPECIALIZED DE-GREASING LIQUID INCLUDED. FOLLOW THE STEPS BELLOW FOR SAFE AND PROPER MAINTENANCE:
 - ALWAYS DISCONNECT, ALLOW TO COOL, AND REMOVE LIGHTCORE FROM LAMPSHADE BEFORE CLEANING!
 - SPRAY AND/ OR SATURATE A MICROFIBER CLOTH WITH DE-GREASER LIQUID. ALWAYS SPRAY AWAY FROM LAMP TO ENSURE NO CONTACT BETWEEN CLEANING LIQUID AND INTERIOR SILK LINING.
 - ! IMPORTANT !** SILK LINING OF EDITION 2024 LAMPS IS DRY CLEAN ONLY. KEEP SILK SURFACES AWAY FROM ANY LIQUIDS AT ALL TIME!
 - ONCE CLOTH IS SATURATED WITH CLEANING LIQUID, WIPE STAINED STEEL SURFACES GENTLY AND CAREFULLY. FOLLOW IMMEDIATELY BY BUFFING STEEL SURFACE WITH DRY MICROFIBER CLOTH UNTIL SURFACE IS CLEAN AND DRY. THIS HELPS AVOID A FOGGY RESIDUE. USE GENTLE MOTION AND ALWAYS FOLLOW LAMP CURVATURE.
 - TO WET-CLEAN THE STEEL BOWS, REMOVE AND CLEAN AWAY FROM SILK SURFACES AS DESCRIBED IN DIAGRAMS AT THE BEGINNING OF SECTION V. OF THIS MANUAL. DRY IMMEDIATELY BY GENTLY BIFFING WITH MICROFIBER CLOTH. CLIP BOWS BACK ON LAMP AFTER DRYING.
 - TO WET-CLEAN THE LAMPSHADE LEGS, REMOVE THE ANTI-SCRATCH MAGNET STRAPS FIRST. THEY ARE MADE OF DRY-CLEAN MATERIALS ONLY AND SHOULD NOT COME IN CONTACTS WITH ANY LIQUIDS.
 - FOR BEST RESULTS, USE MICROFIBER CLOTHS INCLUDED. MICROFIBER IS A LINT-FREE, HIGHLY ABSORBENT BUFFING MATERIAL.
 - FOR PERSISTENT STAINS, FOLLOW THE SAME PROCEDURE AS ABOVE, BUT USE HOUSEHOLD SOLVENTS SUCH AS ISOPROPYL ALCOHOL OR ACETONE. THEY ARE AVAILABLE AT MOST HARDWARE STORES. KEEP THEM AWAY FROM CHILDREN AND PETS AT ALL TIMES, AND FOLLOW THE MANUFACTURER'S STORAGE INSTRUCTIONS. WORK IN A WELL-VENTILATED AREA.
 - REMOVE GREASE STAINS QUICKLY. SATIN STAINLESS STEEL IS A POROUS MATERIAL THAT CAN ABSORB GREASE, MAKING STAINS HARDER TO REMOVE THE LONGER THEY STAY ON.
 - KEEP AWAY FROM SILICONE-BASED LUBRICANTS!
 - KEEP AWAY FROM HAND MOISTURIZERS AND LOTIONS!
 - DO NOT USE STAINLESS STEEL WAXES OR ANY STAINLESS STEEL POLISHING PRODUCTS! WAXES AND POLISHERS FILL UP THE PORES OF UNCOATED STEEL SURFACES AND BUILD UP A DULL RESIDUE OVER TIME.

HANDLING & MAINTENANCE OF SILK-LINED SURFACES

- ALWAYS DISCONNECT THE LAMP FROM THE MAINS AND ALLOW TO COOL BEFORE CLEANING THE LAMP!
- DUST REGULARLY & GENTLY WITH AN ANTI-STATIC SWIFFER OR A FEATHER DUSTER. KEEP SILK CLEAN - IT CANNOT BE WASHED!
- DUST WITH MOTIONS FROM CENTER OF LAMP SHEETS OUT TO SHEETS' EDGES.
 - DUST IN THE DIRECTION OF THE FABRIC GRAIN, WHICH RUNS DIAGONALLY. THE SILK LINING IS CUT ON THE BIAS (DIAGONALLY) FOR AESTHETIC AND STRUCTURAL PURPOSES, ALLOWING IT TO BE LAMINATED ONTO THE STEEL SHEETS WITHOUT BULKY HEMS. UNLIKE CUTTING ALONG THE GRAIN, BIAS CUTTING HELPS PREVENT EDGE UNRAVELING, ELIMINATING THE NEED FOR HEMMING. HOWEVER, THE RAW, HEM-FREE EDGES CAN STILL FRAY SLIGHTLY WITH FRICTION. AVOID RUBBING THE DUSTER AGAINST THE EDGES TO PREVENT DAMAGE.
 - ALWAYS REST LIGHTCORE ROPE ON REINFORCING GASKET INSIDE THE LAMP. THIS PREVENTS ROPE RUBBING AGAINST RAW FABRIC EDGES.
 - ! IMPORTANT !** SILK LINING OF EDITION 2024 LAMPS IS DRY CLEAN ONLY. KEEP SILK SURFACES AWAY FROM ANY LIQUIDS AT ALL TIME!
 - TO WET-CLEAN STEEL BOWS MOUNTED IN THE INTERIOR OF THE LAMP, REMOVE BOWS AND CLEAN AWAY FROM SILK SURFACES AS DESCRIBED IN DIAGRAMS AT THE BEGINNING OF SECTION V. OF THIS MANUAL. CLIP BOWS BACK ON ONCE THEY ARE CLEAN AND DRY.
- KEEP SILK SURFACES AWAY FROM DIRECT UV LIGHT. THE FABRIC IS A HIGH-QUALITY SILK BLEND, DYED WITH LIGHT-FAST DYES. HOWEVER, EVEN PREMIUM TEXTILES CAN DEGRADE OVER TIME WITH PROLONGED EXPOSURE TO AGGRESSIVE UV RAYS.

HANDLING & MAINTENANCE OF ALUMINIUM LAMPING SET

- ALUMINIUM SURFACES ARE ANODIZED AND ARE NOT FINGERPRINT SENSITIVE. ANY STAINING CAN BE WIPED WITH SOAP AND WATER, DISH-WASHING LIQUID, OR GENERIC GLASS GLEANER. ALWAYS DISCONNECT LAMP FROM MAINS AND REMOVE LIGHTCORE FROM LAMPSHADE BEFORE CLEANING. DRY IMMEDIATELY.
- ROPE CANNOT BE WASHED!

HANDLING & MAINTENANCE OF CRYSTAL GLASS REFLECTORS

- CRYSTAL REFLECTORS CAN BE DUSTED OR WASHED WITH GLASS DETERGENT AND HANDLED WITH GLOVES TO PREVENT FINGERPRINTS.
- IN CASE OF BREAKAGE, SPARE REFLECTORS CAN BE RE-PURCHASED FROM **CULTURAxRMM**.

