

Electric Temperature controlled Gooseneck kettle

v2022

PANDE ELECTRICS



MELLOW

A MANUFACTURER FULL TANK 1.3L
BOILING CAPACITY 1.1L temperature controlled gooseneck kettle
gooseneck kettle china

ELEGANCE

FULL TANK 1.2L
BOILING CAPACITY 1L temperature controlled gooseneck kettle
gooseneck kettle china



DELICATE halo

FULL TANK 1.2L
BOILING CAPACITY 1L temperature controlled gooseneck kettle
gooseneck kettle china



PANDE Electric Temperature controlled Gooseneck Kettle

Water at right temperature, anytime you need it.

Two types of control featured panels for you to choose from

Ratings and principal Characteristics

110V-120V 1000W-1200W; (accept custom capacity up to 1300W)

220 V - 240 V 1000W – 1200 W; (accept custom capacity up to 1300W)

CE , CB and FCC certified

GS ,PSE ,UL or ETL (on order)

UK STRIX Thermostat
For accurate temperature control and
Extra safety

Dry-boil protection

Flame-retardant materials

In-built temperature sensor

304 stainless steel with coating

40-98 Celsius degree *set and hold*

Certified power cord only



Simple but powerful control base

Working with detachable certified power cord



Professional Gooseneck Kettle with Accurate Temp Control



Professional Gooseneck Kettle with Accurate Temp Control



PD-1618
Full tank 800ml
Boiling capacity 600ml

110-120V
220V-240
1000W-1200W
Stainless steel kettle with coating







MELLOW Series

PDN-1699 WHITE with wood look



MELLOW Series

PDN-1699 black with wood look

Full tank 1300ml

Boiling capacity 1100ml

120V 60Hz

220V 50Hz

1000W-1200W

Stainless steel kettle with coating





ELEGANCE Series

PDN-1688 BLACK with wood look

Full tank 1200ml

Boiling capacity 1000ml

120V 60Hz

220V 50Hz

1000W-1200W

Stainless steel kettle with coating







PDN-1698 BLACK

Ratings and principal Characteristics 220 V - 240 V;
50 Hz / 60 Hz; 1000 W – 1200 W;
Full tank capacity 1200mL / Boiling capacity 1000mL

304 STAINLESS STEEL

Quality coating, safe to use and easy to clean!

British STRIX thermo controller---Accurate and safe

Cool lid and kettle base

Touch screen, 360 degree rotatable

Wood look finishing



PDN-1699 BRUSH



Ratings and principal Characteristics 220 V - 240 V;
50 Hz / 60 Hz; 1000 W – 1200 W;
Full tank capacity 1200mL / Boiling capacity 1000mL

304 STAINLESS STEEL



British STRIX thermo controller---Accurate and safe

Cool lid and kettle base

Touch screen, 360 degree rotatable





EASY CAFÉ Series

PD-2568 Electric Coffee Percolator

Quality Stainless Steel 304 Coffee Percolator

CB /CE certified.

GS ,FCC ,UL or ETL (when requested)

110V-120V , 220 V - 240 V; 50 Hz / 60 Hz; 900 W – 1100 W

12 Cups (1.7L)

Keep warm function after brewing percolating process done.

Two versions for your choice

1.With a switch on the base of the kettle

2.With no switch on the base.

Giftbox dimensions:20*20*33CM 1.5kgs/piece 1900PCS/20" CONTAINER

12 Cup Coffee percolator

An elegant and vintage design
with a modern twist



HiBrew Series

▶
PDB-1699 WHITE with wood look

Kettle 304 Stainless Steel with coating outside the kettle

1.1L boiling capacity (with full tank 1.3L)

Powered with British Strix thermostat control

Touch screen and Press/Turning switch

With simple touch screen function for set and hold temperatures at most commonly used Celsius 40-98 C or Fahrenheit 104-208 F

Easily to switch off/on the reminding sound BEEP

Easy to switch between Celsius and Fahrenheit displaying





*Real-time temperature displaying

*Setting by turning in step of one Celsius degree

*Set and hold between 40-98 Celsius degree

*Independent fast boiling button for 100 Celsius degree

*Counting function for brewing time when you lift the kettle

*Hidden function by long pressing for auto shut-off time and Celsius / Fahrenheit switch

HiBrew Series

PDB-1698 Black with wood look



DELICATE HALO Series

PDN-1658 Black with wood look

Full tank 1200ml

Boiling capacity 1000ml

120V 60Hz

220V 50Hz

1000W-1200W

Stainless steel kettle with coating





DELICATE HALO Series

PDN-1658 WHITE with wood look





HiBrew Halo Series

PDB-1618 WHITE with wood look
0.6L (full 0.8L)





- *Real-time temperature displaying
- *Setting by turning in step of one Celsius degree
- *Set and hold between 40-98 Celsius degree
- *Independent fast boiling button for 100 Celsius degree
- *Counting function for brewing time when you lift the kettle
- *Hidden function by long pressing for auto shut-off time and Celsius / Fahrenheit switch

▶

Kettle 304 Stainless Steel with coating outside the kettle

0.6L boiling capacity (with full tank 0.8L)

Powered with British Strix thermostat control

Touch screen and Press/Turning switch

With simple touch screen function for set and hold temperatures at most commonly used Celsius 40-98 C or Fahrenheit 104-208 F

Easily to switch off/on the reminding sound BEEP and switch between Celsius and Fahrenheit displaying



HiBrew Series

PDB-1658

Boiling capacity 1L Full 1.2L



PDB-1658 WHITE




PDB-1658 WHITE LIGHT WOOD



PDB-1658 WHITE DARK WOOD

五金车间

五金车间配备不同吨位的油压机、冲床等拉伸冲压设备，产品焊接需求的自动氩焊机、激光焊机、银锡焊、密集点焊机等设备，以及冲压流水线、超声波自动清洗流水线，可满足每日10000套产品的生产能力。同时独立的产品抛光区，自动抛光设备可确保各类五金件的生产需求与产品质量的稳定！配套的五金模具车间，能最快的响应五金模具需求及模具使用维护，保障五金模具的稳定性及生产的顺利！

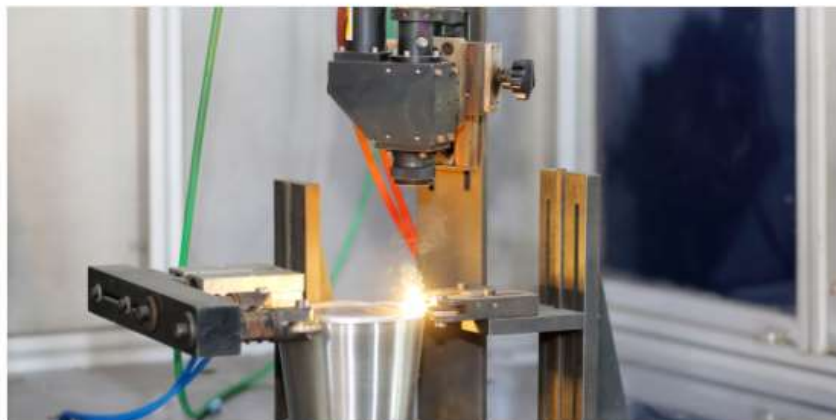


自动激光焊



五金清洗线



五金流水线

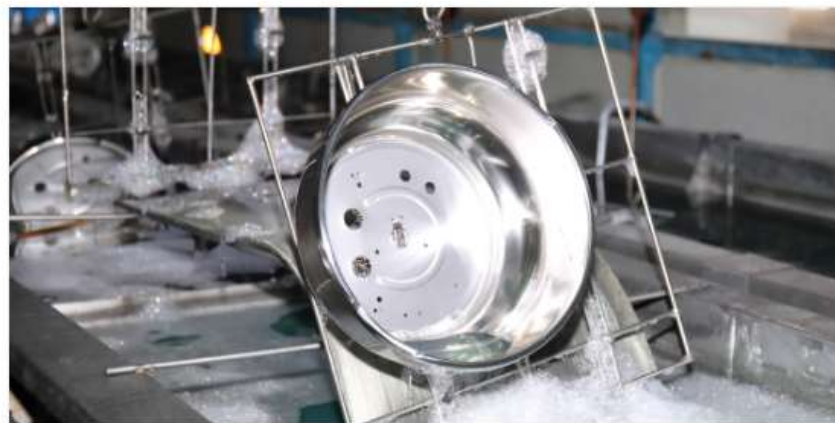

超声波清洗



Sales enquiry charlesp222@sina.com.cn

Produced and presented by PANDE electrics.

Re-distribution for commercial or non-commercial purpose of the material will cause legal issue.



PANDE MANUFACTURING AND PROCUREMENT SERVICE CO.LTD

MP and wechat: +8613570703184

Tel: +862023833280

Email: charlesp222@sina.com

Office Mon.-Sat.9:00 AM-6:00 PM)

Sales office: Room 1425, block 2, No.16 XinJunYiJie, donghuan street, Panyu district Guangzhou
Guangdong province
China
Postal code: 511400