


CULD Sealant

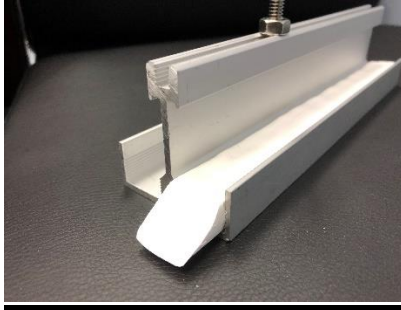

The Essentials:

CULD Sealant is an inert, ultralow density ePTFE material that surpasses silicone / urethane Gel technology in installation, with its ease of installation, removal, and replacement. **CULD** comes as a preformed solid and ready to install off the shelf.

The CULD Sealant

1. Is designed to resolve the issues associated with the installation and replacement of Gel technology in both new and existing cleanroom manufacturing facilities.
2. Can be immediately installed upon a thorough cleaning of any grid. There is no waiting period for alcohol or hydrogen hydroxide to flash off, minimizing installation down time.
3. Ready to install, no mixing or measuring. There is no 48 hour cure time.
4. Life expectancy is at least 30 years under normal operating circumstances.
5. Shelf-life expectancy is 30 years.
6. May be sealed and resealed multiple times without the need to be replaced.
7. Gasket can be installed in as little as 15 minutes. Filter can be installed as soon as the gasket is installed. Once installed the costs associated with Gel removal is eliminated from the equation, as well as any future replacements of sealant.
8. Completely Inert can be disposed of in a land fill. Cannot be incinerated.
9. As a solid we eliminate dangerous slippage issues for personnel or damage to unprotected tools.
10. Does not develop a skin turn green or change color over time under exposure to UV.

