



Water Leak Detector



Product parameter

Input voltage: DC3V CR123A
Quiescent current: $\leq 20\mu\text{A}$
Alarm current: $\leq 125\text{mA}$
Low-Voltage Indication: $\leq 2.7\text{V}$
WIFI: 802.11b/g/n
Detection method: water detection
Installation method: Mount on the ground
Working temperature: $-10\text{-}50^{\circ}\text{C}$
Working humidity: up to 95%RH

Install Free App

Download APP: scan the QR code below to download and install. Register and login: open the "MySmarth" APP to register and login according to the prompts.





Add The Device- Add Manually Mode

Make sure Wi-Fi is available and connected to the Internet.

-Register and log in to the APP with mobile phone number, Open "MySmarth" APP, press the '+' in the upper right corner of the main screen;

-choose "Home Safety", click "Water Leak Detector" to add ; and then click "Next step";

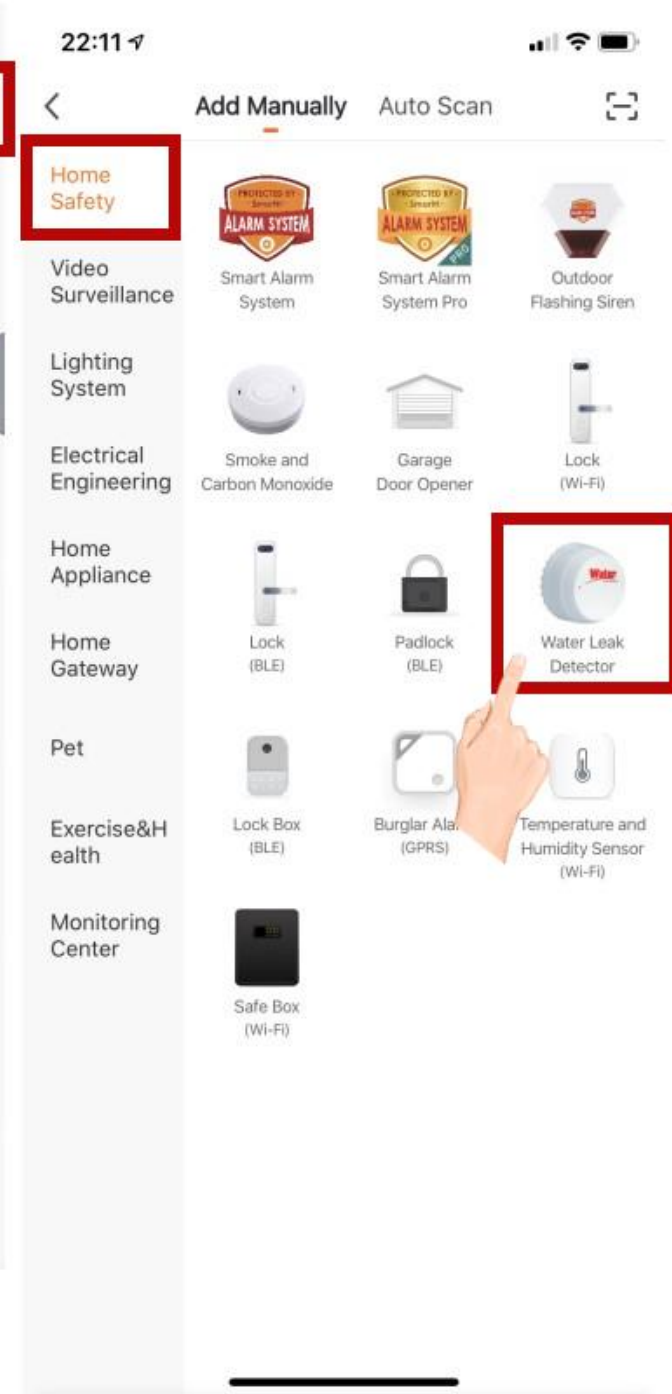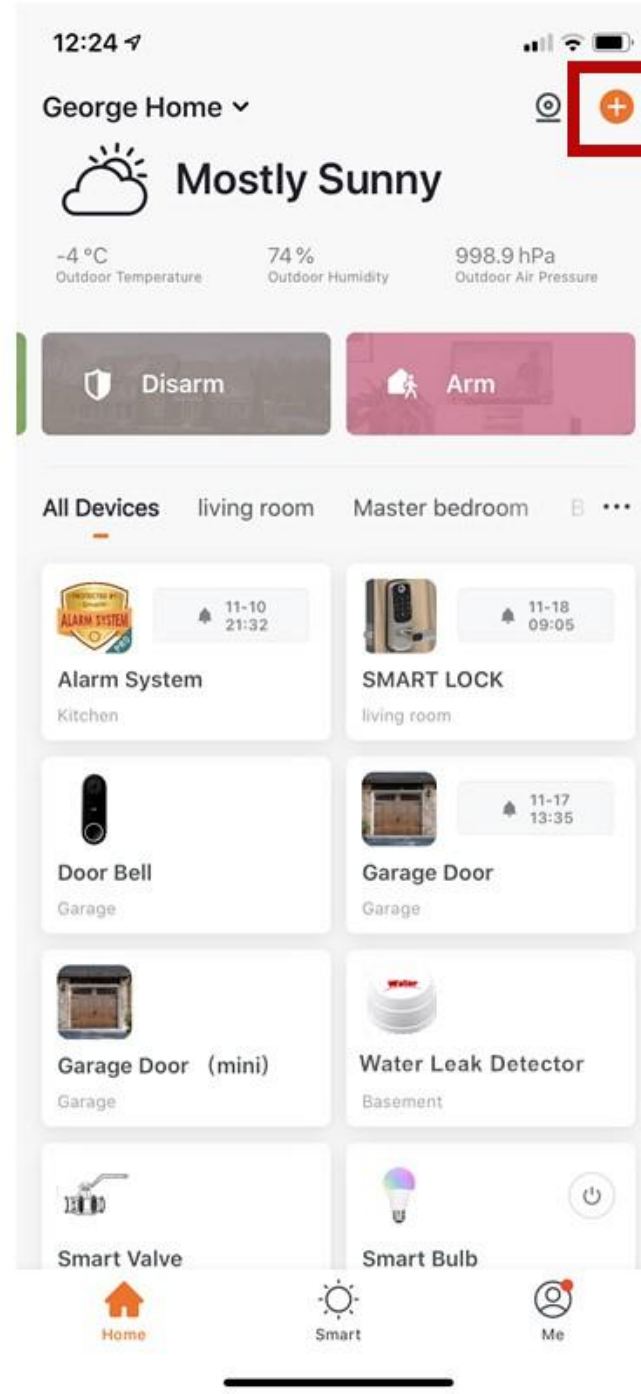



- Use the Pin card in the accessory package to press the reset button for more than 5 seconds, and the indicator light flashes quickly to enter the automatic network configuration.



-If the mobile phone is not connected to wi-fi, please click "Connect to Wi-fi" ;

-It will jump to the WLAN interface and connects Wi-Fi. Please note that only 2.4 GHz Wi-Fi network is supported;

Enter the "WiFi password" according to the prompt, and click to confirm.

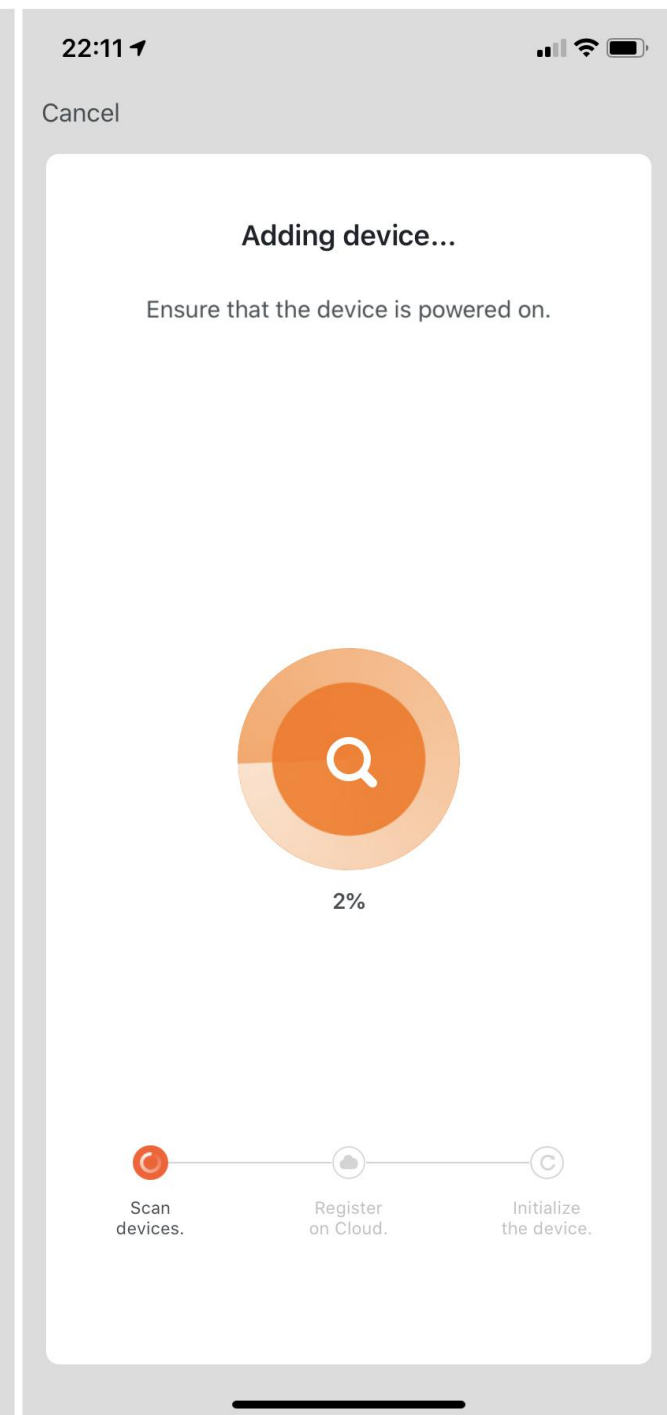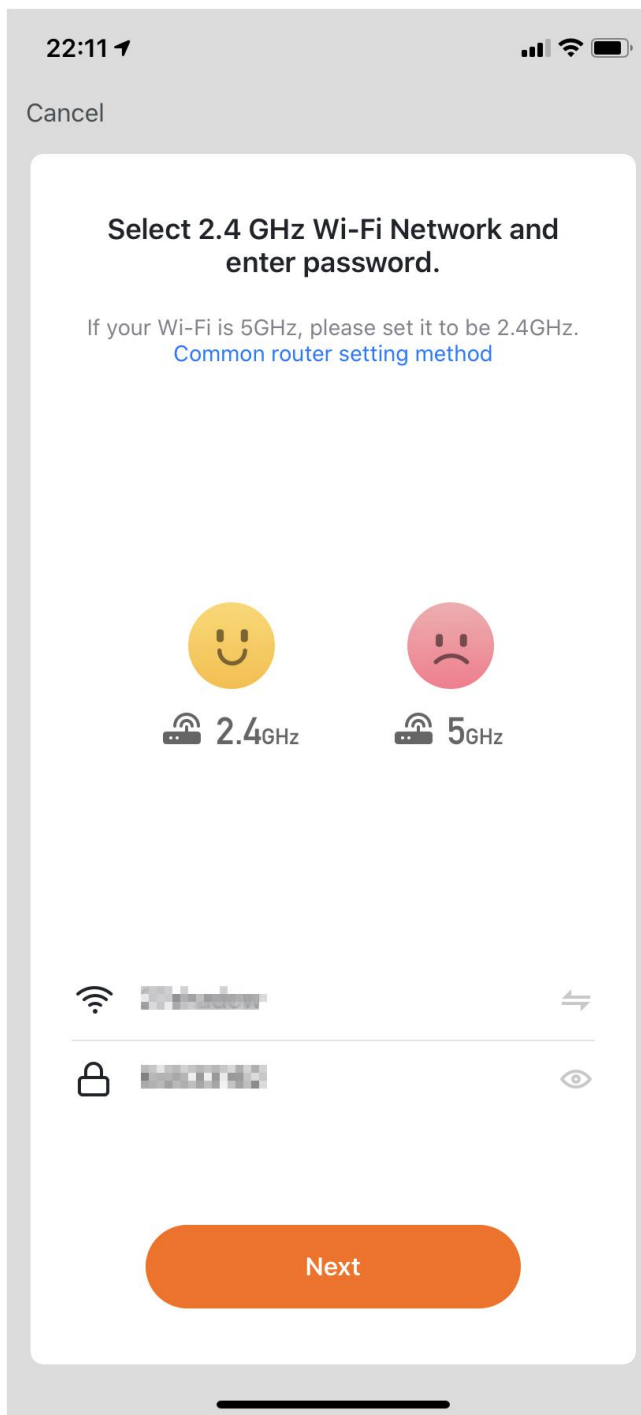

At this time, the connected device will appear on the APP home page .

