



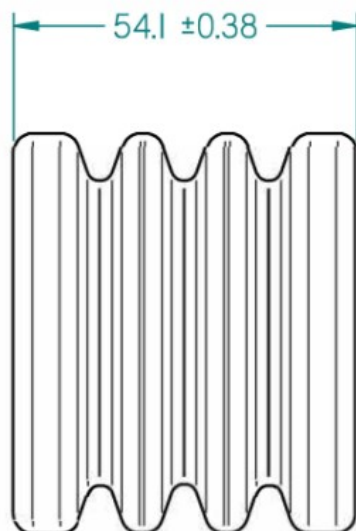

SEE TABLE FOR
INSERT SIZE

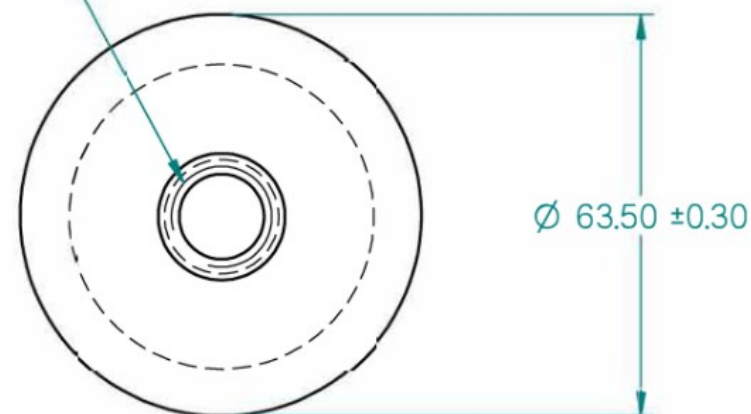

Available Thread

UNC Thread Styles

Part Number	Insert Size	Material
N-002-0082-AAR-301	3/8 - 16 x 9/16	Aluminum
N-002-0082-ASR-301	3/8 - 16 x 9/16	Steel
N-002-0082-AAR-101	1/2 - 13 x 5/8	Aluminum
N-002-0082-ASR-101	1/2 - 13 x 5/8	Steel
N-002-0082-AAR-201	5/8 - 11 x 3/4	Aluminum
N-002-0082-ASR-201	5/8 - 11 x 3/4	Steel

Metric Thread Styles

N-002-0082-AAR-501	M10 X 1.5 X 14.2	Aluminum
N-002-0082-ASR-501	M10 X 1.5 X 14.2	Steel
N-002-0082-AAR-601	M12 X 1.75 X 15.8	Aluminum
N-002-0082-ASR-601	M12 X 1.75 X 15.8	Steel
N-002-0082-AAR-701	M16 X 2.00 X 19.0	Aluminum
N-002-0082-ASR-701	M16 X 2.00 X 19.0	Steel

NOTE:
MATERIAL : EPOXY RESIN
CREEPAGE : >82 MM
RATED VOLTAGE : 2.5kV

STANDARD TOLERANCES UNLESS OTHERWISE SPECIFIED	LINEAR DIMENSION	THIRD ANGLE
	0.5 UP TO 3	±0.1
	OVER 3 UP TO 6	±0.1
	OVER 6 UP TO 30	±0.2
HOLE DIAMETER	OVER 30 UP TO 120	±0.3
	OVER 120 UP TO 400	±0.5
	OVER 400 UP TO 1000	±0.8
	1 UP TO 6	±0.1
ANGLES	OVER 6 UP TO 12	±0.1
	OVER 12	±0.2
		DIMENSIONED ± 1° UNDIMENSIONED 90° ± 2°



TITLE.

N-002-0082-A

DRG NO.