

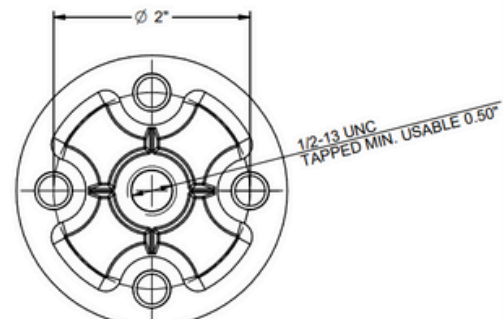



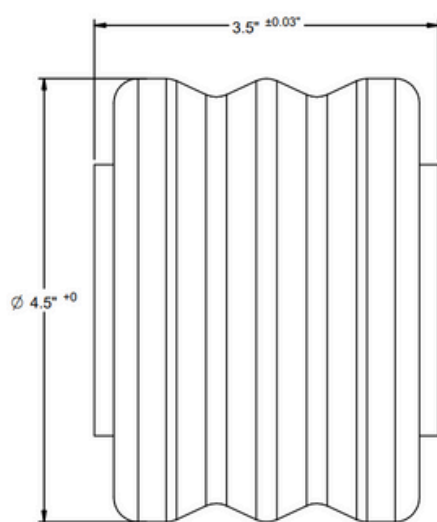


TOP

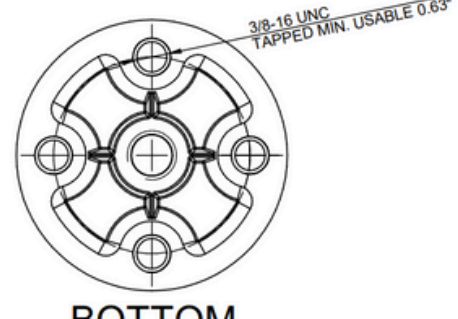


BOTTOM

ELECTRICAL CHARACTERISTICS		MECHANICAL CHARACTERISTICS		PACKING CHARACTERISTICS	
LOW FREQUENCY DRY WITHSTAND	19 kV	CANTILEVER STRENGTH	1000 Lbs.	NET WEIGHT PER UNIT	3.85 Lbs
LIGHTNING IMPULSE WITHSTAND VOLTAGE	60 kV	TORSION STRENGTH	2500 In.-Lbs		
		TENSION STRENGTH	2000 Lbs.		
		COMPRESSION STRENGTH	20000 Lbs.		

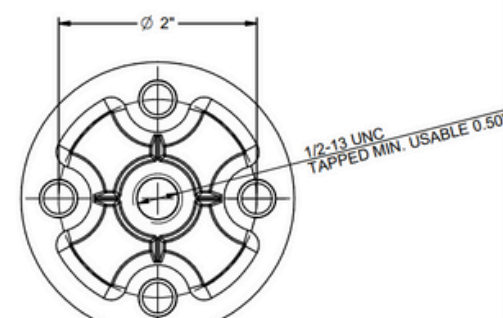
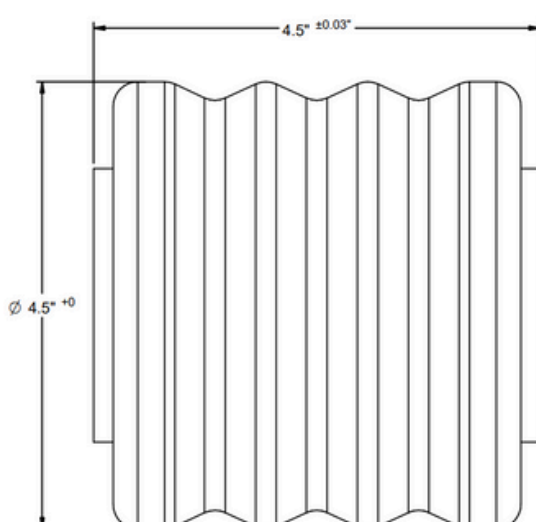


TOP

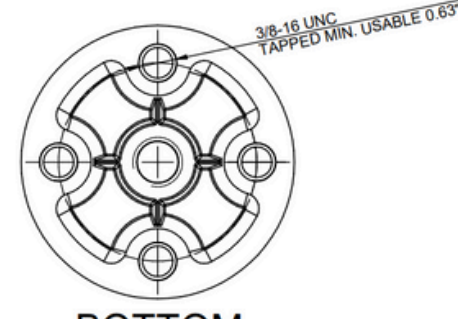


BOTTOM

ELECTRICAL CHARACTERISTICS		MECHANICAL CHARACTERISTICS		PACKING CHARACTERISTICS	
LOW FREQUENCY DRY WITHSTAND	26 kV	CANTILEVER STRENGTH	1500 Lbs.	NET WEIGHT PER UNIT	5.1 Lbs
LIGHTNING IMPULSE WITHSTAND VOLTAGE	75 kV	TORSION STRENGTH	3500 In.-Lbs		
		TENSION STRENGTH	3000 Lbs.		
		COMPRESSION STRENGTH	20000 Lbs.		

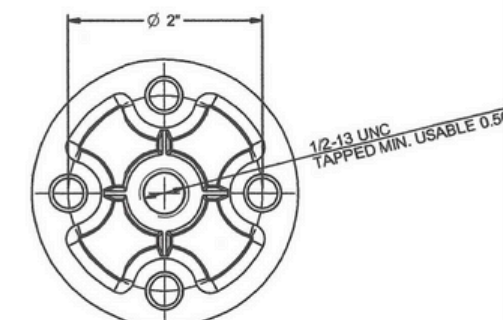
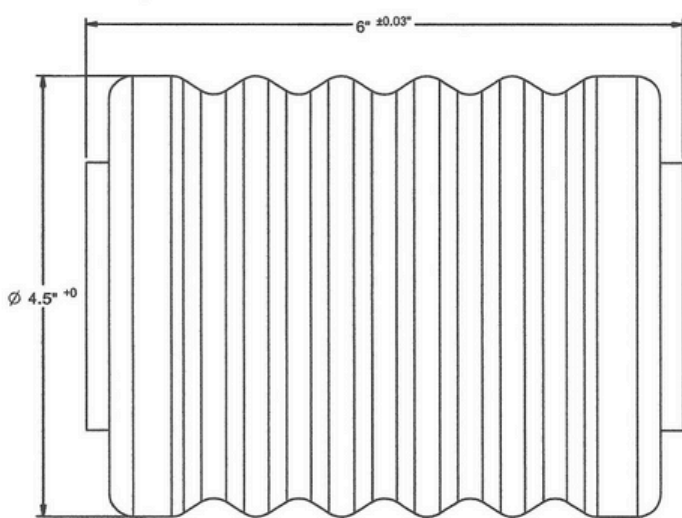


TOP

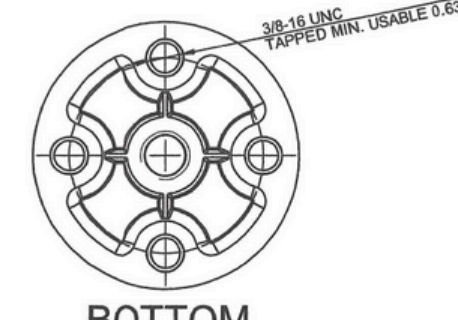


BOTTOM

ELECTRICAL CHARACTERISTICS		MECHANICAL CHARACTERISTICS		PACKING CHARACTERISTICS	
LOW FREQUENCY DRY WITHSTAND	36 kV	CANTILEVER STRENGTH	1250 Lbs.	NET WEIGHT PER UNIT	7.02 Lbs
LIGHTNING IMPULSE WITHSTAND VOLTAGE	95 kV	TORSION STRENGTH	3500 In.-Lbs		
		TENSION STRENGTH	3000 Lbs.		
		COMPRESSION STRENGTH	20000 Lbs.		

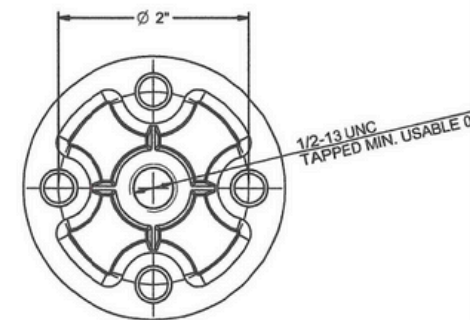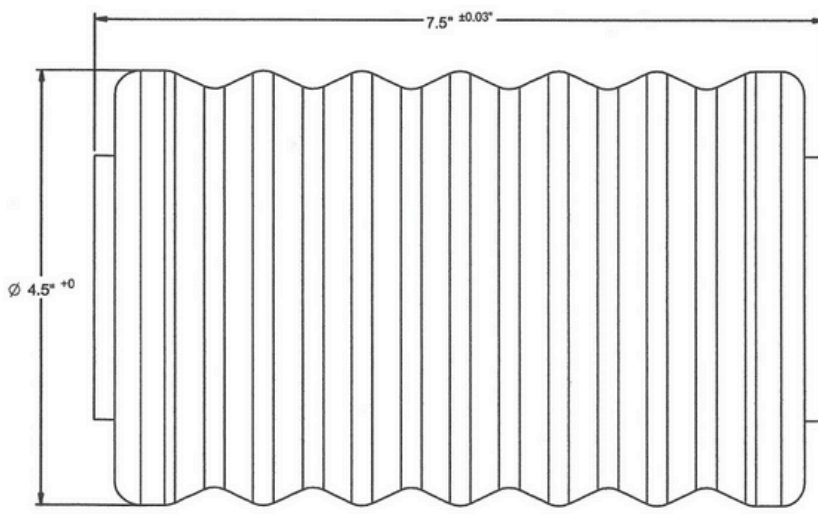

TOP

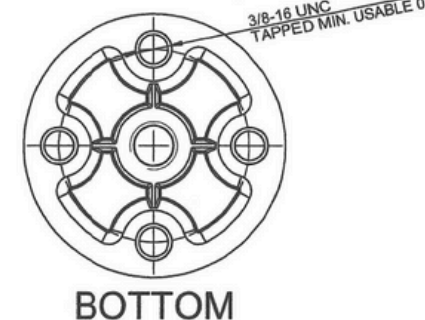

BOTTOM

ELECTRICAL CHARACTERISTICS		MECHANICAL CHARACTERISTICS		PACKING CHARACTERISTICS	
LOW FREQUENCY DRY WITHSTAND	50 kV	CANTILEVER STRENGTH	1000 Lbs.	NET WEIGHT PER UNIT	8.86 Lbs
LIGHTNING IMPULSE WITHSTAND VOLTAGE	110 kV	TORSION STRENGTH	3000 In.-Lbs		
		TENSION STRENGTH	3000 Lbs.		
		COMPRESSION STRENGTH	20000 Lbs.		