


COMMERCIAL KITCHEN  
EQUIPMENT

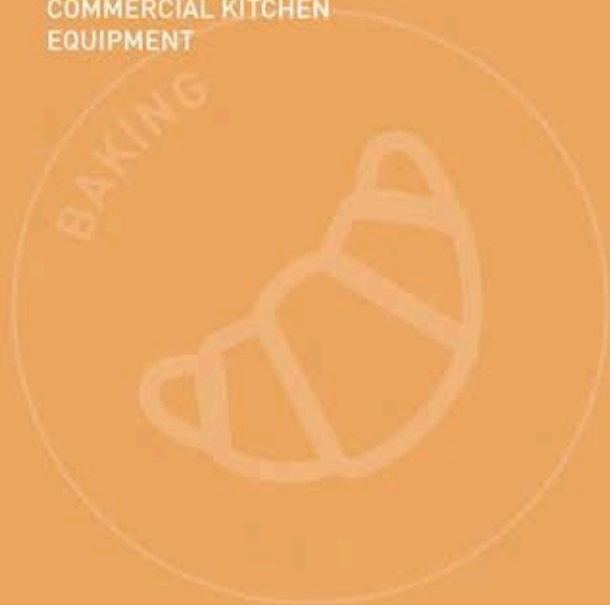

## DAINTINESS CREATE MORE POSSIBILITIES

COTTURA

---

Baking series is based on the oven and the proofer cabinet. The powerful functions enable the bakers to have more room to play. The precise temperature control can make the baking result close to the ideal state. The quick and convenient operation method allows Bakers have more time to create new breads.

# BAKIN

SERIES

# G



# MOE SERIES

## ELECTRIC DECK OVEN

### Features

The pan rack is SS201.

Use electronic over-temperature module, more accurate than the traditional thermostat.

When the neutral wire and live wire is connected wrong, the controller will alarm to break, to prevent the circuit and electrical parts from burning.



MOE-1Y-2



MOE-2Y-4




MOE-3Y-6



MOE-4Y-8

Model		MOE-1Y-2	MOE-2Y-4	MOE-3Y-6	MOE-4Y-8
Spec		1 layer 2 trays	2 layer 4 trays	3 layer 6 trays	4 layer 8 trays
Service Temperature	[°C]	To 380	To 380	To 380	To 380
Voltage	[V/Hz]	380V / 50Hz			
Rated Input Power	[kW]	4.98	9.96	14.94	19.92
Dimension					
Width	[mm]	1260	1260	1260	1260
Deep	[mm]	1310	1360	1460	1460
High	[mm]	1400	1780	2100	2130
Net Weight	[kg]	245	355	500	580
Material		Ext: 201+Galvanized plate , Int: 1.2mm Alclad plate			
Pan Size	[mm]	400 x 600	400 x 600	400 x 600	400 x 600



# MOE SERIES

## ELECTRIC DECK OVEN

### Features

Efficient heating tube makes baking more efficient and even.

Inner liner is made of Plating aluminum plate, which is more durable and tough under high temperature.

Smoke-absorbing design for the hood to keep the whole machine cleaner.

Steam generator is optional.



MOE-1Y-3



MOE-2Y-6



MOE-3Y-9

Model		MOE-1Y-3	MOE-2Y-6	MOE-3Y-9
Spec		1 layer 3 trays	2 layer 6 trays	3 layer 9 trays
Service Temperature	[°C]	To 380	To 380	To 380
Voltage	[V/Hz]	380V / 50Hz		
Rated Input Power	[kW]	7.98	15.96	23.94
Dimension				
Width	[mm]	1690	1690	1690
Deep	[mm]	1310	1360	1460
High	[mm]	1400	1780	2100
Net Weight	[kg]	375	485	630
Material		Ext: 201+Galvanized plate , Int: 1.2mm Alclad plate		
Pan Size	[mm]	400 x 600	400 x 600	400 x 600



# MZE SERIES

## ELECTRIC DECK OVEN


### Features

Efficient heating tube makes baking more efficient and even.

And all the surface is coated with glaze, the glazed process could make there no fingerprint after your finger touch it.

When the neutral wire and live wire is connected wrong, the controller will alarm to break, to prevent the circuit and electrical parts from burning.

Steam generator is optional.



MZE-1Y-2



MZE-2Y-4



MZE-3Y-6

Model		MZE-1Y-1	MZE-1Y-2	MZE-2Y-4	MZE-3Y-6	MZE-4Y-8	MZE-2Y-6	MZE-3Y-9	MZE-3Y-12	MZE-2412S
Spec		1 layer 1 trays	1 layer 2 trays	2 layer 4 trays	3 layer 6 trays	4 layer 8 trays	2 layer 6 trays	3 layer 9 trays	3 layer 12 trays	2 layer 4trays & 12pans proofer
Service Temp.	[°C]	To 380	To 380	To 380	To 380	To 380	To 380	To 380	To 380	To 380 & To 60
Voltage	[V/Hz]	380V / 50Hz								
Rated Input Power	[kW]	3.3	6.75	13.5	20.25	23.4	15.3	23	30.6	15
Dimension										
Width	[mm]	970	1400	1400	1400	1400	1830	1830	1830	1400
Deep	[mm]	1170	1170	1170	1170	1170	1170	1170	1400	1170
High	[mm]	1430	1430	1710	1970	2260	1710	1970	1970	1990
Net Weight	[kg]	170	230	340	470	570	460	600	680	390
Material		Ext: 201+Galvanized plate , Int: 1.2mm Alclad plate								
Pan Size	[mm]	400 x 600	400 x 600	400 x 600	400 x 600	400 x 600	400 x 600	400 x 600	400 x 600	400 x 600



# MZR SERIES

## GAS DECK OVEN

### Features

And all the surface is coated with glaze, the glazed process could make there no fingerprint after your finger touch it.

The handle is plastic dipping, the feel is good.

The intake valve uses double safety solenoid valve for more safety.

Heavy duty caster design with brakes for stable stand.



MZR-1Y-2



MZR-2Y-4



MZR-3Y-6

Model		MZR-1Y-2	MZR-2Y-4	MZR-3Y-6	MZR-2Y-6	MZR-3Y-9
Spec		1 layer 2 trays	2 layer 4 trays	3 layer 6 trays	2 layer 6 trays	3 layer 9 trays
Service Temperature	[°C]	To 380	To 380	To 380	To 380	To 380
Voltage	[V/Hz]	220V/50Hz				
Rated Input Power	[kW]	0.1	0.2	0.3	0.2	0.3
Dimension						
Width	[mm]	1400	1400	1400	1830	1830
Deep	[mm]	1160	1160	1160	1160	1160
High	[mm]	1480	1780	2015	1780	2015
Net Weight	[kg]	260	380	540	500	660
Material		Ext: 201+Galvanized plate , Int: 1.2mm Alclad plate				
Pan Size	[mm]	400 x 600	400 x 600	400 x 600	400 x 600	400 x 600



# MGE-B SERIES

## ELECTRIC DECK OVEN



### Features

The oven has a nice appearance and strong practicability, and is more suitable for shopping malls, supermarkets, and bakeries.

Visible glass window to permit real time control of baking conditions.

Efficient heating tube makes baking more efficient and even.

Digital microcomputer controller can make the temperature more accurate.

The inter layer design of the rear smoke baffle prevents the temperature in the cabinet from falling rapidly.

The whole series is equipped with an electronic intelligent over-temperature module, which is more accurate than the traditional temperature limiter.

Model		MGE-1Y-1B	MGE-1Y-2B	MGE-2Y-2B	MGE-2Y-4B	MGE-3Y-3B	MGE-3Y-6B
Spec		1 layer 1 tray	1 layer 2 trays	2 layers 2 trays	2 layers 4 trays	3 layers 3 trays	3 layers 6 trays
Service Temperature	[°C]	To 380	To 380	To 380	To 380	To 380	To 380
Voltage	[V/Hz]	380V / 50HZ	380V / 50HZ	380V / 50HZ	380V / 50HZ	380V / 50HZ	380V / 50HZ
Rated Input Power	[kW]	3.3	6.6	6.6	13.2	9.9	19.8
Dimension							
Width	[mm]	810	1240	810	1240	810	1240
Depth	[mm]	860	860	860	860	860	860
Height	[mm]	640	640	1120	1120	1515	1515
Net Weight	[kg]	75	115	130	175	190	245
Material		Ext: 430+Galvanized plate, Int: 0.7mm Alclad plate					
Pan Size		400 x 600	400 x 600	400 x 600	400 x 600	400 x 600	400 x 600

# MGE SERIES

## ELECTRIC DECK OVEN

### Features

Visible glass window to permit real-time control of baking conditions.

Efficient heating tube makes baking more efficient and even.

Digital micro-computer controller can make the temperature more accurate.

The interlayer design of the rear smoke baffle prevents the temperature in the cabinet from falling rapidly.



MGE-2Y-6



MGE-3Y-9



MGE-1Y-2



MGE-2Y-4



MGE-3Y-6

Model		MGE-1Y-1	MGE-1Y-2	MGE-2Y-4	MGE-3Y-6	MGE-2Y-6	MGE-3Y-9	MGE-3Y-12	MGE-2412S
Spec		1 layer 1 trays	1 layer 2 trays	2 layer 4 trays	3 layer 6 trays	2 layer 6 trays	3 layer 9 trays	3 layer 12 trays	2 layer 4trays & 12 pans proofer
Service Temp.	[°C]	To 380	To 380	To 380	To 380	To 380	To 380	To 380	To 380 & To 60
Voltage	[V/Hz]	380V / 50Hz							
Rated Input Power	[kW]	3.3	6.6	13.2	19.8	16	24	36	15.2
Dimension									
Width	[mm]	810	1240	1240	1240	1670	1670	1670	1240
Deep	[mm]	860	860	860	860	860	860	1060	860
High	[mm]	625	625	1470	1515	1470	1515	1515	1762
Net Weight	[kg]	75	115	195	255	245	342	400	235
Material		Ext: 430+Galvanized plate , Int: 0.7mm Alclad plate							
Pan Size	[mm]	400 x 600	400 x 600	400 x 600	400 x 600	400 x 600	400 x 600	400 x 600	400 x 600





# MGR SERIES

## GAS DECK OVEN

### Features

Visible glass window to permit real-time control of baking conditions.

Efficient heating tube makes baking more efficient and even.

Digital micro-computer controller can make the temperature more accurate.

The interlayer design of the rear smoke baffle prevents the temperature in the cabinet from falling rapidly.



MGR-2Y-6



MGR-3Y-9



MGR-1Y-2



MGR-2Y-4



MGR-3Y-6

Model		MGR-1Y-2	MGR-2Y-4	MGR-3Y-6	MGR-2Y-6	MGR-3Y-9
Spec		1 layer 2 trays	2 layer 4 trays	3 layer 6 trays	2 layer 6 trays	3 layer 9 trays
Service Temperature	[°C]	To 380	To 380	To 380	To 380	To 380
Voltage	[V/Hz]	220V/50Hz				
Rated Input Power	[kW]	0.1	0.2	0.3	0.2	0.3
Dimension						
Width	[mm]	1340	1340	1340	1770	1770
Deep	[mm]	950	950	950	950	950
High	[mm]	900	1780	1940	1780	1940
Net Weight	[kg]	140	250	360	300	410
Material		Ext: 430+Galvanized plate , Int: 0.7mm Alclad plate				
Pan Size	[mm]	400 x 600	400 x 600	400 x 600	400 x 600	400 x 600



# MOE SERIES

## BULIT-UP CABINET

### Features

The oven built-up on the proofer cabinet, save more space.

Independent temperature control design is more convenient for operation.

Upgraded heating tube ,high efficiency, fast heating and 304 material tube.

Heavy duty caster design with brakes for stable stand.



Model		M0E-2412S
Spec		1 layer 2 trays
Service Temperature	[°C]	To 380 & To 60
Voltage	[V/Hz]	380V / 50Hz , 220V / 50Hz
Rated Input Power	[kW]	9.96 , 0.7
Dimention		
Width	[mm]	1260
Deep	[mm]	1360
High	[mm]	1965
Net Weight	[kg]	455
Material		Ext: 201+Galvanized plate , Int: 1.2mm Alclad plate
Pan Size	[mm]	400 x 600



# MFE SERIES


## CONVECTION OVEN

### Features

The baking tray is placed in the oven in the air so that the internal hot air convection, so the baking uniformity is good.

Fast heating and high efficiency

Thick isolation and save energy.



MFE-4D



MFE-5D

Model		MFE-4D	MFE-5D	MFE-10D
Spec		4 trays	5 trays	10 trays
Service Temperature	[°C]	To 300	To 300	To 300
Voltage	[V/Hz]	380V / 50Hz		
Rated Input Power	[kW]	6.5	9.5	19
Dimension				
Width	[mm]	780	780	780
Deep	[mm]	1235	1235	1235
High	[mm]	640	690	1700
Net Weight	[kg]	120	150	270
Pan Size	[mm]	400 x 600	400 x 600	400 x 600



# COMBINATION OVEN



## Features

The oven supports customer customization, the upper layer of convection oven, the middle layer of deck oven, and the lower layer of proofer cabinet.

One equipment with three functions, user-friendly, and the most space-saving to meet various baking needs.



Model		All	Convection Oven	Deck Oven	Proofer Cabinet
Spec		/	5 trays	1 layer 1 tray	12 trays
Service Temperature/Humidity	[ °C ]	/	To 300	To 380	To 60/Indoor humidity-99%
Voltage	[V/Hz]	/	380V/ 50HZ	380V/ 50HZ	220V/ 50HZ
Rated Input Power	[kW]	13.8	9.5	3.3	1
Dimension					
Width	[mm]	780	/	/	/
Depth	[mm]	1240	/	/	/
Height	[mm]	2160	/	/	/
Pan Size	[mm]		400 x 600	400 x 600	400 x 600

# MKJ-7S

## ROTARY CHICKEN ROSTISSERIE

### Features

The oven is designed with front and rear visible glass doors, so the chicken roasting process can be seen at a glance.

The chicken rack can be disassembled and replaced at will, which is convenient and practical.

The furnace adopts advanced LCD screen computer controller, the content display is more comprehensive, it has the functions of temperature control freely, rotation, segment 1-5, etc., and has the advantages of fast heating and uniform baking.



Model	MKJ-7S	
Spec	7 forks /21 chickens	
Service Temperture	[D]	To 300
Voltage	[V/Hz]	380V / 50HZ
Rated Input Power	[kW]	9.3
Dimention		
Width	[mm]	1000
Deep	[mm]	880
Height	[mm]	1080
Net Weight	[kg]	200
Material	Ext: 1.2mm SS201+0.6mm glass, Int: 1.5mm SS304+0.6mm glass	

# E1500

## TUNNEL FURNACE



### Features

The furnace adopts Japanese Mitsubishi LCD touch screen, PLC module with 20 sets of memory programs, each heating tube is independently controlled, and can be operated automatically and manually.

Each temperature zone is equipped with independent air supply tubes and gas tubes, and the combustion is more stable with PID automatic adjustment and temperature correction functions.

All gas control parts are from foreign brands such as Japan, the United States, Germany, etc., which makes the roasting more even.

All electrical appliances are imported or foreign joint venture brands, and the electrical appliances are stable when used.

High-quality mineral wool board, high density, compartment design, outstanding heat preservation.

Model		E-1500	E-2100	E-2700
Spec		2 treys	3 treys	4 treys
Service Temperature	[°C]	To 380	To 380	To 380
Voltage	[V/Hz]	380V / 50HZ	380V / 50HZ	380V / 50HZ
Average Rated Input Power	[kW/m/h]	9	11	15
Dimension				
Int Width	[mm]	1500	2100	2700
Ext Width	[mm]	2260	2860	3460
Height	[mm]	2350	2350	2350
Net Weight	[kg/m]	1000	1200	1500
Pan Size	[mm]	400 x 600	400 x 600	400 x 600

Model		G-1500	G-2100	G-2700
Spec		2 trays	3 trays	4 trays
Service Temperature	[°C]	To 380	To 380	To 380
Voltage	[V/Hz]	380V / 50HZ	380V / 50HZ	380V / 50HZ
Average Rated Input Power	[kW/m/h]	1.0	11	2.0
Dimension				
Int Width	[mm]	1500	2100	2700
Ext Width	[mm]	2260	2860	3460
Height	[mm]	2350	2350	2350
Net Weight	[kg/m]	1000	1200	1500
Pan Size	[mm]	400 x 600	400 x 600	400 x 600

# VENTILATED RACK OVEN

## Features

High quality stainless steel and the imported components to ensure the reliability and high performance of the oven.

Utilizing Sweden Bentone burner and Japan NSK bearings that has excellent heat resistance, strong security and long service time.

Fast heating SS309 heat exchanger with low-temperature exhaust emission and energy saving advantages.


Modular design and compact structure, easy to install.

Excellent heat convection circulation system can produce high heat and low speed air circulation, ensures uniform baking effect, good expansion and good moisture preservation.

Large amount of steam: up to 5kg of water can be evaporated at 200°C each time, suitable for French Bread.



Model		MXZ-30G	MXZ-30D	MXZ-30E
Power Source		Gas(CNG/LNG)	Diesel(-20#~0#)	Electric
Power	[KW]	1.6	1.6	47
Rated Current	[A]	3	3	72
Heat Output	[Kcal/h]	49870	49870	/
Gas Inlet Pressure	[kPa]	3.5~6	/	/
Voltage		380V(3P+N+PE)/ 50HZ		
Program Quantity		16 (P11-P16 have 5-phase control )		
Service Temperature		To 300°C (Adjustable)		
Baking Time	[min]	0-99(Adjustable)		
Steaming time	[s]	0-99(Adjustable)		
Water Inlet Pressure	[MPa]	0.2~0.6		
Size [WxDxH]	[mm]	1620x1960x2550		
Pan Capacity and Size		36/30/20 trays, 400x600mm		
Weight	[kg]	1590	1590	1480

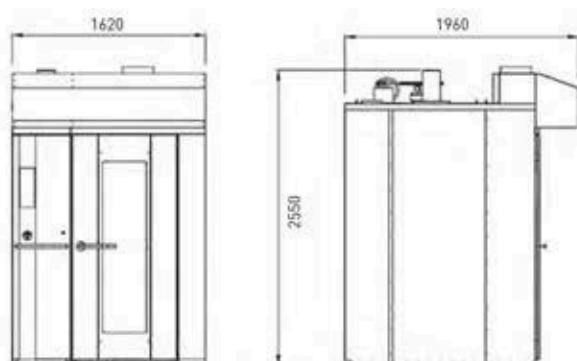

# MOF SERIES PROOFER CABINET

## Features

Three-dimensional circulation heating in the cabinet makes more uniform fermentation.

All series are equipped with automatic water service.

The polyurethane foam is applied for the whole cabinet, 35mm thickness, ultra high performance insulation, greatly reducing operating costs.



MOF-18D

MOF-36D

MOF-36S



Model		MOF-18D	MOF-36D	MOF-36S
Spec		One door 18 trays	One door 36 trays	Two doors 36 trays
Service Temperature	[°C]	To 60	To 60	To 60
Voltage	[V/Hz]	220V / 50Hz		
Rated Input Power	[kW]	0.8	1.7	1.7
Dimension				
Width	[mm]	740	740	1430
Deep	[mm]	800	1250	800
High	[mm]	2050	2050	2050
Net Weight	[kg]	180	265	525
Humidity		0-99%		
Material		Ext: 430 , Int: 430		
Pan Size	[mm]	400 x 600	400 x 600	400 x 600





# MLC SERIES

## RETARDER PROOFER CABINET

### Features

Visible glass window and built-in LED light to permit the state of the dough.

Alloy handle, stainless and durable.

Heavy duty caster design with brakes for easy fixing.

Digital control, automatic shift from refrigeration to proofer.




MLC-18D

MLC-36D

MLC-36S

Model		MLC-18D	MLC-36D	MLC-36S	MLC-32SW
Spec		One door 18 trays	One door 36 trays	Two doors 36 trays	32 trays
Service Temperature	[°C]	-5~60	-5~60	-5~60	-5~60
Voltage	[V/Hz]	220V / 50HZ			
Rated Input Power	[kW]	2	3.3	3.3	3.5
Dimension					
Width	[mm]	755	755	1450	755
Deep	[mm]	920	1220	860	1220
High	[mm]	2170	2170	2170	2220
Net Weight	[kg]	170	254	295	260
Humidity		0-99%			
Material		Ext: 430 , Int: 430			
Pan Size	[mm]	400 x 600	400 x 600	400 x 600	400 x 600

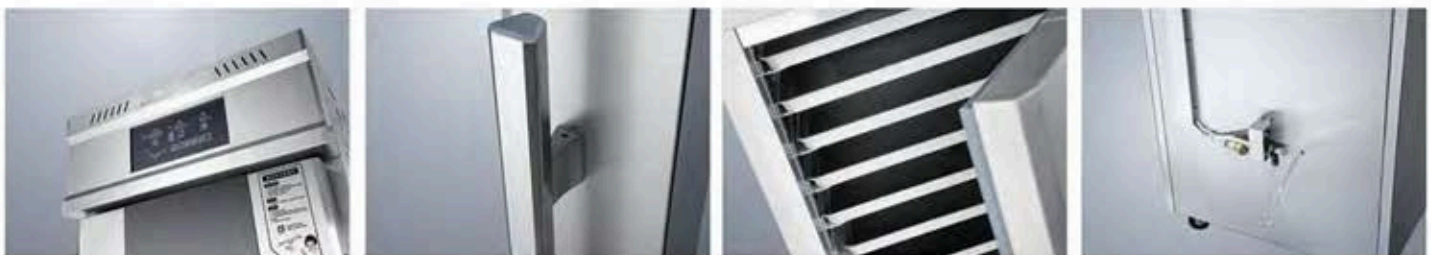

# MGF SERIES PROOFER CABINET

## Features

Visible glass window and built-in LED light to permit the state of the dough.

Alloy handle, stainless and durable.

Heavy duty caster design with brakes for easy fixing.



MGF-18D



MGF-36D



MGF-36S

Model		MGF-18D	MGF-36D	MGF-36S
Spec		One door 18 trays	One door 36 trays	Two doors 36 trays
Service Temperature	[°C]	To 60	To 60	To 60
Voltage	[V/Hz]	220V / 50Hz		
Rated Input Power	[kW]	0.8	1.7	1.7
Dimension				
Width	[mm]	705	705	1395
Deep	[mm]	770	1250	770
High	[mm]	1950	1950	1950
Net Weight	[kg]	110	180	240
Humidity		0-99%		
Material		Ext: Galvanized plate , Int: 430		
Pan Size	[mm]	400 x 600	400 x 600	400 x 600



COTTURA

# FOOD MACHINE



## **STRONG POWER** INCREASING PRODUCTIVITY

---

Food Machinery series provides an amazing efficiency improvement program for your kitchen, saving time and human resources. The powerful and stable motor enables the equipment to handle more food, and the stainless steel body brings a longer service life. The chef can give it some monotonous work, and then spend more time on creation.

# INERY

SERIES

# EUROPEAN SPIRAL MIXER

## Features

Mechanical button, easy to operate.

Stainless steel bowl guard, safe and convenient.

Strong heavy mixing hook.

Pulley drive design and overload protection.

The adjustable block is convenient for the leveling of the protective net.

It is safe and convenient to install power switch.



Timing Function



Heavy Mixing Hook



Protective Cover



MLHM15




MLHM25



MLHM50

Model			MLHM15	MLHM25	MLHM50
Flour	[kg]		15	25	50
Power	[kW]		1.1/2.2+0.55	1.5/4+0.55	2.2/5.5+0.55
Hook Speed	Fast	[rpm]	280	270	200
	Slow	[rpm]	140	135	130
Barrel Speed	Fast	[rpm]	24	20	20
	Slow	[rpm]	24	20	20
Voltage / Frequency (Optional)		[V/Hz]	3-380V/50Hz	3-380V/50Hz	3-380V/50Hz
Dimension					
Length	[mm]		500	560	735
Width	[mm]		880	960	1200
Height	[mm]		1135	1250	1440
Weight	[kg]		320	385	550
Safe Guard			Stainless	Stainless	Stainless
Volume	[L]		30	70	130



# EUROPEAN B SPIRAL MIXER

## Features

Computer panel button, save time and effort.

Stainless steel bowl guard, safe and convenient.

Strong heavy mixing hook.

Pulley drive design and overload protection.

It is safe and convenient to install power switch.

Durable stainless steel bowl.





Touch Switch    Timing Function    Heavy Mixing Hook    Protective Cover



MLHM15B

Model			MLHM15B	MLHM25B	MLHM50B
Flour	[kg]		15	25	50
Power	Hook	[kw]	1.5/2.4	2.2/3.3	3/4.5
	Bowl	[kw]	0.55	0.55	0.55
Hook Speed	Fast	[rpm]	285	270	260
	Slow	[rpm]	142.5	135	130
Bowl Speed	[rpm]		23	23	22.5
Voltage / Frequency (Optional)		[V/Hz]	380V/50Hz	380V/50Hz	380V/50Hz
Dimension					
Length	[mm]		490	600	680
Width	[mm]		890	980	1110
Height	[mm]		1030	1140	1310
Weight	[kg]		225	320	440
Safe Guard			Stainless	Stainless	Stainless
Volume	[l]		30	70	130

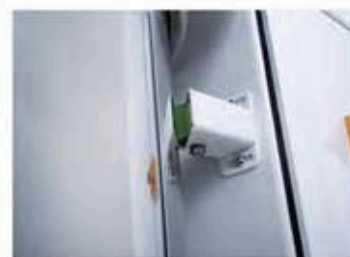

# MLS SERIES

## SPIRAL DOUGH MIXER

### Features

Timing function, save time and effort.

Stainless steel bowl guard, safe and convenient.

Strong Heavy mixing hook.

Pulley drive design and overload protection.

It is safe and convenient to install power switch.

Durable stainless steel bowl.



Timing Function Heavy Mixing Hook Protective Cover



MLS15A



MLS50A

Model		MLS12A	MLS15A	MLS20A	MLS25A	MLS40A	MLS50A
Flour	[kg]	12	15	20	25	40	50
Power	[kW]	0.85/1.5	1.5/2.4	1.5/2.4	2.2/3.3	2.2/3.3	3/4.5
Hook Speed	Fast	[rpm]	252	260	260	269	269
	Slow	[rpm]	125	130	130	134	134
Barrel Speed	Fast	[rpm]	25	26	26	23	23
	Slow	[rpm]	12	13	13	12	12
Voltage (Optional)	[V]	380	380	380	380	380	380
Frequency	[Hz]	50	50	50	50	50	50
Dimension							
Length	[mm]	440	490	535	580	650	676
Width	[mm]	780	875	920	980	1050	1100
Height	[mm]	920	1020	1040	1112	1200	1200
Weight	[kg]	145	170	180	185	210	240
Safe Guard		Stainless	Stainless	Stainless	Stainless	Stainless	Stainless
Volume	[L]	30	40	50	60	110	130



# MLS SERIES

## SPIRAL DOUGH MIXER



MLS08



MLS12



MLS15



MLS20



MLS25



MLS40



MLS50

Model		MLS08	MLS12	MLS15	MLS20	MLS25	MLS40	MLS50
Flour	[kg]	8	12	15	20	25	40	50
Power	[kW]	0.45/0.75	0.85/1.5	1.5/2.4	1.5/2.4	2.2/3.3	2.2/3.3	3/4.5
Hook Speed	Fast	[rpm]	250	252	260	269	269	269
	Slow	[rpm]	125	125	130	130	134	134
Barrel Speed	Fast	[rpm]	25	25	23	23	23	23
	Slow	[rpm]	12	12	13	13	12	12
Voltage (Optional)	[V]	380	380	380	380	380	380	380
Frequency	[Hz]	50	50	50	50	50	50	50
Dimension								
Length	[mm]	440	440	490	535	580	650	680
Width	[mm]	765	780	870	920	980	1050	1100
Height	[mm]	900	920	1020	1040	1112	1200	1200
Weight	[kg]	117	145	170	180	185	210	240
Safe Guard		Stainless	Stainless	Stainless	Stainless	Stainless	Stainless	Stainless
Volume	[L]	20	30	40	50	60	110	130





# MC SERIES

## DOUGH SHEETER

### Features

Equipped with roll stick, easy to operate.

Nylon round block, safe and quiet.

Reversing manual rocker operation

Lifting protective net to ensure personal safety

The lifting handle of continuous surface roller can press the surface evenly.


Reversing pedal operation.



MC-520E



Model		MC-400	MC-520E	MC-520E-L	MC-630E	MC-630E-L	MC630E-ZD
Type		Desktop	Floor type	Floor type	Floor type	Floor type	Floor type
Platform width	[mm]	400	500	500	590	590	630
Platform length	[mm]	800	1000	1200	1400	1800	1800
Thickness of pressing surface	[mm]	1-35	0.2-50	0.2-50	0.2-50	0.2-50	1-47
Voltage [Optional]	[V]	220V/380V	220V/380V	220V/380V	220V/380V	380V	380V
Power [Optional]	[kW]	0.4	0.75	0.75	0.75	0.75	1.1
Weight	[kg]	100	220	220	260	260	285
Dimension							
Length	[mm]	1600	2520	2920	3530	4700	3710
Width	[mm]	840	955	955	1040	1040	1100
Height	[mm]	590	1285	1285	1285	1285	1450
body material			Plastic spraying on iron plate + stainless steel	Plastic spraying on iron plate + stainless steel	Plastic spraying on iron plate + stainless steel	Plastic spraying on iron plate + stainless steel	Plastic spraying on iron plate +304 stainless steel
Remarks							Automatic computer board



# AUTO DOUGH MOULDER



## Features

- Folding hand wheel, ensure the size of the equipment.
- Install emergency stop button and waterproof button to ensure personal and equipment safety.
- Adjustable foundation, stable equipment.



MYMZD500



MYMZD350



MYMZD250

Model		MYMZD600	MYMZD500	MYMZD350	MYMZD250
Adjustment range of pressure roller	[mm]	5-25	5-25	5-25	5-25
Speed of pressure roller	[r/min]	79	79	74	74
Voltage (Optional)	[V]	3-380	3-380	1-220 / 3-380	1-220 / 3-380
Frequency (Optional)	[Hz]	50	50	50	50
Power	[kW]	3	3	2.2	1.5
IP degree		IPX1	IPX1	IPX1	IPX1
Dimension					
Length	[mm]	1290	1290	1110	955
Width	[mm]	860	760	615	530
Height	[mm]	1210	1210	1020	760
Weight	[kg]	350	320	245	210
Flour and water ratio		1:0.4-1:0.45			



# HORIZONTAL DOUGH MIXER



MHMJY25



MHMJG25



MHMJY37



MHMJG50

## Features

Timing function, save time and effort.

Lift the cover and shut down to ensure personal safety.

The transmission mechanism does not need to be oiled to prevent black surface leakage

Reducer drive, silent and efficient

Stainless steel bowl, hygienic and durable.

It has the function of tipping bucket to save manpower.



Model		MHMJY12.5	MHMJY25	MHMJY37	MHMJY50
		MHMJG12.5	MHMJG25	MHMJG37	MHMJG50
Capacity	[kg/h]	113	200	296	400
Wreight	[kg]	110	160	205	260
Power	[kW]	1.1/1.5	1.5/2.2	2.2/3	3
Dimension					
Length	[mm]	725	770	795	955
Width	[mm]	405	480	530	580
Height	[mm]	785	970	990	1070
Voltage (Optional)	[V]	1-220 / 3-380	1-220 / 3-380	3-380	3-380
Frequency (Optional)	[Hz]	50	50	50	50
IP degree		IPX1	IPX1	IPX1	IPX1



# MULTIFUNCTIONAL PLANETARY MIXER

## Features

Mechanical knob, safe and durable

Progressive micro switch bracket, safe and reliable.

The installation of stirrer is simple and firm

Rocker type lifting structure.


Spinning type fixed handle, stable operation.



MDB10

MDB20

MDB40



Model		MDB10	MDB20	MDB30	MDB40	MDB50	MDB60	MDB80
Bowl Volume	[L]	10	20	30	40	50L	60L	80L
Machine Dimension	[cm]	43x44x67	52x53x83	62x62x102	62x64x107	68x68x118	78x84x135	78x84x148
Package Dimension	[cm]	55x57x83	58x68x99	75x75x121	75x75x121	77x77x132	102x91x157	102x91x167
Voltage(Optional)	[V]	220V/380V	220V/380V	220V/380V	220V/380V	220V/380V	220V/380V	220V/380V
Power	[kW]	0.23	0.38	0.75	1.13	1.5	2.25	3.75
Net Weight	[kg]	57	83	150	162	217	334	364
Package Weight	[kg]	79	110	193	205	252	382	412
Mixing Speed [revolution]	[rmp/min]	46/100/156	41/90/162	40/80/156	40/80/156	32/72/124	43/74/120	43/74/120
Mixing Speed [rotation]	[rmp/min]	156/340/530	131/288/518	120/240/468	120/240/468	105/237/409	144/248/403	144/248/403
Hook Mixing Weight [Dough]	[kg]	0.75	1.8	3.7	5.6	7.5	11	14
Ball Mixing Weight [egg]	[kg]	1.5	3	4.5	6	8	10	13
Fan Mixing Weight [fillings]	[kg]	1.5	3	4.5	6	8	10	13




**7L****COOKING CHEF****Features**

Equipped with shield and feeding port, safe and convenient.

Multiple stirrers, multiple functions.

The base is fixed firmly.

Mechanical knob, 12 Speed Adjustment.



<b>Model</b>		<b>MC-BY7</b>
Capacity	[g/time]	500
Weight	[kg]	19.5
Power	[kW]	0.55
Dimension		
Length	[mm]	420
Width	[mm]	230
Height	[mm]	390
Voltage [Optional]	[V]	1-220
Frequency	[Hz]	50




# COOKING CHEF

## Features

Multiple stirrers, multiple functions.

Rotate the handle to facilitate the head lifting.

Mechanical knob, 12 Speed Adjustment.



<b>Model</b>		<b>MC-B7</b>
Capacity	[g/time]	500
Weight	[kg]	22
Power	[kW]	0.6
<b>Dimension</b>		
Length	[mm]	410
Width	[mm]	250
Height	[mm]	425
Voltage [Optional]	[V]	1-220
Frequency [Optional]	[Hz]	50



# MC SERIES

## DOUGH DIVIDE

### Features

Beautiful appearance stainless steel body, convenient and cleanable surface.

Operation panel with simple and clear buttons and indicators; pressing dough into 36 even portions.

The touch switch design prevents accidental machine failure.

Thickened anti-corrosion SS304 trays.



Stainless Steel Body    Stainless Steel Plate    Dough Allocator



Model		MC-D36
Capacity	[grain/time]	36
Weight	[kg]	180
Power	[kW]	0.75
Dimension		
Length	[mm]	400
Width	[mm]	500
Height	[mm]	1300
Voltage [Optional]	[V]	1-220 / 3-380
Frequency [Optional]	[Hz]	50



# MC SERIES

## DOUGH ROUNDER

### Features


Rack type lifting structure, high precision and stability.

Rocker type dough baffle, easy to operate.

Lengthen the spheronizing rod to save labor.



<b>Model</b>		<b>MC-D30A</b>
Capacity	[grain/time]	30
Weight	[kg]	360
Power	[kW]	0.75
<b>Dimension</b>		
Length	[mm]	600
Width	[mm]	770
Height	[mm]	2100
Voltage [Optional]	[V]	1-220 / 3-380
Frequency [Optional]	[Hz]	50

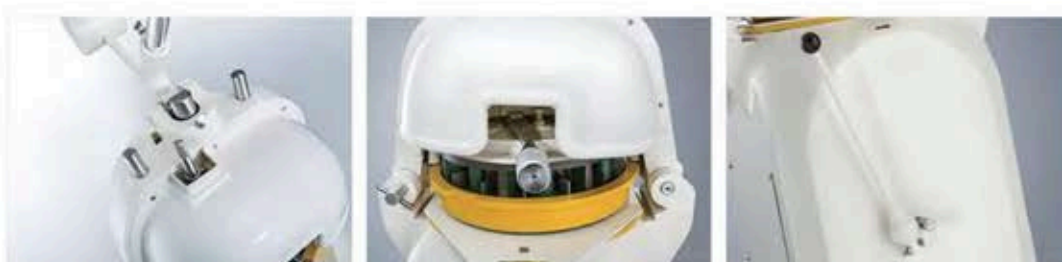



# MC SERIES

## TOAST SLICER

### Features

Stainless steel body, clean and healthy.


Stainless steel saw blade, strong and durable



Stainless Steel  
body



Model		MC-Q25B	MC-Q31B
Capacity	[mm]	thickness 15	thickness 12
Weight	[kg]	35	35
Power	[kW]	0.25	0.25
Dimension			
Length	[mm]	515	515
Width	[mm]	625	625
Height	[mm]	585	585
Voltage [Optional]	[V]	1-220	1-220
Frequency [Optional]	[Hz]	50	50

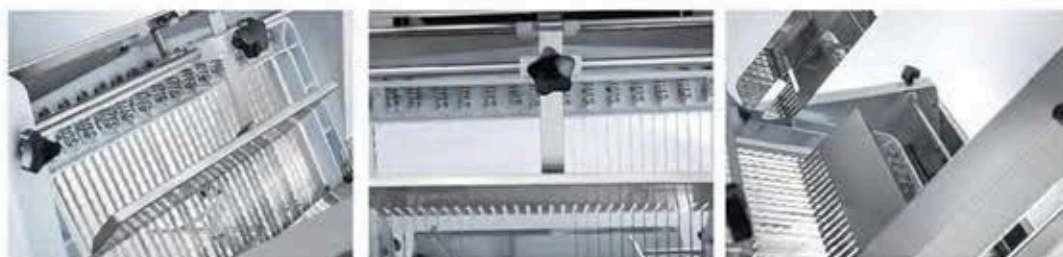

# MTD SERIES

## POTATO PEELING MACHINE

### Features

Six-pole motor and compact structure.

The friction material is made of emery, durable and clean.

Lift the cover and shut down to ensure personal safety. Pointing control discharging.

Reserved observation hole, automatic timing.

A filter screen is attached to the water tank to prevent blockage.



Model		MTD350A	MTD450A
Power	[kW]	0.75	1.1
Dimension			
Length	[mm]	725	825
Width	[mm]	666	825
Height	[mm]	1245	1270
Weight	[kg]	85	115
Capacity	[kg/h]	360	750
Voltage [Optional]	[V]	1-220 / 3-380	1-220 / 3-380
Frequency [Optional]	[Hz]	50	50



# MGT75 MGT100

## PEELING WASHING MACHINE



### Features

The whole machine is made of stainless steel, which has strong corrosion resistance and is not easy to rust, reducing the loss of the main body caused by long-time use.

High density brush roller, increase the contact surface, efficient motor, suitable for high frequency use environment, increased rpm, less working time, improve efficiency.

Weak current control ensures operators' safety.

The new brush material Reduce the damage to food during working, and the loss rate is low.

SUS  
SS



Model		MGT75	MGT100
Voltage	[v]	380V	380V
Frequency	[Hz]	50	50
Power	[kW]	0.75	1.1
Capacity			
Weight	[kg]	130	150
Dimension			
Length	[mm]	1015	1265
Width	[mm]	765	765
Height	[mm]	880	880

# MLQ75

## FLIP CYLINDER SPIRAL MIXER



### Features

Higher body strength to ensure the equipment running stability.

Multiple security configurations for operator safety,

Independent electrical distribution cabinet, making the equipment more stable and durable, Equipped with emergency bypass operating system to ensure continuous production.

Ergonomically designed for integrated operation system, high-power, can be used for 45% of the hard dough mixing.



Model		MLQ75
Voltage	[kW]	380V/50Hz
Power	[kW]	9.75
Hydraulic Station Power	[kW]	1.5
Max Capacity(flour)	[kg]	75
Max Capacity(Dough)	[kg]	120
Min Capacity(Dough)	[r/min]	8
Fast Rpm(hook)	[r/min]	230
Slow Rpm(hook)	[r/min]	115
Rpm(bowl)	[L]	12
Capacity(bowl)	[kg]	200
Weight		1170
Dimension		
Length	[mm]	1600
Width	[mm]	1710
Height	[mm]	1520

# STEAM CABINETS

**COTTURA**



## DELICIOUS NUTRITIOUS & HEALTHY COOKING

Steaming cabinet series is a good helper for the kitchen. Steaming is a nutritious and healthy cooking method that can restore the original deliciousness of the food. It will not destroy the original nutritional value of the food during the cooking process, and the finished product highlights the original food. Some delicious. The independent cooking space makes it possible to complete multiple cooking at the same time, saving a lot of time.

# STEAMING CABINET SERIES

# SEIKO GAS STEAMING CABINET



MC-JR24



MC-JR12



MC-JR10



MC-JR8



MC-JR6

## Features

The electronic ignition system is directly supplied by the joint venture, which is stable and reliable with low failure rate

Automatically stop the gas when the flame is accidentally turned off, which is more safe

Self-priming flue design, strong suction, to avoid backfire and deflagration

The bottom plate of the steamer tank and the heat exchange tube are made of high-quality super-thick 304 material, which has strong corrosion resistance and durability

COOLMES special designed burning chamber, which is easy to clean and maintain, has high thermal efficiency, low use cost, energy saving and time saving

The movable integrated burner can be easily extracted, and it is more convenient to maintain and repair

The shell of the burning chamber is punched and stretched, which increases the strength of the plate and makes it beautiful and practical

High temperature resistant silicone door seal with multiple airbags, strong air tightness, greatly increased heat preservation effect



Integral formed castor with high bearing capacity and long service life

The overflow valve adopts the one-time molding process, which is beautiful in appearance and durable, and ensures the water level height of the equipment in normal operation

The integral high-density cyclopentane foaming, environmental protection, energy saving, strong heat insulation, food can be kept warm for more than 10 hours

High-end appearance, it is a wise choice for enterprises and institutions, school canteens and chain restaurants

Model		MC-JR6	MC-JR8	MC-JR10	MC-JR12	MC-JR24	MC-JRS12	MC-JRS24
LPG Consumption	[kg/h]	0.7-1.0	0.7-1.0	0.7-1.0	0.7-1.0	1.4-2.0	0.7-1.0	1.4-2.0
LNG Consumption	[kg/h]	1.0-1.2	1.0-1.2	1.0-1.2	1.0-1.2	2.0-2.4	1.0-1.2	2.0-2.4
The Max Capacity								
Rice	[kg]	18-24	24-32	30-40	36-48	72-96	36-48	72-96
Pasta	[kg]	12-18	16-24	20-30	24-36	48-72	24-36	48-72
Ribs	[kg]	24-30	32-40	40-50	48-60	96-120	48-60	96-120
Dimension								
Width	[mm]	720	720	720	720	1430	520	1050
Depth	[mm]	660	660	660	660	660	840	840
Height	[mm]	1300	1470	1650	1820	1820	1820	1820
Input Steaming Pressure	[Mpa]	0.02	0.02	0.02	0.02	0.02	0.02	0.02
Steaming Time	[min]	25-50	25-50	25-50	25-50	25-50	25-50	25-50
Net Weight	[kg]	60	75	80	90	170	95	175



# B SMART STEAMING CABINET



MCKZ-ZDB12




MCKZ-ZDB24

## Features

- The whole machine is made of thickened stainless steel, durable and beautiful.
- Personalized designed door controller which is isolated from steam, will increase the service life of the controller greatly.
- Intelligent control system can automatically memorize the parameter setting.
- Self-detection for failure, self-protection for water shortage and power failure.
- Stainless steel linkage handle which can operate by single-hand and can adjust the tightness freely.
- The steaming tray bracket are seamless stretched. Tray is firm and easy to take food.
- Integral stretch forming water tank without welding joints. Clean and completely solve the problem of corrosion and water leakage
- The integral high-density cyclopentane foaming, environmental protection, energy saving, strong heat insulation, food can be kept warm for more than 8 hours.
- Equipped with automatic water inlet device, easy to use.
- High temperature resistant multi-air bag embedded silicone door seal, better sealing, more solid installation.
- Can steam pasta, meat, seafood, more widely used.
- High-end appearance, it is a wise choice for enterprises and institutions, school canteens and chain restaurants.



Model		MCKZ-ZDB12	MCKZ-ZDB24
Voltage	[V]	380	380
Frequency	[Hz]	50	50
Power	[kW]	12	12x2
The Max Capacity			
Rice	[kg]	50	100
Pasta	[kg]	30	60
Ribs	[kg]	36	72
Dimension			
Width	[mm]	735	1480
Depth	[mm]	695	695
Height	[mm]	1540	1540
Input Steaming Pressure	[Mpa]	0.02	0.02
Steaming Time	[min]	25-50	25-50
Net Weight	[kg]	70	130

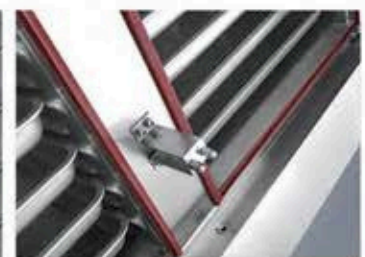



# STEAMED KING

## STEAMING CABINET



### Features

The whole machine is made of 1.0mm thickness stainless steel. Inner material is food grade S.S304, stable structure, safe to use.

The door is made of double-layer high temperature resistant tempered glass, which can withstand high temperature of 700 degrees Celcius with good heat preservation and strong heat insulation.

Microcomputer processor is directly supplied by domestic famous brands, all of which are filled with silica gel and waterproof treatment, which has the characteristics of waterproof, leakage proof, interference prevention and easy replacement.

Intelligent control system, 5 memory functions, easy to adjust time.

Multiple steaming functions: seafood, steamed bread, steamed buns, rice, coarse cereals, chicken, duck, fish, ribs, etc.

Suspended steam tray bracket to avoid falling off the plate due to pressure problems affecting the deformation of the inner box; Easy to disassemble and clean.

Instant heating system: heating fast; shortens steaming time; locks food nutrition.

Superheated steam heating tube: higher heating temperature, faster steaming, shorter steaming time, more than 40% energy saving than conventional steamer.

Automatic water service and multiple protections for water shortage and power failure. The drainage and sewage devices are separated to prevent blockage and for the water tank easy to clean.

The whole machine adopts detachable technology, durable, easy to clean and maintain.

Five models for customers to choose, allow more diversifying choices.

Attractive appearance, your wise choice.



GWZB-8



GWZB-11



GWZB-15

Model		GWZB-8	GWZB-11	GWZB-15
Voltage	[V]	380	380	380
Frequency	[Hz]	50	50	50
Power	[kW]	12+1.3	15+1.5	15+1.5
Steaming Time	[min]	25-40	25-40	25-40
Net Weight	[kg]	130	150	200
Maximum temperature	[°C]	160	160	160
Dimension				
Width	[mm]	880	880	880
Depth	[mm]	860	860	860
Height	[mm]	1235	1535	1935



# SMART SEAFOOD CABINET SERIES



HXZG-2



HXZG-3



HXZG-4



HXZG-5

## Features

The whole machine is made of 1.0mm thickness stainless steel. Inner material is food grade S.S304, stable structure, safe to use.

The door is made of double-layer high temperature resistant tempered glass with good thermal insulation.

Microcomputer processor is directly supplied by domestic famous brands, all of which are filled with silica gel and waterproof treatment, which has the characteristics of waterproof, leakage proof, interference prevention and easy replacement.

Intelligent control system, 5 memory functions, easy to adjust time.

Multiple steaming functions: seafood, steamed bread, steamed buns, rice, coarse cereals, chicken, duck, fish, ribs, etc.

Suspended steam tray bracket to avoid falling off the plate due to pressure problems affecting the deformation of the inner box.

Unique circuit design, rapid steam heating (up to 160°C).

Automatic water service and multiple protections for water shortage and power failure.

The whole machine adopts detachable technology, durable, easy to clean and maintain.

Independent chamber, independent steam supply, steaming food more accurate, faster, more even.

Superheated steam heating tube: higher heating temperature, faster steaming, shorter steaming time, more than 40% energy saving than conventional steamer.

Five models for customers to choose, allow more diversifying choices. Attractive appearance, your wise choice.

Model		HXZG-1	HXZG-2	HXZG-3	HXZG-4	HXZG-5
Voltage	[V]	380	380	380	380	380
Frequency	[Hz]	50	50	50	50	50
Power	[kW]	5.5	4.4+5.5	4.4x2+5.5	4.4x3+5.5	4.4x4+5.5
Steaming Time	[min]	30	30	30	30	30
Net Weight	[kg]	55	90	110	140	200
Maximum temperature	[°C]	160	160	160	160	160
Dimension						
Width	[mm]	820	820	820	820	820
Depth	[mm]	840	840	840	840	840
Height	[mm]	690	970	1270	1545	1785



# Intelligent Single/Double Door ELECTRIC STEAMER WITH TROLLEY



## Features

01: Excellent enclosed space and large steaming capacity improve work efficiency, reduce expenses and costs

02: The application of the fourth generation sealing strip makes the door body and box body more snug, greatly improving the airtightness of the product

03: High steaming efficiency and easy operation

04: Automatic water inlet, pressure relief valve, automatic protection

05: Overall foam insulation, energy-saving and environmentally friendly

06: New multiple airbags, embedded silicone door seal, securely sealed

Rice tray: Add a rice tray to prevent contamination of the water tank and protect the heating pipes

Hinge: The use of new adjustable door hinges greatly reduces the degree of air leakage in the door body

Adjustable door handle: Adopting a new style steam cabinet handle, the operation is convenient and one-step, greatly improving the sealing of the box body

Trolley: The new trolley uses detachable trolley handles to avoid burns. The left baffle device ensures that the tray will not fall during the pushing process

Model		ZFG-ZF24	ZFG-ZF48
Voltage	[v]	380V	380V
Power	[kW]	18	18*2
The Max Capacity	Rice	Pasta	Ribs
Dimension			
Length	[mm]	890	1850
Width	[mm]	1155	1155
Height	[mm]	2000	2000
Input Steaming Pressure		0.02	0.02
Steaming Time	[min]	25-50	25-50

# 24/48 TRAYS

## GAS STEAMER WITH TROLLEY



### Features

01: Excellent enclosed space and large steaming capacity improve work efficiency, reduce expenses and costs

02: The application of the fourth generation sealing strip makes the door body and box body more snug, greatly improving the airtightness of the product

03: High steaming efficiency and easy operation

04: Automatic water inlet, pressure relief valve, automatic protection

05: Overall foam insulation, energy-saving and environmentally friendly

06: New multiple airbags, embedded silicone door seal, securely sealed


Rice tray: Add a rice tray to prevent contamination of the water tank and protect the heating pipes

Hinge: The use of new adjustable door hinges greatly reduces the degree of air leakage in the door body

Adjustable door handle: Adopting a new style steam cabinet handle, the operation is convenient and one-step, greatly improving the sealing of the box body

Trolley: The new trolley uses detachable trolley handles to avoid burns. The left baffle device ensures that the tray will not fall during the pushing process

Model		ZFG-ZFR48	ZFG-ZFR24
Liquefied gas consumption	[kg/h]	2.8-4.0	1.4-2.0
Natural gas consumption	[m3/h]	4.0-4.8	2.0-2.4
Maximum steaming capacity		Pasta	Ribs
Rice	[kg]	144-192	72-96
Pastry	[kg]	96-144	48-72
Spareribs	[kg]	132-240	96-120
Overall dimensions			
length	[mm]	1850	890
width	[mm]	1210	1210
Height	[mm]	2045	2045
Input steam pressure	[mm]	0.02	0.02
Steaming time	[min]	25-50	25-50

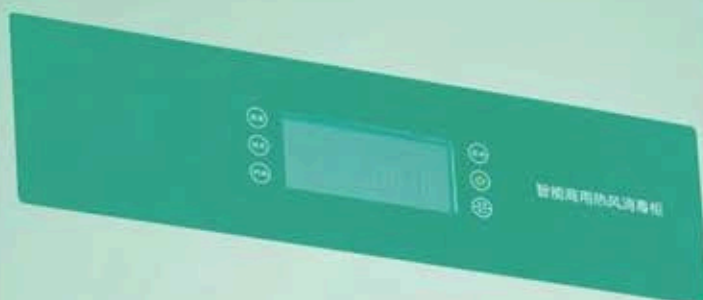

消毒等级:☆☆

COTTURA

DISINFECT



## HEALTHY LIFESTYLE CLEAN AND HYGIENIC

---

Disinfection series is an important member of the catering kitchen, clean and hygienic tableware can well protect the food safety of guests. High-temperature disinfection can be killed by heating to a heat that the germs cannot withstand. Ultraviolet disinfection kills microorganisms through radiation damage and destruction of nucleic acids. Ozone can react with the lipid double bond of the bacterial cell wall to change the cell permeability, thereby killing the bacteria.

# DISINFECTION

SERIES

# SMART VOICE

## DISINFECTION CABINET



RTD360MC-17

RTD720MC-18

### Features

- High quality stainless steel plate
- The integral stretching bottom, clean and sanitary
- Use high-quality and efficient insulation cotton
- Dual temperature sensor, more secure in use
- Deep and shallow basket design, storage more freely
- Intelligent voice controller, powerful function, simple operation
- 360° hot air circulation, sterilizing more thoroughly.
- Two stars disinfection standard



Model		RTD360MC-17	RTD720MC-18
Dimension			
Width	[mm]	650	1310
Depth	[mm]	690	690
Height	[mm]	1980	1980
Capacity	[L]	360	720
Voltage	[V]	220	220
Frequency	[Hz]	50	50
Rated Power	[kW]	2.2	4.4
Temperature Range	[°C]	20-150	20-150
Net Weight	[kg]	95	150
Shelf Bearing	[kg/Layer]	25	25



# WALL-MOUNTED DISINFECTION CABINET



RGP150MC-1



RGP150MC-2

## Features

- High quality stainless steel plate
- Use high-quality and efficient insulation cotton
- Independent water tray design
- Dual temperature sensor, more secure in use
- Can be wall hanging, can be put on the table, save space



Model		RGP150MC-1	RGP150MC-2
Dimension			
Width	[mm]	1230	1230
Depth	[mm]	440	450
Height	[mm]	700	700
Capacity	[L]	150	150
Voltage	[V]	220	220
Frequency	[Hz]	50	50
Rated Power	[kW]	1.3	1.3
Temperature Range	[°C]	20-90	20-90
Net Weight	[kg]	50	50
Shelf Bearing	[kg/Layer]	15	15





Commercial Kitchen Equipment

# COMBINATION DISINFECTION CABINET



# COMBINATION DISINFECTION CABINET



## Features

High quality stainless steel plate

Intelligent control system, independent operation of upper and lower

Ozone + ultraviolet + far infrared + 360° hot air circulation, sterilization more thoroughly

Double toughened glass door body, improve the insulation effect

Full open glass door for lower which enlarge storage space


Multi-function storage, lower for chopping board and cutting tools, upper for towel and tools

Dual temperature sensor, more secure in use

It will power off when open the door.



Model		ZTD560MC-1500
Dimension		
Width	[mm]	1500
Depth	[mm]	800
Height	[mm]	800+1180
Capacity	[L]	230+330
Voltage	[V]	220
Frequency	[Hz]	50
Rated Power	[kW]	0.4+1.6
Temperature Range	[°C]	45 / 80
Net Weight	[kg]	175
Shelf Bearing	[kg/Layer]	15

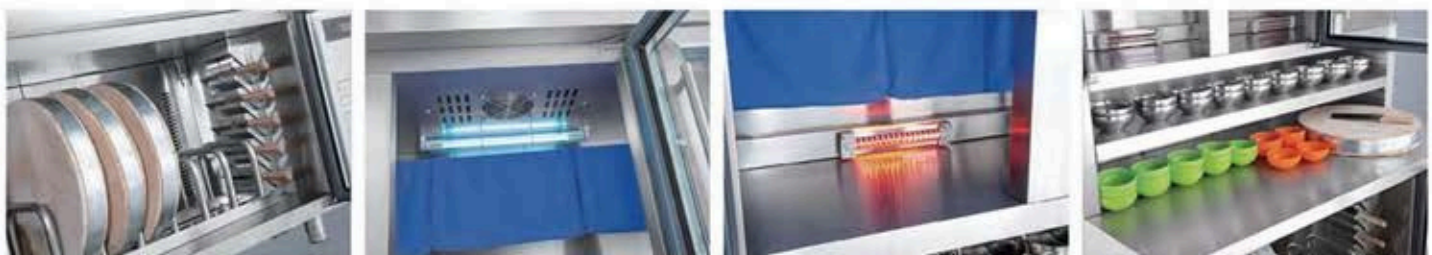

# WARMER SHOWCASE






## Features

- High quality stainless steel plate
- Cyclopentane insulation foaming agent
- The integral stretching bottom, clean and sanitary
- Dual temperature sensor, more secure in use
- Front and back slide door, easy to open and close
- Black crystal panel, beautiful appearance



Model	RTP930MC-1	
Dimension		
Width	[mm]	1400
Depth	[mm]	630
Height	[mm]	2030
Capacity	[L]	930
Voltage	[V]	220
Frequency	[Hz]	50
Rated Power	[kW]	2.4
Temperature Range	[°C]	20~90
Net Weight	[kg]	175
Shelf Bearing	[kg/Layer]	25



# WARMER SHOWCASE

## Features

- High quality stainless steel plate.
- Toughened glass door top open type design, easy to open and save space.
- Back toughened glass.
- Intelligent control system, can be adjusted according to the demand.
- Equipped with warm light lamp.
- With a small adjusting foot, can be put on the table.
- Hot air circulation.



Model	RTD160MC-T1	
Dimension		
Width	[mm]	1200
Depth	[mm]	430
Height	[mm]	680
Capacity	[L]	160
Voltage	[V]	220
Frequency	[Hz]	50
Rated Power	[kW]	1.5
Temperature Range	[°C]	20-80
Net Weight	[kg]	65
Shelf Bearing	[kg/Layer]	25

## Features

- High quality stainless steel plate.
- Toughened pass-through glass door top open type design, easy to open and save space.
- Front and rear glass.
- With a small adjusting foot, can be put on the table.
- Hot air circulation.



Model	RTD330MC-T2	
Dimension		
Width	[mm]	1200
Depth	[mm]	680
Height	[mm]	1200
Capacity	[L]	330
Voltage	[V]	220
Frequency	[Hz]	50
Rated Power	[kW]	1.5
Temperature Range	[°C]	20-80
Net Weight	[kg]	70
Shelf Bearing	[kg/Layer]	25



# YH-DBW


## FOOD WARMER



### Features

1. High quality stainless steel plate
2. Use high-quality and efficient insulation cotton
3. The integral stretching bottom, clean and sanitary
4. Convection air supply and heating, heating up fast, the heat preservation temperature is constant and uniform
5. The temperature is accurate and adjustable to adapt to different foods
6. Electric heating produces moisture, which keeps food moist and tasty during the heat preservation process
7. With automatic protection function, double safety of food and equipment

Model		YH-DBW-1	YH-DBW-2
Dimensions	[mm]	730*950*1860	1400*950*1860
Capacity	[L]	510	1100
Voltage/ Frequency		220V/50HZ	220V/50HZ
Rated Power	[kW]	1.8	2.6
Temperature Range	[℃]	20-85℃	20-85℃
Net Weight	[kg]	120	210
Tray		11	22
Shelf Bearing	[kg/layer]	15	15

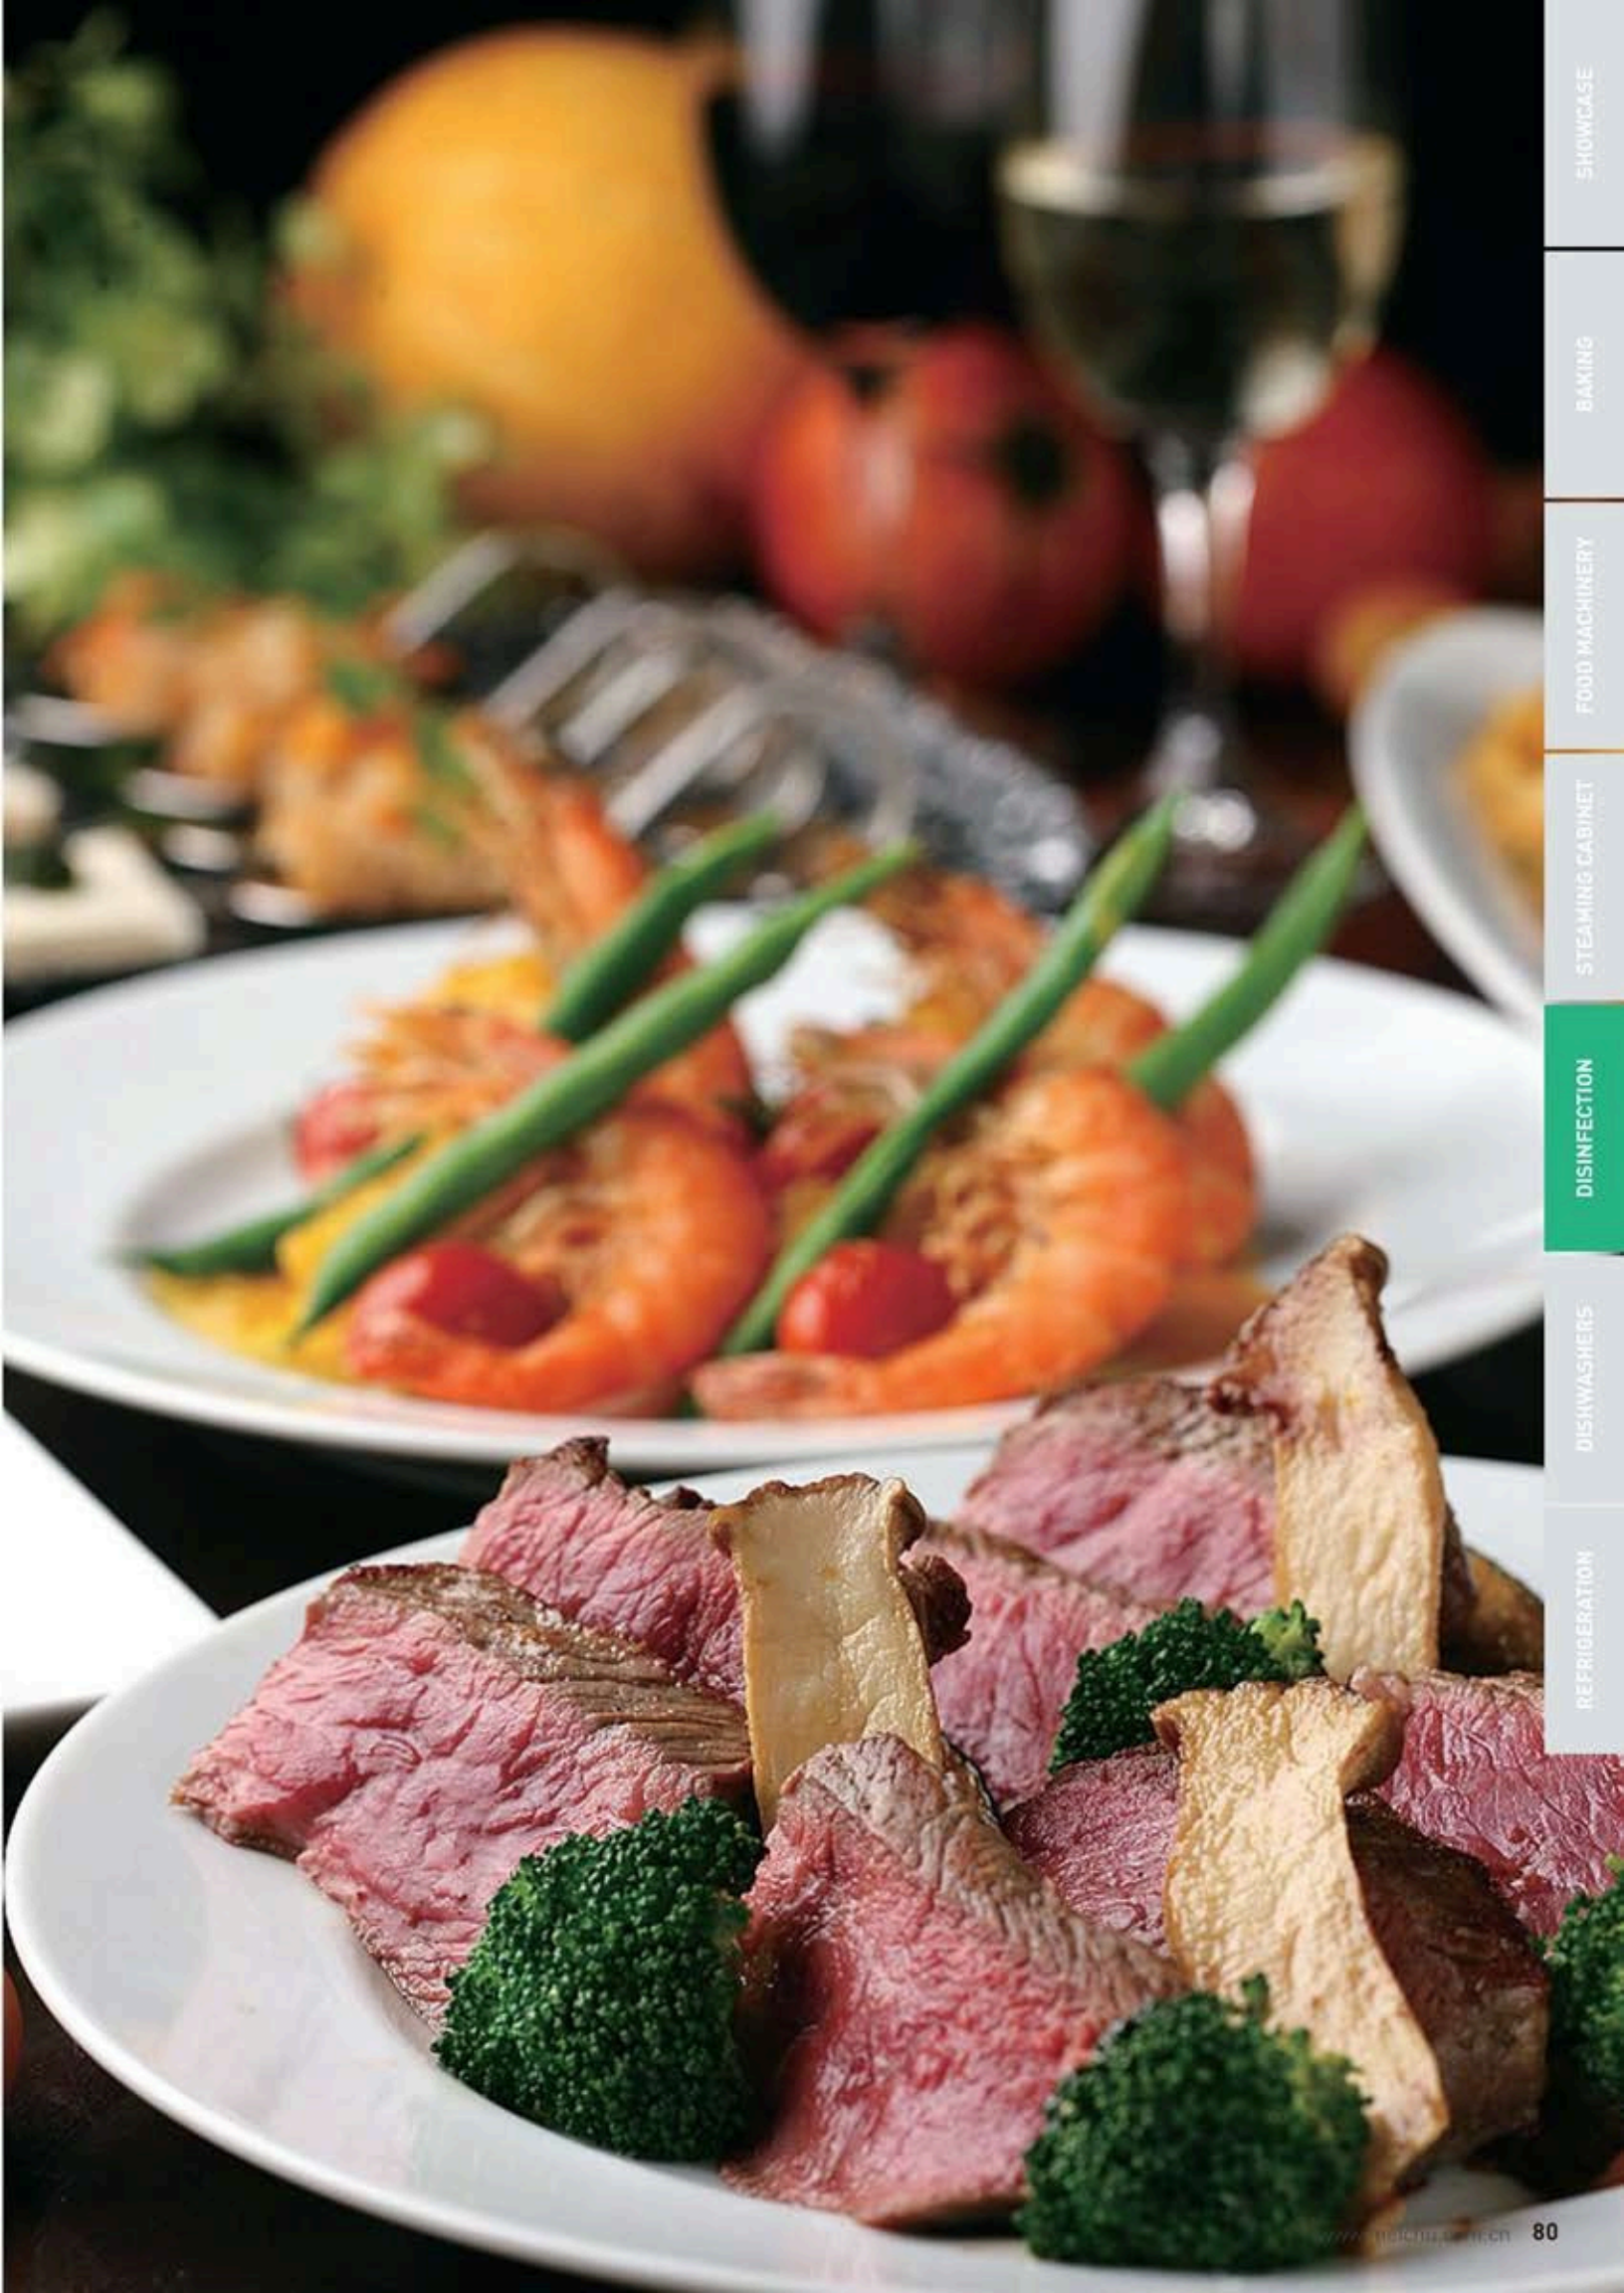

COMMERCIAL KITCHEN  
EQUIPMENT

# DISI COTTURA WAS



## ENJOY CLEANLINESS LIBERATE BORING WORK

---

Dishwashers series greatly reduces the pressure on the kitchen, it is convenient and quick to use, powerful, and saves human resources, while ensuring the cleanliness of the tableware. The powerful drying technology makes the dishes without water marks.

# H- SHERS

SERIES



Commercial Kitchen Equipment

# HOOD TYPE DISHWASHER



# HOOD TYPE DISHWASHER

## Features



Independent intellectual property rights of the cleaning system



Sag type unique cleaning nozzle, make a higher cleaning efficiency



All stainless steel body and Imported electrical accessories



The pointed sloped top of the washroom prevents water droplets from contaminating the dishware that has been cleaned.



Built-in pressure regulating device to ensure the same excellent washing effect under unstable water pressure environment



Automatic water injection, automatic control water level to prevent dry burning.



# A07

## HOOD TYPE DISHWASHER



### Features

For dishwashing room of hotel, restaurant, employee dining

Smartronic and single button control with alerting and fault diagnosis

Colour coded status indication and ergonomic position of the control panel

Enclosed 4 side single-skin hood design - avoiding loss of energy/steam

Anti-clogging wide angle nozzles fan, provide a substantially broader and more precise spray pattern

Automatic door cycle start switch, simple to use

Optimum hygienic safety by one piece deep draw tank with round corner

71°C thermolabel test feature by adjusting temperature setting

Automatic water injection, automatic control to avoid dry burning

Built-in rinse pump, provide equal pressure

Slope-shape wash chamber to prevent the cleaning-wares are polluted by dirt water-drop

Washing Time	60/90/120 S/Rack
Water Consumption	2.7 L/rack
Wash Temperature	71°C
Rinse Temperature	82-90°C
Voltage	380V/50Hz/3N
Total Loading	15.8 kW
Loading Height	440 mm
Rack Size	500x500 mm
Dimension	715x815x1510 (H) mm



# A09

## HOOD TYPE DISHWASHER



### Features

- For dishwashing room of hotel, restaurant, employee dining
- Smartronic and single button control with alerting and fault diagnosis
- Colour coded status indication and ergonomic position of the control panel
- Enclosed 4 side double-skin hood design - avoiding loss of energy/steam
- Anti-clogging wide angle nozzles fan, provide a substantially broader and more precise spray pattern
- Automatic door cycle start switch, simple to use
- Optimum hygienic safety by one piece deep draw tank with round corner
- 71°C thermolabel test feature by adjusting temperature setting
- Automatic water injection, automatic control to avoid dry burning
- Built-in rinse pump, provide equal pressure
- Slope-shape wash chamber to prevent the cleaning-wares are polluted by dirt water-drop

Washing Time	60/90/120 S/Rack
Water Consumption	2.5 L/Rack
Wash Temperature	71°C
Rinse Temperature	82-90°C
Voltage	380V/50Hz/3N
Total Loading	16.4 kW
Loading Height	440 mm
Rack Size	500x500 mm
Dimensions	765x815x1560 [H] mm



# RACK CONVEYOR DISHWASHER



APP CONTROL

HOT AIR CIRCULATION  
CONSTRUCTIONDOUBLE INSULATION  
DOOR

## Features

Use 304 stainless steel large-capacity watertank to reduce the number of water changes

Change the two-speed drive motor design to provide two speed cleaning options.

PLC control, press button, easy to operate and safe.

High-speed circulation convection hot air, fast drying tableware, large circulation ventilation structure, reduce humidity in the washing room, increase comfort.

Double-layer insulation door design, sound insulation and noise reduction, reducing heat loss.

The design of double horns at the inlet and outlet reduces heat dissipation.

Optional Internet of Things intelligent control board control, touch screen operation interface plus mobile APP operation interface, wireless interconnection between the machine and the mobile phone, can achieve remote parameter setting, remote view management, active fault alarm, remote after-sales maintenance, rental remote lock machine.

Basket touch start and automatic stop function to reduce energy consumption.

Recessed cleaning nozzle design, effective anti-blocking, more powerful impulse.

The water level monitoring and anti-dry burning design of the heating tank makes the operation safer and more reliable.

Model	Dishwasher Parameter	Dryer parameter
Basket size	500*500mm	
Product Dimension	1100*770*1630/2015mm	950*770*2160mm
Productivity	130racks/h-200 racks/h	/
Water consumption	1.5L/rack	/
Washing temp. and height	65°C /440mm	440mm
Rinse temp	82-90°C	/
Power supply voltage - Phases	380/50/3N	380/50/3N
Rated Power	45kw	9.75kw
Drying Temp	/	75°C
Market Application	Suitable for 300-500 medium-sized business staff canteen, hotel, social catering and other places	Fit for rack conveyor dishwasher

# M300 FLIGHT TYPE DISHWASHER



APP CONTROL



HOT AIR CIRCULATION  
CONSTRUCTION



DOUBLE INSULATION  
DOOR

## Features

Compact modular design, small footprint, flexible placement.

Conveyor transmission, dual transmission design for exit and entrance, extending the service life of the conveyor.

PLC control, touch screen operation.

Double layer insulation door design, sound insulation and noise reduction, reduce heat loss

Upper and lower washing arm adopt a quick insertion installation structure, easy to disassemble and maintenance.

The concave washing design, effective anti-blocking, stronger impulse.

Entrance monitoring + start and automatic stop functions to reduce energy consumption

The water level monitoring of the heating box is designed to prevent dry burning, more safe and reliable.

The transmission overload protection design ensures machine operation more safe and reliable.

The monitoring of exit tableware, effectively protecting the tableware.

Product Parameter			
Basket size	Single channel main wash + single channel rinse		
Product Dimension	2800*880*1670mm		
Productivity	3500(Dishes/h)	4380(Dishes/h)	6550(Dishes/h)
Water consumption	280(L/h)		
Washing temp. and height	55-65□□440mm		
Rinse temp	80-90℃		
Power supply voltage - Phases	380V/50Hz/3N-		
Rated Power	48KW		
Inlit water temperature	15-40□		
Operating height	860mm		
Market Application	Suitable for 300-800 people, large enterprises, institutions, staff canteens, hotels, social catering and other places		

# RACK CONVEYOR DISHWASHER



APP CONTROL

HOT AIR CIRCULATION  
CONSTRUCTIONDOUBLE INSULATION  
DOOR

## Features

- The machine is equipped with dual rinse modules, making tableware rinsing more thorough.
- Conveyor transmission, dual transmission design for exit and entrance, extending the service life of the conveyor.
- Large capacity L-type 304 stainless steel water tank, reducing the number of water changes.
- PLC control, touch screen operation. Double layer insulation door design, sound insulation and noise reduction, reducing heat loss.
- Upper and lower washing arm adopt a quick insertion installation structure, easy to disassemble and maintenance.
- The concave washing nozzle design, effective anti-blocking and stronger impulse.
- Entrance monitoring +start and automatic stop functions to reduce energy consumption.
- High power circulating hot air drying system, fast drying of tableware.
- The water level monitoring of the heating box is designed to prevent dry burning, more safe and reliable.
- The transmission overload protection design ensures machine operation more safe and reliable.
- The monitoring of exit tableware, effectively protecting the tableware.
- Optional heat recovery module.
- Optional 71 C test paper standard.

Product Parameter	
Product configuration	Customized inlet and outlet length+multi main washing free combination+double spraying+single drying/double drying
Product Dimension	customized length/880(W)*2160(H)mm
Productivity	3500-9750(dish/hour)
Water consumption	280(L/hour)
Washing temp	55-65℃
Washing height/effective washing width	440mm/610mm
Rinse temp	80-90℃
Power supply voltage - Phases	380V/50Hz/3N-
Inlit water temp/operating height	15-40℃/880mm
Market Application	Applicable to 800-3000 people,large and medium-sized enterprises canteens, hotels, restaurant and schools



SHOWCASE

BAKING

FOOD MACHINERY

STEAMING CABINET

DISINFECTION

DISHWASHERS

REFRIGERATION





COTTURA

# RE- FRIGER



## KEEP IT FRESH PROFESSIONAL DESIGN

---

Refrigeration series is an indispensable equipment in the kitchen. It is professionally designed for different kitchens and different foods, so that it can be better preserved and used. Rich specification selection, so that every kitchen can find the right equipment here, if there are special needs, we can also provide non-standard customization.

# RATION

SERIES

# VENTILATED

## Features

No welding and polishing on exterior surface of unit.

43°C ambient temperature.

Door gasket is easy to take off for cleaning and replacement.

High density insulation, 40KG/m<sup>3</sup> CFCs free, up to 75mm thickness of the insulation for cabinet, 60mm for counter.

Standard GN size shelf

Wide round edges and corners for cleaning.

Monoblock Cooling System, easy to take off for repairing and cleaning.

Reversible and self-closing door.

Draining system inside for defrosting water.

High-speed fan motor ensures the cooled air can be blown to everywhere inside.

Digital thermostat with temperature display, precisely set temperature for foods.

Defrosting system by time and temperature automatically.

Heated door frame to avoid water condensation.

Options: Adjustable feet / Castor; AISI 201 stainless steel / AISI 304 stainless steel; 220V/50Hz . 220V/60Hz . 110V/60Hz; Lock & key.digital controller/WIFI controller



**Monoblock Cooling System for Cabinet**

Fast cooling and high efficiency Save more space incabinet,and easy maintenance and cleaning.



**Monoblock Cooling System for Counter**

Fast cooling and high efficiency. Save more space in cabinet,and easy maintenance and cleaning.



**Digital Controller**

Precise control and display the temperature of food based on user demand.




**External LED Lamp for cabinet**

The lamp is provided as standard.



**Flat Inner Top**

More space for storage.More reasonable air circulation inside.




**Strong Magnetic Gasket**

Removable gasket for cleaning and replacement.




**Shelf and Guide**

The height of shelves is adjustable due to the size of stored products.



**Reversible & Self-Closing Door**

Thicken door handle with end cover easy reverse for left hand.



**Round Edge and Corner**

Food residual and water can be easily deaned to reduce bacteria and guarantee the safety of food.



**Adjustable Bullet Feet**

Range 130-200mm.



**Drawer Kits 1/2x200 and 1/3x150**

Flexible and practical exchange of drawer kits and doors. It is optional.



**Castor with Brake**

It is optional.

# STATIC

## Features

No welding and polishing on exterior surface of unit.  
 38°C ambient temperature.  
 Exterior LED lighting for operation.  
 Heated door frame to avoid water condensation.  
 Wide round edges and corners for cleaning.  
 Reversible and selfclosing door.  
 Full copper evaporator, fast cooling.  
 Draining hole in bottom for defrosting water.  
 Adjustable feet, up to 200mm.

High density insulation, 40KG/m<sup>3</sup> CFCs free, up to 75mm thickness of the insulation for cabinet.  
 Door gasket is easy to take off for cleaning and replacement.  
 Digital thermostat with temperature display, precisely set temperature for foods.  
 Options: Adjustable feet / Castor; AISI 201 stainless steel / AISI 304 stainless steel; 220V/50Hz . 220V/60Hz . 110V/60Hz; Lock & key, digital controller/WIFI controller



### Cooling System

Easy maintenance and cleaning.




### Digital Controller

Precise control and display the temperature of food based on user demand.



### External LED Lamp for cabinet

The lamp is provided as standard.

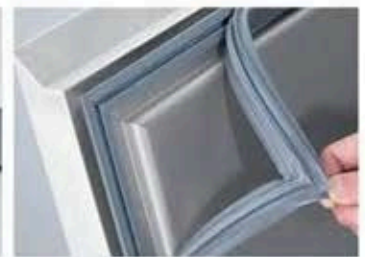


### Strong Magnetic Gasket

Removable gasket for cleaning and replacement.



### Shelf and Guide

The height of shelves are adjustable.



### Door Handle

Practical, Simple and Beautiful.



### Round Edge and Corner

Food residual and water can be easily cleaned to reduce bacteria and guarantee the safety of food



### Adjustable Bullet Feet

Adjustable height 130-200mm.

# VENTILATED GN550 CABINET GN2/1



**GN550TN  
GN550BT**



**GN550TN2  
GN550BT2**




**GN550TNG  
GN550BTG**



**GN550TNG2**

Model No.		GN550TN	GN550BT	GN550TN2	GN550BT2	GN550TNG	GN550BTG	GN550TNG2
Cooling Type		Ventilated	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated
Defrosting Type		Automatic	Automatic	Automatic	Automatic	Automatic	Automatic	Automatic
Capacity	[L]	550	550	550	550	550	550	550
Exterior Dimension								
Width	[mm]	700	700	700	700	700	700	700
Depth	[mm]	820	820	820	820	820	820	820
Height	[mm]	2050	2050	2050	2050	2050	2050	2050
Temperature Range	[°C]	10--2	-18--22	10--2	-18--22	10-0	-15--18	10-0
Ambient Temperature	[°C]	43 T	43 T	43 T	43 T	32N	32N	32N
Refrigerant		R134A/R290	R404A/R290	R134A/R290	R404A/R290	R134A/R290	R404A/R290	R134A/R290
Ext & Int. Materials		AISI304/AISI201						
Door Quantity		1	1	2	2	1	1	2
Voltage / Frequency	[V/Hz]	220V / 50HZ . 220V / 60HZ , 110V / 60HZ						
Controller		digital controller/WIFI controller						

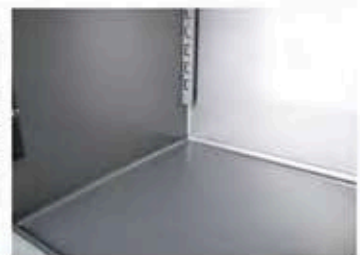

# STATIC

## GN550 CABINET GN2/1



**GN550TNZ  
GN550BTZ**



**GN550TNZ2  
GN550BTZ2**



**GN550TNZG**



**GN550TNZG2**

Model No.		GN550TNZ	GN550BTZ	GN550TNZ2	GN550BTZ2	GN550TNZG	GN550TNZG2
Cooling Type		Static	Static	Static	Static	Static	Static
Capacity	[L]	550	550	550	550	550	550
Exterior Dimension							
Width	[mm]	700	700	700	700	700	700
Depth	[mm]	820	820	820	820	820	820
Height	[mm]	2050	2050	2050	2050	2050	2050
Temperature Range	[°C]	10~-2	-18~-22	10~-2	-18~-22	10~0	10~0
Ambient Temperature	[°C]	38ST	38ST	38ST	38ST	32N	32N
Refrigerant		R134A/R290	R134A/R290	R134A/R290	R134A/R290	R134A/R290	R134A/R290
Ext & Int. Materials		AISI304/AISI201					
Door Quantity		1	1	2	2	1	2
Voltage / Frequency	[V/Hz]	220V / 50HZ . 220V / 60HZ , 110V / 60HZ					
Controller		digital controller/WIFI controller					



# VENTILATED

## GN1.2 CABINET GN2/1



GN1.2TN2  
GN1.2BT2



GN1.2TN4  
GN1.2BT4



GN1.2TNG2  
GN1.2BTG2



GN1.2TNG4

Model No.		GN1.2TN2	GN1.2BT2	GN1.2TN4	GN1.2BT4	GN1.2TNG2	GN1.2BTG2	GN1.2TNG4
Cooling Type		Ventilated	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated
Defrosting Type		Automatic	Automatic	Automatic	Automatic	Automatic	Automatic	Automatic
Capacity	[L]	1220	1220	1220	1220	1220	1220	1220
Exterior Dimension								
Width	[mm]	1400	1400	1400	1400	1400	1400	1400
Depth	[mm]	820	820	820	820	820	820	820
Height	[mm]	2050	2050	2050	2050	2050	2050	2050
Temperature Range	[°C]	10--2	-18--22	10--2	-18--22	10-0	-15--18	10-0
Ambient Temperature	[°C]	43 T	43 T	43 T	43 T	32N	32N	32N
Refrigerant		R134A/R290	R404A/R290	R134A/R290	R404A/R290	R134A/R290	R404A/R290	R134A/R290
Ext & Int. Materials		AISI304/AISI201						
Door Quantity		2	2	4	4	2	2	4
Voltage / Frequency	[V/Hz]	220V / 50HZ . 220V / 60HZ , 110V / 60HZ						
Controller		digital controller/WIFI controller						



# STATIC

## GN1.2 CABINET GN2/1



GN1.2TNZ2  
GN1.2BTZ2



GN1.2TNZ4  
GN1.2BTZ4




GN1.2TNZG2



GN1.2TNZG4

Model No.		GN1.2TNZ2	GN1.2BTZ2	GN1.2TNZ4	GN1.2BTZ4	GN1.2TNZG2	GN1.2TNZG4
Cooling Type		Static	Static	Static	Static	Static	Static
Capacity	[L]	1220	1220	1220	1220	1220	1220
Exterior Dimension							
Width	[mm]	1400	1400	1400	1400	1400	1400
Depth	[mm]	820	820	820	820	820	820
Height	[mm]	2050	2050	2050	2050	2050	2050
Temperature Range	[°C]	10--2	-18--22	10--2	-18--22	10-0	10-0
Ambient Temperature	[°C]	38ST	38ST	38ST	38ST	32N	32N
Refrigerant		R134A/R290	R134A/R290	R134A/R290	R134A/R290	R134A/R290	R134A/R290
Ext & Int. Materials		AISI304/AISI201					
Door Quantity		2	2	4	4	2	4
Voltage / Frequency	[V/Hz]	220V / 50HZ . 220V / 60HZ , 110V / 60HZ					
Controller		digital controller/WIFI controller					






# VENTILATED GN550 SNACK CABINET



GN550TN/S  
GN550BT/S

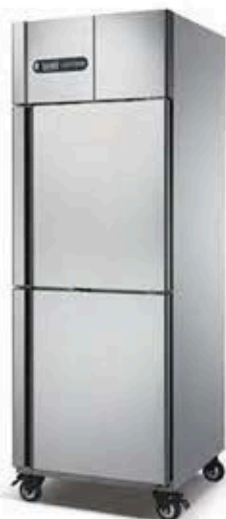

GN550TN2/S  
GN550BT2/S



GN550TNG/S  
GN550BTG/S



GN550TNG2/S

Model No.		GN550TN/S	GN550BT/S	GN550TN2/S	GN550BT2/S	GN550TNG/S	GN550BTG/S	GN550TNG2/S
Cooling Type		Ventilated	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated
Defrosting Type		Automatic	Automatic	Automatic	Automatic	Automatic	Automatic	Automatic
Capacity	[L]	500	500	500	500	500	500	500
Exterior Dimension								
Width	[mm]	740	740	740	740	740	740	740
Depth	[mm]	700	700	700	700	700	700	700
Height	[mm]	2050	2050	2050	2050	2050	2050	2050
Temperature Range	[°C]	10--2	-18--22	10--2	-18--22	10-0	-15--18	10-0
Ambient Temperature	[°C]	43 T	43 T	43 T	43 T	32N	32N	32N
Refrigerant		R134A/R290	R404A/R290	R134A/R290	R404A/R290	R134A/R290	R404A/R290	R134A/R290
Ext & Int. Materials		AISI304/AISI201						
Door Quantity		1	1	2	2	1	1	2
Voltage / Frequency	[V/Hz]	220V / 50HZ . 220V / 60HZ , 110V / 60HZ						
Controller		digital controller/WIFI controller						



# VENTILATED GN1.2 SNACK CABINET



GN1.2TN2/S  
GN1.2BT2/S



GN1.2TN4/S  
GN1.2BT4/S




GN1.2TNG2/S  
GN1.2BTG2/S



GN1.2TNG4/S  
GN1.2BTG4/S

Model No.	GN1.2TN2/S	GN1.2BT2/S	GN1.2TN4/S	GN1.2BT4/S	GN1.2TNG2/S	GN1.2BTG2/S	GN1.2TNG4/S	GN1.2BTG4/S
Cooling Type	Ventilated							
Defrosting Type	Automatic	Automatic	Automatic	Automatic	Automatic	Automatic	Automatic	Automatic
Capacity [L]	1000	1000	1000	1000	1000	1000	1000	1000
Exterior Dimension								
Width [mm]	1400	1400	1400	1400	1400	1400	1400	1400
Depth [mm]	700	700	700	700	700	700	700	700
Height [mm]	2050	2050	2050	2050	2050	2050	2050	2050
Temp. Range [°C]	10~-2	-18~-22	10~-2	-18~-22	10~0	-15~-18	10~0	-15~-18
Ambient Temp. [°C]	43 T	43 T	43 T	43 T	32N	32N	32N	32N
Refrigerant	R134A/R290	R404A/R290	R134A/R290	R404A/R290	R134A/R290	R404A/R290	R134A/R290	R404A/R290
Ext & Int. Materials	AISI304/AISI201							
Door Quantity	2	2	4	4	2	2	4	4
Voltage / Frequency	220V / 50HZ . 220V / 60HZ , 110V / 60HZ							
Controller	digital controller/WIFI controller							



# VENTILATED BAKERY CABINET



DC550  
DF550



DC1.2L2  
DF1.2L2

Model No.		DC550	DF550	DC1.2L2	DF1.2L
Cooling Type		Ventilated	Ventilated	Ventilated	Ventilated
Defrosting Type		Automatic	Automatic	Automatic	Automatic
Capacity	[L]	550	550	1220	1220
Exterior Dimension					
Width	[mm]	700	700	1400	1400
Depth	[mm]	820	820	820	820
Height	[mm]	2050	2050	2050	2050
Temperature Range	[°C]	10--2	-18--22	10-2	-18--22
Ambient Temperature	[°C]	43 T	43 T	43T	43T
Refrigerant		R134A/R290	R404A/R290	R134A/R404A & R290	R134A/R404A & R290
Ext & Int. Materials		AISI304/AISI201			
Door Quantity		1	1	2	2
Voltage / Frequency	[V/Hz]	220V / 50HZ . 220V / 60HZ , 110V / 60HZ			
Controller		digital controller/WIFI controller			



# STATIC FISH CABINET



Model No.	<b>GN550BT-F</b>	
Cooling Type		Static
Defrosting Type		/
Capacity	[L]	550
Exterior Dimension		
Width	[mm]	700
Depth	[mm]	820
Height	[mm]	2050
Temperature Range	[°C]	2~-7
Ambient Temperature	[°C]	43 T
Refrigerant		R134A/R290
Ext & Int. Materials		AISI304/AISI201
Door Quantity		1
Voltage / Frequency	[V/Hz]	220V / 50HZ . 220V / 60HZ , 110V / 60HZ
Controller		digital controller/WIFI controller



# COUNTER GN1/1 PIZZA RANGE



# VENTILATED GN1/1 COUNTER



AWR900



AWF900



AWR1350L2 / AWF1350L2



AWR1350G

Model No.	AWR900	AWF900	AWR900G	AWR1350L2	AWF1350L2	AWR1350G	AWR1500L2	AWF1500L2	AWR1500G
Cooling Type	Ventilated								
Defrosting Type	Automatic								
Capacity [L]	175			260			360		
Exterior Dimension									
Width [mm]	900	900	900	1350	1350	1350	1500	1500	1500
Depth [mm]	700	700	700	700	700	700	800	800	800
Height [mm]	850	850	850	850	850	850	850	850	850
Temp. Range [°C]	10--2	-18--22	10-0	10--2	-18--22	10-0	10--2	-18--22	10-0
Ambient Temp. [°C]	43 T	43 T	32N	43 T	43 T	32N	43 T	43 T	32N
Refrigerant	R134A/R290	R404A/R290	R134A/R290	R134A/R290	R404A/R290	R134A/R290	R134A/R290	R404A/R290	R134A/R290
Ext & Int. Materials	AISI304/AISI201								
Door Quantity	1			2			2		
Voltage / Frequency	220V / 50HZ . 220V / 60HZ , 110V / 60HZ								
Controller	digital controller/WIFI controller								



# VENTILATED GN1/1 COUNTER



AWR1800L3 / AWF1800L3



AWR1800G



AWR2250L4 / AWF2250L4



AWR2250G

Model No.	AWR1800L3	AWF1800L3	AWR1800G	AWR2250L4	AWF2250L4	AWR2250G
Cooling Type	Ventilated					
Defrosting Type	Automatic					
Capacity [L]	400			520		
Exterior Dimension						
Width [mm]	1800	1800	1800	2250	2250	2250
Depth [mm]	700	700	700	700	700	700
Height [mm]	850	850	850	850	850	850
Temp. Range [°C]	10--2	-18--22	10-0	10--2	-18--22	10-0
Ambient Temp. [°C]	43 T	43 T	32N	43 T	43 T	32N
Refrigerant	R134A/R290	R404A/R290	R134A/R290	R134A/R290	R404A/R290	R134A/R290
Ext & Int. Materials	AISI304/AISI201					
Door Quantity	3			4		
Voltage / Frequency	220V / 50HZ . 220V / 60HZ , 110V / 60HZ					
Controller	digital controller/WIFI controller					



# VENTILATED PIZZA RANGE



AWR1500PH



AWR2025PH



D7



AWR2025L3



AWR2025G



AWR2025D7



AWR2025D7PZ



AWR2025PZ

Model No.	D7	AWR1500PH	AWR2025PH	AWR2025L3	AWR2025G	AWR2025D7	AWR2025D7PZ	AWR2025PZ	
Cooling Type	/	Ventilated			Ventilated		Ventilated		
Defrosting Type	/	Automatic			Automatic		Automatic		
Capacity [L]	175	360	550	550	550	550	550	550	
Exterior Dimension									
Width [mm]	525	1500	2025	2025	2025	2025	2025	2025	
Depth [mm]	800	800	800	800	800	800	800	800	
Height [mm]	850	1070	1070	850	850	850	990	990	
Temp. Range [°C]	/	10~0	10~0	10~-2	10~0	10~-2	10~-2	10~-2	
Ambient Temp. [°C]	/	32N	32N	43 T	32N	43 T	43 T	43 T	
Refrigerant	/	R134A/R290			R134A/R290		R134A/R290		
Ext & Int. Materials	/	AISI304/AISI201			AISI304/AISI201		AISI304/AISI201		
Door Quantity	Drawer Qty:7	2	3	3	3	2	2	3	
Voltage / Frequency	/	220V /50HZ,220V/60HZ,110V/60HZ							
Controller		digital controller/WIFI controller							





# TOP PART OPTIONAL FOR COUNTER

Marble top with Stainless Steel edge and beveled backsplash



Marble top with Stainless Steel edge



Marble top with backsplash



Wooden top with Stainless Steel edge and beveled backsplash



Wooden top with Stainless Steel edge



Wooden top



Top with Three walls with bounded edge with backsplash



Top with beveled backsplash



Top with straight backsplash



# SALADETTE



AS900DG



AS900



AS902



AS903



S900



S902



S903

Model No.	AS900DG	AS900	AS902	AS903	S900	S902	S903
Cooling Type	Ventilated				Static		
Defrosting Type	Automatic					/	
Capacity [L]	250	250	280	390	250	280	390
Exterior Dimension							
Width [mm]	900	900	1045	1360	900	1045	1360
Depth [mm]	700	700	700	700	700	700	700
Height [mm]	1300	850	850	850	850	850	850
Temp. Range [°C]	10-0	10-0	10-0	10-0	10-0	10-0	10-0
Ambient Temp. [°C]	32N	32N	32N	32N	32N	32N	32N
Refrigerant	R134A/R290	R134A/R290	R134A/R290	R134A/R290	R134A/R290	R134A/R290	R134A/R290
Ext & Int. Materials	AISI304/AISI201						
Door Quantity	2	2	2	3	2	2	3
Voltage / Frequency	220V / 50HZ . 220V / 60HZ , 110V / 60HZ						
Controller	digital controller/WIFI controller						



# SALADETTE



S901T



S902T



S903T



PS900




PS902



PS903

Model No.	S901T	S902T	S903T	PS900	PS902	PS903
Cooling Type	Static			Static		
Capacity [L]	250	280	390	250	280	390
Exterior Dimension						
Width [mm]	900	1045	1360	900	1045	1360
Depth [mm]	700	700	700	700	700	700
Height [mm]	850	850	850	1075	1075	1075
Temp. Range [°C]	10-0	10-0	10-0	10-0	10-0	10-0
Ambient Temp. [°C]	32N	32N	32N	32N	32N	32N
Refrigerant	R134A/R290	R134A/R290	R134A/R290	R134A/R290	R134A/R290	R134A/R290
Ext & Int. Materials	AISI304/AISI201					
Door Quantity	2	2	3	2	2	3
Voltage / Frequency	220V / 50HZ . 220V / 60HZ , 110V / 60HZ					
Controller	digital controller/WIFI controller					



# SALADETTE



S901D2



S901D4



S903D6



S903PZ





PS92



PS93

Model No.	S901D2	S901D4	S903D6	S903PZ	PS92	PS93
Cooling Type	Static				Static	
Capacity [L]	250	250	390	390	280	390
Exterior Dimension						
Width [mm]	900	900	1360	1360	1045	1360
Depth [mm]	700	700	700	700	700	700
Height [mm]	850	850	850	1020	950	950
Temp. Range [°C]	10-0	10-0	10-0	10-0	10-0	10-0
Ambient Temp. [°C]	32N	32N	32N	32N	32N	32N
Refrigerant	R134A/R290	R134A/R290	R134A/R290	R134A/R290	R134A/R290	R134A/R290
Ext & Int. Materials	AISI304/AISI201					
Door Quantity	1 Door Quantity + 2 Drawers	4 Drawers	6 Drawers	3 Door Quantities	2	3
Voltage / Frequency	220V / 50HZ . 220V / 60HZ , 110V / 60HZ					
Controller	digital controller/WIFI controller					



# VRX

## COOLING TOP

### Features

32°C ambient temperature, works well in hot place  
 Interior of AISI 304 stainless steel  
 Exterior of AISI 304 stainless steel, back of galvanized metal plate  
 High density insulation, CFCs free, 60mm of thickness, 40Kg/M<sup>3</sup>  
 Hot gas to avoid water condensation  
 Suitable for GN 1/3 or GN 1/4 containers  
 Length from 1200 to 2400 mm  
 Digital thermostat with temperature display, precisely set temperature for foods  
 Options: AISI 201 stainless steel, 220V/60Hz



### Containers' Combination Guide

#### GN 1/4 SERIES

VRX1200	
VRX1350 VRX1400	
VRX1500 VRX1600	
VRX1800	
VRX2000	
VRX2250	
VRX2400	

#### GN 1/3 SERIES

VRX1200	
VRX1350 VRX1400	
VRX1500	
VRX1600	
VRX1800	
VRX2000	
VRX2250	
VRX2400	



## VRX335 SERIES

Model No.	VRX1200-335	VRX1350-335	VRX1400-335	VRX1420-335	VRX1500-335	VRX1600-335
Exterior Dimension						
Width [mm]	1200	1350	1400	1420	1500	1600
Depth [mm]	335	335	335	335	335	335
Height [mm]	430	430	430	430	430	430
GN 1/4 Container Qty.	5	6	6	6	7	7
Temp. Range [°C]	10-0	10-0	10-0	10-0	10-0	10-0
Ambient Temp. [°C]	32N	32N	32N	32N	32N	32N
Refrigerant	R134A/R290					
Cooling Type	Static					
Ext & Int. Materials	AISI304/AISI201					
Voltage / Frequency	220V / 50HZ . 220V / 60HZ , 110V / 60HZ					
Controller	digital controller/WIFI controller					

Model No.	VRX1800-335	VRX1885-335	VRX2000-335	VRX2250-335	VRX2400-335
Exterior Dimension					
Width [mm]	1800	1885	2000	2250	2400
Depth [mm]	335	335	335	335	335
Height [mm]	430	430	430	430	430
GN 1/4 Container Qty.	9	9	10	11	12
Temp. Range [°C]	10-0	10-0	10-0	10-0	10-0
Ambient Temp. [°C]	32N	32N	32N	32N	32N
Refrigerant	R134A/R290				
Cooling Type	Static				
Ext & Int. Materials	AISI304/AISI201				
Voltage / Frequency	220V / 50HZ . 220V / 60HZ , 110V / 60HZ				
Controller	digital controller/WIFI controller				

## VRX395 SERIES

Model No.	VRX1200-395	VRX1350-395	VRX1400-395	VRX-1500-395	VRX1600-395	VRX1800-395
Exterior Dimension						
Width [mm]	1200	1350	1400	1500	1600	1800
Depth [mm]	395	395	395	395	395	395
Height [mm]	430	430	430	430	430	430
GN1/3 Container Qty.	4	5	5	6	7	8
Temp. Range [°C]	10-0	10-0	10-0	10-0	10-0	10-0
Ambient Temp. [°C]	32N	32N	32N	32N	32N	32N
Refrigerant	R134A/R290					
Cooling Type	Static					
Ext & Int. Materials	AISI304/AISI201					
Voltage / Frequency	220V / 50HZ . 220V / 60HZ , 110V / 60HZ					
Controller	digital controller/WIFI controller					

Model No.	VRX2000-395	VRX2250-395	VRX2400-395
Exterior Dimension			
Width [mm]	2000	2250	2400
Depth [mm]	395	395	395
Height [mm]	430	430	430
GN1/3 Container Qty.	9	9	10 / 11
Temp. Range [°C]	10-0	10-0	10-0
Ambient Temp. [°C]	32N	32N	32N
Refrigerant	R134A/R290		
Cooling Type	Static		
Ext & Int. Materials	AISI304/AISI201		
Voltage / Frequency	220V / 50HZ . 220V / 60HZ , 110V / 60HZ		
Controller	digital controller/WIFI controller		

REFRIGERATION

SHOWCASE

BAKING

F.D. MACHINERY

STEAMING CABINET

DISINFECTION

DISHWASHERS

REFRIGERATION

# BLAST CHILLER & FREEZER

## Features

No welding and polishing on exterior surface of unit.

32°C ambient temperature.

Interior of AISI 304 stainless steel.

High-speed fan motor ensures the cooled air can be blown to everywhere inside.

Digital thermostat with temperature display, precisely set temperature for foods.

Defrosting system by Time and Temperature automatically.

Heated door frame to avoid water condensation.

Draining system inside for defrosting water.

Door gasket is easy to take off for cleaning and replacement.

Wide round edges and corners for cleaning.

Shelf size: 530x325 Or 600x400 mm.

Options: Castor, AISI 201 stainless steel, 220V/60Hz.



### Cooling System

High power Cooling System



### Smart Controller

The pre-set cycles programs, ensure your products to be quickly chilled or frozen.



### Strong Air Circulation

Big fan motor ensures quickly chilling and freezing to keep quality of foods inside




### Round Edge and Corner

Food residual and water can be easily cleaned to reduce bacteria and guarantee the safety of food



### Food Core Probe

Precisely detect the core temperature of the products



### Strong Magnetic Gasket

Removable gasket for cleaning and replacement



### Self-closing Door

Thicken door handle with end cover. Self close to reduce heat loss



### Container Rack

Suitable container size: 530x325mm and 600x400mm

# BLAST CHILLER & FREEZER

## Features

Defrosting system by time and temperature auto matically.

Heated door frame to avoid water condensation. Options:

Adjustable feet / Castor: AISI 201 stainless steel / AISI 304 stain-less steel : 220V / 50Hz .220V/ 60Hz .

110V/60Hz ; Lock & key.



From +90°C to +3°C: 90mins  
From +90°C to -18°C: 240mins



BCF10



BCF20



BCF40

Model		BCF-10	BCF-20	BCF-40	BCF-60	PF-100
Voltage/Frequency		220V/50Hz,220V/60Hz,110V/60HZ		220V/50Hz,220V/60Hz,380V/50Hz		380V/50Hz
Power	[W]	600	860	2400	2800	2800
Capacity	[L]	60	90	290	440	1000
Refrigeration method		Air cooling	Air cooling	Air cooling	Air cooling	Air cooling
Temperature range	[°C]	0--40	0--40	0--40	+3--40	+3--40
Refrigerant external		R404A	R404A	R404A	R404A	R404A
Dimensions						
Length	[mm]	710	800	800	880	1310
Width	[mm]	700	840	840	985	1420
Height	[mm]	558	1010	1785	1953	2155
Ext & Int. Materials		AIS1304/AIS1201				





# VENTILATED

## 500L SERIES EN CABINET



ARX  
AFX



AR2  
AF2



AS0.5G  
AF0.5G



AS0.5G2



ARF2

Model No.	ARX	AFX	AR2	AF2	AS0.5G	AF0.5G	AS0.5G2	ARF2	
Cooling Type	Ventilated								
Defrosting Type	Automatic								
Capacity [L]	500								
Exterior Dimension									
Width [mm]	680	680	680	680	680	680	680	680	
Depth [mm]	760	760	760	760	760	760	760	760	
Height [mm]	1965	1965	1965	1965	1965	1965	1965	1965	
Temperature Range [°C]	10~-2	0~-18	10~-2	0~-18	10~0	0~-15	10~0	10~-2 0~-18	
Ambient Temperature [°C]	43 T	43 T	43 T	43 T	32N	32N	32N	43 T	
Refrigerant	R134A/R290	R404A/R290	R134A/R290	R404A/R290	R134A/R290	R404A/R290	R134A/R290	R134A/R404A&R290	
Ext & Int. Materials	AISI304/AISI201								
Door Quantity	1	1	2	2	1	1	2	2	
Voltage / Frequency [V/Hz]	220V / 50HZ . 220V / 60HZ , 110V / 60HZ								
Controller	digital controller/WIFI controller								



# STATIC

## 500L SERIES EN CABINET



RX  
FX



R2  
F2



S0.5G



S0.5G2



RF2

Model No.		RX	FX	R2	F2	S0.5G	S0.5G2	RF2
Cooling Type		Static						
Capacity	[L]	500						
Exterior Dimension								
Width	[mm]	680	680	680	680	680	680	680
Depth	[mm]	760	760	760	760	760	760	760
Height	[mm]	1965	1965	1965	1965	1965	1965	1965
Temperature Range	[°C]	10--2	0--18	10--2	0--18	10-0	10-0	10--2   0--18
Ambient Temperature	[°C]	38ST	38ST	38ST	38ST	32N	32N	38ST
Refrigerant		R134A	R134A	R134A	R134A	R134A	R134A	R134A
Ext & Int. Materials		AISI304/AISI201						
Door Quantity		1	1	2	2	1	2	1
Voltage / Frequency	[V/Hz]	220V / 50HZ . 220V / 60HZ , 110V / 60HZ						
Controller		digital controller/WIFI controller						



# VENTILATED

## 1000L SERIES EN CABINET



ARX2 / AFX2



AR4 / AF4



AS1.0G2 / AF1.0G2



AS1.0G4

Model No.		ARX2	AFX2	AR4	AF4	AS1.0G2	AF1.0G2	AS1.0G4
Cooling Type		Ventilated						
Defrosting Type		Automatic						
Capacity	[L]	1000						
Exterior Dimension								
Width	[mm]	1220	1220	1220	1220	1220	1220	1220
Depth	[mm]	760	760	760	760	760	760	760
Height	[mm]	1965	1965	1965	1965	1965	1965	1965
Temperature Range	[°C]	10--2	0--18	10--2	0--18	10-0	0--15	+10-0
Ambient Temperature	[°C]	43 T	43 T	43 T	43 T	32N	32N	32N
Refrigerant		R134A/R290	R404A/R290	R134A/R290	R404A/R290	R134A/R290	R404A/R290	R134A/R290
Ext & Int. Materials		AISI304/AISI201						
Door Quantity		2	2	4	4	2	2	4
Voltage / Frequency	[V/Hz]	220V / 50HZ . 220V / 60HZ , 110V / 60HZ						
Controller		digital controller/WIFI controller						

# VENTILATED EMBEDDED COOLING SYSTEM



AWR12IS/AFW12IS



AR4IM/AF4IM



AS1.0G4IM



AWR12GIS

Model	ARXIM	AR2IM	AFXIM	AF2IM	ARX2IM	AR4IM	AFX2IM	AF4IM	ARX3IM	AR5IM	AFX3IM	AF6IM
Cooling Type	Ventilated				Ventilated				Ventilated			
Defrosting Type	Automatic				Automatic				Automatic			
Capacity [L]	455				982				1530			
Exterior Dimension												
Width [mm]	680	680	680	680	1220	1220	1220	1220	1837	1837	1837	1837
Depth [mm]	770	770	770	770	770	770	770	770	770	770	770	770
Height [mm]	1965	1965	1965	1965	1965	1965	1965	1965	1965	1965	1965	1965
Temperature Range [°C]	10--2	10--2	0--18	0--18	10--2	10--2	0--18	0--18	10--2	10--2	0--18	0--18
Ambient Temperature [°C]	43 T	43 T	43 T	43 T	43 T	43 T	43 T	43 T	43 T	43 T	43 T	43 T
Refrigerant	R134A/R290		R404A/R290		R134A/R290		R404A/R290		R134A/R290		R404A/R290	
Ext & Int. Materials	AISI304/AISI201				AISI304/AISI201				AISI304/AISI201			
Door Quantity	1	2	1	2	2	4	2	4	3	6	3	6
Voltage/Frequency V/Hz	220V/50Hz, 220V/60Hz, 110V/60Hz				220V/50Hz, 220V/60Hz, 110V/60Hz				220V/50Hz, 220V/60Hz, 110V/60Hz			

Model	AWR9IS	AWF9IS	AWR12IS	AWF12IS	AWR15IS	AWF15IS	AWR18IS	AWF18IS
Cooling Type	Ventilated		Ventilated		Ventilated		Ventilated	
Defrosting Type	Automatic		Automatic		Automatic		Automatic	
Capacity [L]	142		255		368		482	
Exterior Dimension								
Width [mm]	900	900	1200	1200	1500	1500	1800	1800
Depth [mm]	750	750	750	750	750	750	750	750
Height [mm]	800	800	800	800	800	800	800	800
Temperature Range [°C]	10--2	0--18	10--2	0--18	10--2	0--18	10--2	0--18
Ambient Temperature [°C]	43 T	43 T	43 T	43 T	43 T	43 T	43 T	43 T
Refrigerant	R134A/R290	R404A/R290	R134A/R290	R404A/R290	R134A/R290	R404A/R290	R134A/R290	R404A/R290
Ext & Int. Materials	AISI304/AISI201		AISI304/AISI201		AISI304/AISI201		AISI304/AISI201	
Door Quantity	1		2		2		3	
Voltage/Frequency V/Hz	220V/50Hz, 220V/60Hz, 110V/60Hz		220V/50Hz, 220V/60Hz, 110V/60Hz		220V/50Hz, 220V/60Hz, 110V/60Hz		220V/50Hz, 220V/60Hz, 110V/60Hz	

# STATIC

## 1000L SERIES EN CABINET



RX2 / FX2



R4 / F4



S1.0G2



S1.0G4



RF4

Model No.		RX2	FX2	R4	F4	S1.0G2	S1.0G4	RF4
Cooling Type		Static						
Capacity	[L]	1000						
Exterior Dimension								
Width	[mm]	1220	1220	1220	1220	1220	1220	1220
Depth	[mm]	760	760	760	760	760	760	760
Height	[mm]	1965	1965	1965	1965	1965	1965	1965
Temperature Range	[°C]	10--2	0--18	10--2	0--18	10-0	10-0	10--2 0--18
Ambient Temperature	[°C]	38ST	38ST	38ST	38ST	32N	32N	38ST
Refrigerant		R134A	R134A	R134A	R134A	R134A	R134A	R134A
Ext & Int. Materials		AISI304/AISI201						
Door Quantity		2	2	4	4	2	4	4
Voltage / Frequency	[V/Hz]	220V / 50HZ . 220V / 60HZ , 110V / 60HZ						
Controller		digital controller/WIFI controller						



# VENTILATED

## 1530L SERIES EN CABINET



ARX3 / AFX3



AR6 / AF6



AS1.6G3 / AF1.6G3



AS1.6G6

Model No.		ARX3	AFX3	AR6	AF6	AS1.6G3	AF1.6G3	AS1.6G6
Cooling Type		Ventilated						
Defrosting Type		Automatic						
Capacity	[L]	1530						
Exterior Dimension								
Width	[mm]	1837	1837	1837	1837	1837	1837	1837
Depth	[mm]	760	760	760	760	760	760	760
Height	[mm]	1965	1965	1965	1965	1965	1965	1965
Temperature Range	[°C]	10~-2	0~-18	10~-2	0~-18	10~0	0~-15	+10~0
Ambient Temperature	[°C]	43 T	43 T	43 T	43 T	32N	32N	32N
Refrigerant		R134A/R290	R404A/R290	R134A/R290	R404A/R290	R134A/R290	R404A/290	R134A/R290
Ext & Int. Materials		AISI304/AISI201						
Door Quantity		3	3	6	6	3	3	6
Voltage / Frequency	[V/Hz]	220V / 50HZ . 220V / 60HZ , 110V / 60HZ						
Controller		digital controller/WIFI controller						

# STATIC

## 1530L SERIES EN CABINET



RX3 / FX3



R6 / F6



S1.6G3



S1.6G6



RF6

Model No.		RX3	FX3	R6	F6	S1.6G3	S1.6G6	RF6
Cooling Type		Static						
Capacity	[L]	1530						
Exterior Dimension								
Width	[mm]	1837	1837	1837	1837	1837	1837	1837
Depth	[mm]	760	760	760	760	760	760	760
Height	[mm]	1965	1965	1965	1965	1965	1965	1965
Temperature Range	[°C]	10~-2	0~-18	10~-2	0~-18	10~0	10~0	10~-2 0~-18
Ambient Temperature	[°C]	38ST	38ST	38ST	38ST	32N	32N	38ST
Refrigerant		R134A	R134A	R134A	R134A	R134A	R134A	R134A
Ext & Int. Materials		AISI304/AISI201						
Door Quantity		3	3	6	6	3	6	6
Voltage / Frequency	[V/Hz]	220V / 50HZ . 220V / 60HZ , 110V / 60HZ						
Controller		digital controller/WIFI controller						




# EN

## CABINET



# STATIC EN CABINET

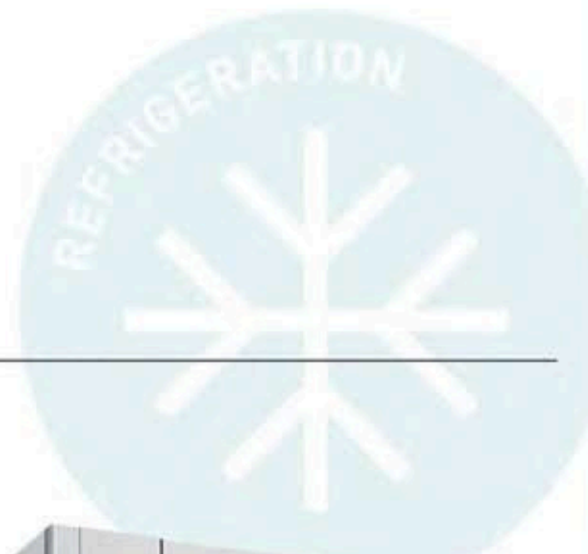

R2H




R4H



R6H

Model No.		R2H	R4H	R6H
Cooling Type		Static	Static	Static
Capacity	[L]	500	1000	1530
Exterior Dimension				
Width	[mm]	680	1220	1837
Depth	[mm]	760	760	760
Height	[mm]	1965	1965	1965
Temperature Range	[°C]	10-0	10-0	10-0
Ambient Temperature	[°C]	32N	32N	32N
Refrigerant		R134A	R134A	R134A
Ext & Int. Materials		AISI304/AISI201		
Door Quantity		1	2	3
Voltage / Frequency	[V/Hz]	220V / 50HZ . 220V / 60HZ , 110V / 60HZ		
Controller		digital controller/WIFI controller		



# VENTILATED EN COUNTER



AWR12 / AWF12



AWR12G




AWR15 / AWF15



AWR15G

Model No.		AWR12	AWF12	AWR12G	AWR15	AWF15	AWR15G
Cooling Type		Ventilated					
Defrosting Type		Automatic					
Capacity	[L]	260			380		
Exterior Dimension							
Width	[mm]	1200	1200	1200	1500	1500	1500
Depth	[mm]	750	750	750	750	750	750
Height	[mm]	800	800	800	800	800	800
Temp. Range	[°C]	10~-2	0~-18	10~0	10~-2	0~-18	10~0
Ambient Temp.	[°C]	43 T	43 T	32N	43 T	43 T	32N
Refrigerant		R134A/R290	R404A/R290	R134A/R290	R134A/R290	R404A/R290	R134A/R290
Ext & Int. Materials		AISI304/AISI201			AISI304/AISI201		
Door Quantity		2			2		
Voltage / Frequency		220V / 50HZ . 220V / 60HZ , 110V / 60HZ					
Controller		digital controller/WIFI controller					



# STATIC EN COUNTER



WR15/WF15



WR15G

Model No.		WR15	WF15	WR15G
Cooling Type			Static	
Capacity	[L]		380	
Exterior Dimension				
Width	[mm]	1500	1500	1500
Depth	[mm]	750	750	750
Height	[mm]	800	800	800
Temp. Range	[°C]	10~-2	0~-18	10~0
Ambient Temp.	[°C]	38ST	38ST	32N
Refrigerant		R134A	R134A	R134A
Ext & Int. Materials		AISI304/AISI201		
Door Quantity		2		
Voltage / Frequency		220V / 50HZ . 220V / 60HZ , 110V / 60HZ		
Controller		digital controller/WIFI controller		



# VENTILATED EN COUNTER



AWR18 / AWF18



AWR18G



AWR18 / AWF18



AWR18G

Model No.		AWR18	AWF18	AWR18G	AWR18	AWF18	AWR18G
Cooling Type		Ventilated					
Defrosting Type		Automatic					
Capacity	[L]	430			430		
Exterior Dimension							
Width	[mm]	1800	1800	1800	1800	1800	1800
Depth	[mm]	750	750	750	750	750	750
Height	[mm]	800	800	800	800	800	800
Temp. Range	[°C]	10~-2	0~-18	10~0	10~-2	0~-18	10~0
Ambient Temp.	[°C]	43 T	43 T	32N	43 T	43 T	32N
Refrigerant		R134A/R290	R404A/R290	R134A/R290	R134A/R290	R404A/R290	R134A/R290
Ext & Int. Materials		AISI304/AISI201			AISI304/AISI201		
Door Quantity		2			3		
Voltage / Frequency		220V / 50HZ . 220V / 60HZ , 110V / 60HZ					
Controller		digital controller/WIFI controller					



# STATIC EN COUNTER



WR18 / WF18



WR18G




WR18 / WF18



WR18G

Model No.		WR18	WF18	WR18G	WR18	WF18	WR18G
Cooling Type		Static					
Capacity	[L]	470			470		
Exterior Dimension							
Width	[mm]	1800	1800	1800	1800	1800	1800
Depth	[mm]	750	750	750	750	750	750
Height	[mm]	800	800	800	800	800	800
Temp. Range	[°C]	10~-2	0~-18	10~0	10~-2	0~-18	10~0
Ambient Temp.	[°C]	38ST	38ST	32N	38ST	38ST	32N
Refrigerant		R134A	R134A	R134A	R134A	R134A	R134A
Ext & Int. Materials		AISI304/AISI304/AISI201			AISI304/AISI304/AISI201		
Door Quantity		2			3		
Voltage / Frequency		220V / 50HZ . 220V / 60HZ , 110V / 60HZ					
Controller		digital controller/WIFI controller					



# TOP PART

OPTIONAL FOR COUNTER



Marble top with Stainless Steel edge and beveled backsplash



Marble top with Stainless Steel edge



Marble top with backsplash



Wooden top with Stainless Steel edge and beveled backsplash



Wooden top with Stainless Steel edge



Wooden top



Top with Three walls with bounded edge with backsplash



Top with beveled backsplash



Top with straight backsplash





# US. STYLE

## REACH-IN REFRIGERATOR / FREEZER

### Features

Precisely control and display the temperature of food based on user's demand.

60mm thick of the insulation to preserve heat and save energy.

The space of shelf is adjustable due to the size of stored products

The door can close automatically when opened, to save energy

Round corner can be cleaned easily to reduce the bacteria. And It will be safer without sharp corner and edge.

We use Top-level EMBRACO Compressor to guarantee the refrigerant transport.

The environment-friendly R290 Refrigerant is widely used to reduce pollution.

Draining system is widely used inside to assist defrosting.



AB-23R / AB-23F



AB-49R / AB-49F

Model No.		AB-23R	AB-23F	AB-49R	AB-49F
Cooling Type		Ventilated	Ventilated	Ventilated	Ventilated
Defrosting Type		Automatic	Automatic	Automatic	Automatic
Capacity	[L]	521	521	1130	1130
Capacity	[cu.ft.]	18.4	18.4	39.9	39.9
Exterior Dimension					
Width	[mm]	686	686	1372	1372
Depth	[mm]	758	758	758	758
Height	[mm]	2126	2126	2126	2126
Temperature Range		28-50°F / -2-10°C	-4-0°F / -20--18°C	28-50°F / -2-10°C	-4-0°F / -20--18°C
Ambient Temperature		100°F / 38°C	100°F / 38°C	100°F / 38°C	100°F / 38°C
Refrigerant		R290/R134A	R290/R404A	R290/R134A	R290/R404A
Ext & Int. Materials		AISI304/AISI201			
Door Quantity		1	1	2	2
Voltage / Frequency	[V/Hz]	115V/60HZ . 220V/50HZ . 220V/60HZ			

# US. STYLE PIZZA PRE TABLE



APPS-44



APPS-67



APPS-93

Model No.		APPS-44	APPS-67	APPS-93
Cooling Type		Ventilated	Ventilated	Ventilated
Defrosting Type		Automatic	Automatic	Automatic
Capacity	[L]	300	587	628
Capacity	[cu.ft.]	10.59	20.73	22.18
Exterior Dimension				
Width	[mm]	1130	1710	2370
Depth	[mm]	880	880	880
Height	[mm]	1033	1033	1033
Temperature Range		37-50°F / 3-10°C		
Ambient Temperature		85°F / 30°C		
Refrigerant		R290/R134A	R290/R134A	R290/R134A
Ext & Int. Materials		AISI304/AISI201		
Door Quantity		1	2	3
Voltage / Frequency	[V/Hz]	115V/60HZ . 220V/50HZ . 220V/60HZ		

# US. STYLE SLAD PRE TABLE



ASUB-28-P12




ASUB-48-P18



ASUB-72-P27

Model No.		ASUB-28-P12	ASUB-36-P15	ASUB-48-P18	ASUB-60-P24	ASUB-72-P27
Cooling Type		Ventilated	Ventilated	Ventilated	Ventilated	Ventilated
Defrosting Type		Automatic	Automatic	Automatic	Automatic	Automatic
Capacity	[L]	202	272	372	471	571
Capacity	[cu.ft.]	7.1	9.6	13.1	16.63	20.16
Exterior Dimension						
Width		700mm/28in	925mm/36in	1230mm/48in	1535mm/60in	1880mm/72in
Depth		875mm/30in	875mm/30in	875mm/30in	875mm/30in	875mm/30in
Height		1098mm/42in	1098mm/42in	1098mm/42in	1098mm/42in	1098mm/42in
Temperature Range		37-50°F / 3-10°C				
Ambient Temperature		85°F / 30°C				
Refrigerant		R290/R134A	R290/R134A	R290/R134A	R290/R134A	R290/R134A
Ext & Int. Materials		AISI304/AISI201				
Door Quantity		1	2	2	2	3
Voltage / Frequency	[V/Hz]	115V/60HZ . 220V/50HZ . 220V/60HZ				

# US. STYLE CHEF BASE

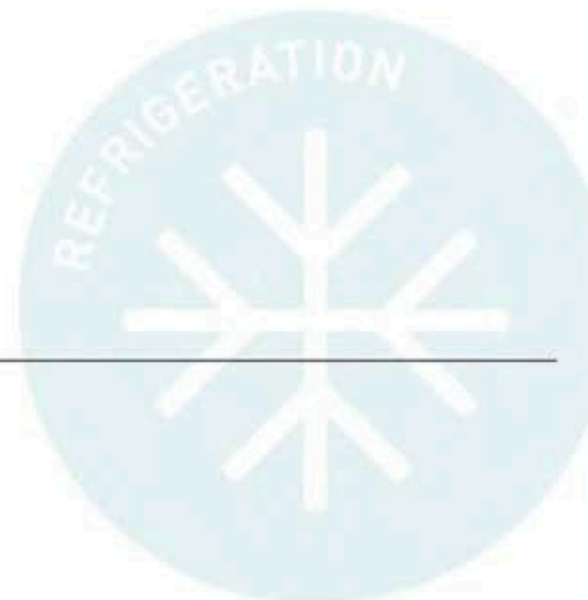

ARCB-36



ARCB-72

Model No.		ARCB-36	ARCB-72
Cooling Type		Ventilated	Ventilated
Defrosting Type		Automatic	Automatic
Capacity	[L]	35.28	104.16
Capacity	[cu.ft.]	1.25	3.68
Exterior Dimension			
Width		925mm/36in	1838mm/72in
Depth		815mm/32in	815mm/32in
Height		649mm/25in	649mm/25in
Temperature Range		37-50°F / 3-10°C	
Ambient Temperature		100°F / 38°C	
Refrigerant		R290/R134A	R290/R134A
Ext & Int. Materials		AISI304/AISI201	
Drawer Quantity		2	4
Voltage / Frequency	[V/Hz]	115V/60HZ . 220V/50HZ . 220V/60HZ	

# US. STYLE COUNTER



AUCB-28R  
AUCB-28F



AUCB-48R  
AUCB-48F



AUCB-72R  
AUCB-72F

Model No.	AUCB-28R	AUCB-28F	AUCB-36R	AUCB-36F	AUCB-48R	AUCB-48F
Cooling Type	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated
Defrosting Type	Automatic	Automatic	Automatic	Automatic	Automatic	Automatic
Capacity [L]	201	201	275	275	376	376
Capacity [cu.ft.]	7.1	7.1	9.7	9.7	13.28	13.28
Exterior Dimension						
Width	700mm/28in	700mm/28in	925mm/36in	925mm/36in	1230mm/48in	1230mm/48in
Depth	765mm/30in	765mm/30in	765mm/30in	765mm/30in	765mm/30in	765mm/30in
Height	900mm/35in	900mm/35in	900mm/35in	900mm/35in	900mm/35in	900mm/35in
Temperature Range	28~50°F/-2~10°C	-4~0°F/-20~-18°C	28~50°F/-2~10°C	-4~0°F/-20~-18°C	28~50°F/-2~10°C	-4~0°F/-20~-18°C
Ambient Temperature	100°F / 38°C					
Refrigerant	R290/R134A	R290/R404A	R290/R134A	R290/R404A	R290/R134A	R290/R404A
Ext & Int. Materials	AISI304/AISI201					
Door Quantity	1	1	2	2	2	2
Voltage / Frequency [V/Hz]	115V/60HZ . 220V/50HZ . 220V/60HZ					

Model No.	AUCB-60R	AUCB-60F	AUCB-72R	AUCB-72F
Cooling Type	Ventilated	Ventilated	Ventilated	Ventilated
Defrosting Type	Automatic	Automatic	Automatic	Automatic
Capacity [L]	475	475	577	577
Capacity [cu.ft.]	16.77	16.77	20.38	20.38
Exterior Dimension				
Width	1535mm/60in	1535mm/60in	1840mm/72in	1840mm/72in
Depth	765mm/30in	765mm/30in	765mm/30in	765mm/30in
Height	900mm/35in	900mm/35in	900mm/35in	900mm/35in
Temperature Range	28~50°F/-2~10°C	-4~0°F/-20~-18°C	28~50°F/-2~10°C	-4~0°F/-20~-18°C
Ambient Temperature	100°F / 38°C			
Refrigerant	R290/R134A	R290/R404A	R290/R134A	R290/R404A
Ext & Int. Materials	AISI304/AISI201			
Door Quantity	2	2	3	3
Voltage / Frequency [V/Hz]	115V/60HZ . 220V/50HZ . 220V/60HZ			

# US. STYLE COUNTER



AUSC-44R  
AUSC-44F



AUSC-67R  
AUSC-67F



AUSC-93R  
AUSC-93F

Model No.		AUSC-44R	AUSC-44F	AUSC-67R	AUSC-67F	AUSC-93R	AUSC-93F
Cooling Type		Ventilated	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated
Defrosting Type		Automatic	Automatic	Automatic	Automatic	Automatic	Automatic
Capacity	[L]	330	330	502	502	1225	1225
Capacity	[cu.ft.]	11.65	11.65	17.72	17.72	43.26	43.26
Exterior Dimension							
Width		1130mm/44in	1130mm/44in	1710mm/67in	1710mm/67in	2390mm/93in	2390mm/93in
Depth		820mm/32in	820mm/32in	820mm/32in	820mm/32in	820mm/32in	820mm/32in
Height		900mm/35in	900mm/35in	900mm/35in	900mm/35in	900mm/35in	900mm/35in
Temperature Range		28-50°F / -2-10°C	-4-0°F/-20--18°C	28-50°F / -2-10°C	-4-0°F/-20--18°C	28-50°F / -2-10°C	-4-0°F/-20--18°C
Ambient Temperature		100°F / 38°C					
Refrigerant		R290/R134A	R290/R404A	R290/R134A	R290/R404A	R290/R134A	R290/R404A
Ext & Int. Materials		AISI304/AISI201					
Door Quantity		1	1	2	2	3	3
Voltage / Frequency	[V/Hz]	115V/60HZ . 220V/50HZ . 220V/60HZ					

# VENTILATED

## UPRIGHT SHOWCASE WITH TWO SIDES GLASS DOORS

### Features

The doors could be opened from two sides, It's very convenient get or put food from two sides

Double doors design, it's convenient to use

Double big glass doors, have a good display effect, beautiful and generous



Two-Channel

Visible Window

Integral Foam


Air-Cooling System

Stainless Steel

Micro-Computer Control



Model No.		AS1.0G4-ST
Cooling Type		Ventilated
Defrosting Type		Automatic
Capacity	[L]	980
Exterior Dimension		
Width	[mm]	1220
Depth	[mm]	830
Height	[mm]	1965
Temperature Range	[°C]	2-8
Ambient Temperature	[°C]	32N
Refrigerant		R404A/R290
Ext & Int. Materials		AISI304/AISI201
Door Quantity		4
Voltage / Frequency	[V/Hz]	220V/50HZ . 220V/60HZ . 110V/60HZ




# STATIC

## UPRIGHT SHOWCASE WITH TWO SIDES GLASS DOORS

### Features

The doors could be opened from two sides, it's very convenient to get or put food from two sides and improve the efficiency.

The sliding doors' design could prevent the impact, easy and convenient to use, and the door frame has the function of anti-condensation, it is much easier to use.




S1.0G4-STP



S1.6G6-STP

Model No.		S1.0G4-STP	S1.6G6-STP
Cooling Type		Static	Static
Capacity	[L]	980	1676
Exterior Dimension			
Width	[mm]	1220	1837
Depth	[mm]	760	760
Height	[mm]	1965	1965
Temperature Range	[°C]	5-10	5-10
Ambient Temperature	[°C]	30N	30N
Refrigerant		R134a	R134a
Ext & Int. Materials		AISI304/AISI201	AISI304/AISI201
Door Quantity		4	4
Voltage / Frequency	[V/Hz]	220V/50HZ . 220V/60HZ . 110V/60HZ	220V/50HZ . 220V/60HZ . 110V/60HZ

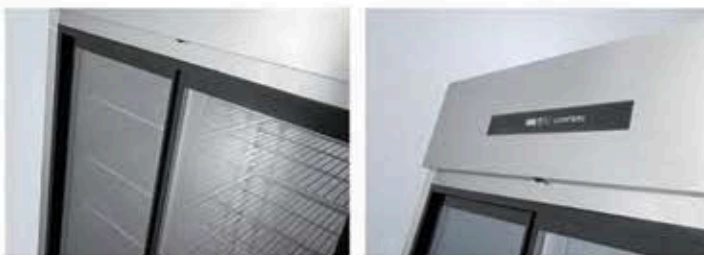



# STATIC

## UPRIGHT CABINET WITH TWO SIDES DOORS

### Features

The doors could be opened from two sides, it's very convenient to get or put food from two sides.

Double doors design, it's convenient to use.

Double big glass doors, have a good display effect, beautiful and generous.



Two-Channel Visible Window Integral Foam



Static-Cooling System Stainless Steel Micro-Computer Control




S1.0G4-ST

### Features

The doors could be opened from the front or back side, every chamber could make cooling independently.

Many chambers could make the food more fresh and no other food's smell.



Two-Channel Integral Foam Static-Cooling System



Stainless Steel Micro-Computer Control



F8-ST

Model No.	S1.0G4-ST	
Cooling Type		Static
Capacity	[L]	980
Exterior Dimension		
Width	[mm]	1220
Depth	[mm]	760
Height	[mm]	1965
Temperature Range	[°C]	2-8
Ambient Temperature	[°C]	32N
Refrigerant		R134a
Ext & Int. Materials		AISI304/AISI201
Door Quantity		4
Voltage / Frequency	[V/Hz]	220V/50HZ . 220V/60HZ . 110V/60HZ

Model No.	F8-ST	
Cooling Type		Static
Capacity	[L]	896
Exterior Dimension		
Width	[mm]	1220
Depth	[mm]	830
Height	[mm]	1965
Temperature Range	[°C]	-3--20
Ambient Temperature	[°C]	32N
Refrigerant		R134a
Ext & Int. Materials		AISI304/AISI201
Door Quantity		4
Voltage / Frequency	[V/Hz]	220V/50HZ . 220V/60HZ . 110V/60HZ



# VENTILATED & STATIC

## UNDERCOUNTER SHOWCASE WITH TWO SIDES SLIDE GLASS DOORS

### Features

The doors could be opened from two sides, it's very convenient to get or put food from both sides, it's more popular in compact places.

The slide doors' design, Anti-collision silent



AWR18G4-STP

Model No.	AWR18G4-STP	
Cooling Type		Ventilated
Defrosting Type		Automatic
Capacity	[L]	490
Exterior Dimension		
Width	[mm]	1800
Depth	[mm]	760
Height	[mm]	800
Temperature Range	[°C]	5-10
Ambient Temperature	[°C]	30N
Refrigerant		R404A/R290
Ext & Int. Materials		AISI304/AISI201
Door Quantity		4
Voltage / Frequency	[V/Hz]	220V/50HZ . 220V/60HZ . 110V/60HZ



### Features

The doors could be opened from two sides, it's very convenient to get or put food from both sides, it's more popular in compact places.

The double doors' design makes it easier and more convenient to use.

Double big glass doors, have a good display effect, beautiful and generous



WS18G4-ST

Model No.	WS18G4-ST	
Cooling Type		Static
Defrosting Type		/
Capacity	[L]	490
Exterior Dimension		
Width	[mm]	1800
Depth	[mm]	810
Height	[mm]	800
Temperature Range	[°C]	5-10
Ambient Temperature	[°C]	30N
Refrigerant		R134a
Ext & Int. Materials		AISI304/AISI201
Door Quantity		4
Voltage / Frequency	[V/Hz]	220V/50HZ . 220V/60HZ . 110V/60HZ



# EN SERIES VENTILATED DOUBLE TEMPERATURE UPRIGHT CABINET

## Features

The internally installed evaporator could keep more cooling air in the cabinet, nearly no cooling air loss.

Three-dimensional air duct design, the temperature more evenly in the cabinet

Automatic defrosting and drain water, no need manual operation.



Integrated Foam



Air-Cooling System



Stainless Steel



Micro-Controller



Model No.	ARF41	
Cooling Type	Ventilated	
Defrosting Type	Automatic	
Capacity	[L]	970
Exterior Dimension		
Width	[mm]	1220
Depth	[mm]	830
Height	[mm]	1965
Temperature Range	[°C]	10--2 / -3--20
Ambient Temperature	[°C]	32N
Refrigerant	R134A/R404A	
Ext & Int. Materials	AISI304/AISI201	
Door Quantity	4	
Voltage / Frequency	[V/Hz]	220V/50HZ . 220V/60HZ . 110V/60HZ



# VENTILATED

## ULTRA-LOW TEMPERATURE SHOWCASE CABINET

### Features

Strong cooling effect, freezer can reach -25 degrees Celsius.



AUF1 / AUR1



AUF2 / AUR2




AUF1 / AUR1



AUF2 / AUR2

Model No.		AUF1	AUF2	AUR1	AUR2	AUF1	AUF2	AUR1	AUR2
Cooling Type		Ventilated				Ventilated			
Defrosting Type		Automatic				Automatic			
Capacity	[L]	485	1085	485	1085	485	1085	485	1085
Exterior Dimension									
Width	[mm]	686	1372	686	1372	686	1372	686	1372
Depth	[mm]	830	830	830	830	830	830	830	830
Height	[mm]	2067	2067	2067	2067	2067	2067	2067	2067
Temperature Range	[°C]	-18--25				0-8			
Ambient Temperature	[°C]	38	38	43	43	38	38	43	43
Refrigerant		R404A				R134a			
Ext & Int. Materials		AISI304/AISI201				AISI304/AISI201			
Door Quantity		1	2	1	2	1	2	1	2
Voltage / Frequency	[V/Hz]	220V/50HZ . 220V/60HZ . 110V/60HZ				220V/50HZ . 220V/60HZ . 110V/60HZ			

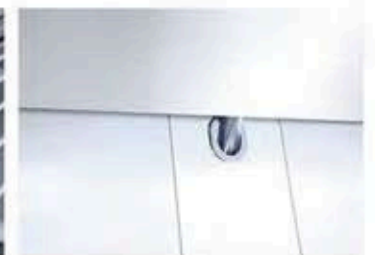

# VENTILATED BAR COUNTER

## Features


Stainless steel material, the top and horizontal handle design, could use the space under the bar.

The use of mirror stainless steel board and LED light inside makes the display effect better.

Horizontal handle design, beautiful in appearance, convenient to use.

The duct system design makes the cooling more evenly.

The famous brand compressor controls temperature more accurately.



Visible Window Air-Cooling System Stainless Steel Micro-Computer Control LED Light



Model No.		BC120AG	BC190AG2	BC295AG3
Cooling Type		Ventilated	Ventilated	Ventilated
Defrosting Type		Automatic	Automatic	Automatic
Capacity	[L]	120	190	295
Exterior Dimension				
Width	[mm]	600	900	1350
Depth	[mm]	560	560	560
Height	[mm]	800	800	800
Temperature Range	[°C]	0-8	0-8	0-8
Ambient Temperature	[°C]	30N	30N	30N
Refrigerant		R134a	R134a	R134a
Ext & Int. Materials		AISI304/AISI201	AISI304/AISI201	AISI304/AISI201
Door Quantity		1	2	3
Voltage / Frequency	[V/Hz]	220V/50HZ		



# UNDERCOUNTER

## WITH THE DRAWABLE COOLING SYSTEM

### Features

The drawable cooling system design is very convenient for repair.

Suitable for the embedded decoration.

"Front breathing" controls the air inlet area, could still works well under ambient temperature 32 degrees Celsius, even with the other three sides blocked up.

Stainless steel is easy to clean.



Model No.		AWR1800M	AWF1800M
Cooling Type		Ventilated	Ventilated
Defrosting Type		Automatic	Automatic
Capacity	[L]	450	450
Exterior Dimension			
Width	[mm]	1880	1880
Depth	[mm]	750	750
Height	[mm]	800	800
Temperature Range	[°C]	-5~10	-20~10
Ambient Temperature	[°C]	32N	32N
Refrigerant		R134a	R404A
Ext & Int. Materials		AISI304/AISI201	AISI304/AISI201
Door Quantity		3	3
Voltage / Frequency	[V/Hz]	220V/50HZ	220V/50HZ



# VENTILATED WALL MOUNTED TYPE CABINET

## Features

The top cooling system could save space and improve space use efficiency.

This could be used with undercounter and it will save more space.

Sliding door design is more suitable for small and compact kitchens.

The wall-mounted design could improve the space efficiency, realizing 3D food fetching and releasing.



Visible Window Air-Cooling System Stainless Steel Micro-Computer Control



Model No.		AWR15T60WA-P	AWR18T60WA-P
Cooling Type		Ventilated	Ventilated
Defrosting Type		Automatic	Automatic
Capacity	[L]	/	/
Exterior Dimension			
Width	[mm]	1500	1800
Depth	[mm]	500	500
Height	[mm]	1000	1000
Temperature Range	[°C]	0-8	0-8
Ambient Temperature	[°C]	32N	32N
Refrigerant		R134a	R134a
Ext & Int. Materials		AISI304/AISI201	AISI304/AISI201
Door Quantity		2	2
Voltage / Frequency	[V/Hz]	220V/50HZ	



# STATIC

## WALL MOUNTED TYPE CABINET

### Features

The static cooling system could save space and improve space use efficiency, realizing 3D food fetching and releasing.

This could be used with undercounter and it will save more space.

Static cooling system occupies less area, and the volume utilization rate is greater than other same-sized cabinets.



Model No.		WR12T60WA	WR15T60WA	WR18T60WA
Cooling Type		Static	Static	Static
Defrosting Type		/	/	/
Capacity	[L]	225	300	375
Exterior Dimension				
Width	[mm]	1200	1500	1800
Depth	[mm]	600	600	600
Height	[mm]	650	650	650
Temperature Range	[°C]	0-8	0-8	0-8
Ambient Temperature	[°C]	32N	32N	32N
Refrigerant		R134a	R134a	R134a
Ext & Int. Materials		AISI304/AISI201	AISI304/AISI201	AISI304/AISI201
Door Quantity		2	2	3
Voltage / Frequency	[V/Hz]	220V/50HZ	220V/50HZ	220V/50HZ

