




Web:- www.lumenolighting.in



Lumeno Lighting

Technology Solutions

Architectural & Landscape

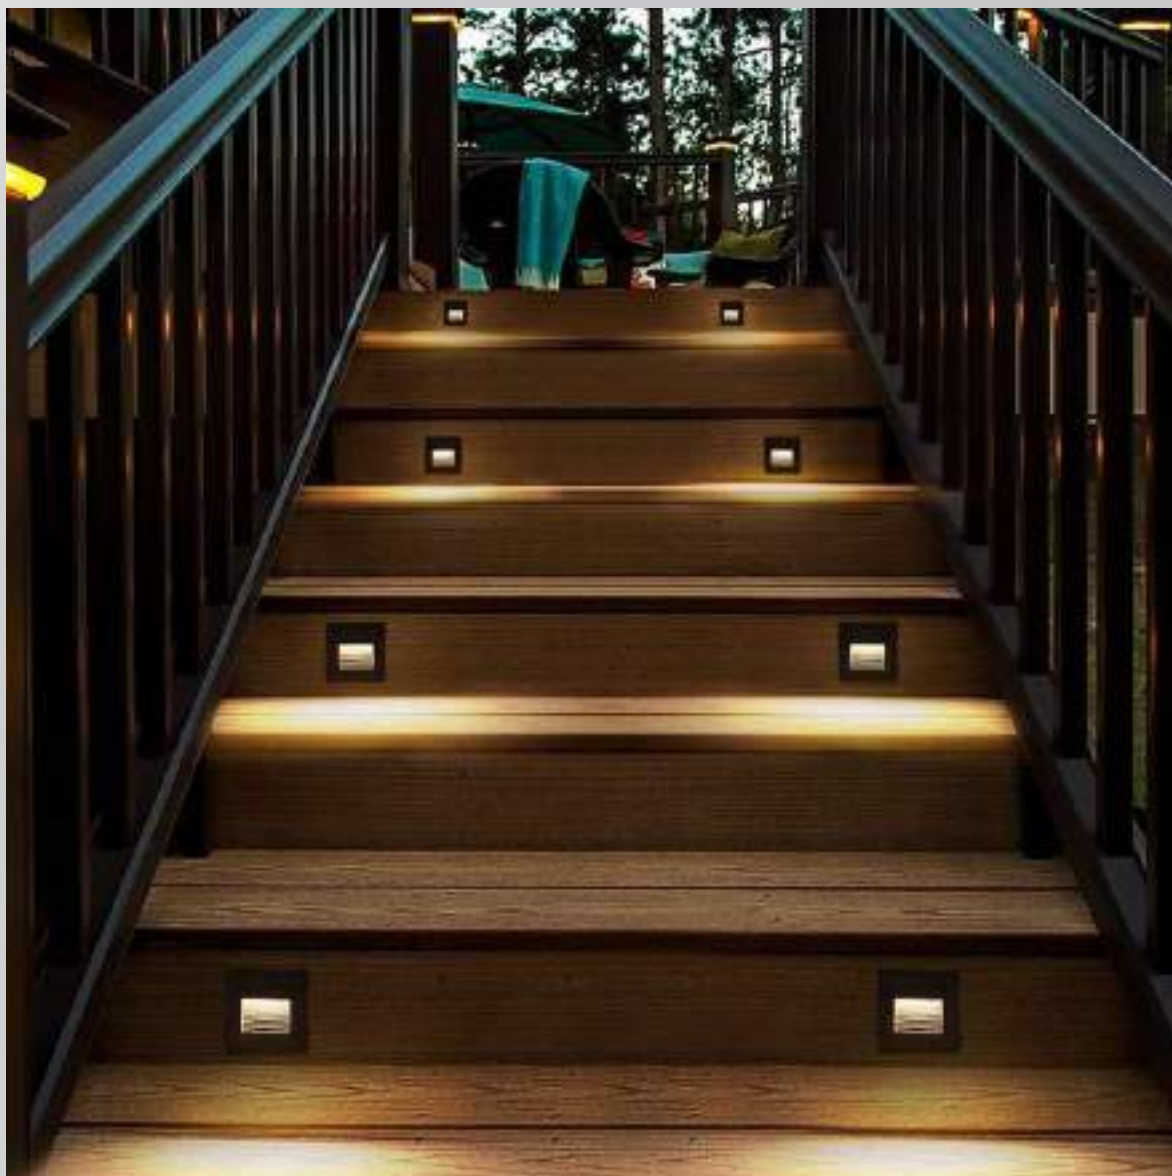

TECHNICAL SPECIFICATION

- Model No : LLFT02
- Watt : 2*1W
- Dimension(mm) : 114*114*60H
- Cut-Out(mm) : 110*110mm
- LED Chip : CREE / Bridgelux
- Material : Die Cast Aluminum
- Body Color : Grey/Black
- Beam Angle : 30°
- Luminous Flux : 260 LM
- LED Life :- 50,000 Hours
- Led Color :- 3000K, 4000K, 6500K
- Color Rendering Index (CRI) :- >80
- Voltage :- 10V
- Input Voltage :- AC 220-240V , 50Hz - 60Hz
- Driver Type :- Constant Current .
- Driver Efficiency :- >0.85%
- Driver Type :- Isolated, INBULT, OSRAM, PHILIPS
- Power Factor :- >0.95
- Under Voltage Protection
- Over voltage Protection





Lumeno Lighting

Technology Solutions

Architectural & Landscape



TECHNICAL SPECIFICATION

- Model No : LLFT04
- Watt : 4*1W
- Dimension(mm) : 170*115*60H
- Cut-Out(mm) : 165*110mm
- LED Chip : CREE / Bridgelux
- Material : Die Cast Aluminum
- Body Color : Grey/Black
- Beam Angle : 30°
- Luminous Flux : 480 LM
- LED Life :- 50,000 Hours
- Led Color :- 3000K, 4000K, 6500K
- Color Rendering Index (CRI) :- >80
- Voltage :- 10V
- Input Voltage :- AC 220-240V , 50Hz - 60Hz
- Driver Type :- Constant Current .
- Driver Efficiency :- >0.85%
- Driver Type :- Isolated, INBULT, OSRAM, PHILIPS
- Power Factor :- >0.95
- Under Voltage Protection
- Over voltage Protection





Lumeno Lighting

Technology Solutions

Architectural & Landscape



TECHNICAL SPECIFICATION

- Model No : LLFT06
- Watt : 6*1W
- Dimension(mm) : 226*115*60H
- Cut-Out(mm) : 221*110mm
- LED Chip : CREE / Bridgelux
- Material : Die Cast Aluminum
- Body Color : Grey/Black
- Beam Angle : 30°
- Luminous Flux : 720 LM
- LED Life :- 50,000 Hours
- Led Color :- 3000K, 4000K, 6500K
- Color Rendering Index (CRI) :- >80
- Voltage :- 10V
- Input Voltage :- AC 220-240V , 50Hz - 60Hz
- Driver Type :- Constant Current .
- Driver Efficiency :- >0.85%
- Driver Type :- Isolated, INBULT, OSRAM, PHILIPS
- Power Factor :- >0.95
- Under Voltage Protection
- Over voltage Protection





Lumeno Lighting

Technology Solutions

Architectural & Landscape



TECHNICAL SPECIFICATION

- Model No : LLFT08
- Watt : 4*2W
- Dimension(mm) : 180*120*75H
- Cut-Out(mm) : 155*95mm
- LED Chip : CREE / Bridgelux
- Material : Die Cast Aluminum
- Body Color : Grey/Black
- Beam Angle : 30°
- Luminous Flux : 960 LM
- LED Life :- 50,000 Hours
- Led Color :- 3000K, 4000K, 6500K
- Color Rendering Index (CRI) :- >80
- Voltage :- 10V
- Input Voltage :- AC 220-240V , 50Hz - 60Hz
- Driver Type :- Constant Current .
- Driver Efficiency :- >0.85%
- Driver Type :- Isolated, INBULT, OSRAM, PHILIPS
- Power Factor :- >0.95
- Under Voltage Protection
- Over voltage Protection





Lumeno Lighting

Technology Solutions

Architectural & Landscape



TECHNICAL SPECIFICATION

- Model No : LLFT12
- Watt : 6*2W
- Dimension(mm) : 226*115*60H
- Cut-Out(mm) : 221*110mm
- LED Chip : CREE / Bridgelux
- Material : Die Cast Aluminum
- Body Color : Grey/Black
- Beam Angle : 30°
- Luminous Flux : 1450 LM
- LED Life :- 50,000 Hours
- Led Color :- 3000K, 4000K, 6500K
- Color Rendering Index (CRI) :- >80
- Voltage :- 10V
- Input Voltage :- AC 220-240V , 50Hz - 60Hz
- Driver Type :- Constant Current .
- Driver Efficiency :- >0.85%
- Driver Type :- Isolated, INBULT, OSRAM, PHILIPS
- Power Factor :- >0.95
- Under Voltage Protection
- Over voltage Protection





Lumeno Lighting Technology Solutions

Architectural & Landscape



TECHNICAL SPECIFICATION

- Model No : LLFT03
- Watt : 3W
- Dimension(mm) : 100*57*50H
- Cut-Out(mm) : 98*50mm
- LED Chip : CREE / Bridgelux
- Material : Die Cast Aluminum
- Body Color : Grey/Black
- Beam Angle : 10°
- Luminous Flux : 330 LM
- LED Life :- 50,000 Hours
- Led Color :- 3000K, 4000K, 6500K
- Color Rendering Index (CRI) :- >80
- Voltage :- 10V
- Input Voltage :- AC 220-240V , 50Hz - 60Hz
- Driver Type :- Constant Current .
- Driver Efficiency :- >0.85%
- Driver Type :- Isolated, INBULT, OSRAM, PHILIPS
- Power Factor :- >0.95
- Under Voltage Protection
- Over voltage Protection





Lumeno Lighting

Technology Solutions

Architectural & Landscape



TECHNICAL SPECIFICATION

- Model No : LLFT6
- Watt : 6W
- Dimension(mm) : 210*58*50H
- Cut-Out(mm) : 220*55mm
- LED Chip : CREE / Bridgelux
- Material : Die Cast Aluminum
- Body Color : Grey/Black
- Beam Angle : 10°
- Luminous Flux : 660 LM
- LED Life :- 50,000 Hours
- Led Color :- 3000K, 4000K, 6500K
- Color Rendering Index (CRI) :- >80
- Voltage :- 10V
- Input Voltage :- AC 220-240V , 50Hz - 60Hz
- Driver Type :- Constant Current .
- Driver Efficiency :- >0.85%
- Driver Type :- Isolated, INBULT, OSRAM, PHILIPS
- Power Factor :- >0.95
- Under Voltage Protection
- Over voltage Protection



Web:- www.lumenolighting.in

MADE IN INDIA






Lumeno Lighting

Technology Solutions

Architectural & Landscape

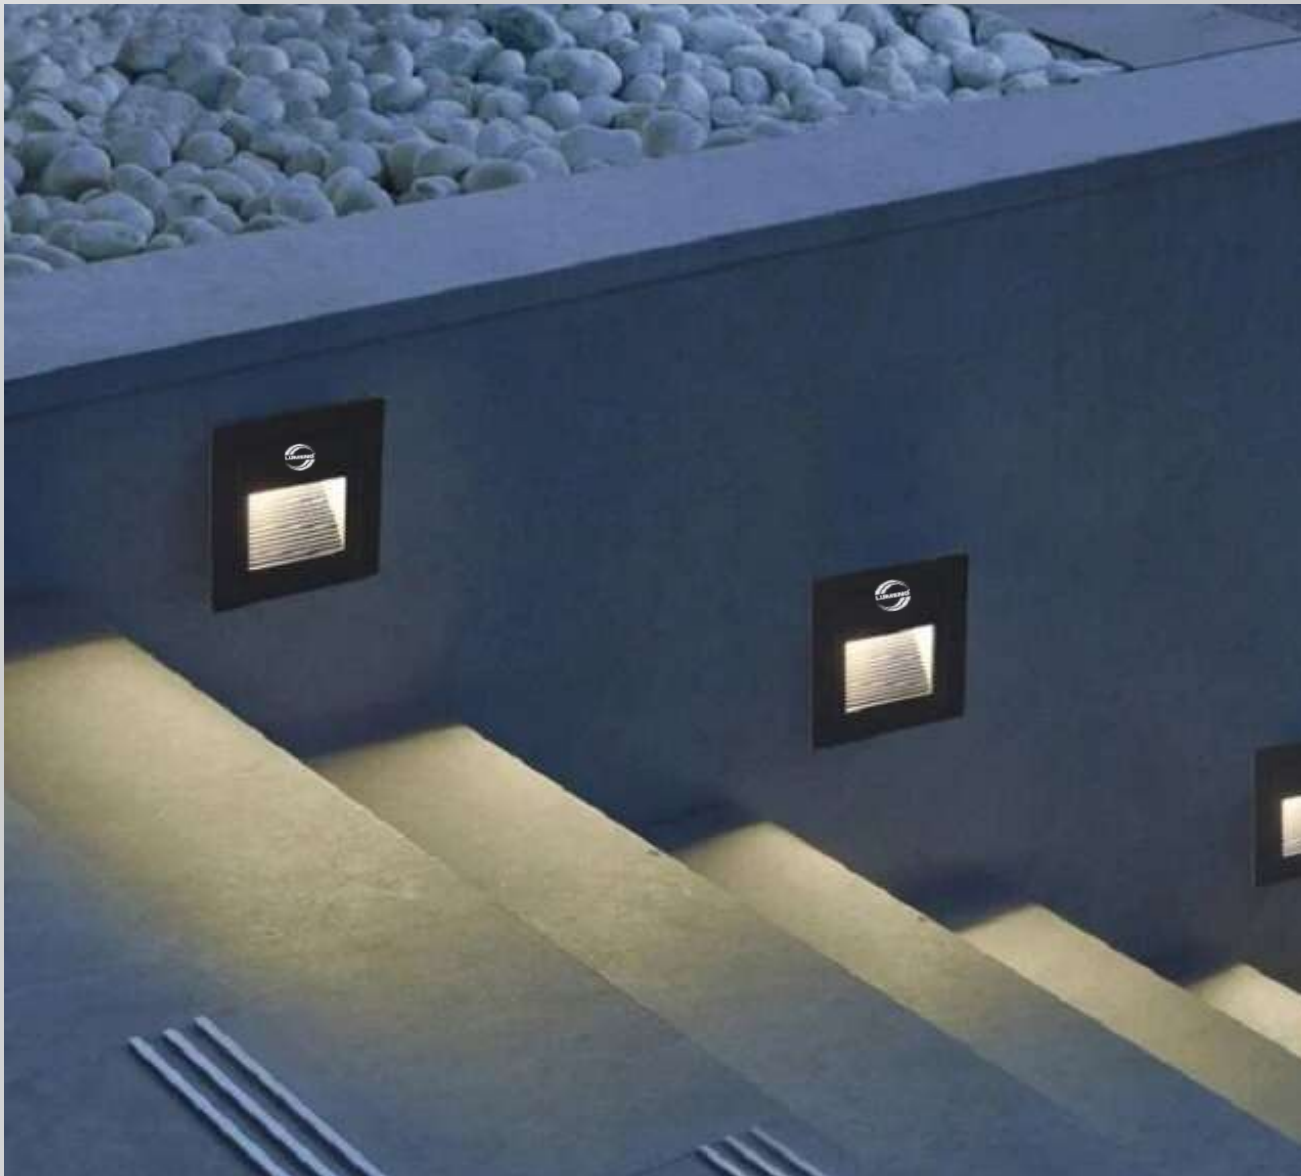

TECHNICAL SPECIFICATION

- Model No : LLFT3
- Watt : 3W
- Dimension(mm) : 85*70*40H
- Cut-Out(mm) : 60*60mm
- LED Chip : CREE / Bridgelux
- Material : Die Cast Aluminum
- Body Color : Grey/Black
- Beam Angle : 30°
- Luminous Flux : 360 LM
- LED Life :- 50,000 Hours
- Led Color :- 3000K, 4000K, 6500K
- Color Rendering Index (CRI) :- >80
- Voltage :- 10V
- Input Voltage :- AC 220-240V , 50Hz - 60Hz
- Driver Type :- Constant Current .
- Driver Efficiency :- >0.85%
- Driver Type :- Isolated, INBULT, OSRAM, PHILIPS
- Power Factor :- >0.95
- Under Voltage Protection
- Over voltage Protection



Web:- www.lumenolighting.in

MADE IN INDIA





Lumeno Lighting

Technology Solutions

Architectural & Landscape



TECHNICAL SPECIFICATION

- Model No : LLFT05
- Watt : 5W
- Dimension(mm) : 160*95*70H
- Cut-Out(mm) : 130*80mm
- LED Chip : Epistar
- Material : Die Cast Aluminum
- Body Color : Grey/Black
- Beam Angle : 120°
- Luminous Flux : 600 LM
- LED Life :- 50,000 Hours
- Led Color :- 3000K, 4000K, 6500K
- Color Rendering Index (CRI) :- >80
- Voltage :- 10V
- Input Voltage :- AC 220-240V , 50Hz - 60Hz
- Driver Type :- Constant Current .
- Driver Efficiency :- >0.85%
- Driver Type :- Isolated, INBULT, OSRAM, PHILIPS
- Power Factor :- >0.95
- Under Voltage Protection
- Over voltage Protection






Lumeno Lighting

Technology Solutions

Architectural & Landscape

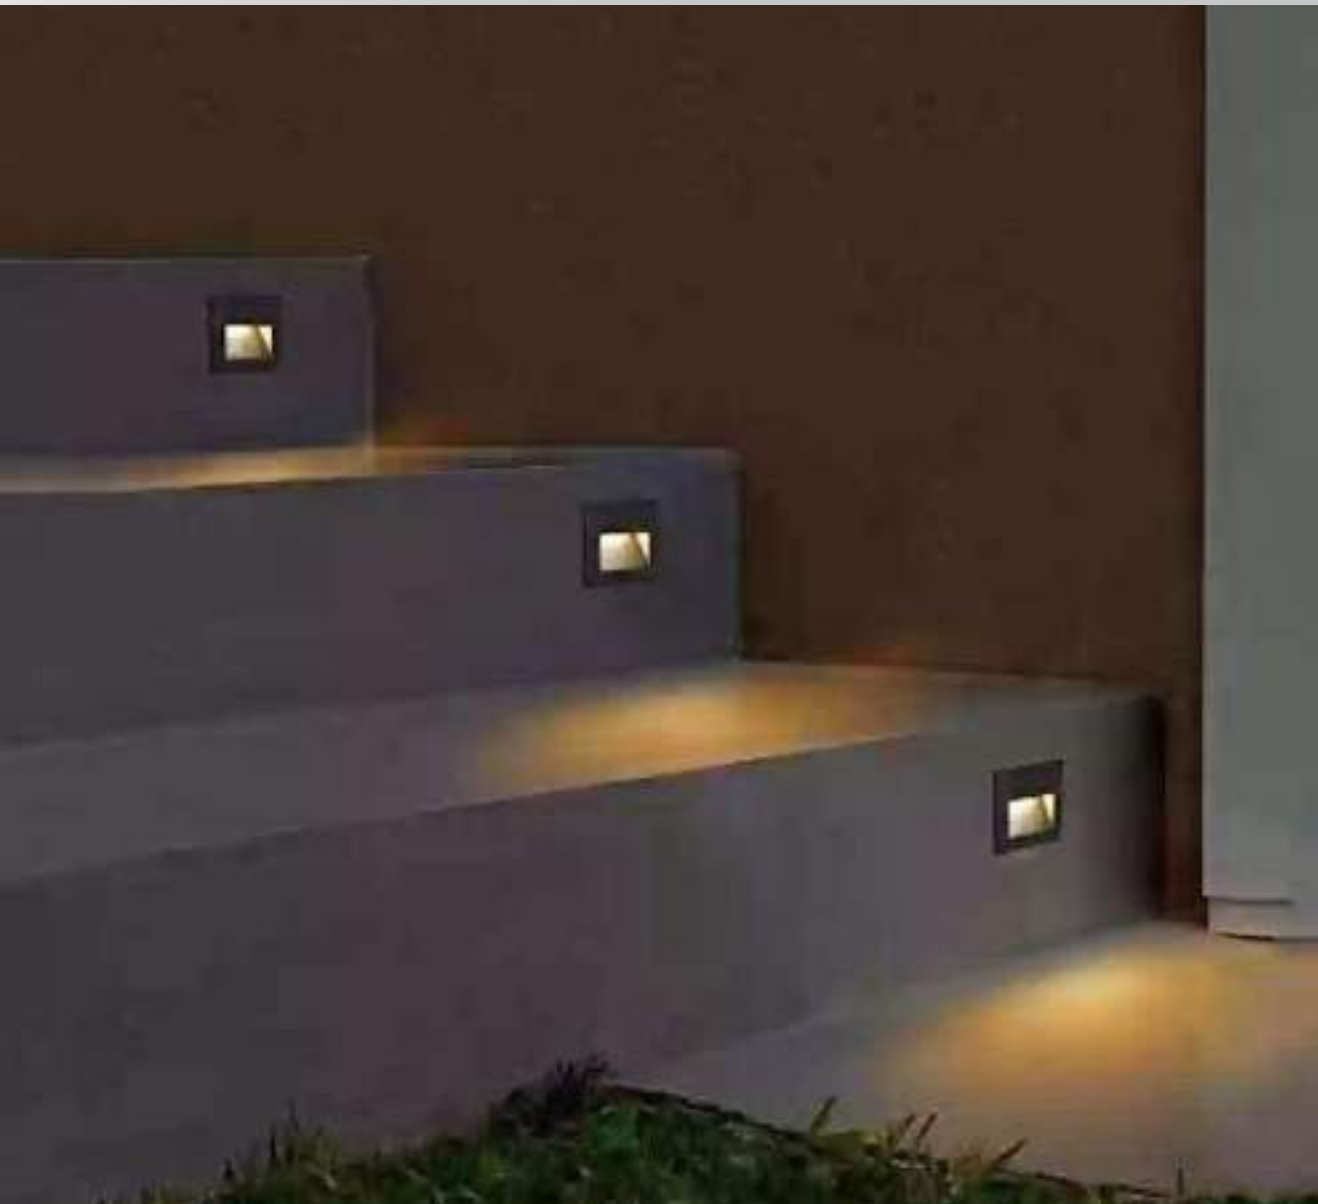

TECHNICAL SPECIFICATION

- Model No : LLFT05
- Watt : 5W
- Dimension(mm) : 160*95*70H
- Cut-Out(mm) : 130*80mm
- LED Chip : Epistar
- Material : Die Cast Aluminum
- Body Color : Grey/Black
- Beam Angle : 120°
- Luminous Flux : 600 LM
- LED Life :- 50,000 Hours
- Led Color :- 3000K, 4000K, 6500K
- Color Rendering Index (CRI) :- >80
- Voltage :- 10V
- Input Voltage :- AC 220-240V , 50Hz - 60Hz
- Driver Type :- Constant Current .
- Driver Efficiency :- >0.85%
- Driver Type :- Isolated, INBULT, OSRAM, PHILIPS
- Power Factor :- >0.95
- Under Voltage Protection
- Over voltage Protection





Lumeno Lighting

Technology Solutions

Architectural & Landscape



TECHNICAL SPECIFICATION

- Model No : LLFT6
- Watt : 6W
- Dimension(mm) : 160*100*80H
- Cut-Out(mm) : 120*70mm
- LED Chip : CREE / Bridgelux
- Material : Die Cast Aluminum
- Body Color : Grey/Black
- Beam Angle : 10°
- Luminous Flux : 660 LM
- LED Life :- 50,000 Hours
- Led Color :- 3000K, 4000K, 6500K
- Color Rendering Index (CRI) :- >80
- Voltage :- 10V
- Input Voltage :- AC 220-240V , 50Hz - 60Hz
- Driver Type :- Constant Current .
- Driver Efficiency :- >0.85%
- Driver Type :- Isolated, INBULT, OSRAM, PHILIPS
- Power Factor :- >0.95
- Under Voltage Protection
- Over voltage Protection



Web:- www.lumenolighting.in

MADE IN INDIA





Lumeno Lighting

Technology Solutions

Architectural & Landscape



TECHNICAL SPECIFICATION

- Model No : LLFT5
- Watt : 5W
- Dimension(mm) : 145*70*40H
- Cut-Out(mm) : 110*55mm
- LED Chip : Epistar
- Material : Die Cast Aluminum
- Body Color : Grey/Black
- Beam Angle : 120°
- Luminous Flux : 660 LM
- LED Life :- 50,000 Hours
- Led Color :- 3000K, 4000K, 6500K
- Color Rendering Index (CRI) :- >80
- Voltage :- 10V
- Input Voltage :- AC 220-240V , 50Hz - 60Hz
- Driver Type :- Constant Current .
- Driver Efficiency :- >0.85%
- Driver Type :- Isolated, INBULT, OSRAM, PHILIPS
- Power Factor :- >0.95
- Under Voltage Protection
- Over voltage Protection



Web:- www.lumenolighting.in

MADE IN INDIA





Lumeno Lighting

Technology Solutions

Architectural & Landscape



TECHNICAL SPECIFICATION

- Model No : LLFT6
- Watt : 6W
- Dimension(mm) : 130*80*75H
- Cut-Out(mm) : 125*75mm
- LED Chip : CREE / Bridgelux
- Material : Die Cast Aluminum
- Body Color : Grey/Black
- Beam Angle : 120°
- Luminous Flux : 660 LM
- LED Life :- 50,000 Hours
- Led Color :- 3000K, 4000K, 6500K
- Color Rendering Index (CRI) :- >80
- Voltage :- 10V
- Input Voltage :- AC 220-240V , 50Hz - 60Hz
- Driver Type :- Constant Current .
- Driver Efficiency :- >0.85%
- Driver Type :- Isolated, INBULT, OSRAM, PHILIPS
- Power Factor :- >0.95
- Under Voltage Protection
- Over voltage Protection



Web:- www.lumenolighting.in

MADE IN INDIA






Lumeno Lighting

Technology Solutions

Architectural & Landscape

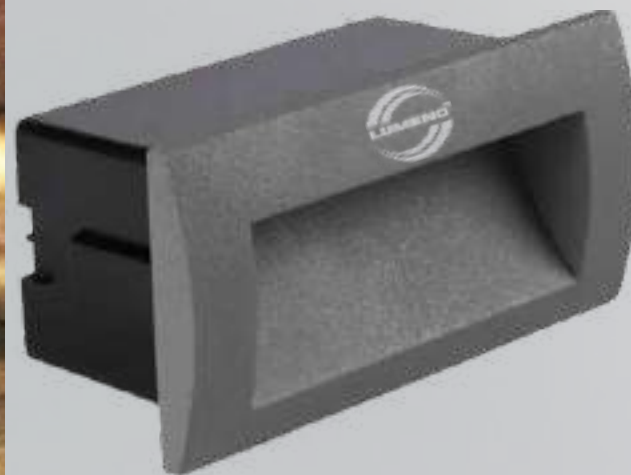

TECHNICAL SPECIFICATION

- Model No : LLFT3
- Watt : 3W
- Dimension(mm) : 140*70*60H
- Cut-Out(mm) : 130*65mm
- LED Chip : CREE / Bridgelux
- Material : Die Cast Aluminum
- Body Color : White/Black
- Beam Angle : 120°
- Luminous Flux : 330 LM
- LED Life :- 50,000 Hours
- Led Color :- 3000K, 4000K, 6500K
- Color Rendering Index (CRI) :- >80
- Voltage :- 10V
- Input Voltage :- AC 220-240V , 50Hz - 60Hz
- Driver Type :- Constant Current .
- Driver Efficiency :- >0.85%
- Driver Type :- Isolated, INBULT, OSRAM, PHILIPS
- Power Factor :- >0.95
- Under Voltage Protection
- Over voltage Protection



Web:- www.lumenolighting.in

MADE IN INDIA





Lumeno Lighting

Technology Solutions

Architectural & Landscape



TECHNICAL SPECIFICATION

- Model No : LLFT8
- Watt : 8W
- Dimension(mm) : 200*90*35H
- LED Chip : CREE / Bridgelux
- Material : Die Cast Aluminum
- Body Color : White/Black/Gray
- Beam Angle : 120°
- Luminous Flux : 880 LM
- LED Life :- 50,000 Hours
- Led Color :- 3000K, 4000K, 6500K
- Color Rendering Index (CRI) :- >80
- Voltage :- 10V
- Input Voltage :- AC 220-240V , 50Hz - 60Hz
- Driver Type :- Constant Current .
- Driver Efficiency :- >0.85%
- Driver Type :- Isolated, INBULT, OSRAM, PHILIPS
- Power Factor :- >0.95
- Under Voltage Protection
- Over voltage Protection



Web:- www.lumenolighting.in

MADE IN INDIA





Lumeno Lighting

Technology Solutions

Architectural & Landscape



TECHNICAL SPECIFICATION

- Model No : LLFT3
- Watt : 3W
- Dimension(mm) : 125*125*40H
- Cut-Out(mm) : 110*110mm
- LED Chip : CREE / Bridgelux
- Material : Die Cast Aluminum
- Body Color : Grey/Black
- Beam Angle : 30°
- Luminous Flux : 330 LM
- LED Life :- 50,000 Hours
- Led Color :- 3000K, 4000K, 6500K
- Color Rendering Index (CRI) :- >80
- Voltage :- 10V
- Input Voltage :- AC 220-240V , 50Hz - 60Hz
- Driver Type :- Constant Current .
- Driver Efficiency :- >0.85%
- Driver Type :- Isolated, INBULT, OSRAM, PHILIPS
- Power Factor :- >0.95
- Under Voltage Protection
- Over voltage Protection



Web:- www.lumenolighting.in

MADE IN INDIA





Lumeno Lighting

Technology Solutions

Architectural & Landscape



TECHNICAL SPECIFICATION

- Model No : LLFT3
- Watt : 3W
- Dimension(mm) : 125*40H
- Cut-Out(mm) : 110*mm
- LED Chip : CREE / Bridgelux
- Material : Die Cast Aluminum
- Body Color : Grey/Black
- Beam Angle : 30°
- Luminous Flux : 330 LM
- LED Life :- 50,000 Hours
- Led Color :- 3000K, 4000K, 6500K
- Color Rendering Index (CRI) :- >80
- Voltage :- 10V
- Input Voltage :- AC 220-240V , 50Hz - 60Hz
- Driver Type :- Constant Current .
- Driver Efficiency :- >0.85%
- Driver Type :- Isolated, INBULT, OSRAM, PHILIPS
- Power Factor :- >0.95
- Under Voltage Protection
- Over voltage Protection





Lumeno Lighting

Technology Solutions

Architectural & Landscape



TECHNICAL SPECIFICATION

- Model No : LLFT3
- Watt : 3W
- Dimension(mm) : 45*60H
- Cut-Out(mm) : 45*mm
- LED Chip : Epistar
- Material : Die Cast Aluminum
- Body Color : Grey/Black
- Beam Angle : 33°
- Luminous Flux : 330 LM
- LED Life :- 50,000 Hours
- Led Color :- 3000K, 4000K, 6500K
- Color Rendering Index (CRI) :- >80
- Voltage :- 10V
- Input Voltage :- AC 220-240V , 50Hz - 60Hz
- Driver Type :- Constant Current .
- Driver Efficiency :- >0.85%
- Driver Type :- Isolated, INBULT, OSRAM, PHILIPS
- Power Factor :- >0.95
- Under Voltage Protection
- Over voltage Protection



Web:- www.lumenolighting.in

MADE IN INDIA





Lumeno Lighting

Technology Solutions

Architectural & Landscape



TECHNICAL SPECIFICATION

- Model No : LLFT3
- Watt : 3W
- Dimension(mm) : 45*45*60H
- Cut-Out(mm) : 45*45*mm
- LED Chip : Epistar
- Material : Die Cast Aluminum
- Body Color : Grey/Black
- Beam Angle : 33°
- Luminous Flux : 330 LM
- LED Life :- 50,000 Hours
- Led Color :- 3000K, 4000K, 6500K
- Color Rendering Index (CRI) :- >80
- Voltage :- 10V
- Input Voltage :- AC 220-240V , 50Hz - 60Hz
- Driver Type :- Constant Current .
- Driver Efficiency :- >0.85%
- Driver Type :- Isolated, INBULT, OSRAM, PHILIPS
- Power Factor :- >0.95
- Under Voltage Protection
- Over voltage Protection



Web:- www.lumenolighting.in

MADE IN INDIA





Lumeno Lighting

Technology Solutions

Architectural & Landscape



TECHNICAL SPECIFICATION

- Model No : LLFT3
- Watt : 3W
- Dimension(mm) : 45*60H
- Cut-Out(mm) : 45*mm
- LED Chip : Epistar
- Material : Die Cast Aluminum
- Body Color : Grey/Black
- Beam Angle : 33°
- Luminous Flux : 330 LM
- LED Life :- 50,000 Hours
- Led Color :- 3000K, 4000K, 6500K
- Color Rendering Index (CRI) :- >80
- Voltage :- 10V
- Input Voltage :- AC 220-240V , 50Hz - 60Hz
- Driver Type :- Constant Current .
- Driver Efficiency :- >0.85%
- Driver Type :- Isolated, INBULT, OSRAM, PHILIPS
- Power Factor :- >0.95
- Under Voltage Protection
- Over voltage Protection



Web:- www.lumenolighting.in

MADE IN INDIA






Lumeno Lighting

Technology Solutions

Architectural & Landscape

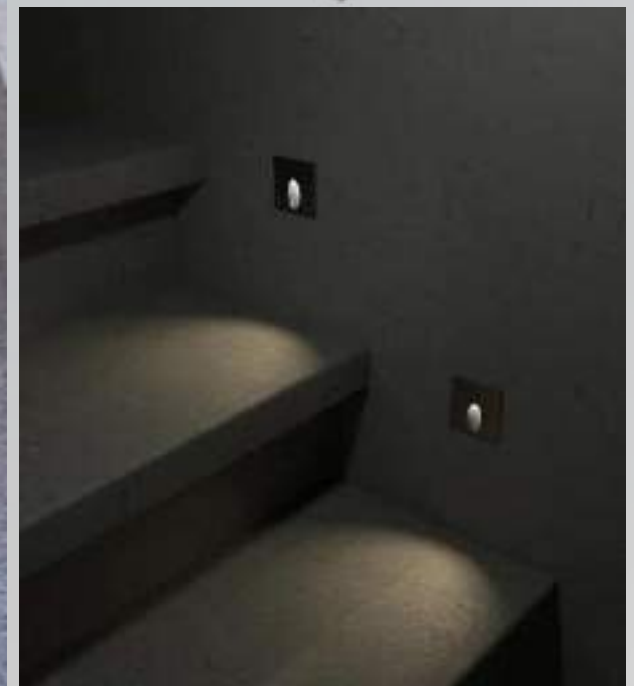

TECHNICAL SPECIFICATION

- Model No : LLFT3
- Watt : 3W
- Dimension(mm) : 85*85*60H
- Cut-Out(mm) : 70*70*mm
- LED Chip : Seoul
- Material : Die Cast Aluminum
- Body Color : Grey/Black
- Beam Angle : 33°
- Luminous Flux : 330 LM
- LED Life :- 50,000 Hours
- Led Color :- 3000K, 4000K, 6500K
- Color Rendering Index (CRI) :- >80
- Voltage :- 10V
- Input Voltage :- AC 220-240V , 50Hz - 60Hz
- Driver Type :- Constant Current .
- Driver Efficiency :- >0.85%
- Driver Type :- Isolated, INBULT, OSRAM, PHILIPS
- Power Factor :- >0.95
- Under Voltage Protection
- Over voltage Protection



Web:- www.lumenolighting.in

MADE IN INDIA





Lumeno Lighting

Technology Solutions

Architectural & Landscape



TECHNICAL SPECIFICATION

- Model No : LLFT3
- Watt : 3W
- Dimension(mm) : 90*60*40H
- LED Chip : Seoul
- Material : Die Cast Aluminum
- Body Color : Grey/Black
- Beam Angle : 120°
- Luminous Flux : 330 LM
- LED Life :- 50,000 Hours
- Led Color :- 3000K, 4000K, 6500K
- Color Rendering Index (CRI) :- >80
- Voltage :- 10V
- Input Voltage :- AC 220-240V , 50Hz - 60Hz
- Driver Type :- Constant Current .
- Driver Efficiency :- >0.85%
- Driver Type :- Isolated, INBULT, OSRAM, PHILIPS
- Power Factor :- >0.95
- Under Voltage Protection
- Over voltage Protection






Lumeno Lighting

Technology Solutions

Architectural & Landscape

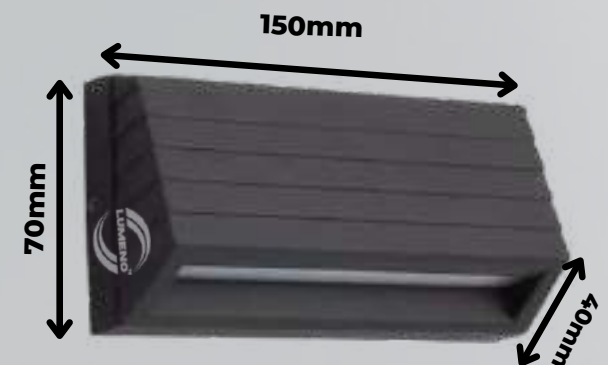

TECHNICAL SPECIFICATION

- Model No : LLFT6
- Watt : 6W
- Dimension(mm) : 150*70*40H
- LED Chip : Seoul
- Material : Die Cast Aluminum
- Body Color : Grey/Black
- Beam Angle : 120°
- Luminous Flux : 330 LM
- LED Life :- 50,000 Hours
- Led Color :- 3000K, 4000K, 6500K
- Color Rendering Index (CRI) :- >80
- Voltage :- 10V
- Input Voltage :- AC 220-240V , 50Hz - 60Hz
- Driver Type :- Constant Current .
- Driver Efficiency :- >0.85%
- Driver Type :- Isolated, INBULT, OSRAM, PHILIPS
- Power Factor :- >0.95
- Under Voltage Protection
- Over voltage Protection





Lumeno Lighting

Technology Solutions

Architectural & Landscape



TECHNICAL SPECIFICATION

- Model No : LLFT4
- Watt : 4W
- Dimension(mm) : 130*55*30H
- LED Chip : Seoul
- Material : Die Cast Aluminum
- Body Color : Grey/Black
- Beam Angle : 120°
- Luminous Flux : 430 LM
- LED Life :- 50,000 Hours
- Led Color :- 3000K, 4000K, 6500K
- Color Rendering Index (CRI) :- >80
- Voltage :- 10V
- Input Voltage :- AC 220-240V , 50Hz - 60Hz
- Driver Type :- Constant Current .
- Driver Efficiency :- >0.85%
- Driver Type :- Isolated, INBULT, OSRAM, PHILIPS
- Power Factor :- >0.95
- Under Voltage Protection
- Over voltage Protection



Web:- www.lumenolighting.in

MADE IN INDIA





Lumeno Lighting

Technology Solutions

Architectural & Landscape



TECHNICAL SPECIFICATION

- Model No : LLFT8
- Watt : 8W
- Dimension(mm) : 170*60*30H
- LED Chip : Seoul
- Material : Die Cast Aluminum
- Body Color : Grey/Black
- Beam Angle : 120°
- Luminous Flux : 850 LM
- LED Life :- 50,000 Hours
- Led Color :- 3000K, 4000K, 6500K
- Color Rendering Index (CRI) :- >80
- Voltage :- 10V
- Input Voltage :- AC 220-240V , 50Hz - 60Hz
- Driver Type :- Constant Current .
- Driver Efficiency :- >0.85%
- Driver Type :- Isolated, INBULT, OSRAM, PHILIPS
- Power Factor :- >0.95
- Under Voltage Protection
- Over voltage Protection





Lumeno Lighting

Technology Solutions

Architectural & Landscape



TECHNICAL SPECIFICATION

- Model No : LLFT8
- Watt : 8W
- Dimension(mm) : 130*70mm
- LED Chip : Seoul
- Material : Die Cast Aluminum
- Body Color : Grey/Black
- Beam Angle : 120°
- Luminous Flux : 880 LM
- LED Life :- 50,000 Hours
- Led Color :- 3000K, 4000K, 6500K
- Color Rendering Index (CRI) :- >80
- Voltage :- 10V
- Input Voltage :- AC 220-240V , 50Hz - 60Hz
- Driver Type :- Constant Current .
- Driver Efficiency :- >0.85%
- Driver Type :- Isolated, INBULT, OSRAM, PHILIPS
- Power Factor :- >0.95
- Under Voltage Protection
- Over voltage Protection



Web:- www.lumenolighting.in

MADE IN INDIA





Lumeno Lighting Architectural & Landscape Technology Solutions



TECHNICAL SPECIFICATION

- Model No : LLFT4
- Watt : 4W
- Dimension(mm) : 115*30mm
- LED Chip : Bridgelux
- Material : Die Cast Aluminum
- Body Color : Grey/Black
- Beam Angle : 120°
- Luminous Flux : 440 LM
- LED Life :- 50,000 Hours
- Led Color :- 3000K, 4000K, 6500K
- Color Rendering Index (CRI) :- >80
- Voltage :- 10V
- Input Voltage :- AC 220-240V , 50Hz - 60Hz
- Driver Type :- Constant Current .
- Driver Efficiency :- >0.85%
- Driver Type :- Isolated, INBULT, OSRAM, PHILIPS
- Power Factor :- >0.95
- Under Voltage Protection
- Over voltage Protection



Web:- www.lumenolighting.in


MADE IN INDIA





Lumeno Lighting Technology Solutions

Architectural & Landscape

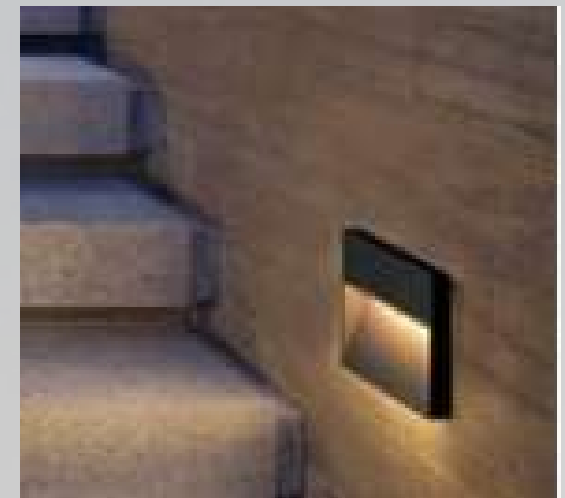

TECHNICAL SPECIFICATION

- Model No : LLFT4
- Watt : 4W
- Dimension(mm) : 115*115*30mm
- LED Chip : Bridgelux
- Material : Die Cast Aluminum
- Body Color : Grey/Black
- Beam Angle : 120°
- Luminous Flux : 440 LM
- LED Life :- 50,000 Hours
- Led Color :- 3000K, 4000K, 6500K
- Color Rendering Index (CRI) :- >80
- Voltage :- 10V
- Input Voltage :- AC 220-240V , 50Hz - 60Hz
- Driver Type :- Constant Current .
- Driver Efficiency :- >0.85%
- Driver Type :- Isolated, INBULT, OSRAM, PHILIPS
- Power Factor :- >0.95
- Under Voltage Protection
- Over voltage Protection



Web:- www.lumenolighting.in

MADE IN INDIA





Lumeno Lighting Technology Solutions

Architectural & Landscape



MODEL	LLIG3W
WATT	3WATT
OUTER CUTTING	100MM*90MM
BEAM ANG	95MM
COLOR	30 DEGREE
INPUT VOLT	3000K, 4000K, 6500K, RGB
NO. OF LED	220V AC 2W*
MATERIAL	3 LED
	SS TOP & ALUMINIUM BODY



TECHNICAL SPECIFICATION

- LED Type :- SMD, COB
- LED Maker :- BRIDGELUX, OSRAM, PHILIPS
- LED Life :- 50,000 Hours
- Rendering Index (CRI) :- >80
- Luminous Flux : 120 - 140 .
- Voltage :- 10V .
- Input Voltage :- AC/DC, 220-240V , 50Hz - 60Hz
- Driver Type :- Constant Current .
- Driver Efficiency :- >0.85%
- Driver Type :- Isolated, INBULT, OSRAM, PHILIPS Power
- Factor :- >0.95
- Under Voltage Protection
- Over voltage Protection



MADE IN INDIA





Lumeno Lighting
Technology Solutions

Architectural & Landscape



MODEL	LLIG6W
WATT	6WATT
OUTER CUTTING	120MM*90MM
BEAM ANG	115MM
COLOR	30 DEGREE
INPUT VOLT	3000K, 4000K, 6500K, RGB
NO. OF LED	220V AC
MATERIAL	1W*6 LED
	SS TOP & ALUMINIUM BODY



TECHNICAL SPECIFICATION

- LED Type :- SMD, COB
- LED Maker :- BRIDGELUX, OSRAM, PHILIPS
- LED Life :- 50,000 Hours
- Rendering Index (CRI) :- >80
- Luminous Flux : 120 - 140 .
- Voltage :- 10V .
- Input Voltage :- AC/DC, 220-240V , 50Hz - 60Hz
- Driver Type :- Constant Current .
- Driver Efficiency :- >0.85%
- Driver Type :- Isolated, INBULT, OSRAM, PHILIPS Power
- Factor :- >0.95
- Under Voltage Protection
- Over voltage Protection



 support@lumenolighting.in

 www.lumenolighting.in

 [@lumeno_lighting](https://www.instagram.com/lumeno_lighting)

MADE IN INDIA





Lumeno Lighting

Technology Solutions

Architectural & Landscape



MODEL	LLIG9W
WATT	9WATT
OUTER CUTTING	150MM*90MM
BEAM ANG	125MM
COLOR	30 DEGREE
INPUT VOLT	3000K, 4000K, 6500K, RGB
NO. OF LED	220V AC
	1W*9 LED



TECHNICAL SPECIFICATION

- LED Type :- SMD, COB
- LED Maker :- BRIDGELUX, OSRAM, PHILIPS
- LED Life :- 50,000 Hours
- Rendering Index (CRI) :- >80
- Luminous Flux : 120 - 140 .
- Voltage :- 10V .
- Input Voltage :- AC/DC, 220-240V , 50Hz - 60Hz
- Driver Type :- Constant Current .
- Driver Efficiency :- >0.85%
- Driver Type :- Isolated, INBULT, OSRAM, PHILIPS Power
- Factor :- >0.95
- Under Voltage Protection
- Over voltage Protection



 support@lumenolighting.in

 www.lumenolighting.in

 @lumeno_lighting

MADE IN INDIA





Lumeno Lighting

Technology Solutions

Architectural & Landscape



MODEL	LLIG12W
WATT	12WATT
OUTER CUTTING	180MM*90MM
BEAM ANG	155MM
COLOR	30 DEGREE
INPUT VOLT	3000K, 4000K, 6500K, RGB
NO. OF LED	220V AC
	1W*12 LED



TECHNICAL SPECIFICATION

- LED Type :- SMD, COB
- LED Maker :- BRIDGELUX, OSRAM, PHILIPS
- LED Life :- 50,000 Hours
- Rendering Index (CRI) :- >80
- Luminous Flux : 120 - 140 .
- Voltage :- 10V .
- Input Voltage :- AC/DC, 220-240V , 50Hz - 60Hz
- Driver Type :- Constant Current .
- Driver Efficiency :- >0.85%
- Driver Type :- Isolated, INBULT, OSRAM, PHILIPS Power
- Factor :- >0.95
- Under Voltage Protection
- Over voltage Protection





Lumeno Lighting

Technology Solutions

Architectural & Landscape



TECHNICAL SPECIFICATION

Model No : LLIGCOB01W
Watt : 1W
Dimension(mm) : 45*60H
Cut-Out(mm) : 35*60mm
LED Chip : CREE / Bridgelux
Material : Die Cast Aluminum
Body Color : SS Body
Beam Angle : 24°
Luminous Flux : 120LM/WATT
LED Life :- 50,000 Hours
Led Color :- 3000K, 4000K, 6500K
Color Rendering Index (CRI) :- >80
Voltage :- 10V Input
Voltage :- AC 220-240V , 50Hz - 60Hz
Driver Type :- Constant Current .

Driver Efficiency :- >0.85%
Driver Type :- Isolated, INBULT,
OSRAM, PHILIPS
Power Factor :- >0.95
Under Voltage Protection
Over voltage Protection



support@lumenolighting.in



www.lumenolighting.in



[@lumeno_lighting](https://www.instagram.com/lumeno_lighting)

MADE IN INDIA





Lumeno Lighting

Technology Solutions

Architectural & Landscape



TECHNICAL SPECIFICATION

Model No : LLIGCOB03W

Watt : 1W

Dimension(mm) : 35*60H

Cut-Out(mm) : 35*60mm

LED Chip : CREE / Bridgelux

Material : Die Cast Aluminum

Body Color : Grey/Black

Beam Angle : 24°

Driver Efficiency :- >0.85%

Driver Type :- Isolated, INBULT, OSRAM, PHILIPS

Power Factor :- >0.95 Under

Voltage Protection

Over voltage Protection

- Luminous Flux : 120LM/WATT
- LED Life :- 50,000 Hours
- Led Color :- 3000K, 4000K, 6500K Color
- Rendering Index (CRI) :- >80
- Voltage :- 10V Input
- Voltage :- AC 220-240V , 50Hz - 60Hz
- Driver Type :- Constant Current .



support@lumenolighting.in



www.lumenolighting.in



@lumeno_lighting

MADE IN INDIA





Lumeno Lighting

Technology Solutions

Architectural & Landscape



MODEL	LLUF3W-SS
WATT	3WATT
OUTER	85MM*140MM
BEAM ANG	30 DEGREE
COLOR	3000K,Blue,Red,Green,RGB
INPUT VOLT	24V, 220V AC/DC
NO. OF LED	1W*3 LED
MATERIAL	SS BODY & PC GLASS

TECHNICAL SPECIFICATION

- LED Type :- SMD, COB
- LED Maker :- BRIDGELUX, OSRAM, PHILIPS
- LED Life :- 50,000 Hours
- Rendering Index (CRI) :- >80
- Luminous Flux : 120 - 140 .
- Voltage :- 10V .
- Input Voltage :- AC/DC, 220-240V , 50Hz - 60Hz
- Driver Type :- Constant Current .
- Driver Efficiency :- >0.85%
- Driver Type :- Isolated, INBULT, OSRAM, PHILIPS Power
- Factor :- >0.95
- Under Voltage Protection
- Over voltage Protection





Lumeno Lighting Technology Solutions

Architectural & Landscape



MODEL
WATT
OUTER
BEAM ANG
COLOR
INPUT VOLT
NO. OF LED

LLUF6W- SS
6WATT
120MM*140MM
30 DEGREE
3000K,Blue,Red,Green,RGB
24V, 220V AC/DC
1W*6 LED

TECHNICAL SPECIFICATION

- LED Type :- SMD, COB
- LED Maker :- BRIDGELUX, OSRAM, PHILIPS
- LED Life :- 50,000 Hours
- Rendering Index (CRI) :- >80
- Luminous Flux : 120 - 140 .
- Voltage :- 10V .
- Input Voltage :- AC/DC, 220-240V , 50Hz - 60Hz
- Driver Type :- Constant Current .
- Driver Efficiency :- >0.85%
- Driver Type :- Isolated, INBULT, OSRAM, PHILIPS Power
- Factor :- >0.95
- Under Voltage Protection
- Over voltage Protection



support@lumenolighting.in

www.lumenolighting.in

@lumeno_lighting

MADE IN INDIA





Lumeno Lighting

Technology Solutions

Architectural & Landscape



MODEL	LLUF9W- SS
WATT	9WATT
OUTER	145MM*180MM
BEAM ANG	30 DEGREE
COLOR	3000K,Blue,Red,Green,RGB
INPUT VOLT	24V, 220V AC/DC
NO. OF LED	1W*9 LED

TECHNICAL SPECIFICATION

- LED Type :- SMD, COB
- LED Maker :- BRIDGELUX, OSRAM, PHILIPS
- LED Life :- 50,000 Hours
- Rendering Index (CRI) :- >80
- Luminous Flux : 120 - 140 .
- Voltage :- 10V .
- Input Voltage :- AC/DC, 220-240V , 50Hz - 60Hz
- Driver Type :- Constant Current .
- Driver Efficiency :- >0.85%
- Driver Type :- Isolated, INBULT, OSRAM, PHILIPS Power
- Factor :- >0.95
- Under Voltage Protection
- Over voltage Protection





Lumeno Lighting

Technology Solutions

Architectural & Landscape



MODEL	LLUF12W- SS
WATT	12WATT
OUTER BEAM ANG	160MM*215MM
COLOR	30 DEGREE
INPUT VOLT	3000K,Blue,Red,Green,RGB
NO. OF LED	24V, 220V AC/DC
MATERIAL	1W*12 LED
	SS BODY

TECHNICAL SPECIFICATION

- LED Type :- SMD, COB
- LED Maker :- BRIDGELUX, OSRAM, PHILIPS
- LED Life :- 50,000 Hours
- Rendering Index (CRI) :- >80
- Luminous Flux : 120 - 140 .
- Voltage :- 10V .
- Input Voltage :- AC/DC, 220-240V , 50Hz - 60Hz
- Driver Type :- Constant Current .
- Driver Efficiency :- >0.85%
- Driver Type :- Isolated, INBULT, OSRAM, PHILIPS Power
- Factor :- >0.95
- Under Voltage Protection
- Over voltage Protection



support@lumenolighting.in

www.lumenolighting.in

@lumeno_lighting

MADE IN INDIA





Lumeno Lighting

Technology Solutions

Architectural & Landscape



MODEL	LLUF3W- SS
WATT	3WATT
OUTER	125MM
INNER RING SIZE	35MM - 50MM
BEAM ANG	10°, 20°, 30°, 40°, 45°, 60°, 90°
COLOR	3000K- 6500K, RGB, (RGBW DMX512)
INPUT VOLT	24V, 220V AC/DC
NO. OF LED	1W*3 LED
MATERIAL	SS BODY & PC GLASS

TECHNICAL SPECIFICATION

- LED Type :- SMD, COB
- LED Maker :- BRIDGELUX, OSRAM, PHILIPS
- LED Life :- 50,000 Hours
- Rendering Index (CRI) :- >80
- Luminous Flux : 120 - 140 .
- Voltage :- 10V .
- Input Voltage :- AC/DC, 220-240V , 50Hz - 60Hz
- Driver Type :- Constant Current .
- Driver Efficiency :- >0.85%
- Driver Type :- Isolated, INBULT, OSRAM, PHILIPS Power
- Factor :- >0.95
- Under Voltage Protection
- Over voltage Protection





Lumeno Lighting

Technology Solutions


Architectural & Landscape



MODEL	LLUF6W- SS
WATT	6WATT
OUTER	125MM
INNER RING SIZE	35MM - 50MM
BEAM ANG	10°, 20°, 30°, 40°, 45°, 60°, 90°
COLOR	3000K- 6500K, RGB, (RGBW DMX512)
INPUT VOLT	24V, 220V AC/DC
NO. OF LED	1W*6 LED
MATERIAL	SS BODY & PC GLASS

TECHNICAL SPECIFICATION

- LED Type :- SMD, COB
- LED Maker :- BRIDGELUX, OSRAM, PHILIPS
- LED Life :- 50,000 Hours
- Rendering Index (CRI) :- >80
- Luminous Flux : 120 - 140 .
- Voltage :- 10V .
- Input Voltage :- AC/DC, 220-240V , 50Hz - 60Hz
- Driver Type :- Constant Current .
- Driver Efficiency :- >0.85%
- Driver Type :- Isolated, INBULT, OSRAM, PHILIPS Power
- Factor :- >0.95
- Under Voltage Protection
- Over voltage Protection

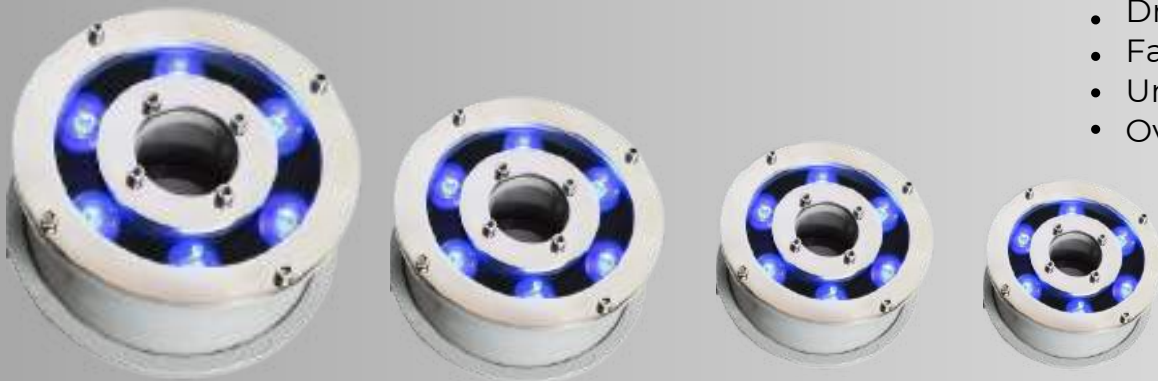



Lumeno Lighting

Technology Solutions

Architectural & Landscape



MODEL	LLUF9W- SS
WATT	9WATT
OUTER	125MM
INNER RING SIZE	35MM - 50MM
BEAM ANG	10°, 20°, 30°, 40°, 45°, 60°, 90°
COLOR	3000K- 6500K, RGB, (RGBW DMX512)
INPUT VOLT	24V, 220V AC/DC
NO. OF LED	1W*9 LED
MATERIAL	SS BODY & PC GLASS

TECHNICAL SPECIFICATION

- LED Type :- SMD, COB
- LED Maker :- BRIDGELUX, OSRAM, PHILIPS
- LED Life :- 50,000 Hours
- Rendering Index (CRI) :- >80
- Luminous Flux : 120 - 140 .
- Voltage :- 10V .
- Input Voltage :- AC/DC, 220-240V , 50Hz - 60Hz
- Driver Type :- Constant Current .
- Driver Efficiency :- >0.85%
- Driver Type :- Isolated, INBULT, OSRAM, PHILIPS Power
- Factor :- >0.95
- Under Voltage Protection
- Over voltage Protection





Lumeno Lighting

Technology Solutions

Architectural & Landscape



MODEL	LLUF12W- SS
WATT	12WATT
OUTER	125MM
INNER RING SIZE	35MM - 50MM
BEAM ANG	10°, 20°, 30°, 40°, 45°, 60°, 90°
COLOR	3000K- 6500K, RGB, (RGBW DMX512)
INPUT VOLT	24V, 220V AC/DC
NO. OF LED	3W*4LED
MATERIAL	SS BODY & PC GLASS

TECHNICAL SPECIFICATION

- LED Type :- SMD, COB
- LED Maker :- BRIDGELUX, OSRAM, PHILIPS
- LED Life :- 50,000 Hours
- Rendering Index (CRI) :- >80
- Luminous Flux : 120 - 140 .
- Voltage :- 10V .
- Input Voltage :- AC/DC, 220-240V , 50Hz - 60Hz
- Driver Type :- Constant Current .
- Driver Efficiency :- >0.85%
- Driver Type :- Isolated, INBULT, OSRAM, PHILIPS Power
- Factor :- >0.95
- Under Voltage Protection
- Over voltage Protection





Lumeno Lighting

Technology Solutions


Architectural & Landscape



MODEL	LLUF18W- SS
WATT	18WATT
OUTER	125MM
INNER RING SIZE	35MM - 50MM
BEAM ANG	10°, 20°, 30°, 40°, 45°, 60°, 90°
COLOR	3000K- 6500K, RGB, (RGBW DMX512)
INPUT VOLT	24V, 220V AC/DC
NO. OF LED	3W*6 LED
MATERIAL	SS BODY & PC GLASS

TECHNICAL SPECIFICATION

- LED Type :- SMD, COB
- LED Maker :- BRIDGELUX, OSRAM, PHILIPS
- LED Life :- 50,000 Hours
- Rendering Index (CRI) :- >80
- Luminous Flux : 120 - 140 .
- Voltage :- 10V .
- Input Voltage :- AC/DC, 220-240V , 50Hz - 60Hz
- Driver Type :- Constant Current .
- Driver Efficiency :- >0.85%
- Driver Type :- Isolated, INBULT, OSRAM, PHILIPS Power
- Factor :- >0.95
- Under Voltage Protection
- Over voltage Protection

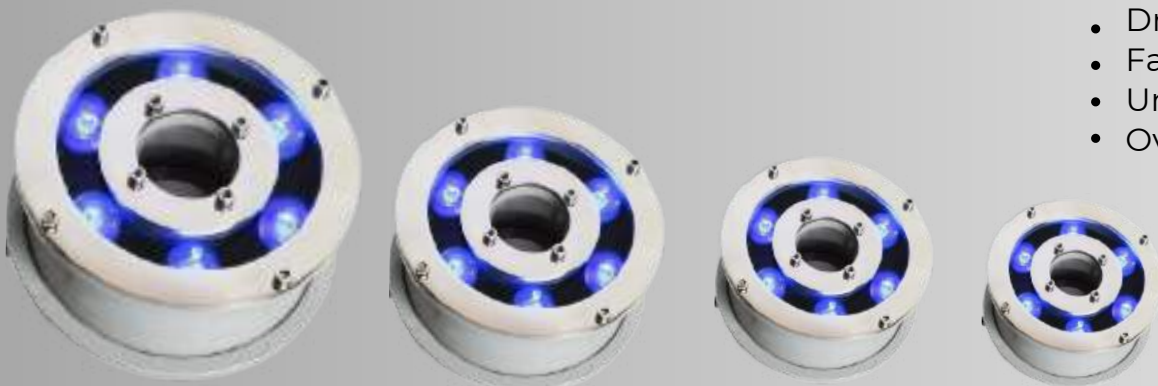



Lumeno Lighting

Technology Solutions

Architectural & Landscape



MODEL	LLUF27W- SS
WATT	27WATT
OUTER	125MM
INNER RING SIZE	35MM - 50MM
BEAM ANG	10°, 20°, 30°, 40°, 45°, 60°, 90°
COLOR	3000K- 6500K, RGB, (RGBW DMX512)
INPUT VOLT	24V, 220V AC/DC
NO. OF LED	3W*9 LED
MATERIAL	SS BODY & PC GLASS

TECHNICAL SPECIFICATION

- LED Type :- SMD, COB
- LED Maker :- BRIDGELUX, OSRAM, PHILIPS
- LED Life :- 50,000 Hours
- Rendering Index (CRI) :- >80
- Luminous Flux : 120 - 140 .
- Voltage :- 10V .
- Input Voltage :- AC/DC, 220-240V , 50Hz - 60Hz
- Driver Type :- Constant Current .
- Driver Efficiency :- >0.85%
- Driver Type :- Isolated, INBULT, OSRAM, PHILIPS Power
- Factor :- >0.95
- Under Voltage Protection
- Over voltage Protection



 support@lumenolighting.in

 www.lumenolighting.in

 [@lumeno_lighting](https://www.instagram.com/lumeno_lighting)

MADE IN INDIA





Lumeno Lighting Technology Solutions

Architectural & Landscape



MODEL
WATT
OUTER
BEAM ANG
COLOR
INPUT VOLT
NO. OF LED
MATERIAL

LLSPL - SS
3WATT
50MM
10°, 20°, 30°, 40°, 45°, 60°, 90°
3000K- 6500K, RGB,
24V, 220V AC/DC
3W*1 LED
SS BODY & PC GLASS

TECHNICAL SPECIFICATION

- LED Type :- SMD, COB
- LED Maker :- BRIDGELUX, OSRAM, PHILIPS
- LED Life :- 50,000 Hours
- Rendering Index (CRI) :- >80
- Luminous Flux : 120 - 140 .
- Voltage :- 10V .
- Input Voltage :- AC/DC, 220-240V , 50Hz - 60Hz
- Driver Type :- Constant Current .
- Driver Efficiency :- >0.85%
- Driver Type :- Isolated, OSRAM, PHILIPS
- Power Factor :- >0.95
- Under Voltage Protection
- Over voltage Protection



 support@lumenolighting.in

 www.lumenolighting.in

 @lumeno_lighting

MADE IN INDIA





Lumeno Lighting
Technology Solutions

Architectural & Landscape



MODEL	LLSPL - SS
WATT	3W / 9W
OUTER	75MM
BEAM ANG	10°, 20°, 30°, 40°, 45°, 60°, 90°
COLOR	3000K- 6500K, RGB,
INPUT VOLT	24V, 220V AC/DC
NO. OF LED	1W*3 LED / 3W*3 LED
MATERIAL	SS BODY & PC GLASS



TECHNICAL SPECIFICATION

- LED Type :- SMD, COB
- LED Maker :- BRIDGELUX, OSRAM, PHILIPS
- LED Life :- 50,000 Hours
- Rendering Index (CRI) :- >80
- Luminous Flux : 120 - 140 .
- Voltage :- 10V .
- Input Voltage :- AC/DC, 220-240V , 50Hz - 60Hz
- Driver Type :- Constant Current .
- Driver Efficiency :- >0.85%
- Driver Type :- Isolated, OSRAM, PHILIPS
- Power Factor :- >0.95
- Under Voltage Protection
- Over voltage Protection



support@lumenolighting.in



www.lumenolighting.in



[@lumeno_lighting](https://www.instagram.com/lumeno_lighting)

MADE IN INDIA





Lumeno Lighting
Technology Solutions

Architectural & Landscape



MODEL	LLSPL - SS
WATT	6WATT / 18WATT
OUTER	100MM
BEAM ANG	10°, 20°, 30°, 40°, 45°, 60°, 90°
COLOR	3000K- 6500K, RGB
INPUT VOLT	24V, 220V AC/DC
NO. OF LED	1W*6 LED / 3W*6 LED
MATERIAL	SS BODY & PC GLASS

TECHNICAL SPECIFICATION

- LED Type :- SMD, COB
- LED Maker :- BRIDGELUX, OSRAM, PHILIPS
- LED Life :- 50,000 Hours
- Rendering Index (CRI) :- >80
- Luminous Flux : 120 - 140 .
- Voltage :- 10V .
- Input Voltage :- AC/DC, 220-240V , 50Hz - 60Hz
- Driver Type :- Constant Current .
- Driver Efficiency :- >0.85%
- Driver Type :- Isolated, OSRAM, PHILIPS
- Power Factor :- >0.95
- Under Voltage Protection
- Over voltage Protection





Lumeno Lighting Technology Solutions

Architectural & Landscape



MODEL	LLSPL - SS
WATT	9WATT / 27WATT
OUTER	125MM
BEAM ANG	10°, 20°, 30°, 40°, 45°, 60°, 90°
COLOR	3000K- 6500K, RGB
INPUT VOLT	24V, 220V AC/DC
NO. OF LED	1W*9LED / 3W*9 LED
MATERIAL	SS BODY & PC GLASS



support@lumenolighting.in

www.lumenolighting.in

[@lumeno_lighting](https://www.instagram.com/lumeno_lighting)

MADE IN INDIA



TECHNICAL SPECIFICATION

- LED Type :- SMD, COB
- LED Maker :- BRIDGELUX, OSRAM, PHILIPS
- LED Life :- 50,000 Hours
- Rendering Index (CRI) :- >80
- Luminous Flux : 120 - 140 .
- Voltage :- 10V .
- Input Voltage :- AC/DC, 220-240V , 50Hz - 60Hz
- Driver Type :- Constant Current .
- Driver Efficiency :- >0.85%
- Driver Type :- Isolated, OSRAM, PHILIPS
- Power Factor :- >0.95
- Under Voltage Protection
- Over voltage Protection



Lumeno Lighting

Technology Solutions

Architectural & Landscape



MODEL	LLSPL - SS
WATT	18WATT
OUTER	150MM
BEAM ANG	10°, 20°, 30°, 40°, 45°, 60°, 90°
COLOR	3000K- 6500K, RGB
INPUT VOLT	24V, 220V AC/DC
NO. OF LED	1W*18 LED
MATERIAL	SS BODY & PC GLASS

TECHNICAL SPECIFICATION

- LED Type :- SMD, COB
- LED Maker :- BRIDGELUX, OSRAM, PHILIPS
- LED Life :- 50,000 Hours
- Rendering Index (CRI) :- >80
- Luminous Flux : 120 - 140 .
- Voltage :- 10V .
- Input Voltage :- AC/DC, 220-240V , 50Hz - 60Hz
- Driver Type :- Constant Current .
- Driver Efficiency :- >0.85%
- Driver Type :- Isolated, OSRAM, PHILIPS
- Power Factor :- >0.95
- Under Voltage Protection
- Over voltage Protection





Lumeno Lighting

Technology Solutions

Architectural & Landscape



MODEL
WATT
OUTER
BEAM ANG
COLOR
INPUT VOLT
NO. OF LED
MATERIAL

LLSPL - SS
12WATT / 36WATT
125MM
10°, 20°, 30°, 40°, 45°, 60°, 90°
3000K- 6500K, RGB
24V, 220V AC/DC
1W*12 LED / 3W*12 LED
SS BODY & PC GLASS



TECHNICAL SPECIFICATION

- LED Type :- SMD, COB
- LED Maker :- BRIDGELUX, OSRAM, PHILIPS
- LED Life :- 50,000 Hours
- Rendering Index (CRI) :- >80
- Luminous Flux : 120 - 140 .
- Voltage :- 10V .
- Input Voltage :- AC/DC, 220-240V , 50Hz - 60Hz
- Driver Type :- Constant Current .
- Driver Efficiency :- >0.85%
- Driver Type :- Isolated, OSRAM, PHILIPS
- Power Factor :- >0.95
- Under Voltage Protection
- Over voltage Protection





Lumeno Lighting

Technology Solutions

Architectural & Landscape



MODEL	LLSPL - SS
WATT	3WATT / 9WATT
OUTER	125MM
BEAM ANG	10°, 20°, 30°, 40°, 45°, 60°, 90°
COLOR	3000K- 6500K, RGB, (RGBW DMX512)
INPUT VOLT	24V, 220V AC/DC
MATERIAL	SS BODY & PC GLASS

TECHNICAL SPECIFICATION

- LED Type :- SMD, COB
- LED Maker :- BRIDGELUX, OSRAM, PHILIPS
- LED Life :- 50,000 Hours
- Rendering Index (CRI) :- >80
- Luminous Flux : 120 - 140 .
- Voltage :- 10V .
- Input Voltage :- AC/DC, 220-240V , 50Hz - 60Hz
- Driver Type :- Constant Current .
- Driver Efficiency :- >0.85%
- Driver Type :- Isolated, INBULT, OSRAM, PHILIPS Power
- Factor :- >0.95
- Under Voltage Protection
- Over voltage Protection





Lumeno Lighting

Technology Solutions

Architectural & Landscape



MODEL	LLSPL - SS
WATT	6WATT / 18WATT
OUTER	125MM
BEAM ANG	10°, 20°, 30°, 40°, 45°, 60°, 90°
COLOR	3000K- 6500K, RGB, (RGBW DMX512)
INPUT VOLT	24V, 220V AC/DC
MATERIAL	SS BODY & PC GLASS

TECHNICAL SPECIFICATION

- LED Type :- SMD, COB
- LED Maker :- BRIDGELUX, OSRAM, PHILIPS
- LED Life :- 50,000 Hours
- Rendering Index (CRI) :- >80
- Luminous Flux : 120 - 140 .
- Voltage :- 10V .
- Input Voltage :- AC/DC, 220-240V , 50Hz - 60Hz
- Driver Type :- Constant Current .
- Driver Efficiency :- >0.85%
- Driver Type :- Isolated, INBULT, OSRAM, PHILIPS Power
- Factor :- >0.95
- Under Voltage Protection
- Over voltage Protection



support@lumenolighting.in



www.lumenolighting.in



@lumeno_lighting

MADE IN INDIA





Lumeno Lighting
Technology Solutions

Architectural & Landscape



MODEL	LLSPL - SS
WATT	9WATT / 27WATT
OUTER	125MM
BEAM ANG	10°, 20°, 30°, 40°, 45°, 60°, 90°
COLOR	3000K- 6500K, RGB, (RGBW DMX512)
INPUT VOLT	24V, 220V AC/DC
MATERIAL	SS BODY & PC GLASS

TECHNICAL SPECIFICATION

- LED Type :- SMD, COB
- LED Maker :- BRIDGELUX, OSRAM, PHILIPS
- LED Life :- 50,000 Hours
- Rendering Index (CRI) :- >80
- Luminous Flux : 120 - 140 .
- Voltage :- 10V .
- Input Voltage :- AC/DC, 220-240V , 50Hz - 60Hz
- Driver Type :- Constant Current .
- Driver Efficiency :- >0.85%
- Driver Type :- Isolated, INBULT, OSRAM, PHILIPS Power
- Factor :- >0.95
- Under Voltage Protection
- Over voltage Protection





Lumeno Lighting

Technology Solutions

Architectural & Landscape



MODEL	LLSPL - SS
WATT	12WATT / 36WATT
OUTER	225MM
BEAM ANG	10°, 20°, 30°, 40°, 45°, 60°, 90°
COLOR	3000K- 6500K, RGB, (RGBW DMX512)
INPUT VOLT	24V, 220V AC/DC
MATERIAL	SS BODY & PC GLASS

TECHNICAL SPECIFICATION

- LED Type :- SMD, COB
- LED Maker :- BRIDGELUX, OSRAM, PHILIPS
- LED Life :- 50,000 Hours
- Rendering Index (CRI) :- >80
- Luminous Flux : 120 - 140 .
- Voltage :- 10V .
- Input Voltage :- AC/DC, 220-240V , 50Hz - 60Hz
- Driver Type :- Constant Current .
- Driver Efficiency :- >0.85%
- Driver Type :- Isolated, INBULT, OSRAM, PHILIPS Power
- Factor :- >0.95
- Under Voltage Protection
- Over voltage Protection



support@lumenolighting.in



www.lumenolighting.in



@lumeno_lighting

MADE IN INDIA





Lumeno Lighting

Technology Solutions

Architectural & Landscape



MODEL	LLSLP - SS / PC
WATT	18WATT
OUTER	225MM
BEAM ANG	10°, 20°, 30°, 40°, 45°, 60°, 90°
COLOR	3000K- 6500K, RGB, (RGBW DMX512)
INPUT VOLT	24V, 220V AC/DC
MATERIAL	SS BODY & PC GLASS

TECHNICAL SPECIFICATION

- LED Type :- SMD, COB
- LED Maker :- BRIDGELUX, OSRAM, PHILIPS
- LED Life :- 50,000 Hours
- Rendering Index (CRI) :- >80
- Luminous Flux : 120 - 140 .
- Voltage :- 10V .
- Input Voltage :- AC/DC, 220-240V , 50Hz - 60Hz
- Driver Type :- Constant Current .
- Driver Efficiency :- >0.85%
- Driver Type :- Isolated, INBULT, OSRAM, PHILIPS Power
- Factor :- >0.95
- Under Voltage Protection
- Over voltage Protection



support@lumenolighting.in

www.lumenolighting.in

[@lumeno_lighting](https://www.instagram.com/lumeno_lighting)

MADE IN INDIA





Lumeno Lighting

Technology Solutions

Architectural & Landscape



MODEL	LLSLP - SS / PC
WATT	12WATT / 18WATT
OUTER	275MM
BEAM ANG	10°, 20°, 30°, 40°, 45°, 60°, 90°
COLOR	3000K- 6500K, RGB, (RGBW DMX512)
INPUT VOLT	24V, 220V AC/DC
MATERIAL	SS BODY & PC GLASS



TECHNICAL SPECIFICATION

- LED Type :- SMD, COB
- LED Maker :- BRIDGELUX, OSRAM, PHILIPS
- LED Life :- 50,000 Hours
- Rendering Index (CRI) :- >80
- Luminous Flux : 120 - 140 .
- Voltage :- 10V .
- Input Voltage :- AC/DC, 220-240V , 50Hz - 60Hz
- Driver Type :- Constant Current .
- Driver Efficiency :- >0.85%
- Driver Type :- Isolated, OSRAM, PHILIPS Power Factor :-
- >0.95
- Under Voltage Protection
- Over voltage Protection





Lumeno Lighting

Technology Solutions

Architectural & Landscape



MODEL
WATT
OUTER
BEAM ANG
COLOR
INPUT VOLT
MATERIAL

LLSLP - SS / PC
27WATT / 36WATT
275MM
10°, 20°, 30°, 40°, 45°, 60°, 90°
3000K- 6500K, RGB, (RGBW DMX512)
24V, 220V AC/DC
SS BODY & PC GLASS



TECHNICAL SPECIFICATION

- LED Type :- SMD, COB
- LED Maker :- BRIDGELUX, OSRAM, PHILIPS
- LED Life :- 50,000 Hours
- Rendering Index (CRI) :- >80
- Luminous Flux : 120 - 140 .
- Voltage :- 10V .
- Input Voltage :- AC/DC, 220-240V , 50Hz - 60Hz
- Driver Type :- Constant Current .
- Driver Efficiency :- >0.85%
- Driver Type :- Isolated, OSRAM, PHILIPS Power
- Factor :- >0.95
- Under Voltage Protection
- Over voltage Protection



support@lumenolighting.in



www.lumenolighting.in



@lumeno_lighting

MADE IN INDIA





Lumeno Lighting
Technology Solutions

Architectural & Landscape



MODEL
WATT
OUTER
BEAM ANG
COLOR
INPUT VOLT
MATERIAL

LLSLP - SS / PC
12WATT / 18WATT
275MM
10°, 20°, 30°, 40°, 45°, 60°, 90°
3000K- 6500K, RGB, (RGBW DMX512)
24V, 220V AC/DC
SS BODY & PC GLASS



TECHNICAL SPECIFICATION

- LED Type :- SMD, COB
- LED Maker :- BRIDGELUX, OSRAM, PHILIPS
- LED Life :- 50,000 Hours
- Rendering Index (CRI) :- >80
- Luminous Flux : 120 - 140 .
- Voltage :- 10V .
- Input Voltage :- AC/DC, 220-240V , 50Hz - 60Hz
- Driver Type :- Constant Current .
- Driver Efficiency :- >0.85%
- Driver Type :- Isolated, OSRAM, PHILIPS Power Factor :-
- >0.95
- Under Voltage Protection
- Over voltage Protection



support@lumenolighting.in

www.lumenolighting.in

[@lumeno_lighting](https://www.instagram.com/lumeno_lighting)

MADE IN INDIA





Lumeno Lighting

Technology Solutions

Architectural & Landscape



MODEL
WATT
OUTER
BEAM ANG
COLOR
INPUT VOLT
MATERIAL

LLSLP - SS / PC
12WATT / 18WATT
250MM
10°, 20°, 30°, 40°, 45°, 60°, 90°
3000K- 6500K, RGB, (RGBW DMX512)
24V, 220V AC/DC
SS BODY & PC GLASS

TECHNICAL SPECIFICATION

- LED Type :- SMD, COB
- LED Maker :- BRIDGELUX, OSRAM, PHILIPS
- LED Life :- 50,000 Hours
- Rendering Index (CRI) :- >80
- Luminous Flux : 120 - 140 .
- Voltage :- 10V .
- Input Voltage :- AC/DC, 220-240V , 50Hz - 60Hz
- Driver Type :- Constant Current .
- Driver Efficiency :- >0.85%
- Driver Type :- Isolated, OSRAM, PHILIPS Power
- Factor :- >0.95
- Under Voltage Protection
- Over voltage Protection



support@lumenolighting.in

www.lumenolighting.in

@lumeno_lighting

MADE IN INDIA





Lumeno Lighting
Technology Solutions

Architectural & Landscape



MODEL
WATT
OUTER
BEAM ANG
COLOR
INPUT VOLT
MATERIAL

LLSLP - SS / PC
12WATT / 18WATT
250MM
10°, 20°, 30°, 40°, 45°, 60°, 90°
3000K- 6500K, RGB, (RGBW DMX512)
24V, 220V AC/DC
SS BODY & PC GLASS

TECHNICAL SPECIFICATION

- LED Type :- SMD, COB
- LED Maker :- BRIDGELUX, OSRAM, PHILIPS
- LED Life :- 50,000 Hours
- Rendering Index (CRI) :- >80
- Luminous Flux : 120 - 140 .
- Voltage :- 10V .
- Input Voltage :- AC/DC, 220-240V , 50Hz - 60Hz
- Driver Type :- Constant Current .
- Driver Efficiency :- >0.85%
- Driver Type :- Isolated, OSRAM, PHILIPS Power Factor :- >0.95
- Under Voltage Protection
- Over voltage Protection



support@lumenolighting.in



www.lumenolighting.in



@lumeno_lighting

MADE IN INDIA





Lumeno Lighting
Technology Solutions

Architectural & Landscape



MODEL	LLSLP - SS / PC
WATT	12WATT / 18WATT
OUTER	250MM
BEAM ANG	10°, 20°, 30°, 40°, 45°, 60°, 90°
COLOR	3000K- 6500K, RGB, (RGBW DMX512)
INPUT VOLT	24V, 220V AC/DC
MATERIAL	SS BODY & PC GLASS

TECHNICAL SPECIFICATION

- LED Type :- SMD, COB
- LED Maker :- BRIDGELUX, OSRAM, PHILIPS
- LED Life :- 50,000 Hours
- Rendering Index (CRI) :- >80
- Luminous Flux : 120 - 140 .
- Voltage :- 10V .
- Input Voltage :- AC/DC, 220-240V , 50Hz - 60Hz
- Driver Type :- Constant Current .
- Driver Efficiency :- >0.85%
- Driver Type :- Isolated, OSRAM, PHILIPS Power
- Factor :- >0.95
- Under Voltage Protection
- Over voltage Protection



support@lumenolighting.in



www.lumenolighting.in



@lumeno_lighting

MADE IN INDIA





Lumeno Lighting

Technology Solutions

Architectural & Landscape



MODEL
WATT
OUTER
BEAM ANG
COLOR
INPUT VOLT
MATERIAL

LLSPL - SS / PC
12WATT / 18WATT
250MM
10°, 20°, 30°, 40°, 45°, 60°, 90°
3000K- 6500K, RGB, (RGBW DMX512)
24V, 220V AC/DC
SS BODY & PC GLASS



TECHNICAL SPECIFICATION

- LED Type :- SMD, COB
- LED Maker :- BRIDGELUX, OSRAM, PHILIPS
- LED Life :- 50,000 Hours
- Rendering Index (CRI) :- >80
- Luminous Flux : 120 - 140 .
- Voltage :- 10V .
- Input Voltage :- AC/DC, 220-240V , 50Hz - 60Hz
- Driver Type :- Constant Current .
- Driver Efficiency :- >0.85%
- Driver Type :- Isolated, OSRAM, PHILIPS Power
- Factor :- >0.95
- Under Voltage Protection
- Over voltage Protection



 support@lumenolighting.in

 www.lumenolighting.in

 @lumeno_lighting

MADE IN INDIA





Lumeno Lighting

Technology Solutions

Architectural & Landscape



MODEL
WATT
OUTER
BEAM ANG
COLOR
INPUT VOLTS
MATERIAL

LLSPL- SS / PC
9WATT / 12WATT / 18WATT
240MM
10°, 20°, 30°, 40°, 45°, 60°, 90°
3000K- 6500K, RGB, (RGBW DMX512)
24V, 220V AC/DC
SS BODY & PC GLASS

TECHNICAL SPECIFICATION

- LED Type :- SMD, COB
- LED Maker :- BRIDGELUX, OSRAM, PHILIPS
- LED Life :- 50,000 Hours
- Rendering Index (CRI) :- >80
- Luminous Flux : 120 - 140 .
- Voltage :- 10V .
- Input Voltage :- AC/DC, 220-240V , 50Hz - 60Hz
- Driver Type :- Constant Current .
- Driver Efficiency :- >0.85%
- Driver Type :- Isolated, OSRAM, PHILIPS Power
- Factor :- >0.95
- Under Voltage Protection
- Over voltage Protection





Lumeno Lighting

Technology Solutions

Architectural & Landscape



MODEL

LLSPL - SS / PC

WATT

9WATT / 12WATT / 18WATT / 27WATT

OUTER

250MM

BEAM ANG

10°, 20°, 30°, 40°, 45°, 60°, 90°

COLOR

3000K- 6500K, RGB, (RGBW DMX512)

INPUT VOLTS

24V, 220V AC/DC

MATERIAL

SS BODY & PC GLASS

TECHNICAL SPECIFICATION

- LED Type :- SMD, COB
- LED Maker :- BRIDGELUX, OSRAM, PHILIPS
- LED Life :- 50,000 Hours
- Rendering Index (CRI) :- >80
- Luminous Flux : 120 - 140 .
- Voltage :- 10V .
- Input Voltage :- AC/DC, 220-240V , 50Hz - 60Hz
- Driver Type :- Constant Current .
- Driver Efficiency :- >0.85%
- Driver Type :- Isolated, OSRAM, PHILIPS
- Power Factor :- >0.95
- Under Voltage Protection
- Over voltage Protection



support@lumenolighting.in

www.lumenolighting.in

[@lumeno_lighting](https://www.instagram.com/lumeno_lighting)

MADE IN INDIA





Lumeno Lighting

Technology Solutions

Architectural & Landscape



MODEL
WATT
OUTER
BEAM ANG
COLOR
INPUT VOLT
MATERIAL

LLSPL - SS / PC
6WATT / 9WATT / 18WATT / 27WATT
200MM
10°, 20°, 30°, 40°, 45°, 60°, 90°
3000K- 6500K, RGB, (RGBW DMX512)
24V, 220V AC/DC
SS BODY & PC GLASS



TECHNICAL SPECIFICATION

- LED Type :- SMD, COB
- LED Maker :- BRIDGELUX, OSRAM, PHILIPS
- LED Life :- 50,000 Hours
- Rendering Index (CRI) :- >80
- Luminous Flux : 120 - 140 .
- Voltage :- 10V .
- Input Voltage :- AC/DC, 220-240V , 50Hz - 60Hz
- Driver Type :- Constant Current .
- Driver Efficiency :- >0.85%
- Driver Type :- Isolated, OSRAM, PHILIPS Power
- Factor :- >0.95
- Under Voltage Protection
- Over voltage Protection





Lumeno Lighting
Technology Solutions

Architectural & Landscape



MODEL
WATT
OUTER
BEAM ANG
COLOR
INPUT VOLT
MATERIAL

LLSPL - SS / PC
12WATT / 36WATT
125MM
10°, 20°, 30°, 40°, 45°, 60°, 90°
3000K- 6500K, RGB, (RGBW DMX512)
24V, 220V AC/DC
SS BODY & PC GLASS



TECHNICAL SPECIFICATION

- LED Type :- SMD, COB
- LED Maker :- BRIDGELUX, OSRAM, PHILIPS
- LED Life :- 50,000 Hours
- Rendering Index (CRI) :- >80
- Luminous Flux : 120 - 140 .
- Voltage :- 10V .
- Input Voltage :- AC/DC, 220-240V , 50Hz - 60Hz
- Driver Type :- Constant Current .
- Driver Efficiency :- >0.85%
- Driver Type :- Isolated, OSRAM, PHILIPS
- Power Factor :- >0.95
- Under Voltage Protection
- Over voltage Protection



support@lumenolighting.in

www.lumenolighting.in

[@lumeno_lighting](https://www.instagram.com/lumeno_lighting)

MADE IN INDIA





Lumeno Lighting

Technology Solutions

Architectural & Landscape



MODEL
WATT
OUTER
BEAM ANG
COLOR
INPUT VOLT
MATERIAL

LLSPL - SS / PC
9WATT / 12WATT / 18WATT
225MM
10°, 20°, 30°, 40°, 45°, 60°, 90°
3000K- 6500K, RGB, (RGBW DMX512)
24V, 220V AC/DC
SS BODY & PC GLASS



TECHNICAL SPECIFICATION

- LED Type :- SMD, COB
- LED Maker :- BRIDGELUX, OSRAM, PHILIPS
- LED Life :- 50,000 Hours
- Rendering Index (CRI) :- >80
- Luminous Flux : 120 - 140 .
- Voltage :- 10V .
- Input Voltage :- AC/DC, 220-240V , 50Hz - 60Hz
- Driver Type :- Constant Current .
- Driver Efficiency :- >0.85%
- Driver Type :- Isolated, OSRAM, PHILIPS Power
- Factor :- >0.95
- Under Voltage Protection
- Over voltage Protection





Lumeno Lighting
Technology Solutions

Architectural & Landscape



SURFACE WALL WASHERS



TECHNICAL SPECIFICATION

Model No : LLWL036

Watt : 36W

Dimension(mm) : 500MM, 1 MTR

LED Chip : CREE / Bridgelux

Material : Die Cast Aluminum

Body Color : Grey/Black

Beam Angle : 10°, 20°, 30°, 40°,
45°, 60°, 90°

- Luminous Flux : 100lm/W
- LED Life : 50,000 Hours
- Led Color : 3000K, 4000K, 6500K, RGB, RGBW (DMX)
- Color Rendering Index (CRI) : >80
- Voltage : 10V
- Input Voltage : AC 220-240V , 50Hz - 60Hz
- Driver Type : Constant Current .

- Driver Efficiency : >0.85%
- Driver Type :- Isolated, OSRAM, PHILIPS, INDIAN
- Power Factor : >0.95
- Under Voltage Protection
- Over voltage Protection
- Material : Alu Die Casting



support@lumenolighting.in



www.lumenolighting.in



@lumeno_lighting

MADE IN INDIA





Lumeno Lighting
Technology Solutions

Architectural & Landscape



SURFACE WALL WASHERS



TECHNICAL SPECIFICATION

AC & DC, FITTING AVAILABLE

Model No : LLWL036

Watt : 24W, 36W

Dimension(mm) : 500MM, 1 MTR

LED Chip : CREE / Bridgelux, Osram

Material : Die Cast Aluminum

Body Color : Grey/Black Beam

Angle : 38°

- Luminous Flux : 100lm/W
- LED Life : 50,000 Hours
- Led Color : 3000K, 4000K, 6500K, RGB (RGBW , DMX512)
- Color Rendering Index (CRI) : >80
- Voltage : 10V
- Input Voltage : AC 220-240V , 50Hz - 60Hz
- Driver Type : Constant Current .

- Driver Efficiency : >0.85%
- Driver Type :- Isolated, OSRAM, PHILIPS, INDIAN (IP65)
- Power Factor : >0.95
- Under Voltage Protection
- Over voltage Protection
- Material : Alu Die Casting



support@lumenolighting.in



www.lumenolighting.in



@lumeno_lighting

MADE IN INDIA





Lumeno Lighting
Technology Solutions

Architectural & Landscape



TECHNICAL SPECIFICATION

Model No : LLWL AC FITTING

Watt : 12W, 18W, 24W, 36W, 48W

Dimension(mm) : 300MM, 500MM,
600MM, 1000MM, 1200MM

LED Chip : CREE / Bridgelux, Osram

Material : Die Cast Aluminum

Body Color : Grey/Black Beam

Angle : 120°

Luminous Flux : 100lm/W

LED Life : 50,000 Hours

Led Color : 3000K, 4000K, 6500K, RGB
(RGBW , DMX512)

Color Rendering Index (CRI) : >80

Voltage : 10V

Input Voltage : AC 220-240V , 50Hz - 60Hz

Driver Type : Constant Current .

Driver Efficiency : >0.85%

Driver Type :- Isolated, OSRAM,
PHILIPS, INDIAN (IP65)

Power Factor : >0.95

Under Voltage Protection

Over voltage Protection

Material : Alu Die Casting



support@lumenolighting.in



www.lumenolighting.in



@lumeno_lighting

MADE IN INDIA





Lumeno Lighting
Technology Solutions

Architectural & Landscape



TECHNICAL SPECIFICATION

Model No : LLWL DC FITTING

Watt : 12W, 18W, 24W, 36W, 48W

Dimension(mm) : 300MM, 500MM,
600MM, 1000MM, 1200MM

LED Chip : CREE / Bridgelux, Osram

Material : Die Cast Aluminum

Body Color : Grey/Black Beam

Angle : 120°

Luminous Flux : 100lm/W

LED Life : 50,000 Hours

Led Color : 3000K, 4000K, 6500K, RGB
(RGBW , DMX512)

Color Rendering Index (CRI) : >80

Voltage : 10V

Input Voltage : AC 220-240V , 50Hz - 60Hz

Driver Type : Constant Current .

Driver Efficiency : >0.85%

Driver Type :- Isolated, OSRAM,
PHILIPS, INDIAN (IP65)

Power Factor : >0.95

Under Voltage Protection

Over voltage Protection

Material : Alu Die Casting



support@lumenolighting.in



www.lumenolighting.in



@lumeno_lighting

MADE IN INDIA





Lumeno Lighting
Technology Solutions

Architectural & Landscape



WALL WASHER WITH VISOR



TECHNICAL SPECIFICATION

- Model No : LLWL036
- Watt : 24W, 36W, 48W, 72W
- Dimension(mm) : 500MM, 1 MTR
- LED Chip : CREE / Bridgelux, Osram
- Material : Die Cast Aluminum
- Body Color : Grey/Black Beam
- Angle : 38°

AC & DC, FITTING AVAILABLE

- Luminous Flux : 100lm/W
- LED Life : 50,000
- Hours Led Color : 3000K, 4000K, 6500K, RGB (RGBW , DMX512)
- Color Rendering Index (CRI) : >80
- Voltage : 10V
- Input Voltage : AC 220-240V , 50Hz - 60Hz
- Driver Type : Constant Current .
- Driver Efficiency : >0.85%
- Driver Type :- Isolated, OSRAM, PHILIPS, INDIAN (IP65)
- Power Factor : >0.95
- Under Voltage Protection
- Over voltage Protection
- Material : Alu Die Casting



support@lumenolighting.in



www.lumenolighting.in



@lumeno_lighting

MADE IN INDIA





Lumeno Lighting
Technology Solutions

Architectural & Landscape



TECHNICAL SPECIFICATION

- Model No : LLWL036
- Watt : 18W, 36W
- Dimension(mm) : 500MM, 1 MTR
- LED Chip : CREE / Bridgelux, Osram
- Material : Die Cast Aluminum
- Body Color : Grey/Black
- Beam Angle : 10°, 20°, 30°, 40°, 45°, 60°, 90°

AC & DC, FITTING AVAILABLE

- Luminous Flux : 100lm/W
- LED Life : 50,000 Hours
- Led Color : 3000K, 4000K, 6500K, RGB (RGBW , DMX512)
- Color Rendering Index (CRI) : >80
- Voltage : 10V

- Driver Efficiency : >0.85%
- Driver Type :- Isolated, OSRAM, PHILIPS, INDIAN (IP68)
- Power Factor : >0.95
- Under Voltage Protection
- Over voltage Protection
- Material : Alu Die Casting



support@lumenolighting.in



www.lumenolighting.in



@lumeno_lighting

MADE IN INDIA





Lumeno Lighting

Technology Solutions

Architectural & Landscape



MODEL	WATT
LLST101	20W
LLST102	24W
LLST103	30W
LLST104	36W
LLST104	50W
LLST104	72W
LLST107	100W
LLST108	150W

TECHNICAL SPECIFICATION

LED Type :- SMD
LED Maker :- OSRAM, BRIDGELUX, OSRAM, PHILIPS
Color Temperature :- 3000K, 4000K, 6500K .
Color Rendering Index (CRI) :- >80
Luminous Flux : 140 - 150 .
Voltage :- 6V , 9V .
Input Voltage :- AC 220-240V , 50Hz - 60Hz
Driver Type :- Constant Current .
Driver Efficiency :- >85%
Driver Type :- Isolated, OSRAM, PHILIPS
Power Factor :- >0.95
Under Voltage Protection
Over voltage Protection





Lumeno Lighting

Technology Solutions

Architectural & Landscape



MODEL WATT

LLST109	18W
LLST110	24W
LLST111	36W
LLST112	50W
LLST113	72W
LLST114	100W

TECHNICAL SPECIFICATION

LED Type :- SMD

LED Maker :- OSRAM, BRIDGELUX, OSRAM, PHILIPS

Color Temperature :- 3000K, 4000K, 6500K .

Color Rendering Index (CRI) :- >80

Luminous Flux : 140 - 150 .

Voltage :- 6V , 9V .

Input Voltage :- AC 220-240V , 50Hz - 60Hz

Driver Type :- Constant Current .

Driver Efficiency :- >85%

Driver Type :- Isolated, OSRAM, PHILIPS

Power Factor :- >0.95

Under Voltage Protection

Over voltage Protection



 support@lumenolighting.in

 www.lumenolighting.in

 @lumeno_lighting

MADE IN INDIA





Lumeno Lighting

Technology Solutions

Architectural & Landscape



MODEL	WATT
LLST115	35W
LLST116	50W
LLST117	100W
LLST118	150W
LLST119	200W

TECHNICAL SPECIFICATION

LED Type :- SMD

LED Maker :- BRIDGELUX, OSRAM, PHILIPS

LED Life :- 50,000 Hours

Color Temperature :- 3000K, 4000K, 6500K

Color Rendering Index (CRI) :- >90

Luminous Flux : 120 - 140 .

Voltage :- 6V , 9V .

Input Voltage :- AC 220-240V , 50Hz - 60Hz

Driver Type :- Constant Current .

Driver Efficiency :- >85%

Driver Type :- Isolated, 4KV, INBULT

Power Factor :- >0.95

Under Voltage Protection

Over voltage Protection



support@lumenolighting.in



www.lumenolighting.in



@lumeno_lighting

MADE IN INDIA





Lumeno Lighting

Technology Solutions

Architectural & Landscape



MODEL WATT

LLST120 80W

LLST121 110W

TECHNICAL SPECIFICATION

LED Type :- SMD

LED Maker :- BRIDGELUX, OSRAM, PHILIPS

LED Life :- 50,000 Hours

Color Temperature :- 3000K, 4000K, 6500K,

Color Rendering Index (CRI) :- >80

Luminous Flux : 120 - 140 .

Voltage :- 10V .

Input Voltage :- AC 220-240V , 50Hz - 60Hz

Driver Type :- Constant Current .

Driver Efficiency :- >85%

Driver Type :- Isolated, INBULT, OSRAM, PHILIPS

Power Factor :- >0.95

Under Voltage Protection

Over voltage Protection



support@lumenolighting.in



www.lumenolighting.in



[@lumeno_lighting](https://www.instagram.com/lumeno_lighting)

MADE IN INDIA





Lumeno Lighting

Technology Solutions

Architectural & Landscape



MODEL	WATT
LLST122	80W
LLST123	100W
LLST124	120W
LLST125	150W
LLST126	200W
LLST127	250W

TECHNICAL SPECIFICATION

LED Type :- SMD

LED Maker :- BRIDGELUX, OSRAM, PHILIPS

LED Life :- 50,000 Hours

Color Temperature :- 3000K, 4000K, 6500K,

Color Rendering Index (CRI) :- >80

Luminous Flux : 120 - 140 .

Voltage :- 10V .

Input Voltage :- AC 220-240V , 50Hz - 60Hz

Driver Type :- Constant Current .

Driver Efficiency :- >85%

Driver Type :- Isolated, INBULT, OSRAM, PHILIPS

Power Factor :- >0.95

Under Voltage Protection

Over voltage Protection



 support@lumenolighting.in

 www.lumenolighting.in

 @lumeno_lighting

MADE IN INDIA





Lumeno Lighting
Technology Solutions

Architectural & Landscape



MODEL WATT
LLST128 100W
LLST129 150W

TECHNICAL SPECIFICATION

LED Type :- SMD

LED Maker :- BRIDGELUX, OSRAM, PHILIPS

LED Life :- 50,000 Hours

Color Temperature :- 3000K, 4000K, 6500K,

Color Rendering Index (CRI) :- >80

Luminous Flux : 120 - 140 .

Voltage :- 10V .

Input Voltage :- AC 220-240V , 50Hz - 60Hz

Driver Type :- Constant Current .

Driver Efficiency :- >85%

Driver Type :- Isolated, INBULT, OSRAM, PHILIPS

Power Factor :- >0.95

Under Voltage Protection

Over voltage Protection



support@lumenolighting.in



www.lumenolighting.in



[@lumeno_lighting](https://www.instagram.com/lumeno_lighting)

MADE IN INDIA






Lumeno Lighting

Technology Solutions

Architectural & Landscape

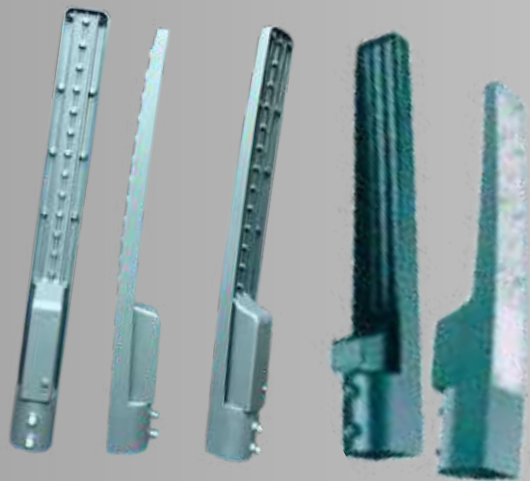

MODEL	WATT
LLST130	24W
LLST131	36W
LLST132	50W

TECHNICAL SPECIFICATION

LED Type :- SMD

LED Maker :- BRIDGELUX, OSRAM, PHILIPS

LED Life :- 50,000 Hours

Color Temperature :- 3000K, 4000K, 6500K,

Color Rendering Index (CRI) :- >80

Luminous Flux : 120 - 140 .

Voltage :- 10V .

Input Voltage :- AC 220-240V , 50Hz - 60Hz

Driver Type :- Constant Current .

Driver Efficiency :- >85%

Driver Type :- Isolated, INBULT, OSRAM, PHILIPS

Power Factor :- >0.95

Under Voltage Protection

Over voltage Protection



 support@lumenolighting.in

 www.lumenolighting.in

 [@lumeno_lighting](https://www.instagram.com/lumeno_lighting)

MADE IN INDIA





Lumeno Lighting

Technology Solutions

Architectural & Landscape



MODEL WATT TECHNICAL SPECIFICATION



LLFL101	20W	LED Type :- SMD
LLFL102	30W	LED Maker :- BRIDGELUX, OSRAM, PHILIPS
LLFL103	50W	LED Life :- 50,000 Hours
LLFL104	100W	Color Temperature :- 3000K, 4000K, 6500K,
LLFL105	150W	Color Rendering Index (CRI) :- >80
LLFL106	200W	Luminous Flux : 120 - 140 .
LLFL107	250W	Voltage :- 10V .
LLFL108	300W	Input Voltage :- AC 220-240V , 50Hz - 60Hz
LLFL109	400W	Driver Type :- Constant Current .
LLFL 110	500W	Driver Efficiency :- >85%
		Driver Type :- Isolated, INBULT, OSRAM, PHILIPS
		Power Factor :- >0.95
		Under Voltage Protection
		Over voltage Protection





Lumeno Lighting

Technology Solutions

Architectural & Landscape



MODEL WATT TECHNICAL SPECIFICATION

LLFL111	20W	LED Type :- SMD
LLFL112	30W	LED Maker :- BRIDGELUX, OSRAM, PHILIPS
LLFL113	50W	LED Life :- 50,000 Hours
LLFL114	100W	Color Temperature :- 3000K, 4000K, 6500K,
LLFL115	150W	Color Rendering Index (CRI) :- >80
LLFL116	200W	Luminous Flux : 120 - 140 .
LLFL117	250W	Voltage :- 10V .
LLFL118	300W	Input Voltage :- AC 220-240V , 50Hz - 60Hz
LLFL119	400W	Driver Type :- Constant Current .
LLFL 120	500W	Driver Efficiency :- >85%
		Driver Type :- Isolated, INBULT, OSRAM, PHILIPS
		Power Factor :- >0.95
		Under Voltage Protection
		Over voltage Protection





Lumeno Lighting
Technology Solutions

Architectural & Landscape



MODEL WATT TECHNICAL SPECIFICATION

LLFL121	50W
LLFL122	100W
LLFL123	200W

LED Type :- SMD
LED Maker :- BRIDGELUX, OSRAM, PHILIPS
LED Life :- 50,000 Hours
Color Temperature :- 3000K, 4000K, 6500K,
Color Rendering Index (CRI) :- >80
Luminous Flux : 120 - 140 .
Voltage :- 10V .
Input Voltage :- AC 220-240V , 50Hz - 60Hz
Driver Type :- Constant Current .
Driver Efficiency :- >85%
Driver Type :- Isolated, INBULT, OSRAM, PHILIPS
Power Factor :- >0.95
Under Voltage Protection
Over voltage Protection





Lumeno Lighting
Technology Solutions

Architectural & Landscape



MODEL WATT TECHNICAL SPECIFICATION

LLFL124	50W	LED Type :- SMD
LLFL125	100W	LED Maker :- BRIDGELUX, OSRAM, PHILIPS
LLFL126	150W	LED Life :- 50,000 Hours
LLFL127	200W	Color Temperature :- 3000K, 4000K, 6500K,
LLFL128	300W	Color Rendering Index (CRI) :- >80
LLFL129	400W	Luminous Flux : 120 - 140 .
LLFL130	600W	Voltage :- 10V .
		Input Voltage :- AC 220-240V , 50Hz - 60Hz
		Driver Type :- Constant Current .
		Driver Efficiency :- >85%
		Driver Type :- Isolated, INBULT, OSRAM, PHILIPS
		Power Factor :- >0.95
		Under Voltage Protection
		Over voltage Protection





Lumeno Lighting

Technology Solutions

Architectural & Landscape



MODEL WATT TECHNICAL SPECIFICATION

LLFL131	50W	LED Type :- SMD
LLFL132	100W	LED Maker :- BRIDGELUX, OSRAM, PHILIPS
LLFL133	150W	LED Life :- 50,000 Hours
LLFL134	200W	Color Temperature :- 3000K, 4000K, 6500K,
LLFL135	300W	Color Rendering Index (CRI) :- >80
LLFL136	400W	Luminous Flux : 120 - 140 .
LLFL137	600W	Voltage :- 10V .
		Input Voltage :- AC 220-240V , 50Hz - 60Hz
		Driver Type :- Constant Current .
		Driver Efficiency :- >85%
		Driver Type :- Isolated, INBULT, OSRAM, PHILIPS
		Power Factor :- >0.95
		Under Voltage Protection
		Over voltage Protection





Lumeno Lighting
Technology Solutions

Architectural & Landscape



MODEL WATT TECHNICAL SPECIFICATION

LLFL138	50W
LLFL139	100W
LLFL140	150W
LLFL141	200W
LLFL142	300W
LLFL143	400W
LLFL144	600W

LED Type :- SMD
LED Maker :- BRIDGELUX, OSRAM, PHILIPS
LED Life :- 50,000 Hours
Color Temperature :- 3000K, 4000K, 6500K,
Color Rendering Index (CRI) :- >80
Luminous Flux : 120 - 140 .
Voltage :- 10V .
Input Voltage :- AC 220-240V , 50Hz - 60Hz
Driver Type :- Constant Current .
Driver Efficiency :- >85%
Driver Type :- Isolated, INBULT, OSRAM, PHILIPS
Power Factor :- >0.95
Under Voltage Protection
Over voltage Protection





Lumeno Lighting
Technology Solutions

Architectural & Landscape



MODEL WATT TECHNICAL SPECIFICATION

LLFL145	50W
LLFL146	72W
LLFL147	100W
LLFL148	150W
LLFL149	150W
LLFL150	200W

LED Type :- SMD
LED Maker :- BRIDGELUX, OSRAM, PHILIPS
LED Life :- 50,000 Hours
Color Temperature :- 3000K, 4000K, 6500K,
Color Rendering Index (CRI) :- >80
Luminous Flux : 120 - 140 .
Voltage :- 10V .
Input Voltage :- AC 220-240V , 50Hz - 60Hz
Driver Type :- Constant Current .
Driver Efficiency :- >85%
Driver Type :- Isolated, INBULT, OSRAM, PHILIPS
Power Factor :- >0.95
Under Voltage Protection
Over voltage Protection

DMX512, FITTING





Lumeno Lighting

Technology Solutions

Architectural & Landscape



MODEL WATT

LLUFO101 100W

LLUFO102 150W

LLUFO103 200W

TECHNICAL SPECIFICATION

LED Type :- SMD

LED Maker :- BRIDGELUX, OSRAM, PHILIPS

LED Life :- 50,000 Hours

Color Temperature :- 3000K, 4000K, 6500K,

Color Rendering Index (CRI) :- >80

Luminous Flux : 120 - 140 .

Voltage :- 10V .

Input Voltage :- AC 220-240V , 50Hz - 60Hz

Driver Type :- Constant Current .

Driver Efficiency :- >85%

Driver Type :- Isolated, INBULT, OSRAM, PHILIPS

Power Factor :- >0.95

Under Voltage Protection

Over voltage Protection





Lumeno Lighting
Technology Solutions

Architectural & Landscape



MODEL WATT TECHNICAL SPECIFICATION

LLUF0104 50W
LLUFO105 80W
LLUFO106 100W
LLUFO107 120W
LLUFO108 150W
LLUFO109 180W

LED Type :- SMD
LED Maker :- BRIDGELUX, OSRAM, PHILIPS
LED Life :- 50,000 Hours
Color Temperature :- 3000K, 4000K, 6500K,
Color Rendering Index (CRI) :- >80
Luminous Flux : 120 - 140 .
Voltage :- 10V .
Input Voltage :- AC 220-240V , 50Hz - 60Hz
Driver Type :- Constant Current .
Driver Efficiency :- >85%
Driver Type :- Isolated, INBULT, OSRAM, PHILIPS
Power Factor :- >0.95
Under Voltage Protection
Over voltage Protection





LUMENO LIGHTING TECHNOLOGY SOLUTIONS

Architectural and Landscape Lighting

Contact

Bangalore Karnataka - 560040
Email- support@lumenolighting.in
www.lumenolighting.in



support@lumenolighting.in



www.lumenolighting.in




[@lumeno_lighting](https://www.instagram.com/lumeno_lighting) **MADE IN INDIA**





LUMENO LIGHTING TECHNOLOGY SOLUTIONS

BOLLARDS LIGHTS



IP68



support@lumenolighting.in



www.lumenolighting.in



[@lumeno_lighting](https://www.instagram.com/lumeno_lighting) **MADE IN INDIA**






BOLLARD LIGHTS



- Model :- LLBL101
- Wattage :- 5W - 20W
- Chip Brand :- CREE , BRIDGLUX
- Color Temp :- 3000K, 4000K, 6500K
- IP Rating :- IP65
- Lifetime :- 50,000hrs
- Height :- As Per Requirement
- Housing Material :- Aluminum & M.S Powder Coated



- Model :- LLBL102
- Wattage :- 5W - 20W
- Chip Brand :- CREE , BRIDGLUX
- Color Temp :- 3000K, 4000K, 6500K
- IP Rating :- IP65
- Lifetime :- 50,000hrs
- Height :- As Per Requirement
- Housing Material :- Aluminum & M.S Powder Coated



support@lumenolighting.in



www.lumenolighting.in



[@lumeno_lighting](https://www.instagram.com/lumeno_lighting) MADE IN INDIA






BOLLARD LIGHTS



- Model :- LLBL103
- Wattage :- 5W - 20W
- Chip Brand :- CREE , BRIDGLUX
- Color Temp :- 3000K, 4000K, 6500K
- IP Rating :- IP65
- Lifetime :- 50,000hrs
- Height :- As Per Requirement
- Housing Material :- Aluminum & M.S Powder Coated



- Model :- LLBL104
- Wattage :- 5W - 20W
- Chip Brand :- CREE , BRIDGLUX
- Color Temp :- 3000K, 4000K, 6500K
- IP Rating :- IP65
- Lifetime :- 50,000hrs
- Height :- As Per Requirement
- Housing Material :- Aluminum & M.S Powder Coated



support@lumenolighting.in



www.lumenolighting.in



[@lumeno_lighting](https://www.instagram.com/lumeno_lighting) MADE IN INDIA





BOLLARD LIGHTS



- Model :- LLBL105
- Wattage :- 5W - 20W
- Chip Brand :- CREE , BRIDGLUX
- Color Temp :- 3000K, 4000K, 6500K
- IP Rating :- IP65
- Lifetime :- 50,000hrs
- Height :- As Per Requirement
- Housing Material :- Aluminum & M.S Powder Coated



- Model :- LLBL106
- Wattage :- 5W - 20W
- Chip Brand :- CREE , BRIDGLUX
- Color Temp :- 3000K, 4000K, 6500K
- IP Rating :- IP65
- Lifetime :- 50,000hrs
- Height :- As Per Requirement
- Housing Material :- Aluminum & M.S Powder Coated



support@lumenolighting.in



www.lumenolighting.in



[@lumeno_lighting](https://www.instagram.com/lumeno_lighting) MADE IN INDIA






BOLLARD LIGHTS



- Model :- LLBL107
- Wattage :- 5W - 20W
- Chip Brand :- CREE , BRIDGLUX
- Color Temp :- 3000K, 4000K, 6500K
- IP Rating :- IP65
- Lifetime :- 50,000hrs
- Height :- As Per Requirement
- Housing Material :- Aluminum & M.S Powder Coated



- Model :- LLBL108
- Wattage :- 5W - 20W
- Chip Brand :- CREE , BRIDGLUX
- Color Temp :- 3000K, 4000K, 6500K
- IP Rating :- IP65
- Lifetime :- 50,000hrs
- Height :- As Per Requirement
- Housing Material :- Aluminum & M.S Powder Coated



support@lumenolighting.in



www.lumenolighting.in



[@lumeno_lighting](https://www.instagram.com/lumeno_lighting) MADE IN INDIA





BOLLARD LIGHTS



- Model :- LLBL109
- Wattage :- 5W - 20W
- Chip Brand :- CREE , BRIDGLUX
- Color Temp :- 3000K, 4000K, 6500K
- IP Rating :- IP65
- Lifetime :- 50,000hrs
- Height :- As Per Requirement
- Housing Material :- Aluminum & M.S Powder Coated



- Model :- LLBL110
- Wattage :- 5W - 20W
- Chip Brand :- CREE , BRIDGLUX
- Color Temp :- 3000K, 4000K, 6500K
- IP Rating :- IP65
- Lifetime :- 50,000hrs
- Height :- As Per Requirement
- Housing Material :- Aluminum & M.S Powder Coated



support@lumenolighting.in



www.lumenolighting.in



[@lumeno_lighting](https://www.instagram.com/lumeno_lighting) MADE IN INDIA






BOLLARD LIGHTS



- Model :- LLBL111
- Wattage :- 5W - 20W
- Chip Brand :- CREE , BRIDGLUX
- Color Temp :- 3000K, 4000K, 6500K
- IP Rating :- IP65
- Lifetime :- 50,000hrs
- Height :- As Per Requirement
- Housing Material :- Aluminum & M.S Powder Coated



- Model :- LLBL112
- Wattage :- 5W - 20W
- Chip Brand :- CREE , BRIDGLUX
- Color Temp :- 3000K, 4000K, 6500K
- IP Rating :- IP65
- Lifetime :- 50,000hrs
- Height :- As Per Requirement
- Housing Material :- Aluminum & M.S Powder Coated



support@lumenolighting.in



www.lumenolighting.in



[@lumeno_lighting](https://www.instagram.com/lumeno_lighting) MADE IN INDIA






BOLLARD LIGHTS



- Model :- LLBL113
- Wattage :- 5W - 20W
- Chip Brand :- CREE , BRIDGLUX
- Color Temp :- 3000K, 4000K, 6500K
- IP Rating :- IP65
- Lifetime :- 50,000hrs
- Height :- As Per Requirement
- Housing Material :- Aluminum & M.S Powder Coated



- Model :- LLBL114
- Wattage :- 5W - 20W
- Chip Brand :- CREE , BRIDGLUX
- Color Temp :- 3000K, 4000K, 6500K
- IP Rating :- IP65
- Lifetime :- 50,000hrs
- Height :- As Per Requirement
- Housing Material :- Aluminum & M.S Powder Coated



support@lumenolighting.in



www.lumenolighting.in



@lumenolighting MADE IN INDIA





BOLLARD LIGHTS



- Model :- LLBL115
- Wattage :- 5W - 20W
- Chip Brand :- CREE , BRIDGLUX
- Color Temp :- 3000K, 4000K, 6500K
- IP Rating :- IP65
- Lifetime :- 50,000hrs
- Height :- As Per Requirement
- Housing Material :- Aluminum & M.S Powder Coated



- Model :- LLBL116
- Wattage :- 5W - 20W
- Chip Brand :- CREE , BRIDGLUX
- Color Temp :- 3000K, 4000K, 6500K
- IP Rating :- IP65
- Lifetime :- 50,000hrs
- Height :- As Per Requirement
- Housing Material :- Aluminum & M.S Powder Coated



support@lumenolighting.in



www.lumenolighting.in



[@lumeno_lighting](https://www.instagram.com/lumeno_lighting) MADE IN INDIA





BOLLARD LIGHTS



- Model :- LLBL117
- Wattage :- 5W - 20W
- Chip Brand :- CREE , BRIDGLUX
- Color Temp :- 3000K, 4000K, 6500K
- IP Rating :- IP65
- Lifetime :- 50,000hrs
- Height :- As Per Requirement
- Housing Material :- Aluminum & M.S Powder Coated



- Model :- LLBL118
- Wattage :- 5W - 20W
- Chip Brand :- CREE , BRIDGLUX
- Color Temp :- 3000K, 4000K, 6500K
- IP Rating :- IP65
- Lifetime :- 50,000hrs
- Height :- As Per Requirement
- Housing Material :- Aluminum & M.S Powder Coated



support@lumenolighting.in



www.lumenolighting.in



[@lumeno_lighting](https://www.instagram.com/lumeno_lighting) MADE IN INDIA





BOLLARD LIGHTS




- **Model** :- LLBL119
- **Wattage** :- 5W - 20W
- **Chip Brand** :- CREE , BRIDGLUX
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height** :- As Per Requirement
- **Housing Material** :- Aluminum & M.S Powder Coated



- **Model**
- **Wattage**
- **Chip Brand**
- **Color Temp**
- **IP Rating**
- **Lifetime**
- **Height**
- **Housing Material**



- :- LLBL120
- :- 5W - 20W
- :- CREE , BRIDGLUX
- :- 3000K, 4000K, 6500K
- :- IP65
- :- 50,000hrs
- :- As Per Requirement
- :- Aluminum & M.S Powder Coated



support@lumenolighting.in



www.lumenolighting.in



[@lumeno_lighting](https://www.instagram.com/lumeno_lighting) **MADE IN INDIA**






BOLLARD LIGHTS



- Model :- LLBL121
- Wattage :- 5W - 20W
- Chip Brand :- CREE , BRIDGLUX
- Color Temp :- 3000K, 4000K, 6500K
- IP Rating :- IP65
- Lifetime :- 50,000hrs
- Height :- As Per Requirement
- Housing Material :- Aluminum & M.S Powder Coated



- Model :- LLBL122
- Wattage :- 5W - 20W
- Chip Brand :- CREE , BRIDGLUX
- Color Temp :- 3000K, 4000K, 6500K
- IP Rating :- IP65
- Lifetime :- 50,000hrs
- Height :- As Per Requirement
- Housing Material :- Aluminum & M.S Powder Coated



support@lumenolighting.in



www.lumenolighting.in



[@lumeno_lighting](https://www.instagram.com/lumeno_lighting) MADE IN INDIA






BOLLARD LIGHTS



- Model :- LLBL123
- Wattage :- 5W - 20W
- Chip Brand :- CREE , BRIDGLUX
- Color Temp :- 3000K, 4000K, 6500K
- IP Rating :- IP65
- Lifetime :- 50,000hrs
- Height :- As Per Requirement
- Housing Material :- Aluminum & M.S Powder Coated



- Model :- LLBL124
- Wattage :- 5W - 20W
- Chip Brand :- CREE , BRIDGLUX
- Color Temp :- 3000K, 4000K, 6500K
- IP Rating :- IP65
- Lifetime :- 50,000hrs
- Height :- As Per Requirement
- Housing Material :- Aluminum & M.S Powder Coated



support@lumenolighting.in



www.lumenolighting.in



[@lumeno_lighting](https://www.instagram.com/lumeno_lighting) **MADE IN INDIA**






BOLLARD LIGHTS



- Model :- LLBL125
- Wattage :- 5W - 20W
- Chip Brand :- CREE , BRIDGLUX
- Color Temp :- 3000K, 4000K, 6500K
- IP Rating :- IP65
- Lifetime :- 50,000hrs
- Height :- As Per Requirement
- Housing Material :- Aluminum & M.S Powder Coated



- Model :- LLBL126
- Wattage :- 5W - 20W
- Chip Brand :- CREE , BRIDGLUX
- Color Temp :- 3000K, 4000K, 6500K
- IP Rating :- IP65
- Lifetime :- 50,000hrs
- Height :- As Per Requirement
- Housing Material :- Aluminum & M.S Powder Coated



support@lumenolighting.in



www.lumenolighting.in



[@lumeno_lighting](https://www.instagram.com/lumeno_lighting) MADE IN INDIA






BOLLARD LIGHTS



- Model :- LLBL127
- Wattage :- 5W - 20W
- Chip Brand :- CREE , BRIDGLUX
- Color Temp :- 3000K, 4000K, 6500K
- IP Rating :- IP65
- Lifetime :- 50,000hrs
- Height :- As Per Requirement
- Housing Material :- Aluminum & M.S Powder Coated



- Model :- LLBL128
- Wattage :- 5W - 20W
- Chip Brand :- CREE , BRIDGLUX
- Color Temp :- 3000K, 4000K, 6500K
- IP Rating :- IP65
- Lifetime :- 50,000hrs
- Height :- As Per Requirement
- Housing Material :- Aluminum & M.S Powder Coated



support@lumenolighting.in



www.lumenolighting.in



[@lumeno_lighting](https://www.instagram.com/lumeno_lighting) MADE IN INDIA






BOLLARD LIGHTS



- Model :- LLBL129
- Wattage :- 5W - 20W
- Chip Brand :- CREE , BRIDGLUX
- Color Temp :- 3000K, 4000K, 6500K
- IP Rating :- IP65
- Lifetime :- 50,000hrs
- Height :- As Per Requirement
- Housing Material :- Aluminum & M.S Powder Coated



- Model :- LLBL130
- Wattage :- 5W - 20W
- Chip Brand :- CREE , BRIDGLUX
- Color Temp :- 3000K, 4000K, 6500K
- IP Rating :- IP65
- Lifetime :- 50,000hrs
- Height :- As Per Requirement
- Housing Material :- Aluminum & M.S Powder Coated



support@lumenolighting.in



www.lumenolighting.in



[@lumeno_lighting](https://www.instagram.com/lumeno_lighting) MADE IN INDIA






BOLLARD LIGHTS



- Model :- LLBL131
- Wattage :- 5W - 20W
- Chip Brand :- CREE , BRIDGLUX
- Color Temp :- 3000K, 4000K, 6500K
- IP Rating :- IP65
- Lifetime :- 50,000hrs
- Height :- As Per Requirement
- Housing Material :- Aluminum & M.S Powder Coated



- Model :- LLBL132
- Wattage :- 5W - 20W
- Chip Brand :- CREE , BRIDGLUX
- Color Temp :- 3000K, 4000K, 6500K
- IP Rating :- IP65
- Lifetime :- 50,000hrs
- Height :- As Per Requirement
- Housing Material :- Aluminum & M.S Powder Coated



support@lumenolighting.in



www.lumenolighting.in



[@lumeno_lighting](https://www.instagram.com/lumeno_lighting) MADE IN INDIA






BOLLARD LIGHTS



- Model :- LLBL133
- Wattage :- 5W - 20W
- Chip Brand :- CREE , BRIDGLUX
- Color Temp :- 3000K, 4000K, 6500K
- IP Rating :- IP65
- Lifetime :- 50,000hrs
- Height :- As Per Requirement
- Housing Material :- Aluminum & M.S Powder Coated



- Model :- LLBL134
- Wattage :- 5W - 20W
- Chip Brand :- CREE , BRIDGLUX
- Color Temp :- 3000K, 4000K, 6500K
- IP Rating :- IP65
- Lifetime :- 50,000hrs
- Height :- As Per Requirement
- Housing Material :- Aluminum & M.S Powder Coated



support@lumenolighting.in



www.lumenolighting.in



[@lumeno_lighting](https://www.instagram.com/lumeno_lighting) MADE IN INDIA






BOLLARD LIGHTS



- Model :- LLBL135
- Wattage :- 5W - 20W
- Chip Brand :- CREE , BRIDGLUX
- Color Temp :- 3000K, 4000K, 6500K
- IP Rating :- IP65
- Lifetime :- 50,000hrs
- Height :- As Per Requirement
- Housing Material :- Aluminum & M.S Powder Coated

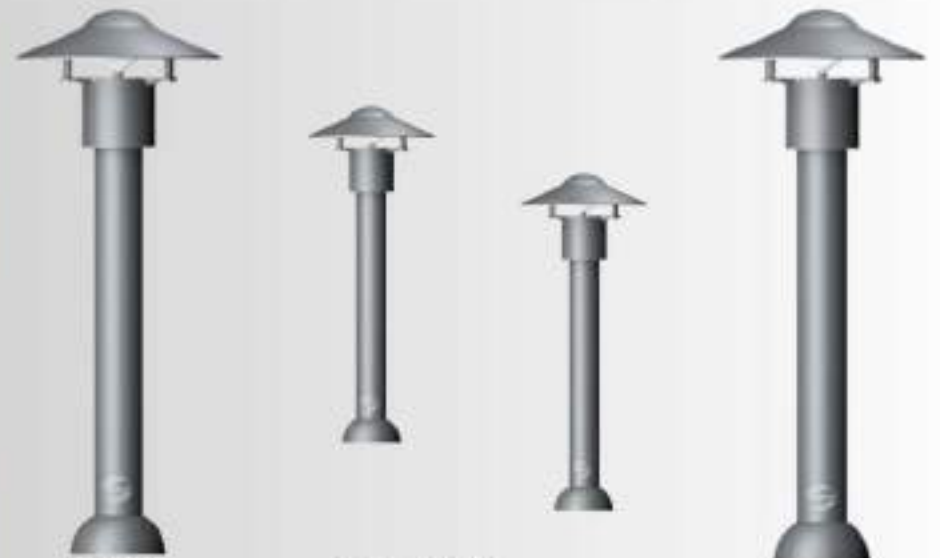

- Model :- LLBL136
- Wattage :- 5W - 20W
- Chip Brand :- CREE , BRIDGLUX
- Color Temp :- 3000K, 4000K, 6500K
- IP Rating :- IP65
- Lifetime :- 50,000hrs
- Height :- As Per Requirement
- Housing Material :- Aluminum & M.S Powder Coated



support@lumenolighting.in



www.lumenolighting.in



[@lumeno_lighting](https://www.instagram.com/lumeno_lighting) MADE IN INDIA






BOLLARD LIGHTS



- Model :- LLBL137
- Wattage :- 5W - 20W
- Chip Brand :- CREE , BRIDGLUX
- Color Temp :- 3000K, 4000K, 6500K
- IP Rating :- IP65
- Lifetime :- 50,000hrs
- Height :- As Per Requirement
- Housing Material :- Aluminum & M.S Powder Coated



- Model :- LLBL138
- Wattage :- 5W - 20W
- Chip Brand :- CREE , BRIDGLUX
- Color Temp :- 3000K, 4000K, 6500K
- IP Rating :- IP65
- Lifetime :- 50,000hrs
- Height :- As Per Requirement
- Housing Material :- Aluminum & M.S Powder Coated



support@lumenolighting.in



www.lumenolighting.in



[@lumeno_lighting](https://www.instagram.com/lumeno_lighting) MADE IN INDIA





BOLLARD LIGHTS



- Model :- LLBL139
- Wattage :- 5W - 20W
- Chip Brand :- CREE , BRIDGLUX
- Color Temp :- 3000K, 4000K, 6500K
- IP Rating :- IP65
- Lifetime :- 50,000hrs
- Height :- As Per Requirement
- Housing Material :- Aluminum & M.S Powder Coated



- Model :- LLBL140
- Wattage :- 5W - 20W
- Chip Brand :- CREE , BRIDGLUX
- Color Temp :- 3000K, 4000K, 6500K
- IP Rating :- IP65
- Lifetime :- 50,000hrs
- Height :- As Per Requirement
- Housing Material :- Aluminum & M.S Powder Coated



support@lumenolighting.in



www.lumenolighting.in



[@lumeno_lighting](https://www.instagram.com/lumeno_lighting) MADE IN INDIA






BOLLARD LIGHTS



- Model :- LLBL141
- Wattage :- 5W - 20W
- Chip Brand :- CREE , BRIDGLUX
- Color Temp :- 3000K, 4000K, 6500K
- IP Rating :- IP65
- Lifetime :- 50,000hrs
- Height :- As Per Requirement
- Housing Material :- Aluminum & M.S Powder Coated



- Model :- LLBL142
- Wattage :- 5W - 20W
- Chip Brand :- CREE , BRIDGLUX
- Color Temp :- 3000K, 4000K, 6500K
- IP Rating :- IP65
- Lifetime :- 50,000hrs
- Height :- As Per Requirement
- Housing Material :- Aluminum & M.S Powder Coated



support@lumenolighting.in



www.lumenolighting.in



[@lumeno_lighting](https://www.instagram.com/lumeno_lighting) MADE IN INDIA






BOLLARD LIGHTS



- Model :- LLBL142
- Wattage :- 5W - 20W
- Chip Brand :- CREE , BRIDGLUX
- Color Temp :- 3000K, 4000K, 6500K
- IP Rating :- IP65
- Lifetime :- 50,000hrs
- Height :- As Per Requirement
- Housing Material :- Aluminum & M.S Powder Coated



- Model :- LLBL143
- Wattage :- 5W - 20W
- Chip Brand :- CREE , BRIDGLUX
- Color Temp :- 3000K, 4000K, 6500K
- IP Rating :- IP65
- Lifetime :- 50,000hrs
- Height :- As Per Requirement
- Housing Material :- Aluminum & M.S Powder Coated



support@lumenolighting.in



www.lumenolighting.in



@lumenolighting MADE IN INDIA






BOLLARD LIGHTS



- Model :- LLBL144
- Wattage :- 5W - 20W
- Chip Brand :- CREE , BRIDGLUX
- Color Temp :- 3000K, 4000K, 6500K
- IP Rating :- IP65
- Lifetime :- 50,000hrs
- Height :- As Per Requirement
- Housing Material :- Aluminum & M.S Powder Coated



- Model :- LLBL145
- Wattage :- 5W - 20W
- Chip Brand :- CREE , BRIDGLUX
- Color Temp :- 3000K, 4000K, 6500K
- IP Rating :- IP65
- Lifetime :- 50,000hrs
- Height :- As Per Requirement
- Housing Material :- Aluminum & M.S Powder Coated



support@lumenolighting.in



www.lumenolighting.in



@lumenolighting MADE IN INDIA






BOLLARD LIGHTS



- Model :- LLBL146
- Wattage :- 5W - 20W
- Chip Brand :- CREE , BRIDGLUX
- Color Temp :- 3000K, 4000K, 6500K
- IP Rating :- IP65
- Lifetime :- 50,000hrs
- Height :- As Per Requirement
- Housing Material :- Aluminum & M.S Powder Coated



- Model :- LLBL147
- Wattage :- 5W - 20W
- Chip Brand :- CREE , BRIDGLUX
- Color Temp :- 3000K, 4000K, 6500K
- IP Rating :- IP65
- Lifetime :- 50,000hrs
- Height :- As Per Requirement
- Housing Material :- Aluminum & M.S Powder Coated



support@lumenolighting.in



www.lumenolighting.in



@lumenolighting MADE IN INDIA






BOLLARD LIGHTS



- Model :- LLBL148
- Wattage :- 5W - 20W
- Chip Brand :- CREE , BRIDGLUX
- Color Temp :- 3000K, 4000K, 6500K
- IP Rating :- IP65
- Lifetime :- 50,000hrs
- Height :- As Per Requirement
- Housing Material :- Aluminum & M.S Powder Coated



- Model :- LLBL149
- Wattage :- 5W - 20W
- Chip Brand :- CREE , BRIDGLUX
- Color Temp :- 3000K, 4000K, 6500K
- IP Rating :- IP65
- Lifetime :- 50,000hrs
- Height :- As Per Requirement
- Housing Material :- Aluminum & M.S Powder Coated



support@lumenolighting.in



www.lumenolighting.in



[@lumeno_lighting](https://www.instagram.com/lumeno_lighting) MADE IN INDIA






BOLLARD LIGHTS



- Model :- LLBL150
- Wattage :- 5W - 20W
- Chip Brand :- CREE , BRIDGLUX
- Color Temp :- 3000K, 4000K, 6500K
- IP Rating :- IP65
- Lifetime :- 50,000hrs
- Height :- As Per Requirement
- Housing Material :- Aluminum & M.S Powder Coated



- Model :- LLBL151
- Wattage :- 5W - 20W
- Chip Brand :- CREE , BRIDGLUX
- Color Temp :- 3000K, 4000K, 6500K
- IP Rating :- IP65
- Lifetime :- 50,000hrs
- Height :- As Per Requirement
- Housing Material :- Aluminum & M.S Powder Coated



support@lumenolighting.in



www.lumenolighting.in



[@lumeno_lighting](https://www.instagram.com/lumeno_lighting) MADE IN INDIA






BOLLARD LIGHTS



- Model :- LLBL152
- Wattage :- 5W - 20W
- Chip Brand :- CREE , BRIDGLUX
- Color Temp :- 3000K, 4000K, 6500K
- IP Rating :- IP65
- Lifetime :- 50,000hrs
- Height :- As Per Requirement
- Housing Material :- Aluminum & M.S Powder Coated



- Model :- LLBL153
- Wattage :- 5W - 20W
- Chip Brand :- CREE , BRIDGLUX
- Color Temp :- 3000K, 4000K, 6500K
- IP Rating :- IP65
- Lifetime :- 50,000hrs
- Height :- As Per Requirement
- Housing Material :- Aluminum & M.S Powder Coated



support@lumenolighting.in



www.lumenolighting.in



@lumeno_lighting MADE IN INDIA






BOLLARD LIGHTS



- Model :- LLBL154
- Wattage :- 5W - 20W
- Chip Brand :- CREE , BRIDGLUX
- Color Temp :- 3000K, 4000K, 6500K
- IP Rating :- IP65
- Lifetime :- 50,000hrs
- Height :- As Per Requirement
- Housing Material :- Aluminum & M.S Powder Coated



- Model :- LLBL155
- Wattage :- 5W - 20W
- Chip Brand :- CREE , BRIDGLUX
- Color Temp :- 3000K, 4000K, 6500K
- IP Rating :- IP65
- Lifetime :- 50,000hrs
- Height :- As Per Requirement
- Housing Material :- Aluminum & M.S Powder Coated



support@lumenolighting.in



www.lumenolighting.in



@lumenolighting

MADE IN INDIA





BOLLARD LIGHTS



- Model :- LLBL156
- Wattage :- 5W - 20W
- Chip Brand :- CREE , BRIDGLUX
- Color Temp :- 3000K, 4000K, 6500K
- IP Rating :- IP65
- Lifetime :- 50,000hrs
- Height :- As Per Requirement
- Housing Material :- Aluminum & M.S Powder Coated



- Model :- LLBL157
- Wattage :- 5W - 20W
- Chip Brand :- CREE , BRIDGLUX
- Color Temp :- 3000K, 4000K, 6500K
- IP Rating :- IP65
- Lifetime :- 50,000hrs
- Height :- As Per Requirement
- Housing Material :- Aluminum & M.S Powder Coated



support@lumenolighting.in



www.lumenolighting.in



@lumeno_lighting MADE IN INDIA






BOLLARD LIGHTS



- Model :- LLBL158
- Wattage :- 5W - 20W
- Chip Brand :- CREE , BRIDGLUX
- Color Temp :- 3000K, 4000K, 6500K
- IP Rating :- IP65
- Lifetime :- 50,000hrs
- Height :- As Per Requirement
- Housing Material :- Aluminum & M.S Powder Coated



- Model :- LLBL159
- Wattage :- 5W - 20W
- Chip Brand :- CREE , BRIDGLUX
- Color Temp :- 3000K, 4000K, 6500K
- IP Rating :- IP65
- Lifetime :- 50,000hrs
- Height :- As Per Requirement
- Housing Material :- Aluminum & M.S Powder Coated



support@lumenolighting.in



www.lumenolighting.in



@lumenolighting MADE IN INDIA






BOLLARD LIGHTS



- Model :- LLBL160
- Wattage :- 5W - 20W
- Chip Brand :- CREE , BRIDGLUX
- Color Temp :- 3000K, 4000K, 6500K
- IP Rating :- IP65
- Lifetime :- 50,000hrs
- Height :- As Per Requirement
- Housing Material :- Aluminum & M.S Powder Coated



- Model :- LLBL161
- Wattage :- 5W - 20W
- Chip Brand :- CREE , BRIDGLUX
- Color Temp :- 3000K, 4000K, 6500K
- IP Rating :- IP65
- Lifetime :- 50,000hrs
- Height :- As Per Requirement
- Housing Material :- Aluminum & M.S Powder Coated



support@lumenolighting.in



www.lumenolighting.in



@lumeno_lighting

MADE IN INDIA






BOLLARD LIGHTS



- Model :- LLBL162
- Wattage :- 5W - 20W
- Chip Brand :- CREE , BRIDGLUX
- Color Temp :- 3000K, 4000K, 6500K
- IP Rating :- IP65
- Lifetime :- 50,000hrs
- Height :- As Per Requirement
- Housing Material :- Aluminum & M.S Powder Coated



- Model :- LLBL163
- Wattage :- 5W - 20W
- Chip Brand :- CREE , BRIDGLUX
- Color Temp :- 3000K, 4000K, 6500K
- IP Rating :- IP65
- Lifetime :- 50,000hrs
- Height :- As Per Requirement
- Housing Material :- Aluminum & M.S Powder Coated



support@lumenolighting.in



www.lumenolighting.in



@lumenolighting MADE IN INDIA






BOLLARD LIGHTS



- Model :- LLBL164
- Wattage :- 5W - 20W
- Chip Brand :- CREE , BRIDGLUX
- Color Temp :- 3000K, 4000K, 6500K
- IP Rating :- IP65
- Lifetime :- 50,000hrs
- Height :- As Per Requirement
- Housing Material :- Aluminum & M.S Powder Coated



- Model :- LLBL165
- Wattage :- 5W - 20W
- Chip Brand :- CREE , BRIDGLUX
- Color Temp :- 3000K, 4000K, 6500K
- IP Rating :- IP65
- Lifetime :- 50,000hrs
- Height :- As Per Requirement
- Housing Material :- Aluminum & M.S Powder Coated



support@lumenolighting.in



www.lumenolighting.in



@lumeno_lighting

MADE IN INDIA






BOLLARD LIGHTS



- Model :- LLBL166
- Wattage :- 5W - 20W
- Chip Brand :- CREE , BRIDGLUX
- Color Temp :- 3000K, 4000K, 6500K
- IP Rating :- IP65
- Lifetime :- 50,000hrs
- Height :- As Per Requirement
- Housing Material :- Aluminum & M.S Powder Coated



- Model :- LLBL167
- Wattage :- 5W - 20W
- Chip Brand :- CREE , BRIDGLUX
- Color Temp :- 3000K, 4000K, 6500K
- IP Rating :- IP65
- Lifetime :- 50,000hrs
- Height :- As Per Requirement
- Housing Material :- Aluminum & M.S Powder Coated



support@lumenolighting.in



www.lumenolighting.in



@lumeno_lighting MADE IN INDIA






BOLLARD LIGHTS



- Model :- LLBL168
- Wattage :- 5W - 20W
- Chip Brand :- CREE , BRIDGLUX
- Color Temp :- 3000K, 4000K, 6500K
- IP Rating :- IP65
- Lifetime :- 50,000hrs
- Height :- As Per Requirement
- Housing Material :- Aluminum & M.S Powder Coated



- Model :- LLBL169
- Wattage :- 5W - 20W
- Chip Brand :- CREE , BRIDGLUX
- Color Temp :- 3000K, 4000K, 6500K
- IP Rating :- IP65
- Lifetime :- 50,000hrs
- Height :- As Per Requirement
- Housing Material :- Aluminum & M.S Powder Coated



support@lumenolighting.in



www.lumenolighting.in



@lumenolighting

MADE IN INDIA






BOLLARD LIGHTS



- Model :- LLBL170
- Wattage :- 5W - 20W
- Chip Brand :- CREE , BRIDGLUX
- Color Temp :- 3000K, 4000K, 6500K
- IP Rating :- IP65
- Lifetime :- 50,000hrs
- Height :- As Per Requirement
- Housing Material :- Aluminum & M.S Powder Coated



- Model :- LLBL171
- Wattage :- 5W - 20W
- Chip Brand :- CREE , BRIDGLUX
- Color Temp :- 3000K, 4000K, 6500K
- IP Rating :- IP65
- Lifetime :- 50,000hrs
- Height :- As Per Requirement
- Housing Material :- Aluminum & M.S Powder Coated



support@lumenolighting.in



www.lumenolighting.in



@lumenolighting

MADE IN INDIA






BOLLARD LIGHTS



- Model :- LLBL172
- Wattage :- 5W - 20W
- Chip Brand :- CREE , BRIDGLUX
- Color Temp :- 3000K, 4000K, 6500K
- IP Rating :- IP65
- Lifetime :- 50,000hrs
- Height :- As Per Requirement
- Housing Material :- Aluminum & M.S Powder Coated



- Model :- LLBL173
- Wattage :- 5W - 20W
- Chip Brand :- CREE , BRIDGLUX
- Color Temp :- 3000K, 4000K, 6500K
- IP Rating :- IP65
- Lifetime :- 50,000hrs
- Height :- As Per Requirement
- Housing Material :- Aluminum & M.S Powder Coated



support@lumenolighting.in



www.lumenolighting.in



@lumenolighting

MADE IN INDIA






BOLLARD LIGHTS



- Model :- LLBL174
- Wattage :- 5W - 20W
- Chip Brand :- CREE , BRIDGLUX
- Color Temp :- 3000K, 4000K, 6500K
- IP Rating :- IP65
- Lifetime :- 50,000hrs
- Height :- As Per Requirement
- Housing Material :- Aluminum & M.S Powder Coated



- Model :- LLBL175
- Wattage :- 5W - 20W
- Chip Brand :- CREE , BRIDGLUX
- Color Temp :- 3000K, 4000K, 6500K
- IP Rating :- IP65
- Lifetime :- 50,000hrs
- Height :- As Per Requirement
- Housing Material :- Aluminum & M.S Powder Coated



support@lumenolighting.in



www.lumenolighting.in



[@lumeno_lighting](https://www.instagram.com/lumeno_lighting) MADE IN INDIA





BOLLARD LIGHTS



- Model :- LLBL176
- Wattage :- 5W - 20W
- Chip Brand :- CREE , BRIDGLUX
- Color Temp :- 3000K, 4000K, 6500K
- IP Rating :- IP65
- Lifetime :- 50,000hrs
- Height :- As Per Requirement
- Housing Material :- Aluminum & M.S Powder Coated



- Model :- LLBL177
- Wattage :- 5W - 20W
- Chip Brand :- CREE , BRIDGLUX
- Color Temp :- 3000K, 4000K, 6500K
- IP Rating :- IP65
- Lifetime :- 50,000hrs
- Height :- As Per Requirement
- Housing Material :- Aluminum & M.S Powder Coated



IP68



support@lumenolighting.in



www.lumenolighting.in



@lumeno_lighting MADE IN INDIA






BOLLARD LIGHTS



- Model :- LLBL178
- Wattage :- 5W - 20W
- Chip Brand :- CREE , BRIDGLUX
- Color Temp :- 3000K, 4000K, 6500K
- IP Rating :- IP65
- Lifetime :- 50,000hrs
- Height :- As Per Requirement
- Housing Material :- Aluminum & M.S Powder Coated



- Model :- LLBL179
- Wattage :- 5W - 20W
- Chip Brand :- CREE , BRIDGLUX
- Color Temp :- 3000K, 4000K, 6500K
- IP Rating :- IP65
- Lifetime :- 50,000hrs
- Height :- As Per Requirement
- Housing Material :- Aluminum & M.S Powder Coated



support@lumenolighting.in



www.lumenolighting.in



@lumenolighting MADE IN INDIA






BOLLARD LIGHTS



- Model :- LLBL181
- Wattage :- 5W - 20W
- Chip Brand :- CREE , BRIDGLUX
- Color Temp :- 3000K, 4000K, 6500K
- IP Rating :- IP65
- Lifetime :- 50,000hrs
- Height :- As Per Requirement
- Housing Material :- Aluminum & M.S Powder Coated



- Model :- LLBL182
- Wattage :- 5W - 20W
- Chip Brand :- CREE , BRIDGLUX
- Color Temp :- 3000K, 4000K, 6500K
- IP Rating :- IP65
- Lifetime :- 50,000hrs
- Height :- As Per Requirement
- Housing Material :- Aluminum & M.S Powder Coated



support@lumenolighting.in



www.lumenolighting.in



@lumeno_lighting

MADE IN INDIA







BOLLARD LIGHTS



- Model :- LLBL183
- Wattage :- 5W - 20W
- Chip Brand :- CREE , BRIDGLUX
- Color Temp :- 3000K, 4000K, 6500K
- IP Rating :- IP65
- Lifetime :- 50,000hrs
- Height :- As Per Requirement
- Housing Material :- Aluminum & M.S Powder Coated

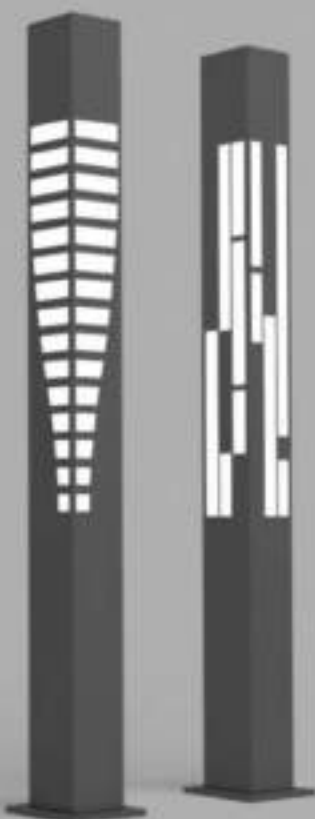

- Model :- LLBL184
- Wattage :- 5W - 20W
- Chip Brand :- CREE , BRIDGLUX
- Color Temp :- 3000K, 4000K, 6500K
- IP Rating :- IP65
- Lifetime :- 50,000hrs
- Height :- As Per Requirement
- Housing Material :- Aluminum & M.S Powder Coated



support@lumenolighting.in



www.lumenolighting.in



@lumeno_lighting

MADE IN INDIA






BOLLARD LIGHTS



- Model :- LLBL185
- Wattage :- 5W - 20W
- Chip Brand :- CREE , BRIDGLUX
- Color Temp :- 3000K, 4000K, 6500K
- IP Rating :- IP65
- Lifetime :- 50,000hrs
- Height :- As Per Requirement
- Housing Material :- Aluminum & M.S Powder Coated



- Model :- LLBL186
- Wattage :- 5W - 20W
- Chip Brand :- CREE , BRIDGLUX
- Color Temp :- 3000K, 4000K, 6500K
- IP Rating :- IP65
- Lifetime :- 50,000hrs
- Height :- As Per Requirement
- Housing Material :- Aluminum & M.S Powder Coated



support@lumenolighting.in



www.lumenolighting.in



@lumenolighting

MADE IN INDIA





BOLLARD LIGHTS



- Model :- LLBL187
- Wattage :- 5W - 20W
- Chip Brand :- CREE , BRIDGLUX
- Color Temp :- 3000K, 4000K, 6500K
- IP Rating :- IP65
- Lifetime :- 50,000hrs
- Height :- As Per Requirement
- Housing Material :- Aluminum & M.S Powder Coated



- Model :- LLBL188
- Wattage :- 5W - 20W
- Chip Brand :- CREE , BRIDGLUX
- Color Temp :- 3000K, 4000K, 6500K
- IP Rating :- IP65
- Lifetime :- 50,000hrs
- Height :- As Per Requirement
- Housing Material :- Aluminum & M.S Powder Coated



support@lumenolighting.in



www.lumenolighting.in



@lumenolighting MADE IN INDIA






BOLLARD LIGHTS



- Model :- LLBL189
- Wattage :- 5W - 20W
- Chip Brand :- CREE , BRIDGLUX
- Color Temp :- 3000K, 4000K, 6500K
- IP Rating :- IP65
- Lifetime :- 50,000hrs
- Height :- As Per Requirement
- Housing Material :- Aluminum & M.S Powder Coated



- Model :- LLBL190
- Wattage :- 5W - 20W
- Chip Brand :- CREE , BRIDGLUX
- Color Temp :- 3000K, 4000K, 6500K
- IP Rating :- IP65
- Lifetime :- 50,000hrs
- Height :- As Per Requirement
- Housing Material :- Aluminum & M.S Powder Coated



support@lumenolighting.in



www.lumenolighting.in



@lumeno_lighting

MADE IN INDIA





BOLLARD LIGHTS



- Model :- LLBL191
- Wattage :- 5W - 20W
- Chip Brand :- CREE , BRIDGLUX
- Color Temp :- 3000K, 4000K, 6500K
- IP Rating :- IP65
- Lifetime :- 50,000hrs
- Height :- As Per Requirement
- Housing Material :- Aluminum & M.S Powder Coated



- Model :- LLBL192
- Wattage :- 5W - 20W
- Chip Brand :- CREE , BRIDGLUX
- Color Temp :- 3000K, 4000K, 6500K
- IP Rating :- IP65
- Lifetime :- 50,000hrs
- Height :- As Per Requirement
- Housing Material :- Aluminum & M.S Powder Coated



support@lumenolighting.in



www.lumenolighting.in



[@lumeno_lighting](https://www.instagram.com/lumeno_lighting)

MADE IN INDIA






BOLLARD LIGHTS



- Model :- LLBL193
- Wattage :- 5W - 20W
- Chip Brand :- CREE , BRIDGLUX
- Color Temp :- 3000K, 4000K, 6500K
- IP Rating :- IP65
- Lifetime :- 50,000hrs
- Height :- As Per Requirement
- Housing Material :- Aluminum & M.S Powder Coated



- Model :- LLBL194
- Wattage :- 5W - 20W
- Chip Brand :- CREE , BRIDGLUX
- Color Temp :- 3000K, 4000K, 6500K
- IP Rating :- IP65
- Lifetime :- 50,000hrs
- Height :- As Per Requirement
- Housing Material :- Aluminum & M.S Powder Coated



support@lumenolighting.in



www.lumenolighting.in



@lumeno_lighting

MADE IN INDIA






BOLLARD LIGHTS



- Model :- LLBL195
- Wattage :- 5W - 20W
- Chip Brand :- CREE , BRIDGLUX
- Color Temp :- 3000K, 4000K, 6500K
- IP Rating :- IP65
- Lifetime :- 50,000hrs
- Height :- As Per Requirement
- Housing Material :- Aluminum & M.S Powder Coated



- Model :- LLBL196
- Wattage :- 5W - 20W
- Chip Brand :- CREE , BRIDGLUX
- Color Temp :- 3000K, 4000K, 6500K
- IP Rating :- IP65
- Lifetime :- 50,000hrs
- Height :- As Per Requirement
- Housing Material :- Aluminum & M.S Powder Coated



support@lumenolighting.in



www.lumenolighting.in



@lumeno_lighting

MADE IN INDIA






BOLLARD LIGHTS



- Model :- LLBL197
- Wattage :- 5W - 20W
- Chip Brand :- CREE , BRIDGLUX
- Color Temp :- 3000K, 4000K, 6500K
- IP Rating :- IP65
- Lifetime :- 50,000hrs
- Height :- As Per Requirement
- Housing Material :- Aluminum & M.S Powder Coated



- Model :- LLBL198
- Wattage :- 5W - 20W
- Chip Brand :- CREE , BRIDGLUX
- Color Temp :- 3000K, 4000K, 6500K
- IP Rating :- IP65
- Lifetime :- 50,000hrs
- Height :- As Per Requirement
- Housing Material :- Aluminum & M.S Powder Coated



support@lumenolighting.in



www.lumenolighting.in



@lumenolighting

MADE IN INDIA






LUMENO LIGHTING TECHNOLOGY SOLUTIONS



Contact

Bangalore Karnataka - 560053
Email- support@lumenolighting.in
www.lumenolighting.in



support@lumenolighting.in



www.lumenolighting.in



[@lumeno_lighting](https://www.instagram.com/lumeno_lighting)

MADE IN INDIA





LUMENO LIGHTING TECHNOLOGY SOLUTIONS TOP POST LIGHTS





TOP POST LIGHTS



- **Model** :- LLTP101
- **Wattage** :- 50W to 100W
- **Chip Brand** :- CREE , BRIDGLUX
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Dia Size** :- As Per Requirement
- **Housing Material**:- Aluminum & M.S Powder Coated



- **Model** :- LLTP102
- **Wattage** :- 50W to 100W
- **Chip Brand** :- CREE , BRIDGLUX
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Dia Size** :- As Per Requirement
- **Housing Material** :- Aluminum & M.S Powder Coated

- **Model** :- LLTP103
- **Wattage** :- 50W to 100W
- **Chip Brand** :- CREE , BRIDGLUX
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Dia Size** :- As Per Requirement
- **Housing Material** :- Aluminum & M.S Powder Coated





TOP POST LIGHTS



- **Model** :- LLTP104
- **Wattage** :- 50W to 100W
- **Chip Brand** :- CREE , BRIDGLUX
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Dia Size** :- As Per Requirement
- **Housing Material** :- Aluminum & M.S Powder Coated



- **Model** :- LLTP105
- **Wattage** :- 50W to 100W
- **Chip Brand** :- CREE , BRIDGLUX
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Dia Size** :- As Per Requirement
- **Housing Material** :- Aluminum & M.S Powder Coated

- **Model** :- LLTP106
- **Wattage** :- 50W to 100W
- **Chip Brand** :- CREE , BRIDGLUX
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Dia Size** :- As Per Requirement
- **Housing Material** :- Aluminum & M.S Powder Coated





TOP POST LIGHTS



- **Model** :- LLTP107
- **Wattage** :- 50W to 100W
- **Chip Brand** :- CREE , BRIDGLUX
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Dia Size** :- As Per Requirement
- **Housing Material** :- Aluminum & M.S Powder Coated



- **Model** :- LLTP108
- **Wattage** :- 50W to 100W
- **Chip Brand** :- CREE , BRIDGLUX
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Dia Size** :- As Per Requirement
- **Housing Material** :- Aluminum & M.S Powder Coated

- **Model** :- LLTP109
- **Wattage** :- 50W to 100W
- **Chip Brand** :- CREE , BRIDGLUX
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Dia Size** :- As Per Requirement
- **Housing Material** :- Aluminum & M.S Powder Coated





TOP POST LIGHTS



- **Model** :- LLTP110
- **Wattage** :- 50W to 100W
- **Chip Brand** :- CREE , BRIDGLUX
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Dia Size** :- As Per Requirement
- **Housing Material** :- Aluminum & M.S Powder Coated



- **Model** :- LLTP111
- **Wattage** :- 50W to 100W
- **Chip Brand** :- CREE , BRIDGLUX
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Dia Size** :- As Per Requirement
- **Housing Material** :- Aluminum & M.S Powder Coated

- **Model** :- LLTP112
- **Wattage** :- 50W to 100W
- **Chip Brand** :- CREE , BRIDGLUX
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Dia Size** :- As Per Requirement
- **Housing Material** :- Aluminum & M.S Powder Coated





TOP POST LIGHTS



- **Model** :- LLTP113
- **Wattage** :- 50W to 100W
- **Chip Brand** :- CREE , BRIDGLUX
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Dia Size** :- As Per Requirement
- **Housing Material** :- Aluminum & M.S Powder Coated



- **Model** :- LLTP114
- **Wattage** :- 50W to 100W
- **Chip Brand** :- CREE , BRIDGLUX
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Dia Size** :- As Per Requirement
- **Housing Material** :- Aluminum & M.S Powder Coated

- **Model** :- LLTP115
- **Wattage** :- 50W to 100W
- **Chip Brand** :- CREE , BRIDGLUX
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Dia Size** :- As Per Requirement
- **Housing Material** :- Aluminum & M.S Powder Coated





TOP POST LIGHTS



- **Model** :- LLTP116
- **Wattage** :- 50W to 100W
- **Chip Brand** :- CREE , BRIDGLUX
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Dia Size** :- As Per Requirement
- **Housing Material** :- Aluminum & M.S Powder Coated



- **Model** :- LLTP117
- **Wattage** :- 50W to 100W
- **Chip Brand** :- CREE , BRIDGLUX
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Dia Size** :- As Per Requirement
- **Housing Material** :- Aluminum & M.S Powder Coated

- **Model** :- LLTP118
- **Wattage** :- 50W to 100W
- **Chip Brand** :- CREE , BRIDGLUX
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Dia Size** :- As Per Requirement
- **Housing Material** :- Aluminum & M.S Powder Coated





TOP POST LIGHTS



- **Model** :- LLTP119
- **Wattage** :- 50W to 100W
- **Chip Brand** :- CREE , BRIDGLUX
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Dia Size** :- As Per Requirement
- **Housing Material** :- Aluminum & M.S Powder Coated



- **Model** :- LLTP120
- **Wattage** :- 50W to 100W
- **Chip Brand** :- CREE , BRIDGLUX
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Dia Size** :- As Per Requirement
- **Housing Material** :- Aluminum & M.S Powder Coated

- **Model** :- LLTP121
- **Wattage** :- 50W to 100W
- **Chip Brand** :- CREE , BRIDGLUX
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Dia Size** :- As Per Requirement
- **Housing Material** :- Aluminum & M.S Powder Coated





TOP POST LIGHTS



- **Model** :- LLTP122
- **Wattage** :- 50W to 100W
- **Chip Brand** :- CREE , BRIDGLUX
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Dia Size** :- As Per Requirement
- **Housing Material** :- Aluminum & M.S Powder Coated



- **Model** :- LLTP123
- **Wattage** :- 50W to 100W
- **Chip Brand** :- CREE , BRIDGLUX
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Dia Size** :- As Per Requirement
- **Housing Material** :- Aluminum & M.S Powder Coated

- **Model** :- LLTP124
- **Wattage** :- 50W to 100W
- **Chip Brand** :- CREE , BRIDGLUX
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Dia Size** :- As Per Requirement
- **Housing Material** :- Aluminum & M.S Powder Coated





TOP POST LIGHTS



- **Model** :- LLTP125
- **Wattage** :- 50W to 100W
- **Chip Brand** :- CREE , BRIDGLUX
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Dia Size** :- As Per Requirement
- **Housing Material** :- Aluminum & M.S Powder Coated



- **Model** :- LLTP126
- **Wattage** :- 50W to 100W
- **Chip Brand** :- CREE , BRIDGLUX
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Dia Size** :- As Per Requirement
- **Housing Material** :- Aluminum & M.S Powder Coated

- **Model** :- LLTP127
- **Wattage** :- 50W to 100W
- **Chip Brand** :- CREE , BRIDGLUX
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Dia Size** :- As Per Requirement
- **Housing Material** :- Aluminum & M.S Powder Coated





TOP POST LIGHTS



- **Model** :- LLTP128
- **Wattage** :- 50W to 100W
- **Chip Brand** :- CREE , BRIDGLUX
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Dia Size** :- As Per Requirement
- **Housing Material** :- Aluminum & M.S Powder Coated



- **Model** :- LLTP129
- **Wattage** :- 50W to 100W
- **Chip Brand** :- CREE , BRIDGLUX
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Dia Size** :- As Per Requirement
- **Housing Material** :- Aluminum & M.S Powder Coated

- **Model** :- LLTP130
- **Wattage** :- 50W to 100W
- **Chip Brand** :- CREE , BRIDGLUX
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Dia Size** :- As Per Requirement
- **Housing Material** :- Aluminum & M.S Powder Coated





TOP POST LIGHTS



- **Model** :- LLTP131
- **Wattage** :- 50W to 100W
- **Chip Brand** :- CREE , BRIDGLUX
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Dia Size** :- As Per Requirement
- **Housing Material** :- Aluminum & M.S Powder Coated



- **Model** :- LLTP132
- **Wattage** :- 50W to 100W
- **Chip Brand** :- CREE , BRIDGLUX
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Dia Size** :- As Per Requirement
- **Housing Material** :- Aluminum & M.S Powder Coated

- **Model** :- LLTP133
- **Wattage** :- 50W to 100W
- **Chip Brand** :- CREE , BRIDGLUX
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Dia Size** :- As Per Requirement
- **Housing Material** :- Aluminum & M.S Powder Coated





TOP POST LIGHTS



- **Model** :- LLTP134
- **Wattage** :- 50W to 100W
- **Chip Brand** :- CREE , BRIDGLUX
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Dia Size** :- As Per Requirement
- **Housing Material** :- Aluminum & M.S Powder Coated



- **Model** :- LLTP135
- **Wattage** :- 50W to 100W
- **Chip Brand** :- CREE , BRIDGLUX
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Dia Size** :- As Per Requirement
- **Housing Material** :- Aluminum & M.S Powder Coated

- **Model** :- LLTP136
- **Wattage** :- 50W to 100W
- **Chip Brand** :- CREE , BRIDGLUX
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Dia Size** :- As Per Requirement
- **Housing Material** :- Aluminum & M.S Powder Coated





TOP POST LIGHTS



- **Model** :- LLTP137
- **Wattage** :- 50W to 100W
- **Chip Brand** :- CREE , BRIDGLUX
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Dia Size** :- As Per Requirement
- **Housing Material** :- Aluminum & M.S Powder Coated



- **Model** :- LLTP138
- **Wattage** :- 50W to 100W
- **Chip Brand** :- CREE , BRIDGLUX
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Dia Size** :- As Per Requirement
- **Housing Material** :- Aluminum & M.S Powder Coated

- **Model** :- LLTP139
- **Wattage** :- 50W to 100W
- **Chip Brand** :- CREE , BRIDGLUX
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Dia Size** :- As Per Requirement
- **Housing Material** :- Aluminum & M.S Powder Coated





TOP POST LIGHTS



- **Model** :- LLTP140
- **Wattage** :- 50W to 100W
- **Chip Brand** :- CREE , BRIDGLUX
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Dia Size** :- As Per Requirement
- **Housing Material** :- Aluminum & M.S Powder Coated



- **Model** :- LLTP141
- **Wattage** :- 50W to 100W
- **Chip Brand** :- CREE , BRIDGLUX
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Dia Size** :- As Per Requirement
- **Housing Material** :- Aluminum & M.S Powder Coated

- **Model** :- LLTP142
- **Wattage** :- 50W to 100W
- **Chip Brand** :- CREE , BRIDGLUX
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Dia Size** :- As Per Requirement
- **Housing Material** :- Aluminum & M.S Powder Coated





TOP POST LIGHTS



- **Model** :- LLTP143
- **Wattage** :- 50W to 100W
- **Chip Brand** :- CREE , BRIDGLUX
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Dia Size** :- As Per Requirement
- **Housing Material** :- Aluminum & M.S Powder Coated



- **Model** :- LLTP144
- **Wattage** :- 50W to 100W
- **Chip Brand** :- CREE , BRIDGLUX
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Dia Size** :- As Per Requirement
- **Housing Material** :- Aluminum & M.S Powder Coated

- **Model** :- LLTP145
- **Wattage** :- 50W to 100W
- **Chip Brand** :- CREE , BRIDGLUX
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Dia Size** :- As Per Requirement
- **Housing Material** :- Aluminum & M.S Powder Coated





LUMENO LIGHTING TECHNOLOGY SOLUTIONS



Contact

Bangalore Karnataka - 560053
Email- support@lumenolighting.in
www.lumenolighting.in



support@lumenolighting.in



www.lumenolighting.in



[@lumeno_lighting](https://www.instagram.com/lumeno_lighting)

MADE IN INDIA





LUMENO LIGHTING TECHNOLOGY SOLUTIONS

DECORATIVE POLES



IP68



support@lumenolighting.in



www.lumenolighting.in



[@lumeno_lighting](https://www.instagram.com/lumeno_lighting)

MADE IN INDIA





DECORATIVE POLE LIGHTS



- **Model** :- LLPL101
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated



- **Model** :- LLPL102
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated





DECORATIVE POLE LIGHTS



- **Model** :- LLPL103
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated



- **Model** :- LLPL104
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated



support@lumenolighting.in



www.lumenolighting.in



[@lumeno_lighting](https://www.instagram.com/lumeno_lighting) MADE IN INDIA





DECORATIVE POLE LIGHTS



- **Model** :- LLPL105
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated



- **Model** :- LLPL106
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated






DECORATIVE POLE LIGHTS



- **Model** :- LLPL107
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated



- **Model** :- LLPL108
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated





DECORATIVE POLE LIGHTS



- **Model** :- LLPL109
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated



- **Model** :- LLPL110
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated





DECORATIVE POLE LIGHTS



- **Model** :- LLPL111
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated



- **Model** :- LLPL112
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated






DECORATIVE POLE LIGHTS



- **Model** :- LLPL113
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated

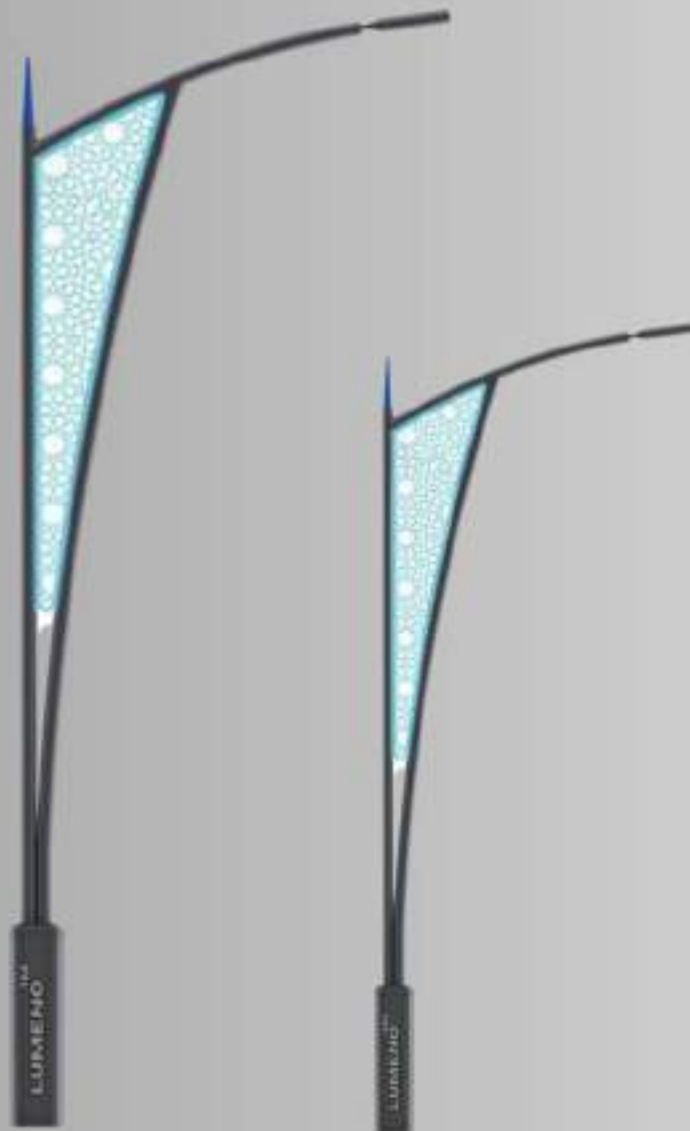

- **Model** :- LLPL114
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated






DECORATIVE POLE LIGHTS



- **Model** :- LLPL115
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated



- **Model** :- LLPL116
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated



support@lumenolighting.in



www.lumenolighting.in



[@lumeno_lighting](https://www.instagram.com/lumeno_lighting) MADE IN INDIA







DECORATIVE POLE LIGHTS



- **Model** :- LLPL117
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated

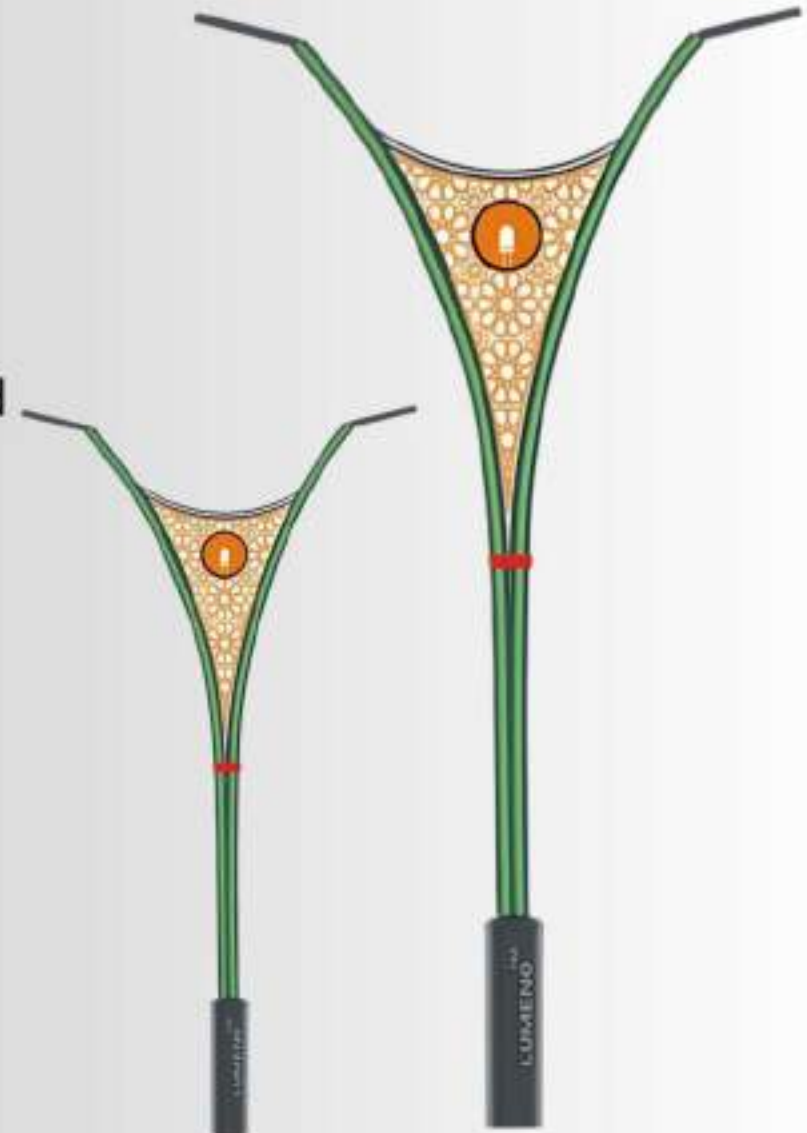

- **Model** :- LLPL118
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated



support@lumenolighting.in



www.lumenolighting.in



[@lumeno_lighting](https://www.instagram.com/lumeno_lighting)

MADE IN INDIA






DECORATIVE POLE LIGHTS



- **Model** :- LLPL119
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated

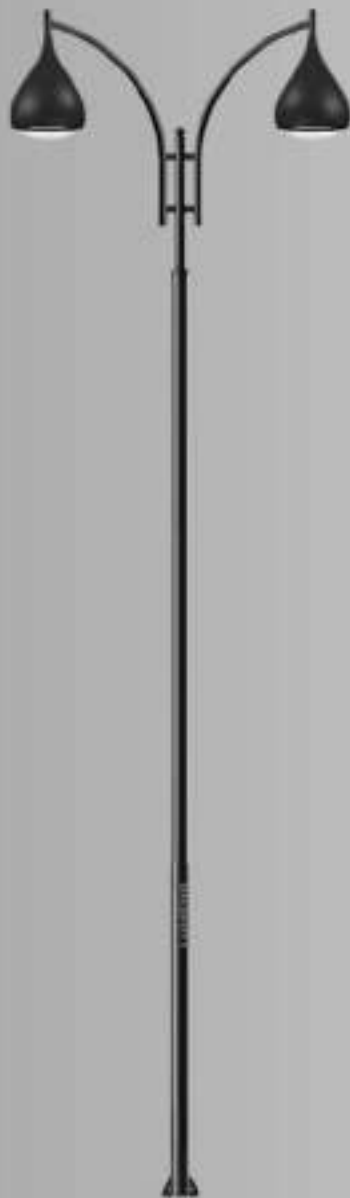

- **Model** :- LLPL120
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated





DECORATIVE POLE LIGHTS



- **Model** :- LLPL121
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated



- **Model** :- LLPL122
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated





DECORATIVE POLE LIGHTS



- **Model** :- LLPL123
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated



- **Model** :- LLPL124
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated





DECORATIVE POLE LIGHTS



- **Model** :- LLPL125
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated



- **Model** :- LLPL126
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated





DECORATIVE POLE LIGHTS



- **Model** :- LLPL127
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated



- **Model** :- LLPL128
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated





DECORATIVE POLE LIGHTS



- **Model** :- LLPL129
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated



- **Model** :- LLPL130
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated






DECORATIVE POLE LIGHTS



- **Model** :- LLPL131
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated



- **Model** :- LLPL132
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated



support@lumenlighting.in



www.lumenlighting.in



[@lumeno_lighting](https://www.instagram.com/lumeno_lighting) MADE IN INDIA






DECORATIVE POLE LIGHTS



- **Model** :- LLPL133
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated



- **Model** :- LLPL134
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated



support@lumenolighting.in



www.lumenolighting.in



[@lumeno_lighting](https://www.instagram.com/lumeno_lighting) MADE IN INDIA






DECORATIVE POLE LIGHTS



- **Model** :- LLPL135
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated



- **Model** :- LLPL136
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated






DECORATIVE POLE LIGHTS



- **Model** :- LLPL137
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated



- **Model** :- LLPL138
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated



support@lumenolighting.in



www.lumenolighting.in



@lumenolighting

MADE IN INDIA





DECORATIVE POLE LIGHTS



- **Model** :- LLPL139
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated



- **Model** :- LLPL140
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated





DECORATIVE POLE LIGHTS



- **Model** :- LLPL141
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated



- **Model** :- LLPL142
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated





DECORATIVE POLE LIGHTS



- **Model** :- LLPL143
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated



- **Model** :- LLPL144
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated





DECORATIVE POLE LIGHTS



- **Model** :- LLPL145
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated



- **Model** :- LLPL1046
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated





DECORATIVE POLE LIGHTS



- **Model** :- LLPL147
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated



- **Model** :- LLPL148
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated





DECORATIVE POLE LIGHTS



- **Model** :- LLPL149
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated



- **Model** :- LLPL150
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated





DECORATIVE POLE LIGHTS



- **Model** :- LLPL151
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated



- **Model** :- LLPL152
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated





DECORATIVE POLE LIGHTS



- **Model** :- LLPL153
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated



- **Model** :- LLPL154
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated





DECORATIVE POLE LIGHTS



- **Model** :- LLPL155
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated



- **Model** :- LLPL156
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated







DECORATIVE POLE LIGHTS



- **Model** :- LLPL1057
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated

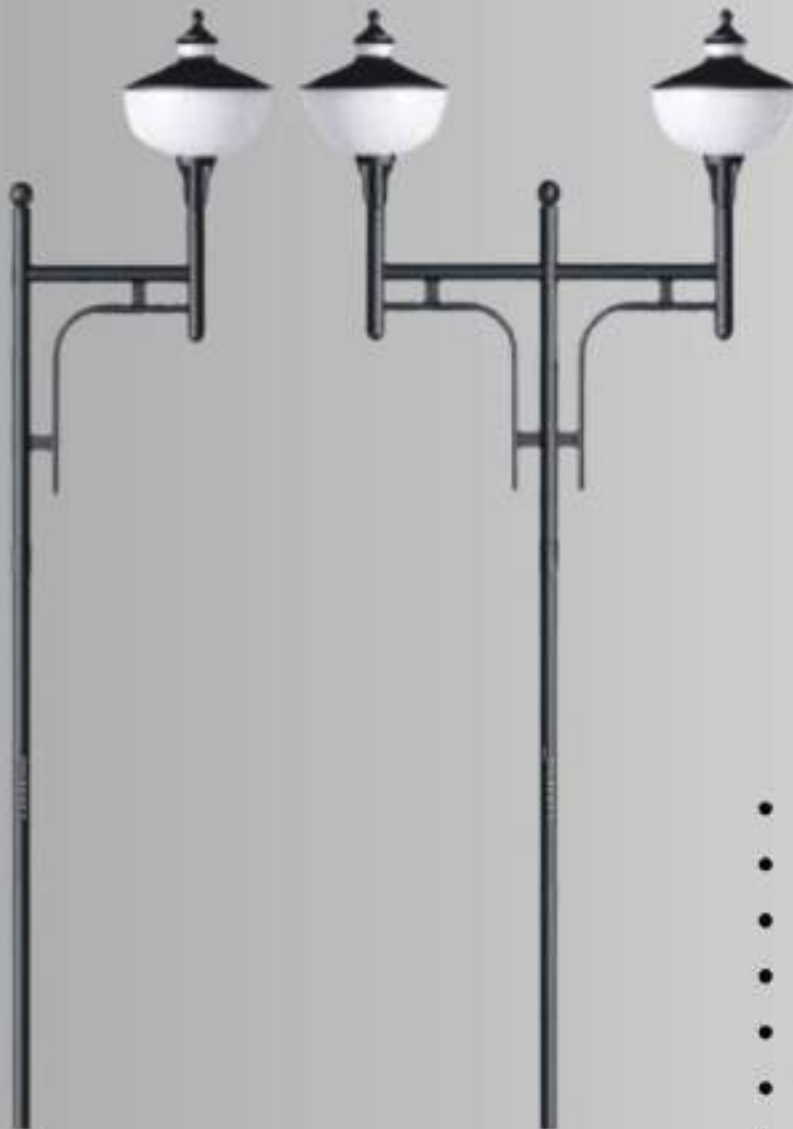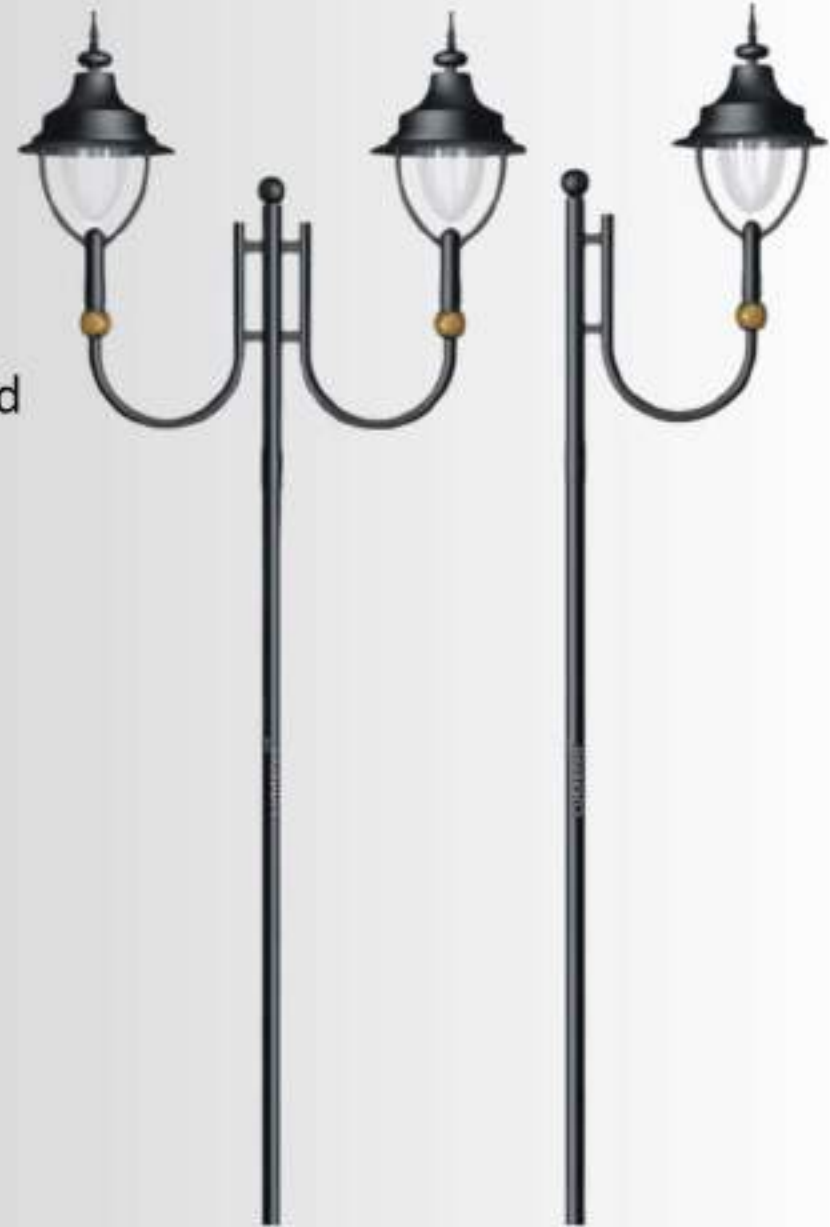

- **Model** :- LLPL158
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated





DECORATIVE POLE LIGHTS



- **Model** :- LLPL159
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated



- **Model** :- LLPL160
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated






DECORATIVE POLE LIGHTS



- **Model** :- LLPL161
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated

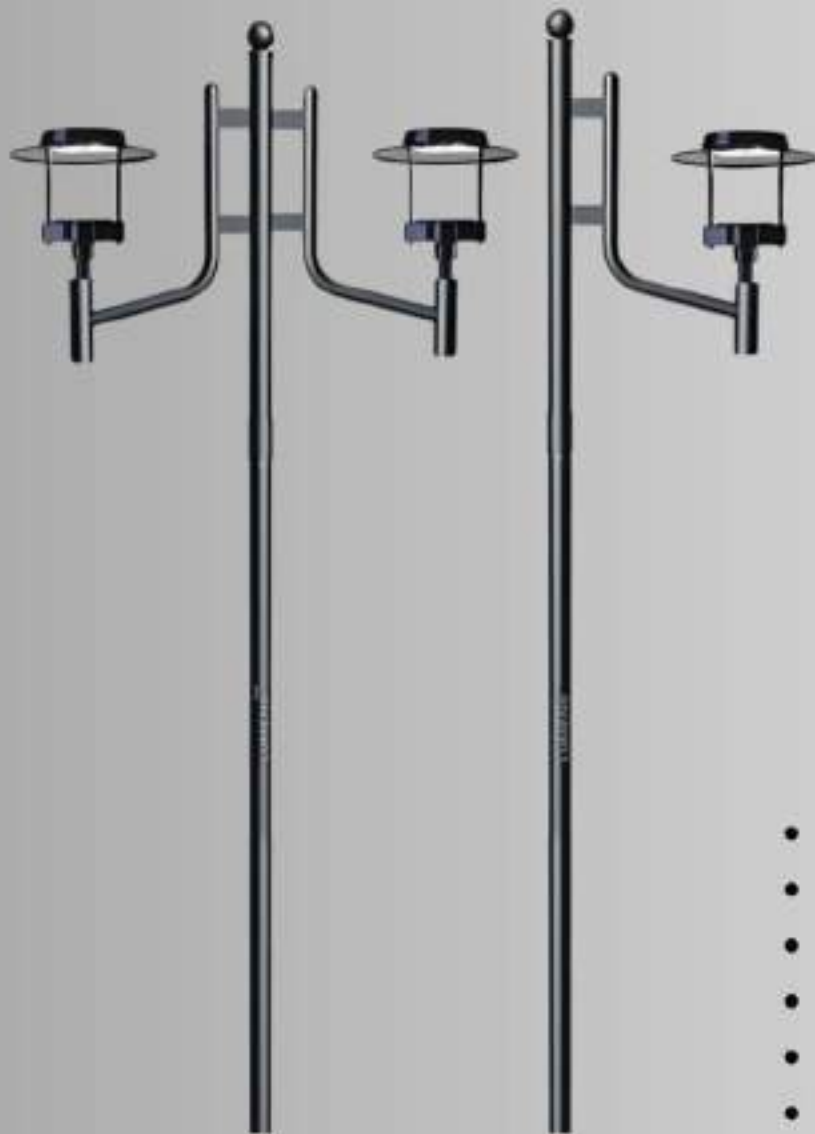

- **Model** :- LLPL162
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated







DECORATIVE POLE LIGHTS



- **Model** :- LLPL163
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated

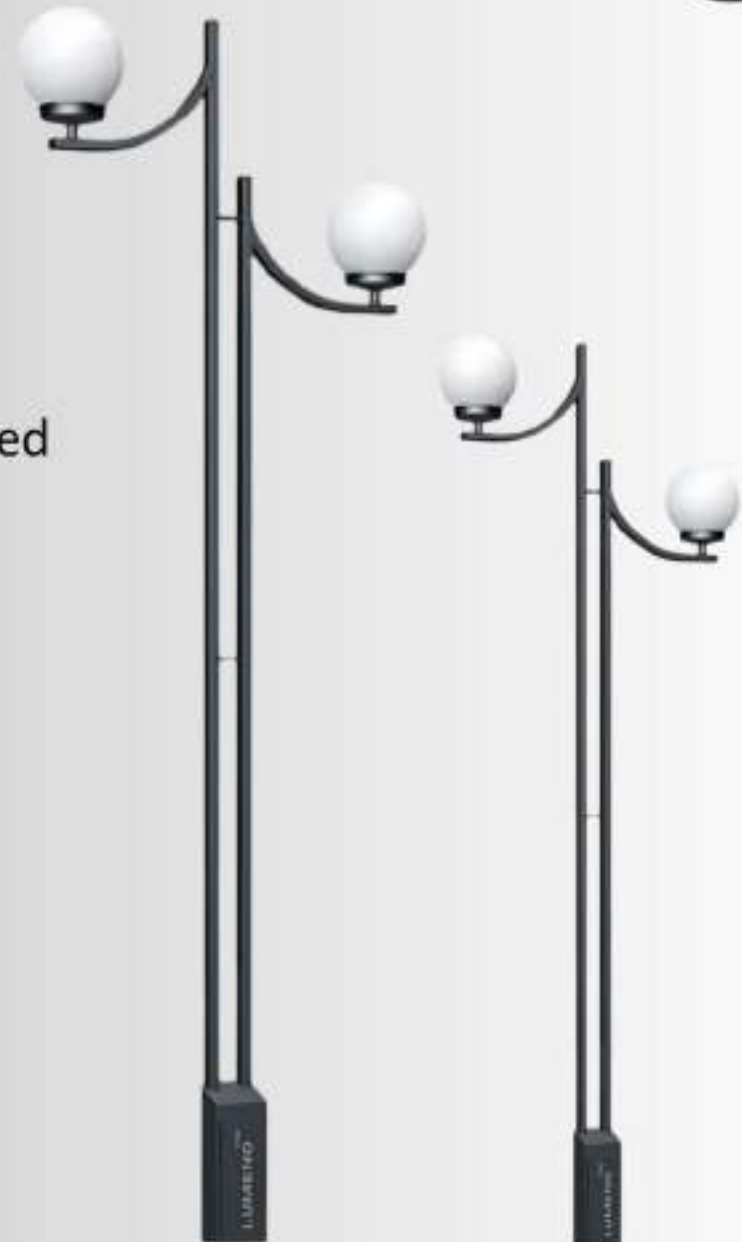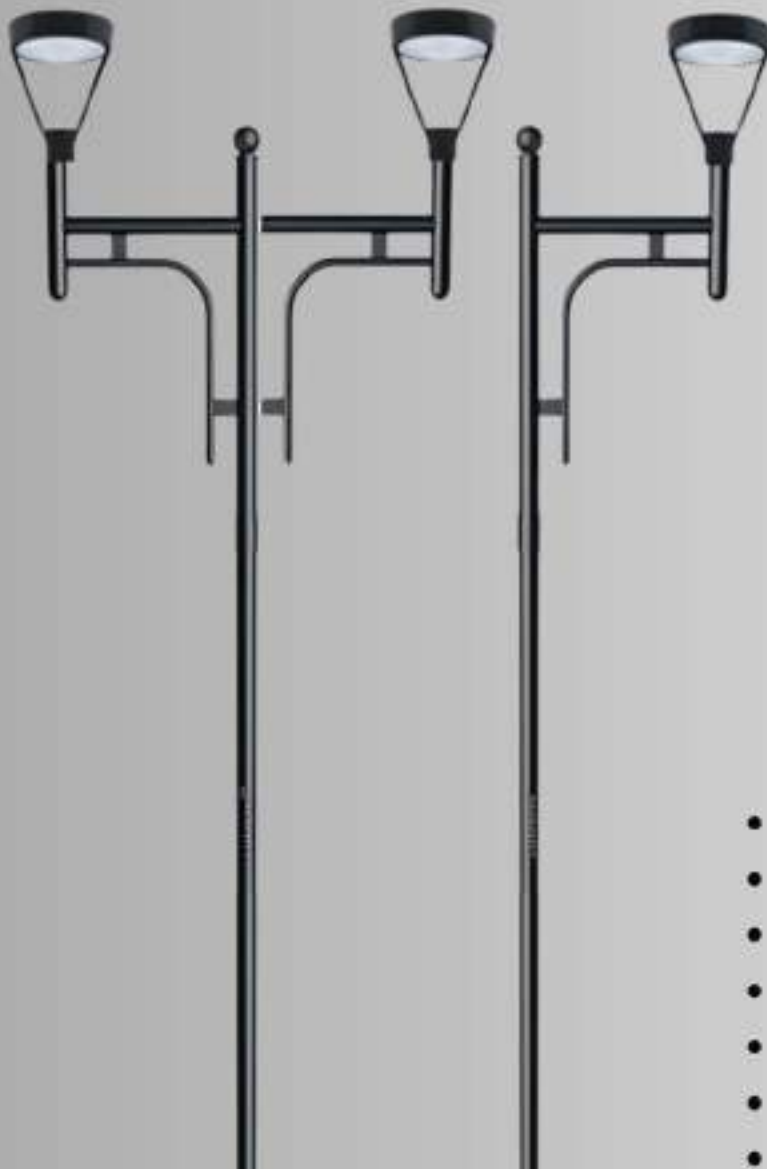

- **Model** :- LLPL164
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated





DECORATIVE POLE LIGHTS



- **Model** :- LLPL165
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated



- **Model** :- LLPL166
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated





DECORATIVE POLE LIGHTS



- **Model** :- LLPL167
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated



- **Model** :- LLPL168
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated



support@lumenolighting.in



www.lumenolighting.in



[@lumeno_lighting](https://www.instagram.com/lumeno_lighting) MADE IN INDIA





DECORATIVE POLE LIGHTS



- **Model** :- LLPL169
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated



- **Model** :- LLPL170
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated





DECORATIVE POLE LIGHTS



- **Model** :- LLPL171
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated



- **Model** :- LLPL172
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated





DECORATIVE POLE LIGHTS



- **Model** :- LLPL173
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated



- **Model** :- LLPL174
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated





DECORATIVE POLE LIGHTS



- **Model** :- LLPL175
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated



- **Model** :- LLPL176
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated






DECORATIVE POLE LIGHTS



- **Model** :- LLPL177
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated



- **Model** :- LLPL178
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated



support@lumenolighting.in



www.lumenolighting.in



[@lumeno_lighting](https://www.instagram.com/lumeno_lighting) MADE IN INDIA






DECORATIVE POLE LIGHTS



- **Model** :- LLPL179
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated



- **Model** :- LLPL180
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated



support@lumenolighting.in



www.lumenolighting.in



[@lumeno_lighting](https://www.instagram.com/lumeno_lighting)

MADE IN INDIA





DECORATIVE POLE LIGHTS



- **Model** :- LLPL181
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated



- **Model** :- LLPL182
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated






DECORATIVE POLE LIGHTS



- **Model** :- LLPL183
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated



- **Model** :- LLPL184
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated



support@lumenolighting.in



www.lumenolighting.in



[@lumeno_lighting](https://www.instagram.com/lumeno_lighting) MADE IN INDIA






DECORATIVE POLE LIGHTS



- **Model** :- LLPL185
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated



- **Model** :- LLPL186
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated



support@lumenlighting.in



www.lumenlighting.in



[@lumeno_lighting](https://www.instagram.com/lumeno_lighting) MADE IN INDIA





DECORATIVE POLE LIGHTS



- **Model** :- LLPL187
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated



- **Model** :- LLPL188
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated





DECORATIVE POLE LIGHTS



- **Model** :- LLPL189
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated



- **Model** :- LLPL190
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated





DECORATIVE POLE LIGHTS



- **Model** :- LLPL191
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated



- **Model** :- LLPL192
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated





DECORATIVE POLE LIGHTS



- **Model** :- LLPL193
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated



- **Model** :- LLPL194
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated






DECORATIVE POLE LIGHTS



- **Model** :- LLPL195
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated



- **Model** :- LLPL196
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated



support@lumenolighting.in



www.lumenolighting.in



[@lumeno_lighting](https://www.instagram.com/lumeno_lighting) MADE IN INDIA







DECORATIVE POLE LIGHTS



- **Model** :- LLPL197
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated

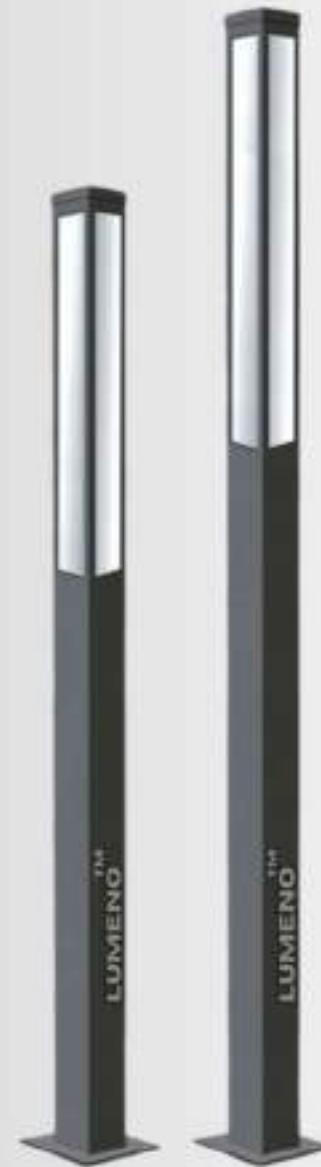

- **Model** :- LLPL198
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated



support@lumenolighting.in



www.lumenolighting.in



[@lumeno_lighting](https://www.instagram.com/lumeno_lighting) MADE IN INDIA






DECORATIVE POLE LIGHTS



- **Model** :- LLPL199
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated



- **Model** :- LLPL200
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated



support@lumenolighting.in



www.lumenolighting.in



[@lumeno_lighting](https://www.instagram.com/lumeno_lighting) MADE IN INDIA







DECORATIVE POLE LIGHTS



- **Model** :- LLPL201
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated

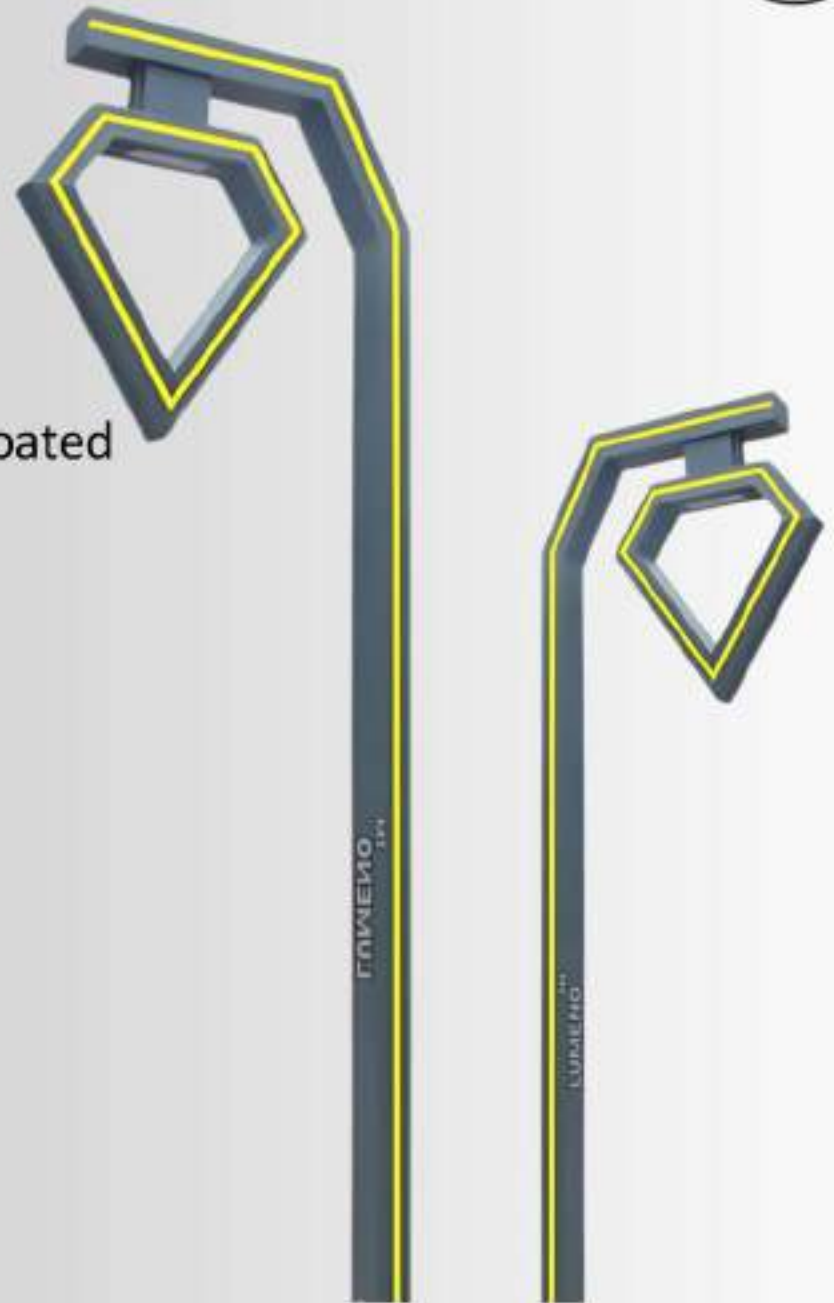

- **Model** :- LLPL202
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated



support@lumenolighting.in



www.lumenolighting.in



[@lumeno_lighting](https://www.instagram.com/lumeno_lighting) MADE IN INDIA





DECORATIVE POLE LIGHTS



- **Model** :- LLPL203
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated



- **Model** :- LLPL204
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated



support@lumenolighting.in



www.lumenolighting.in



[@lumeno_lighting](https://www.instagram.com/lumeno_lighting) MADE IN INDIA





DECORATIVE POLE LIGHTS



- **Model** :- LLPL205
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated



- **Model** :- LLPL206
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated








DECORATIVE POLE LIGHTS



- **Model** :- LLPL207
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated

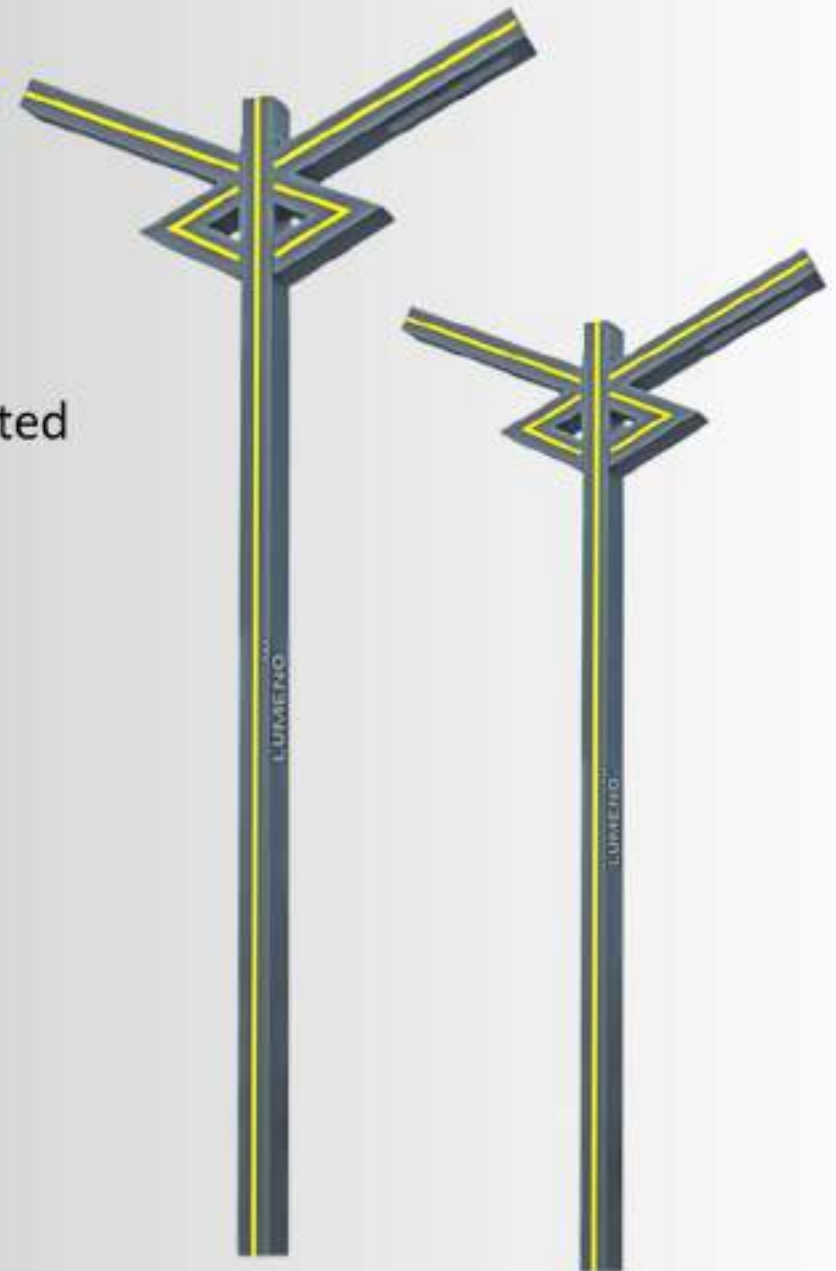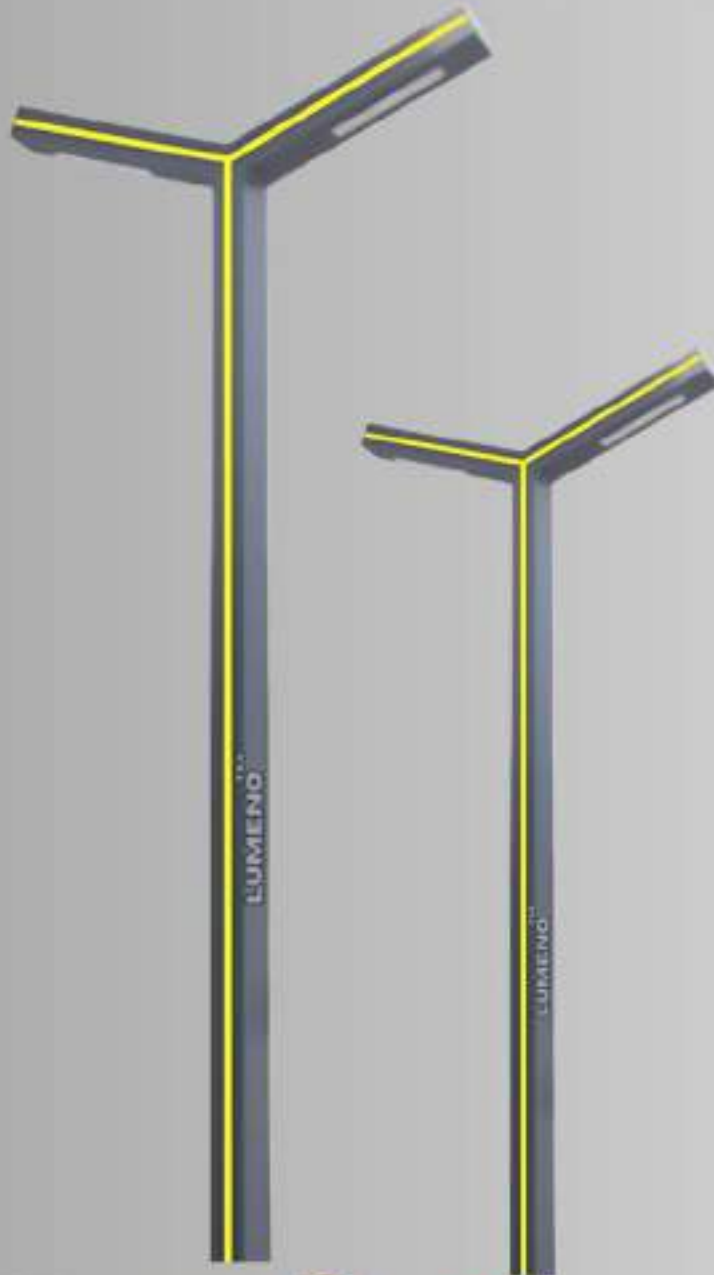

- **Model** :- LLPL208
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated



support@lumenolighting.in



www.lumenolighting.in



[@lumeno_lighting](https://www.instagram.com/lumeno_lighting) MADE IN INDIA







DECORATIVE POLE LIGHTS



- **Model** :- LLPL209
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated

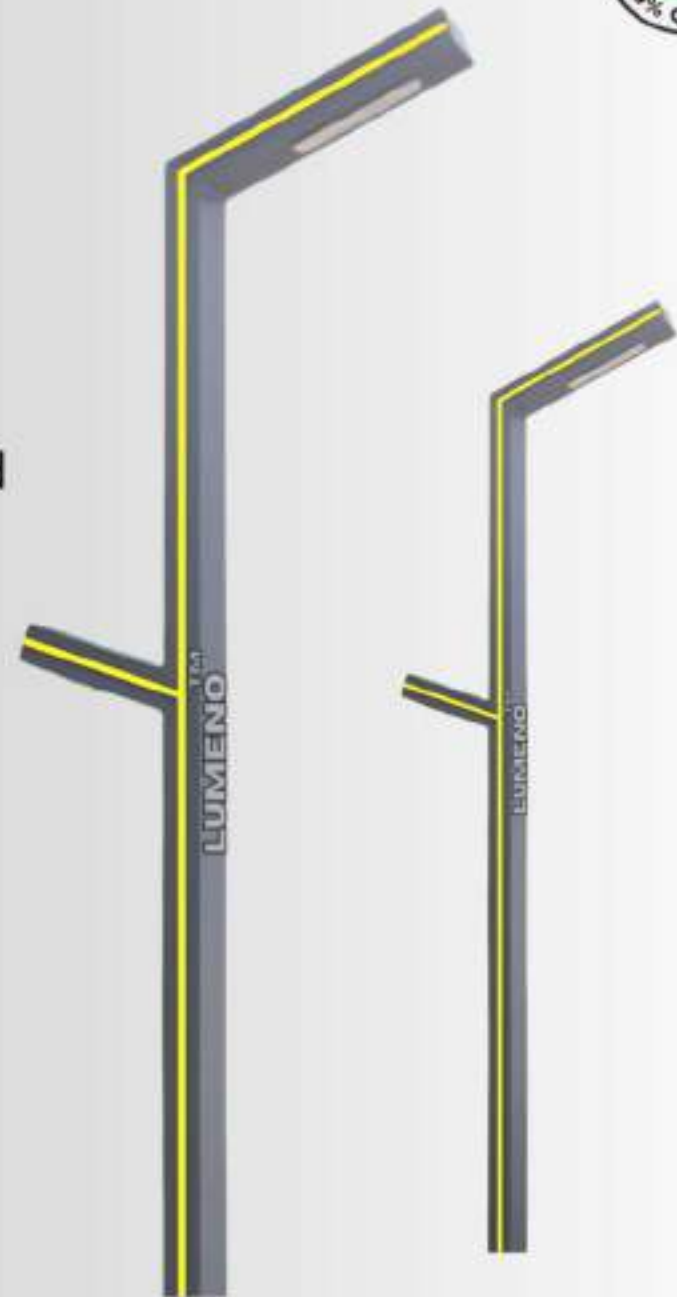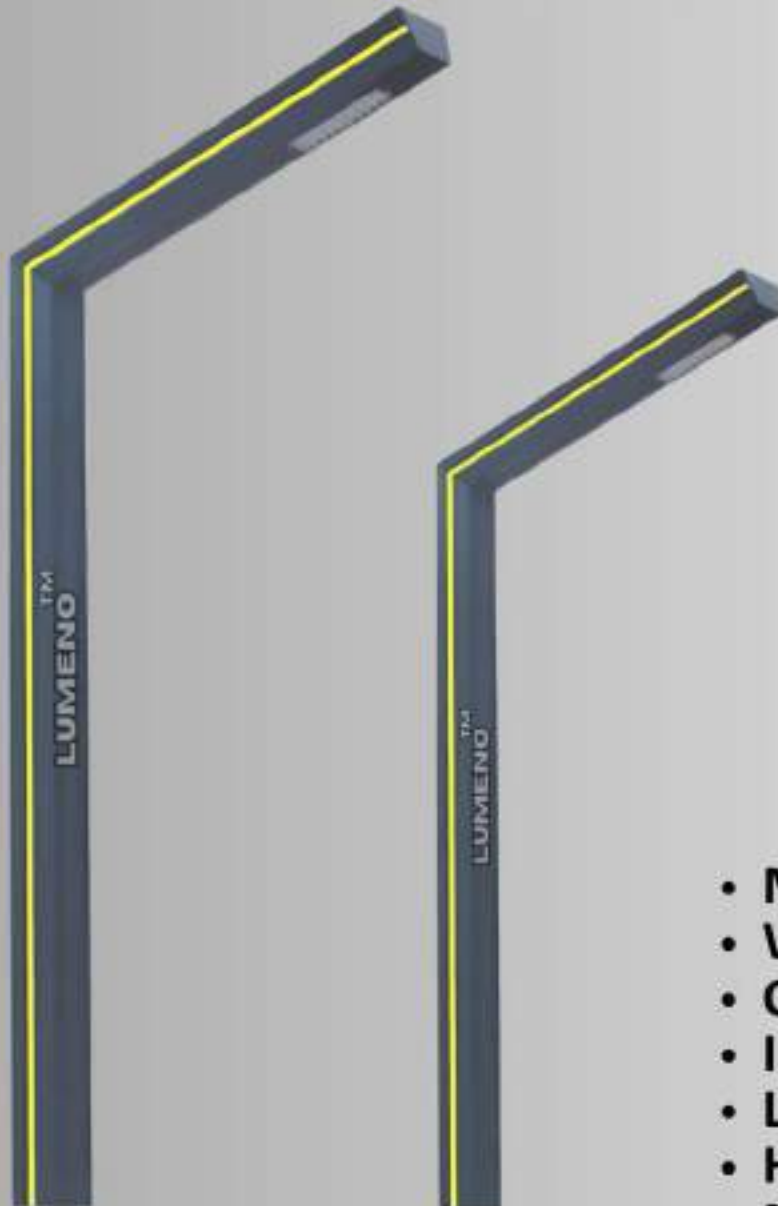

- **Model** :- LLPL210
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated





DECORATIVE POLE LIGHTS



- **Model** :- LLPL211
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated



- **Model** :- LLPL212
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated






DECORATIVE POLE LIGHTS



- **Model** :- LLPL213
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated

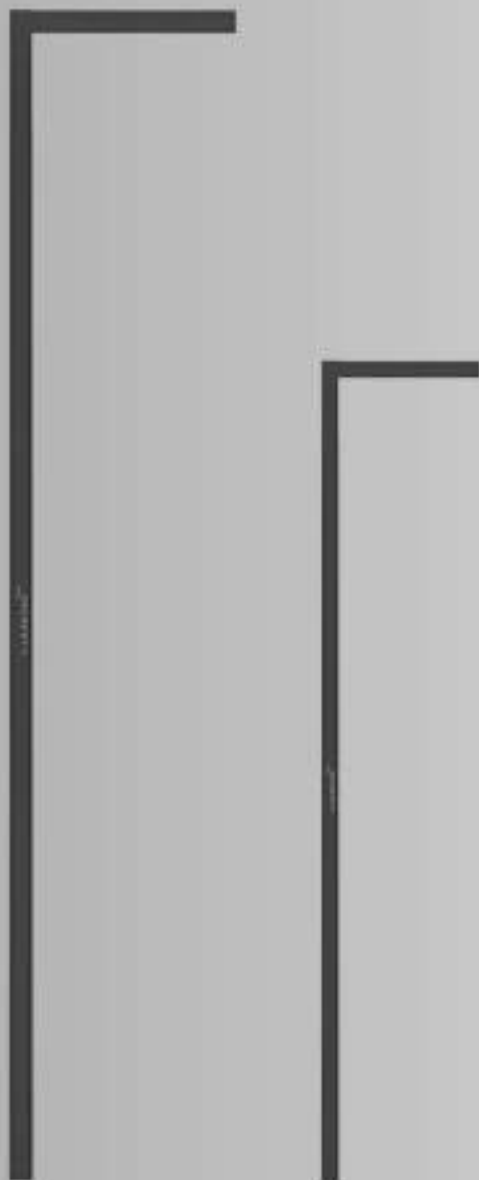

- **Model** :- LLPL214
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated





DECORATIVE POLE LIGHTS



- **Model** :- LLPL215
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated



- **Model** :- LLPL216
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated






DECORATIVE POLE LIGHTS



- **Model** :- LLPL217
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated



- **Model** :- LLPL218
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated



support@lumenolighting.in



www.lumenolighting.in



[@lumeno_lighting](https://www.instagram.com/lumeno_lighting) MADE IN INDIA






DECORATIVE POLE LIGHTS



- **Model** :- LLPL219
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated



- **Model** :- LLPL220
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated



support@lumenolighting.in



www.lumenolighting.in



[@lumeno_lighting](https://www.instagram.com/lumeno_lighting) MADE IN INDIA






DECORATIVE POLE LIGHTS



- **Model** :- LLPL221
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated



- **Model** :- LLPL222
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated



support@lumenolighting.in



www.lumenolighting.in



[@lumeno_lighting](https://www.instagram.com/lumeno_lighting) MADE IN INDIA







DECORATIVE POLE LIGHTS



- **Model** :- LLPL223
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated

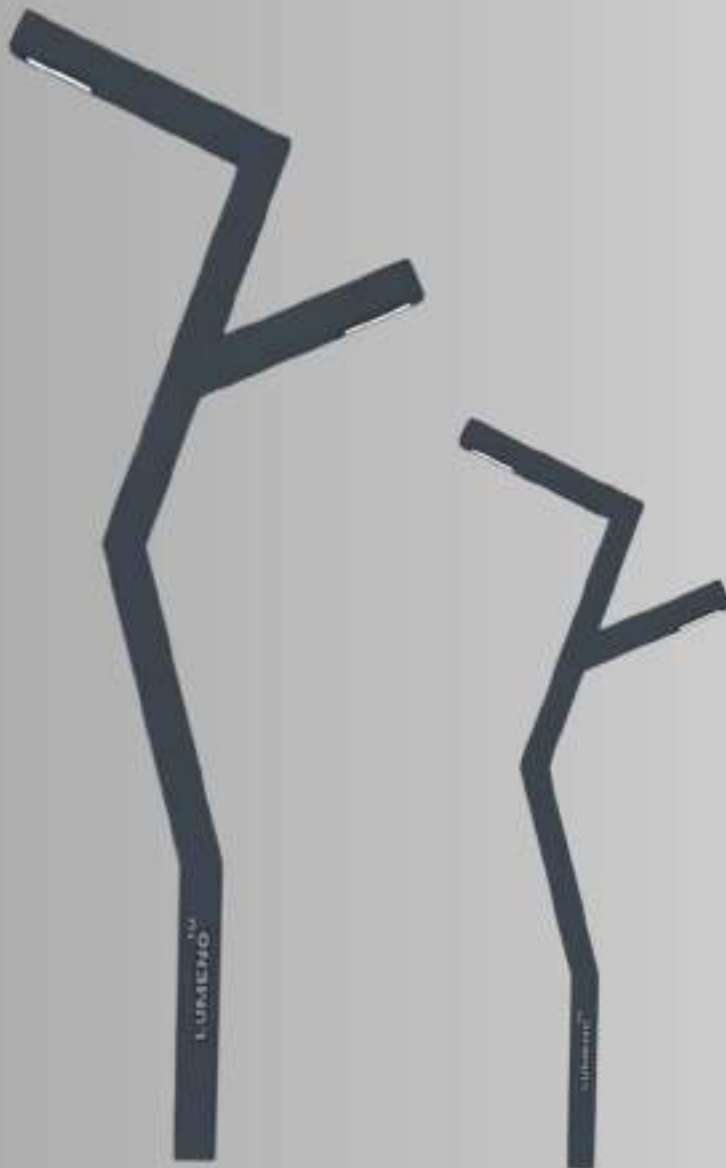

- **Model** :- LLPL224
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated



support@lumenolighting.in



www.lumenolighting.in



[@lumeno_lighting](https://www.instagram.com/lumeno_lighting) MADE IN INDIA






DECORATIVE POLE LIGHTS



- **Model** :- LLPL225
- **Wattage** :- 50W - 200W
- **Color Temp** :- 3000K, 4000K, 6500K
- **IP Rating** :- IP65
- **Lifetime** :- 50,000hrs
- **Height & Size** :- As Per Requirement
- **Material** :- Aluminum & M.S Powder Coated



support@lumenolighting.in



www.lumenolighting.in



[@lumeno_lighting](https://www.instagram.com/lumeno_lighting)

MADE IN INDIA






LUMENO LIGHTING TECHNOLOGY SOLUTIONS

Contact

Bangalore Karnataka - 560053
Email- support@lumenolighting.in
www.lumenolighting.in



support@lumenolighting.in



www.lumenolighting.in



[@lumeno_lighting](https://www.instagram.com/lumeno_lighting)

MADE IN INDIA





LUMENO LIGHTING
TECHNOLOGY SOLUTIONS

Architectural and
Landscape Lighting



ARCHITECTURAL LIGHTS



The name you can Trust for Quality & Excellence....



support@lumenolighting.in



www.lumenolighting.in



[@lumeno_lighting](https://www.instagram.com/lumeno_lighting)

MADE IN INDIA





LUMENO LIGHTING TECHNOLOGY SOLUTIONS

Architectural and
Landscape Lighting



LUMENO LED WINDOW LIGHTS



- **Model :** LL-WSL
- **Input Voltage :** DC24V
- **Chip Brand:** OSRAM/CREE
- **Color Temp :** 1800-6500K/RGB/RGBW
- **Beam Angle:** 10° to 120°
- **IP Rating :** IP 66 / Ip67
- **Working Temp :** -40~+50
- **Working Lifetime:** >50000H
- **RGBW:** DMX512 control
- **Housing Material:** Aluminum Alloy



support@lumenolighting.in



www.lumenolighting.in



@lumeno_lighting

MADE IN INDIA





LUMENO LIGHTING TECHNOLOGY SOLUTIONS

LUMENO LED POINT LIGHT

Architectural and
Landscape Lighting



- **Model :** LL-LLPL
- **Wattage:** 05W, 12W, 18W
- **Input Voltage :** DC24V
- **Chip Brand:** OSRAM/CREE
- **Color Temp :** 1800-6500K/RGB/RGBW
- **Beam Angle:** 120° Lens
- **IP Rating :** IP 66 / Ip67
- **Working Temp :** -40~+50
- **Working Lifetime:** >50000H
- **RGBW:** DMX512 control
- **Housing Material:** Aluminum Alloy



support@lumenolighting.in



www.lumenolighting.in



@lumenolighting

MADE IN INDIA





LUMENO LIGHTING TECHNOLOGY SOLUTIONS LUMENO MOON SPOT LIGHT

Architectural and
Landscape Lighting



- **Model :** LL-LMSP
- **Wattage:** 03W, 06W, 09W
- **Input Voltage :** DC24V
- **Chip Brand:** OSRAM/CREE
- **Color Temp :** 1800-6500K/RGB/RGBW
- **Beam Angle:** 15°to 120° Lens
- **IP Rating :** IP 66 / Ip67
- **Working Temp :** -40~+50
- **Working Lifetime:** >50000H
- **RGBW:** DMX512 control
- **Housing Material:** Aluminum Alloy





LUMENO LIGHTING TECHNOLOGY SOLUTIONS

LUMENO MOON SPOT LIGHT

Architectural and
Landscape Lighting



- **Model :** LL-LMSP
- **Wattage:** 09W, 12W, 24W, 36W
- **Input Voltage :** DC24V
- **Chip Brand:** OSRAM/CREE
- **Color Temp :** 1800-6500K/RGB/RGBW
- **Beam Angle:** 15°to 120° Lens
- **IP Rating :** IP 66 / Ip67
- **Working Temp :** -40~+50
- **Working Lifetime:** >50000H
- **RGBW:** DMX512 control
- **Housing Material:** Aluminum Alloy





LUMENO LIGHTING TECHNOLOGY SOLUTIONS

Architectural and
Landscape Lighting



LUMENO TRACK FOCUS LIGHT



- **Model :** LL-LMSP
- **Wattage:** 03W, 06W, 09W, 12W
- **Input Voltage :** DC24V
- **Chip Brand:** OSRAM/CREE
- **Color Temp :** 1800-6500K/RGB/RGBW
- **Beam Angle:** 15° to 120° Lens
- **IP Rating :** IP 66 / Ip67
- **Working Temp :** -40~+50
- **Working Lifetime:** >50000H
- **RGBW:** DMX512 control
- **Housing Material:** Aluminum Alloy



support@lumenolighting.in



www.lumenolighting.in



[@lumeno_lighting](https://www.instagram.com/lumeno_lighting)

MADE IN INDIA





LUMENO LIGHTING TECHNOLOGY SOLUTIONS

LUMENO FOCUS FLOOD LIGHT

Architectural and
Landscape Lighting



- **Model :** LL-LFFL
- **Wattage:** 12W,15W, 18W
- **Input Voltage :** DC24V
- **Chip Brand:** OSRAM/CREE
- **Color Temp :** 1800-6500K/RGB/RGBW
- **Beam Angle:** 15°to 120° Lens
- **IP Rating :** IP 66 / Ip67
- **Working Temp :** -40~+50
- **Working Lifetime:** >50000H
- **RGBW:** DMX512 control
- **Housing Material:** Aluminum Alloy





LUMENO LIGHTING TECHNOLOGY SOLUTIONS LUMENO PATH FLOOD LIGHT

Architectural and
Landscape Lighting



- **Model :** LL-LPFL
- **Wattage:** 09W, 12W, 18W, 24W, 36W
- **Input Voltage :** DC24V
- **Chip Brand:** OSRAM/CREE
- **Color Temp :** 1800-6500K/RGB/RGBW
- **Beam Angle:** 15° to 120° Lens
- **IP Rating :** IP 66 / Ip67
- **Working Temp :** -40~+50
- **Working Lifetime:** >50000H
- **RGBW:** DMX512 control
- **Housing Material:** Aluminum Alloy





LUMENO LIGHTING
TECHNOLOGY SOLUTIONS

Architectural and
Landscape Lighting



LUMENO PATH FLOOD LIGHT



- **Model :** LL-LPFL
- **Wattage:** 09W, 12W, 15W, 18W,
• : 24W, 30W, 36W
- **Input Voltage :** DC24V
- **Chip Brand:** OSRAM/CREE
- **Color Temp :** 1800-6500K/RGB/RGBW
- **Beam Angle:** 15° to 120° Lens
- **IP Rating :** IP 66 / Ip67
- **Working Temp :** -40~+50
- **Working Lifetime:** >50000H
- **RGBW:** DMX512 control
- **Housing Material:** Aluminum Alloy



support@lumenolighting.in



www.lumenolighting.in



@lumenolighting

MADE IN INDIA





LUMENO LIGHTING
TECHNOLOGY SOLUTIONS

Architectural and
Landscape Lighting



LUMENO PARH FOCUS LIGHT



- **Model :** LL-LPFL
- **Wattage:** 48W, 60W, 72W
- **Input Voltage :** DC24V
- **Chip Brand:** OSRAM/CREE
- **Color Temp :** 1800-6500K/RGB/RGBW
- **Beam Angle:** 15°to 120° Lens
- **IP Rating :** IP 66 / Ip67
- **Working Temp :** -40~+50
- **Working Lifetime:** >50000H
- **RGBW:** DMX512 control
- **Housing Material:** Aluminum Alloy





LUMENO LIGHTING
TECHNOLOGY SOLUTIONS


Architectural and
Landscape Lighting



LUMENO ROUND FOCUS LIGHT



- **Model :** LL-LRFL
- **Wattage:** 06W, 09W, 12W, 15W
- **Input Voltage :** DC24V
- **Chip Brand:** OSRAM/CREE
- **Color Temp :** 1800-6500K/RGB/RGBW
- **Beam Angle:** 15° to 120° Lens
- **IP Rating :** IP 66 / Ip67
- **Working Temp :** -40~+50
- **Working Lifetime:** >50000H
- **RGBW:** DMX512 control
- **Housing Material:** Aluminum Alloy

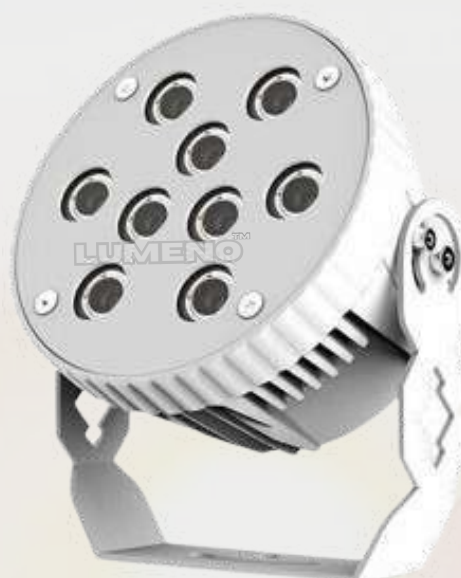

support@lumenolighting.in



www.lumenolighting.in



@lumenolighting

MADE IN INDIA





LUMENO LIGHTING TECHNOLOGY SOLUTIONS

Architectural and
Landscape Lighting



LUMENO ROUND FOCUS LIGHT



- **Model :** LL-LRFL
- **Wattage:** 12W, 18W, 24W, 36W
- **Input Voltage :** DC24V
- **Chip Brand:** OSRAM/CREE
- **Color Temp :** 1800-6500K/RGB/RGBW
- **Beam Angle:** 15°to 120° Lens
- **IP Rating :** IP 66 / Ip67
- **Working Temp :** -40~+50
- **Working Lifetime:** >50000H
- **RGBW:** DMX512 control
- **Housing Material:** Aluminum Alloy



support@lumenolighting.in



www.lumenolighting.in



[@lumeno_lighting](https://www.instagram.com/lumeno_lighting)

MADE IN INDIA





LUMENO LIGHTING
TECHNOLOGY SOLUTIONS


Architectural and
Landscape Lighting



LUMENO FOCUS HIGH LIGHT



- **Model :** LL-LFHL
- **Wattage:** 18W, 36W, 72W,
- **Input Voltage :** DC24V
- **Chip Brand:** OSRAM/CREE
- **Color Temp :** 1800-6500K/RGB/RGBW
- **Beam Angle:** 15°to 120° Lens
- **IP Rating :** IP 66 / Ip67
- **Working Temp :** -40~+50
- **Working Lifetime:** >50000H
- **RGBW:** DMX512 control
- **Housing Material:** Aluminum Alloy

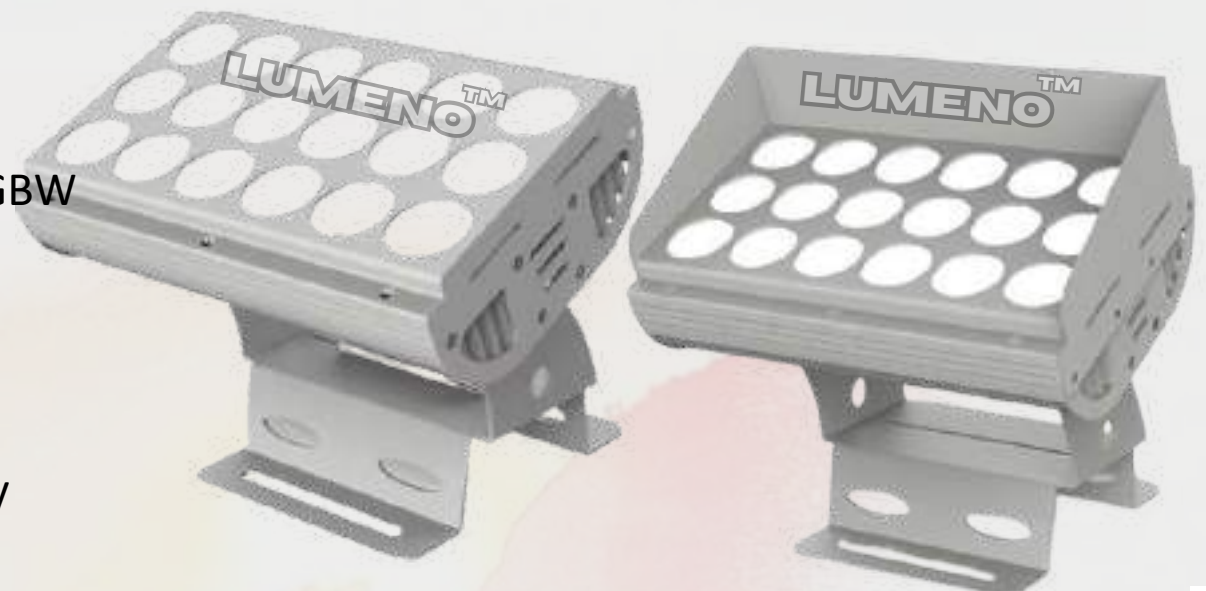

support@lumenolighting.in



www.lumenolighting.in



[@lumeno_lighting](https://www.instagram.com/lumeno_lighting)

MADE IN INDIA





LUMENO LIGHTING TECHNOLOGY SOLUTIONS

Architectural and
Landscape Lighting



LUMENO FOCUS HIGH LIGHT



- **Model :** LL-LFHL
- **Wattage:** 96W, 144W
- **Input Voltage :** DC24V
- **Chip Brand:** OSRAM/CREE
- **Color Temp :** 1800-6500K/RGB/RGBW
- **Beam Angle:** 15°to 120° Lens
- **IP Rating :** IP 66 / Ip67
- **Working Temp :** -40~+50
- **Working Lifetime:** >50000H
- **RGBW:** DMX512 control
- **Housing Material:** Aluminum Alloy



support@lumenolighting.in



www.lumenolighting.in



@lumenolighting

MADE IN INDIA





LUMENO LIGHTING
TECHNOLOGY SOLUTIONS


Architectural and
Landscape Lighting



LUMENO LED FOCUS LIGHT



- **Model :** LL-LRFL
- **Wattage:** 30W, 36W, 48W, 72W,
- **Input Voltage :** DC24V
- **Chip Brand:** OSRAM/CREE
- **Color Temp :** 1800-6500K/RGB/RGBW
- **Beam Angle:** 15°to 120° Lens
- **IP Rating :** IP 66 / Ip67
- **Working Temp :** -40~+50
- **Working Lifetime:** >50000H
- **RGBW:** DMX512 control
- **Housing Material:** Aluminum Alloy

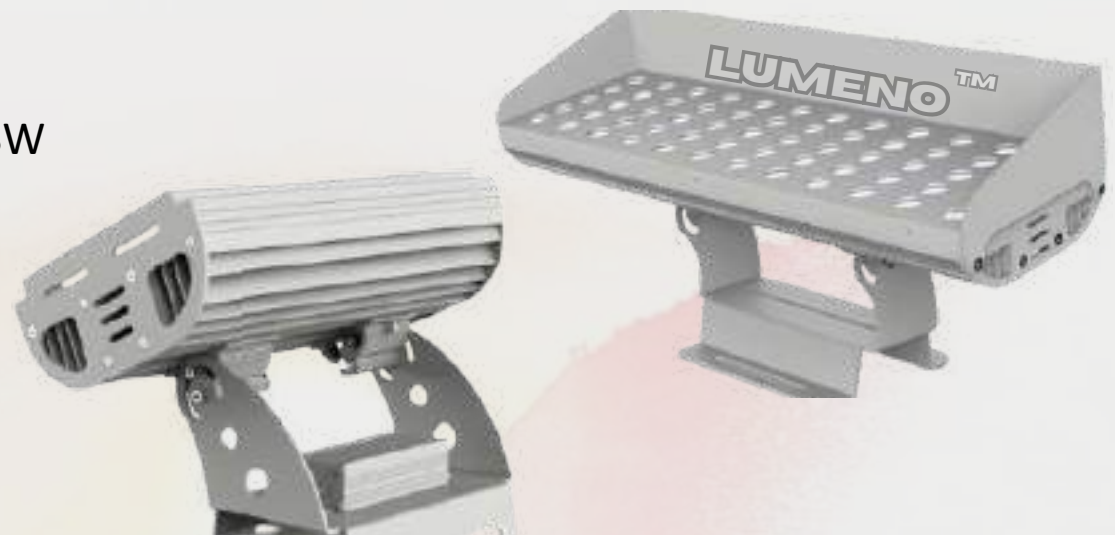

support@lumenolighting.in



www.lumenolighting.in



[@lumeno_lighting](https://www.instagram.com/lumeno_lighting)

MADE IN INDIA





LUMENO LIGHTING
TECHNOLOGY SOLUTIONS

Architectural and
Landscape Lighting



LUMENO LED FOCUS LIGHT



- **Model :** LL-LRFL
- **Wattage:** 60W,72W, 120, 144W
- **Input Voltage :** DC24V
- **Chip Brand:** OSRAM/CREE
- **Color Temp :** 1800-6500K/RGB/RGBW
- **Beam Angle:** 15°to 120° Lens
- **IP Rating :** IP 66 / Ip67
- **Working Temp :** -40~+50
- **Working Lifetime:** >50000H
- **RGBW:** DMX512 control
- **Housing Material:** Aluminum Alloy






LUMENO LIGHTING TECHNOLOGY SOLUTIONS LUMENO WALL WASHER

Architectural and
Landscape Lighting



- **Model :** LL- WALL WASHER
- **Wattage:** 12W,15W, 18W, 24W, 36W, 48W, 60W, 72W
- **Input Voltage :** DC24V
- **Chip Brand:** OSRAM/CREE
- **Color Temp :** 1800-6500K/RGB/RGBW
- **Beam Angle:** 10°to 120° Lens
- **IP Rating :** IP 66 / Ip67
- **Working Temp :** -40~+50
- **Working Lifetime:** >50000H
- **RGBW:** DMX512 control
- **Housing Material:** Aluminum Alloy

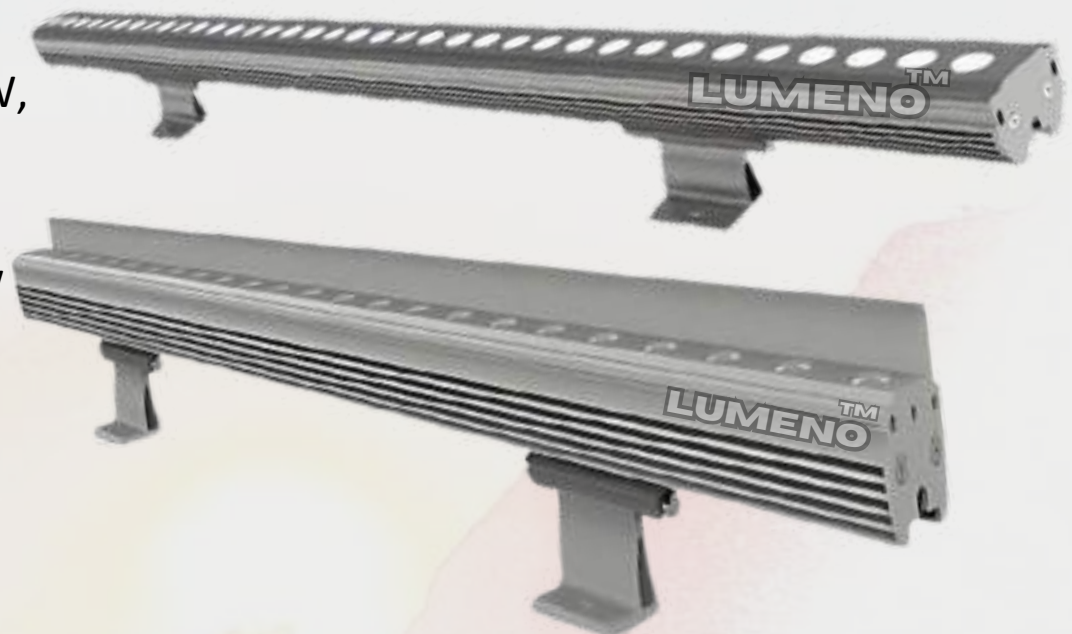

support@lumenolighting.in



www.lumenolighting.in



@lumenolighting

MADE IN INDIA





LUMENO LIGHTING TECHNOLOGY SOLUTIONS LUMENO WALL WASHER

Architectural and
Landscape Lighting



- **Model :** LL- WALL WASHER
- **Wattage:** 12W,15W, 18W, 24W, 36W, 48W, 60W, 72W
- **Input Voltage :** DC24V
- **Chip Brand:** OSRAM/CREE
- **Color Temp :** 1800-6500K/RGB/RGBW
- **Beam Angle:** 10°to 120° Lens
- **IP Rating :** IP 66 / Ip67
- **Working Temp :** -40~+50
- **Working Lifetime:** >50000H
- **RGBW:** DMX512 control
- **Housing Material:** Aluminum Alloy



support@lumenolighting.in



www.lumenolighting.in



@lumenolighting


MADE IN INDIA





LUMENO LIGHTING TECHNOLOGY SOLUTIONS LUMENO WALL WASHER

Architectural and
Landscape Lighting

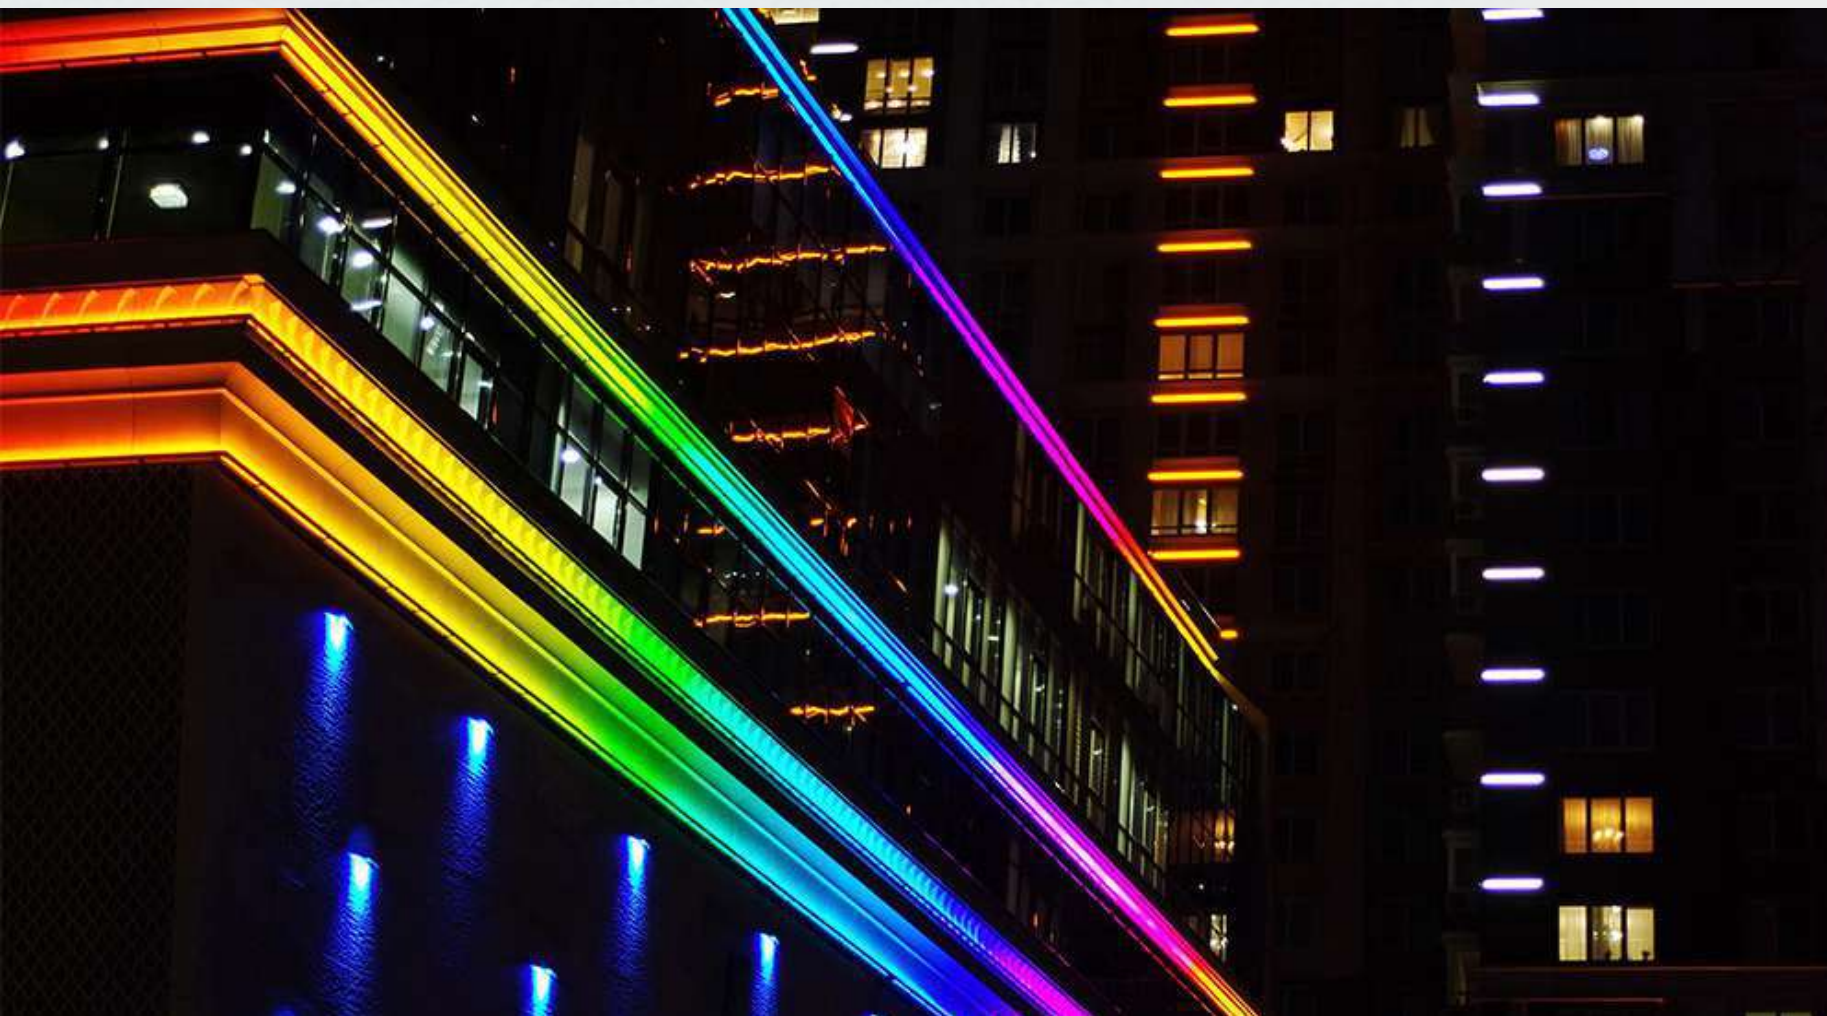

- **Model :** LL- WALL WASHER
- **Wattage:** 12W, 24W, 36W, 48W, 60W, 72W
- **Input Voltage :** DC24V
- **Chip Brand:** OSRAM/CREE
- **Color Temp :** 1800-6500K/RGB/RGBW
- **Beam Angle:** 10°to 120° Lens
- **IP Rating :** IP 66 / Ip67
- **Working Temp :** -40~+50
- **Working Lifetime:** >50000H
- **RGBW:** DMX512 control
- **Housing Material:** Aluminum Alloy



support@lumenolighting.in



www.lumenolighting.in



[@lumeno_lighting](https://www.instagram.com/lumeno_lighting)

MADE IN INDIA






LUMENO LIGHTING TECHNOLOGY SOLUTIONS

Architectural and
Landscape Lighting

LUMENO WALL WASHER



- **Model :** LL- WALL WASHER
- **Wattage:** 12W, 24W, 36W,
- **Input Voltage :** DC24V
- **Chip Brand:** OSRAM/CREE
- **Color Temp :** 1800-6500K/RGB/RGBW
- **Beam Angle:** 10°to 120° Lens
- **IP Rating :** IP 66 / Ip67
- **Working Temp :** -40~+50
- **Working Lifetime:** >50000H
- **RGBW:** DMX512 control
- **Housing Material:** Aluminum Alloy

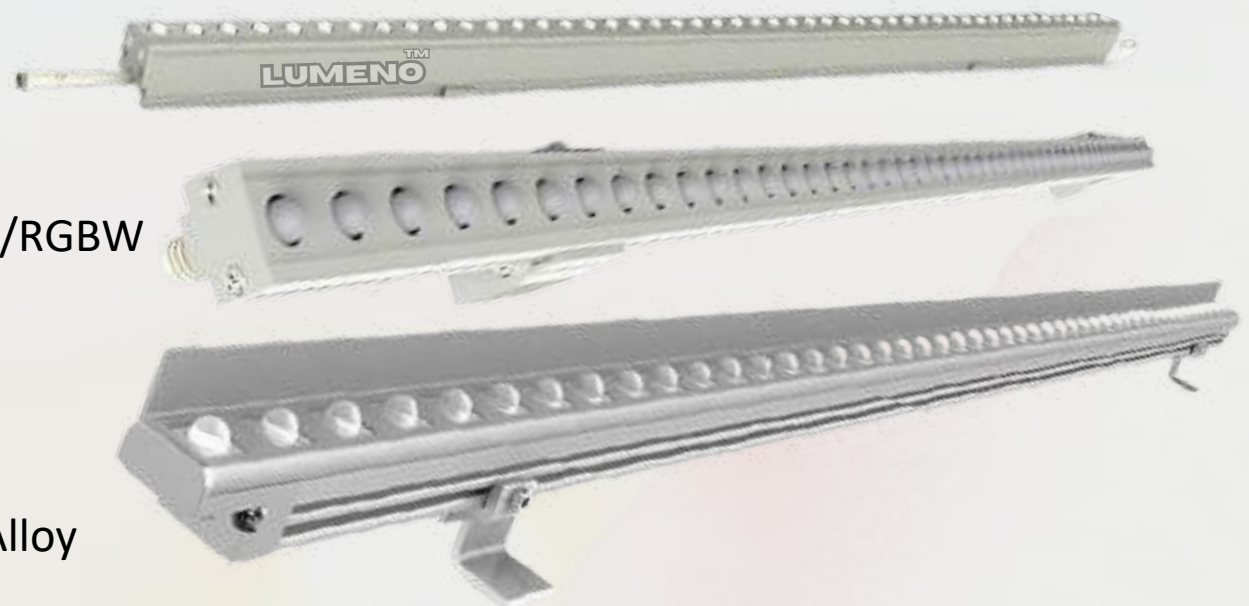

support@lumenolighting.in



www.lumenolighting.in



[@lumeno_lighting](https://www.instagram.com/lumeno_lighting) **MADE IN INDIA**





LUMENO LIGHTING TECHNOLOGY SOLUTIONS

LUMENO WALL WASHER

Architectural and
Landscape Lighting



- **Model :** LL- WALL WASHER
- **Wattage:** 12W, 24W, 36W, 48W, 60W, 72W
- **Input Voltage :** DC24V
- **Chip Brand:** OSRAM/CREE
- **Color Temp :** 1800-6500K/RGB/RGBW
- **Beam Angle:** 10°to 120° Lens
- **IP Rating :** IP 66 / Ip67
- **Working Temp :** -40~+50
- **Working Lifetime:** >50000H
- **RGBW:** DMX512 control
- **Housing Material:** Aluminum Alloy



support@lumenolighting.in



www.lumenolighting.in



[@lumeno_lighting](https://www.instagram.com/lumeno_lighting)

MADE IN INDIA






LUMENO LIGHTING TECHNOLOGY SOLUTIONS LUMENO WALL WASHER

Architectural and
Landscape Lighting



- **Model :** LL- WALL WASHER
- **Wattage:** 12W, 18W
- **Input Voltage :** DC24V
- **Chip Brand:** OSRAM/CREE
- **Color Temp :** 1800-6500K/RGB/RGBW
- **Beam Angle:** 10°to 120° Lens
- **IP Rating :** IP 66 / Ip67
- **Working Temp :** -40~+50
- **Working Lifetime:** >50000H
- **RGBW:** DMX512 control
- **Housing Material:** Aluminum Alloy

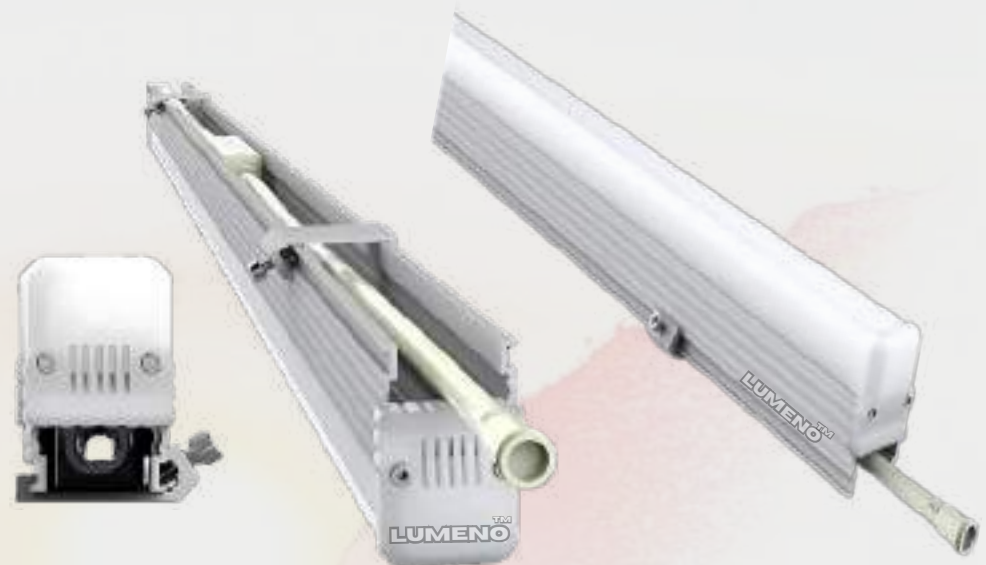

support@lumenolighting.in



www.lumenolighting.in



@lumenolighting

MADE IN INDIA





LUMENO LIGHTING TECHNOLOGY SOLUTIONS

**Architectural and
Landscape Lighting**

Contact

Bangalore Karnataka - 560053
Email- support@lumenolighting.in
www.lumenolighting.in



support@lumenolighting.in



www.lumenolighting.in



[@lumeno_lighting](https://www.instagram.com/lumeno_lighting)

MADE IN INDIA

