

Product Part Number

- 66U-6A-CMR-XX

Product Description

- VTP, 23AWG solid bare copper, CAT.6A, CMR
- With cross filler
- Overall metal foil screen

Product Features

- High performance of transmission.
- High quality of safety property.
- Sweep frequency up to **750** MHz.


Application

- Structure cabling for horizontal and building backbone cable.
- Transmission of digital and analogue for data, video and audio applications.
- Overall metal shielded providing good protection from EMI noise.
- IEEE 802.3an 10GBASE-T and legacy speeds.
- CDDI / ATM / Token Ring
- IEEE 802.3af (PoE) / IEEE 802.3at (PoE+) / IEEE 802.3bt (PoE++)

Applicable Standard

- Electrical Transmission
 - ANSI/TIA-568.2-D (2018)
 - ISO/IEC 11801-1
 - IEC 61156-5 (Edition 2.1)
- Flame Test
 - UL 1666 (CMR)
- Material and Construction
 - UL 444
 - UL 444 LP-Rating 0.5A
 - CSA 22.2 NO.214
- EU Directive 2011/65/EU & 2015/863/EU
- EU Directive 2006/95/EC (LVD)

Sectional Drawing

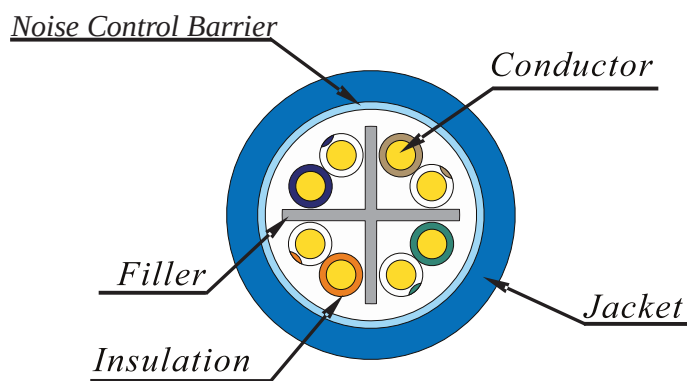

All Material According To SS-00259

Material and Construction

Conductor	Material	23AWG solid bare copper	
Insulation	Material	Polyolefin (PO)	
	Color code & diameter	Blue & white/blue stripe	1.10 ± 0.02 mm
		Orange & white/orange stripe	1.05 ± 0.02 mm
		Green & white/green stripe	1.09 ± 0.02 mm
		Brown & white/brown stripe	1.05 ± 0.02 mm
Twisted	Description	Left hand direction	
Filler	Material	Polyolefin (PO)	
Assembly	Description	Left hand direction	
Barrier	Material	Noise Control Barrier	
Jacket	Material	Flame retardant polyvinyl chloride (FRPVC)	
	Diameter	7.0 ± 0.2 mm	
	Thickness	0.50 ± 0.05 mm	
	Color	Per customer`s request	
Marking	ELITE 10GS CAT 6A --- E142890 UTP 4PR 23AWG 75°C D M V N NMSQ) 1/1.6 F UWMF!S 3 U P !.6 79 3 n n z z ! S p I T ! D PN! Q M J B O U ! Y Y Y Y G U Note 1: mmyy is date code.		

Usage & Environmental Condition

Temperature range	Storage & shipping	-20°C to 75°C
	Installation	0°C to 60°C
	Operation	-20°C to 75°C
Minimum bending radius		≥ 8 times of overall diameter
Maximum pulling tension		≤ 110 N

Physical & Electrical Characteristics (at 20°C)

Voltage rating	300V
Spark test	2.5 KV DC
AC leakage current through overall jacket	≤ 10mA (1.5KV AC)
Cable cold bend	-20°C for 4 hr
Conductor DC resistance	≤ 9.38 Ω/100m
Resistance unbalance	≤ 4%
Dielectric strength	1.5 KV ac for 2 s
Insulation resistance	≥ 5000 MΩ • k n
Mutual capacitance	≤ 5.6 nF/100m
Capacitance unbalance pair-to-ground	≤ 330 pF/100m
Nominal Velocity of Propagation	68%

Transmission Performance (at 20°C)

Frequency	IL	NEXT	PS. NEXT	ACR	PS. ACR	ACRF	PS. ACRF	RL	Propagation Delay	Delay Skew
(MHz)	Max.	Min.	Min.	Min.	Min.	Min.	Min.	Min.	Max.	Max.
! !	dB/100m	dB/100m	dB/100m	dB/100m	dB/100m	dB/100m	dB/100m	dB/100m	ns/100m	ns/100m
1	2.08	74.30	72.30	72.22	70.22	67.80	64.80	20.00	570.00	45.00
4	3.80	65.27	63.27	61.47	59.47	55.76	52.76	23.01	552.00	
8	5.31	60.75	58.75	55.44	53.44	49.74	46.74	24.52	546.73	
10	5.93	59.30	57.30	53.37	51.37	47.80	44.80	25.00	545.38	
16	7.49	56.24	54.24	48.75	46.75	43.72	40.72	25.00	543.00	
20	8.38	54.78	52.78	46.41	44.41	41.78	38.78	25.00	542.05	
25	9.38	53.33	51.33	43.95	41.95	39.84	36.84	24.32	541.20	
31.25	10.50	51.88	49.88	41.37	39.37	37.90	34.90	23.64	540.44	
62.5	14.99	47.36	45.36	32.37	30.37	31.88	28.88	21.54	538.55	
100	19.14	44.30	42.30	25.17	23.17	27.80	24.80	20.11	537.60	
150	23.68	41.66	39.66	17.98	15.98	24.28	21.28	18.87	536.94	
200	27.58	39.78	37.78	12.21	10.21	21.78	18.78	18.00	536.55	
250	31.07	38.33	36.33	7.26	5.26	19.84	16.84	17.32	536.28	
300	34.27	37.14	35.14	2.88	0.88	18.26	15.26	16.77	536.08	
350	37.25	36.14	34.14	N.A.	N.A.	16.92	13.92	16.30	535.92	
400	40.05	35.27	33.27	N.A.	N.A.	15.76	12.76	15.89	535.80	
450	42.71	34.50	32.50	N.A.	N.A.	14.74	11.74	15.53	535.70	
500	45.26	33.82	31.82	N.A.	N.A.	13.82	10.82	15.21	535.61	
550	47.70	33.19	31.19	N.A.	N.A.	12.99	9.99	14.92	535.54	
600	50.05	32.63	30.63	N.A.	N.A.	12.24	9.24	14.66	535.47	
650	52.33	32.11	30.11	N.A.	N.A.	11.54	8.54	14.42	535.41	
700	54.53	31.62	29.62	N.A.	N.A.	10.90	7.90	14.19	535.36	
750	56.68	31.17	29.17	N.A.	N.A.	10.30	7.30	13.98	535.31	

Values above 500MHz are for information only.