



HANDSET SERIES
4000 GALLON OIL SAND SEPERATOR

General Notes: 1. Unit comes with interior piping installed.
2. Inflow section of unit must be filled with at least 14.5" of clear water prior to use.


Specifications: 1. Concrete has design strength of 5,000psi @ 28 days. 2. Steel reinforcement: ASTM A-615, grade 60 ASTM A-497 welded wire fabric. 3. Designed for H2O loading with #4 rebar placed on 12" center, both ways. second matt being off set 6" each way over the bottom matt with 5000 psi concrete at 6" minimum thickness. 4. CI Casting: ASTM A-48, class 30/35.

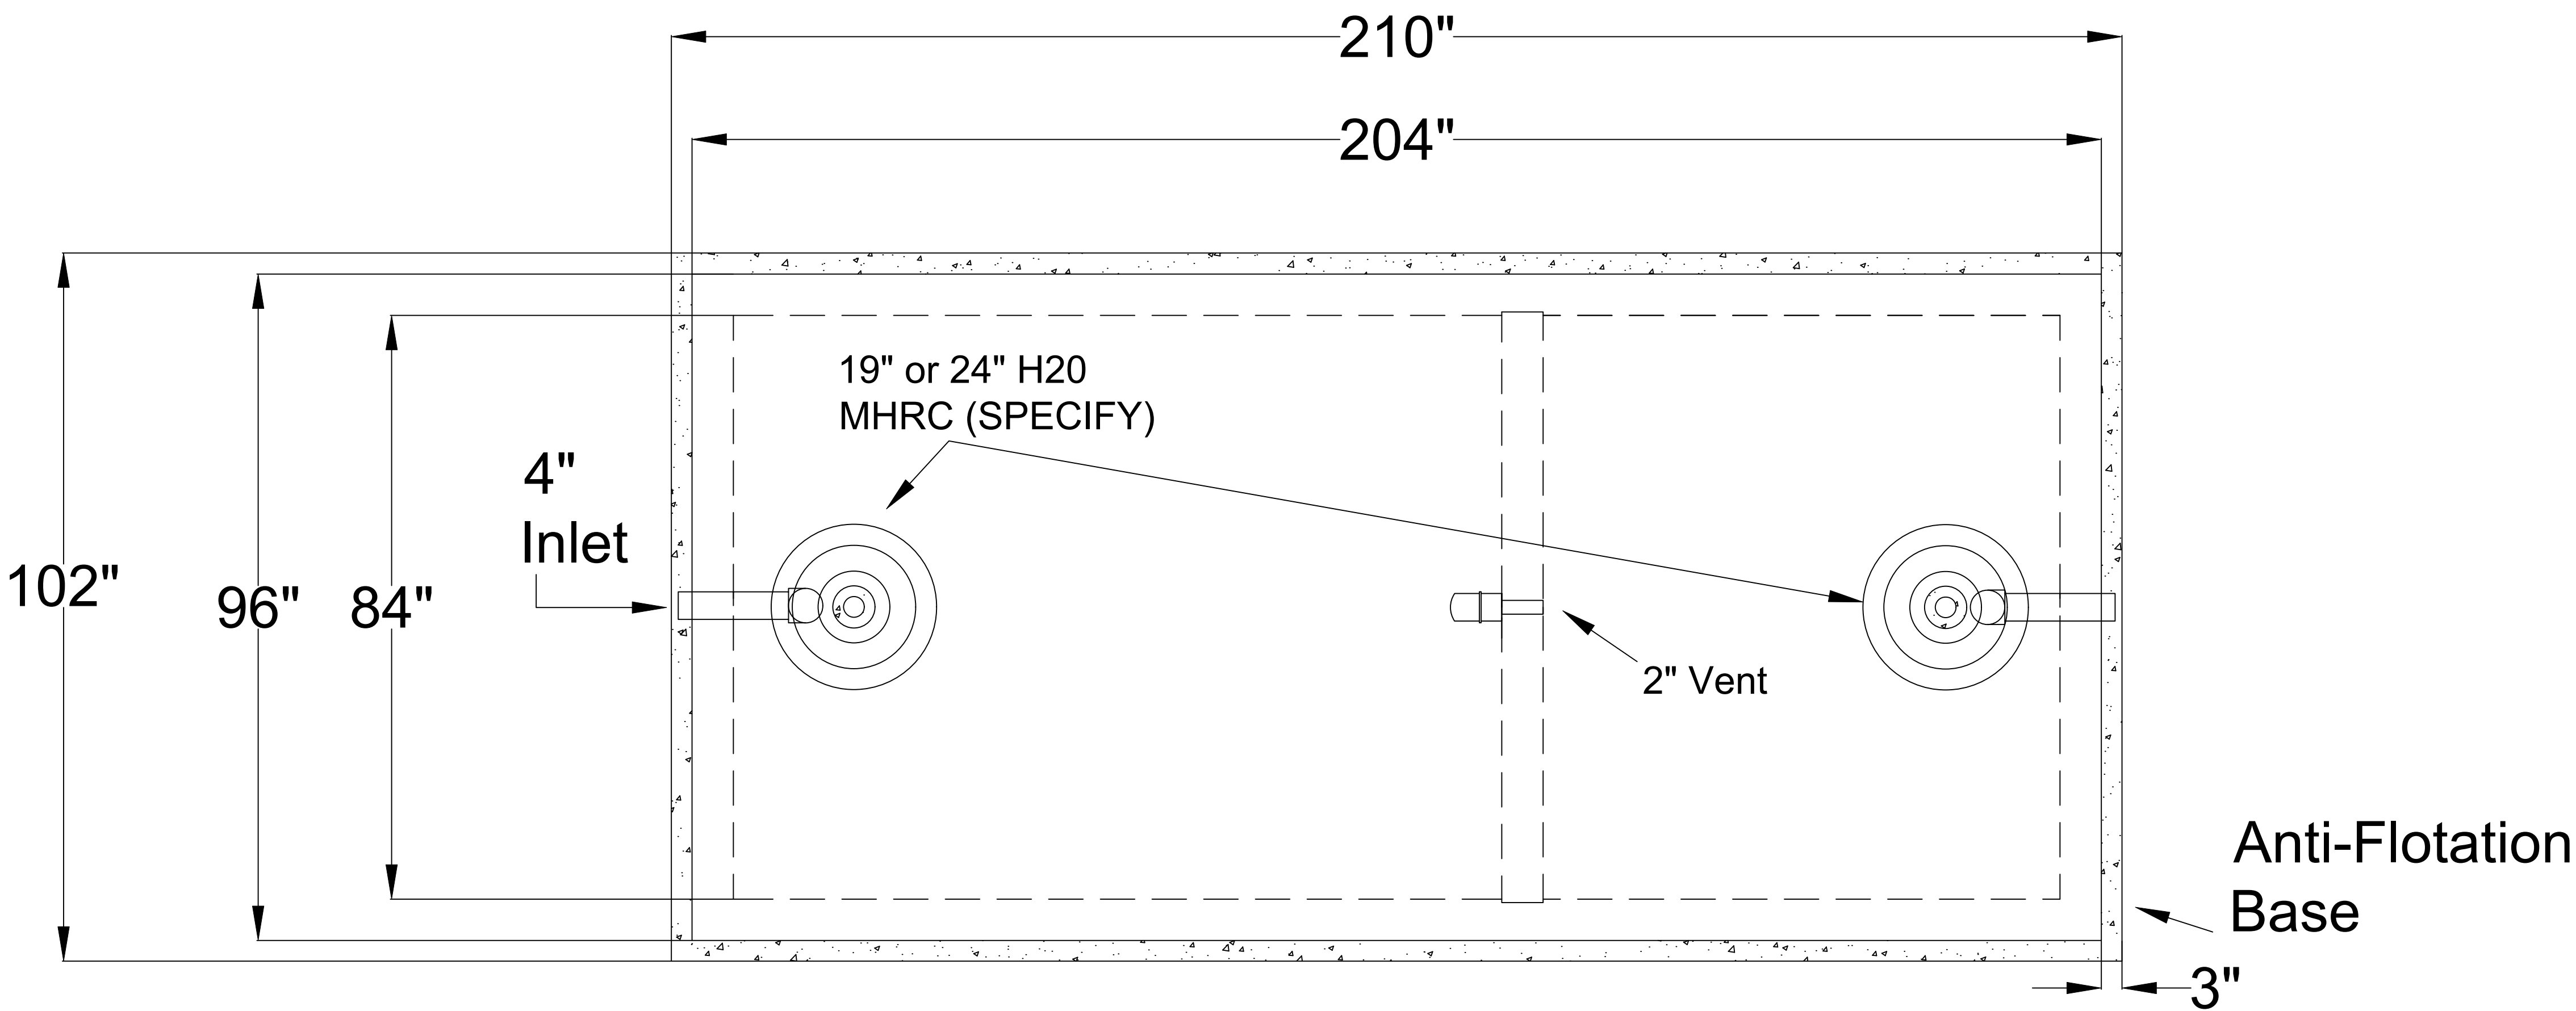

TOP VIEW

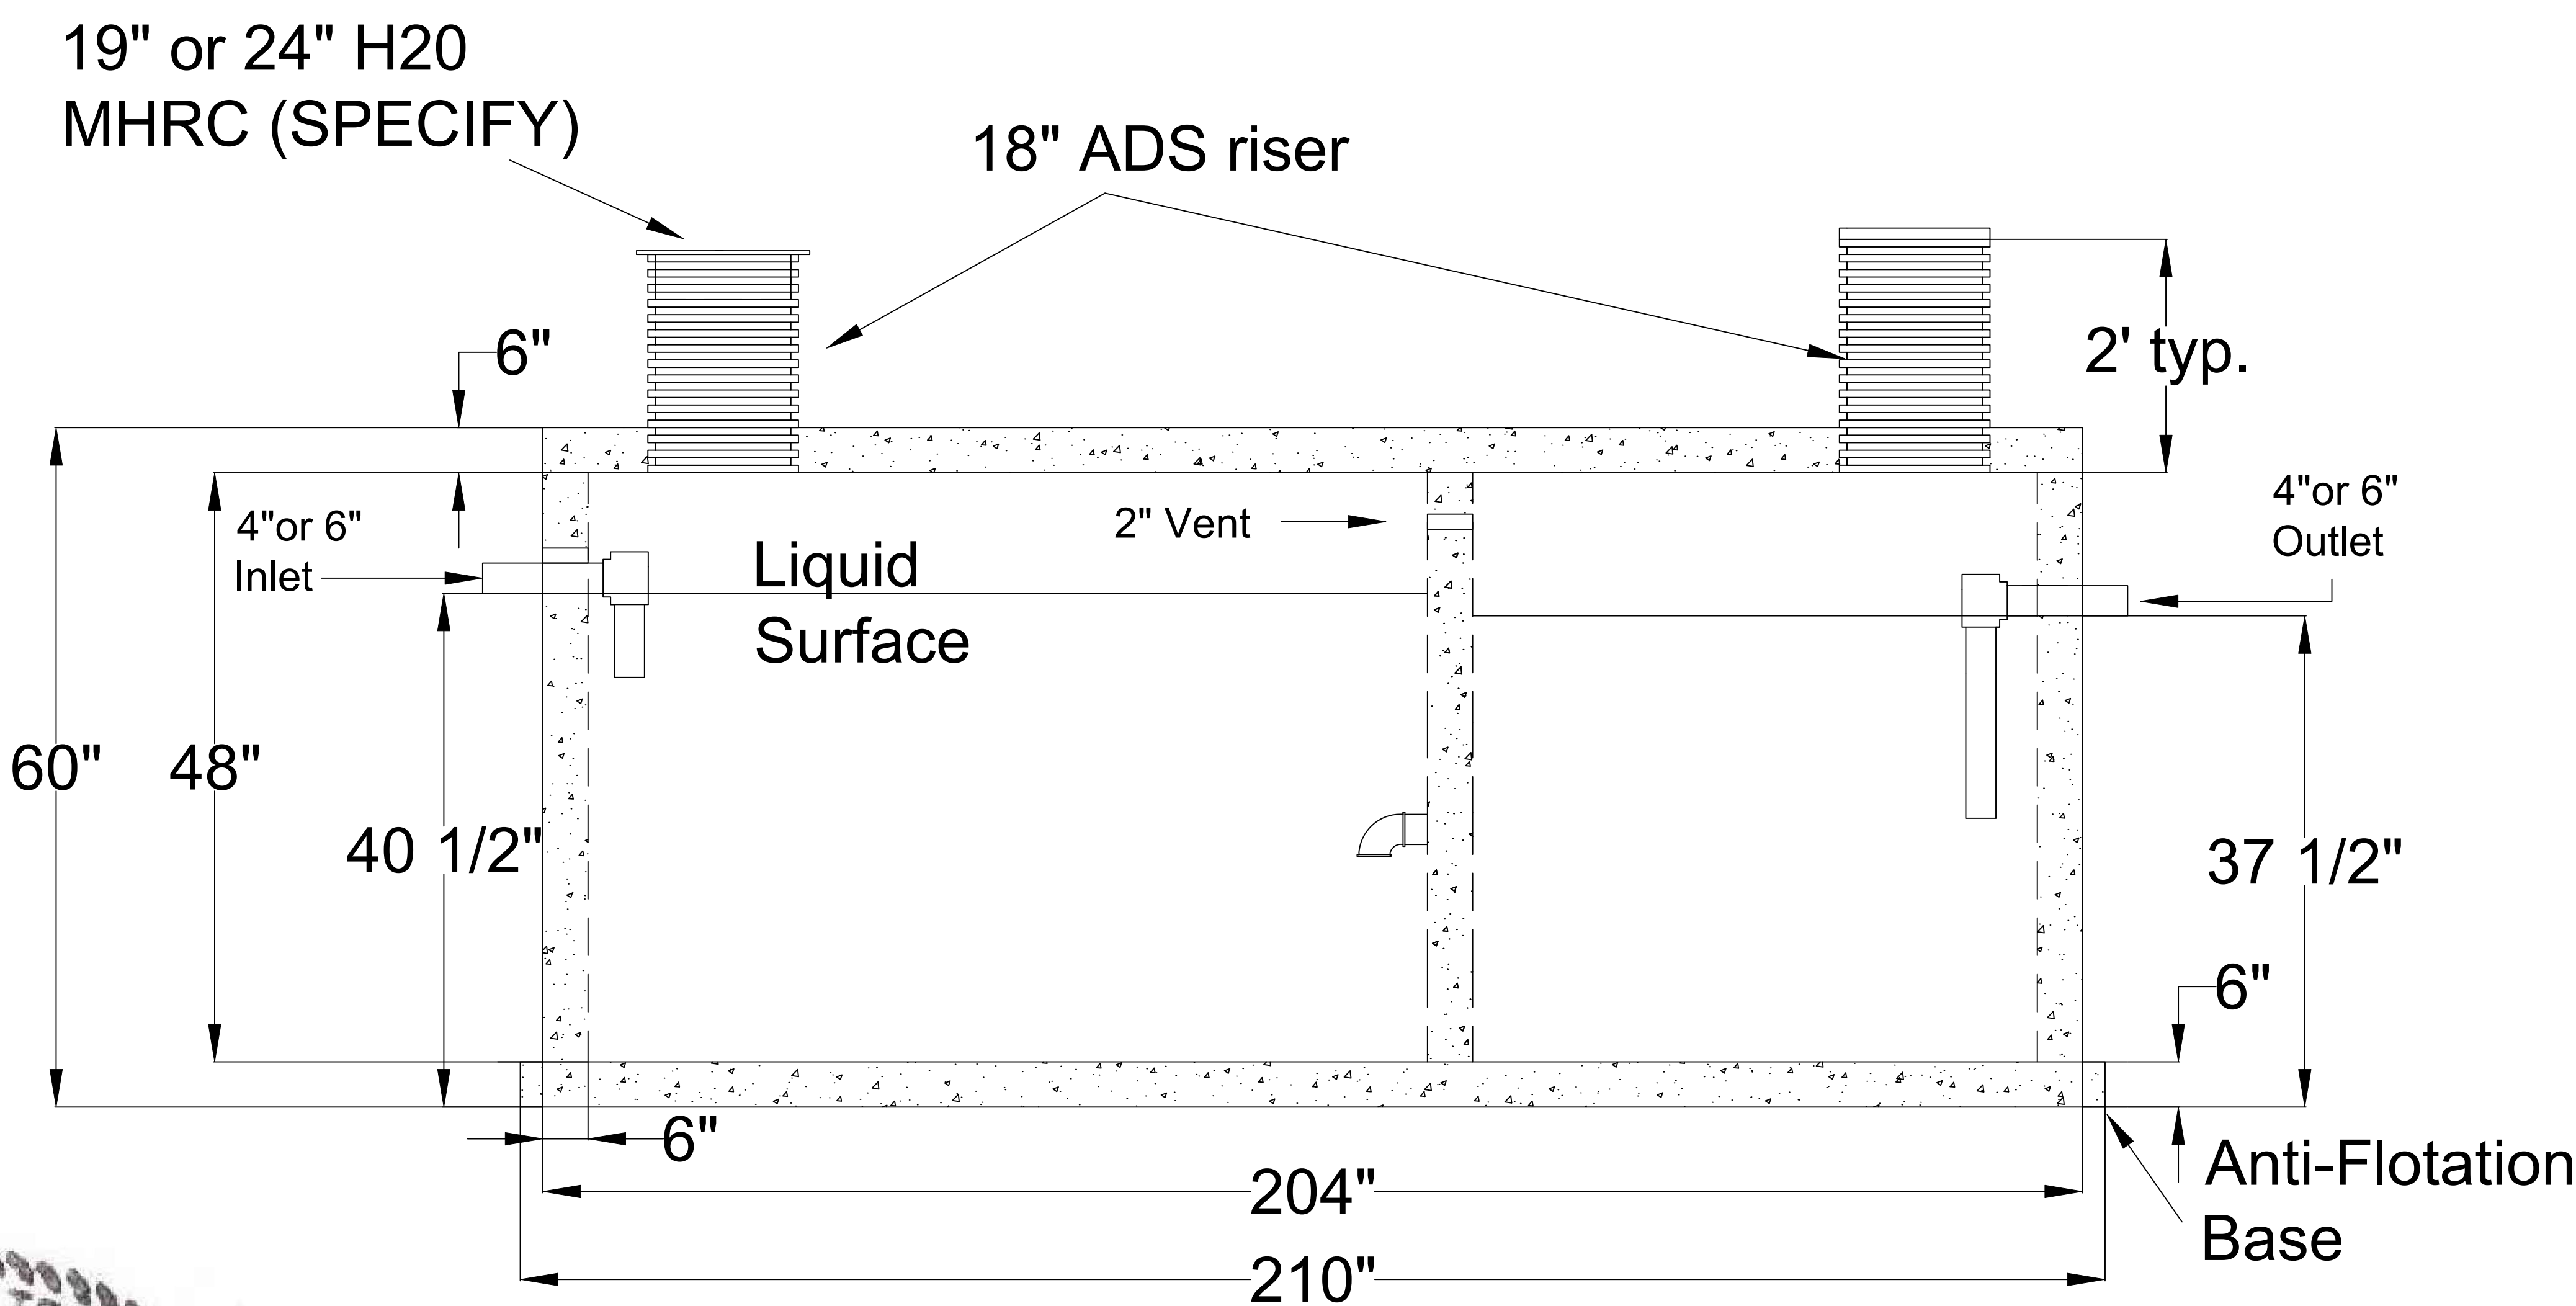

SIDE VIEW

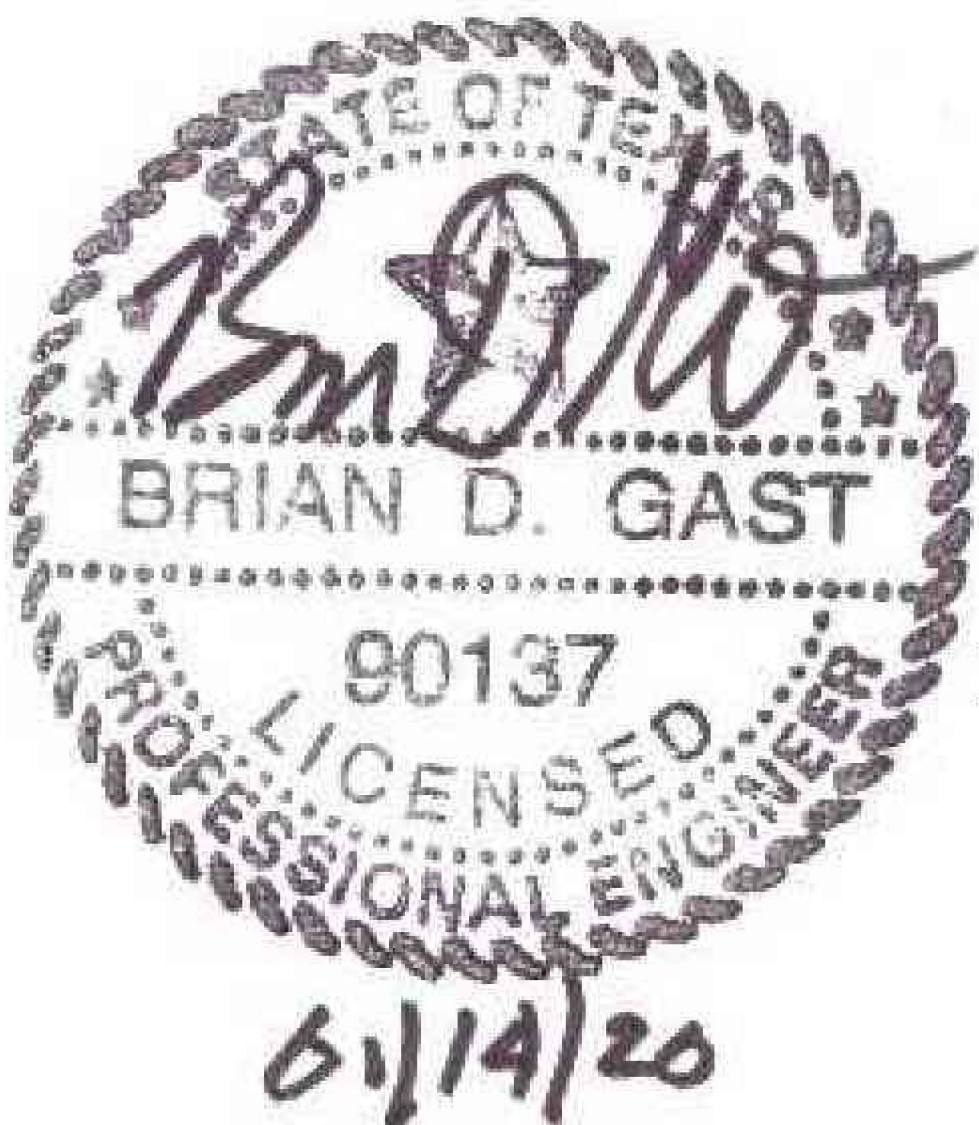

4000galossepe90.dwg

FILE NAME:

APPROVED FOR PRODUCTION

DATE:

JOB TITLE:

AUTHORIZED BY

PRINT:

SIGN: