

PRECON ENVIRONMENTAL PRODUCTS, LLC

817-448-9718 OFFICE

6868 FM 730 SOUTH

AZLE, TX 76020

817-448-9886 FAX

frank@precon-tx.com


www.precon-tx.com

General Notes: 1. Unit comes with interior piping installed.
2. Inflow section of unit must be filled with at least 14.5" of clear water prior to use.


Specifications: 1. Concrete has design strength of 5,000psi @ 28 days. 2. Steel reinforcement: ASTM A-615, grade 60 ASTM A-497 welded wire fabric. 3. Designed for H2O loading. 4. CI Casting: ASTM A-48, class 30/35.

INTERNAL LINING WITH CS90 EPOXY COATING. (optional)

1

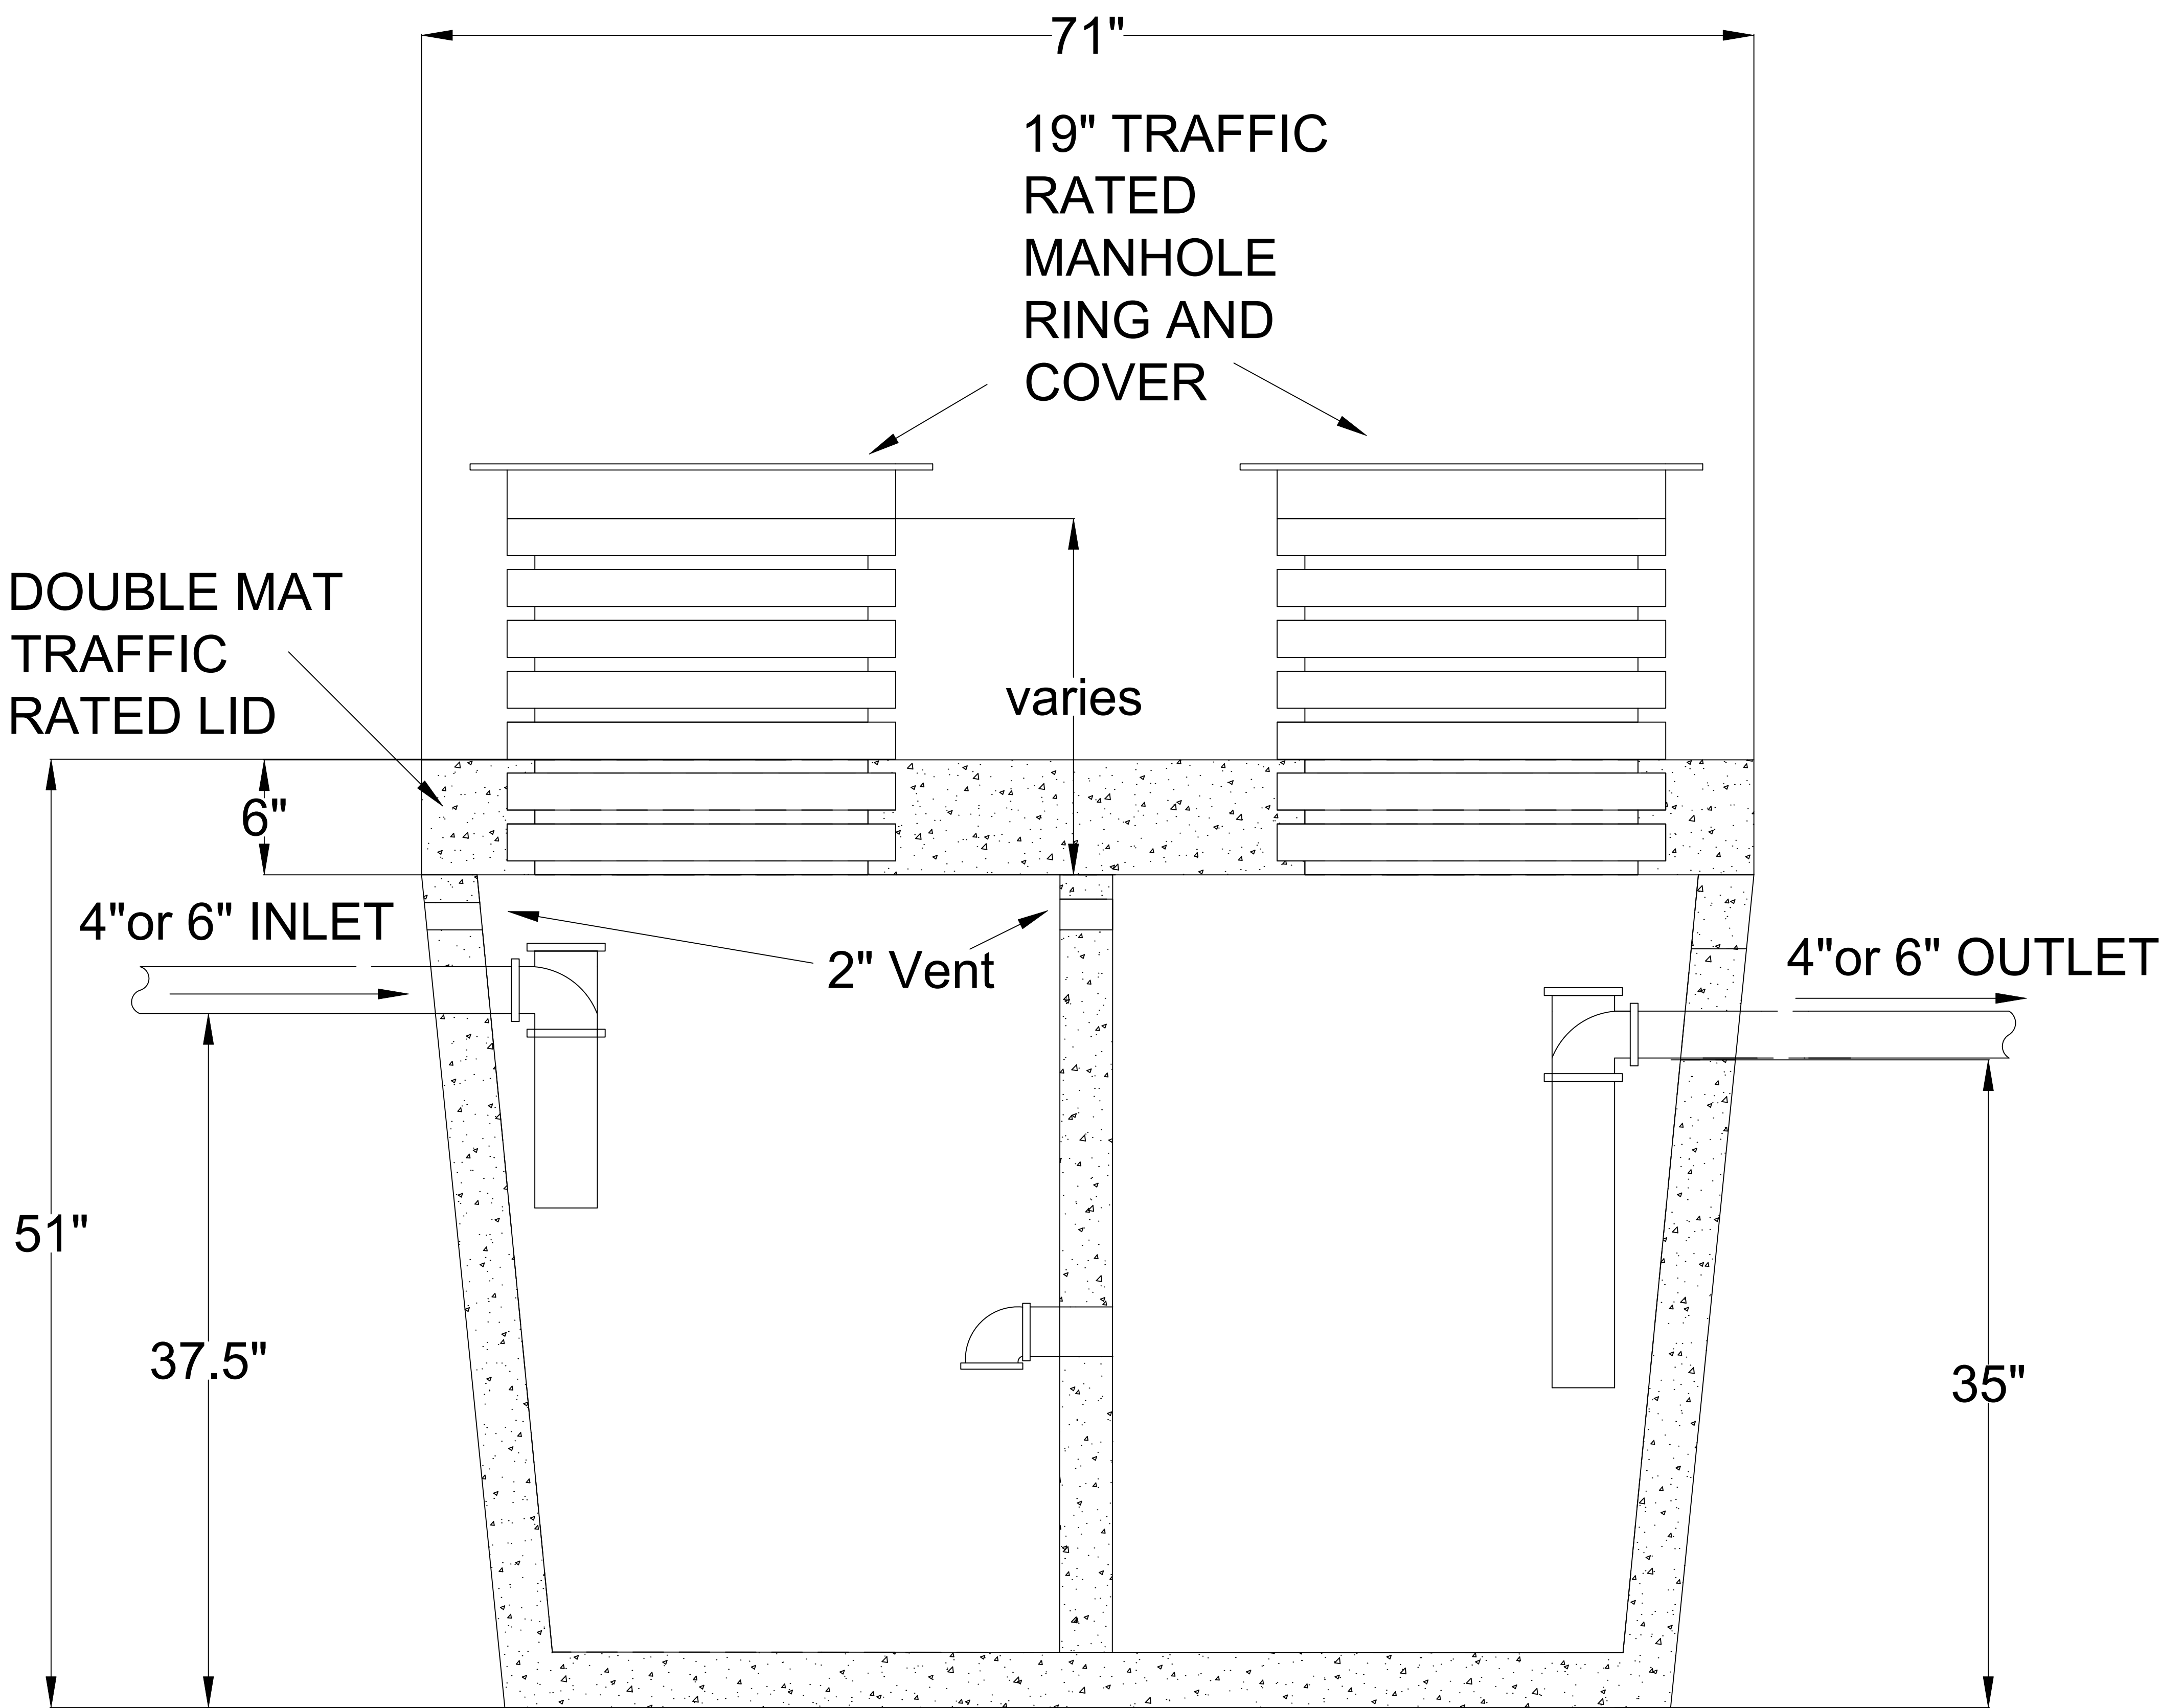


SIDE VIEW

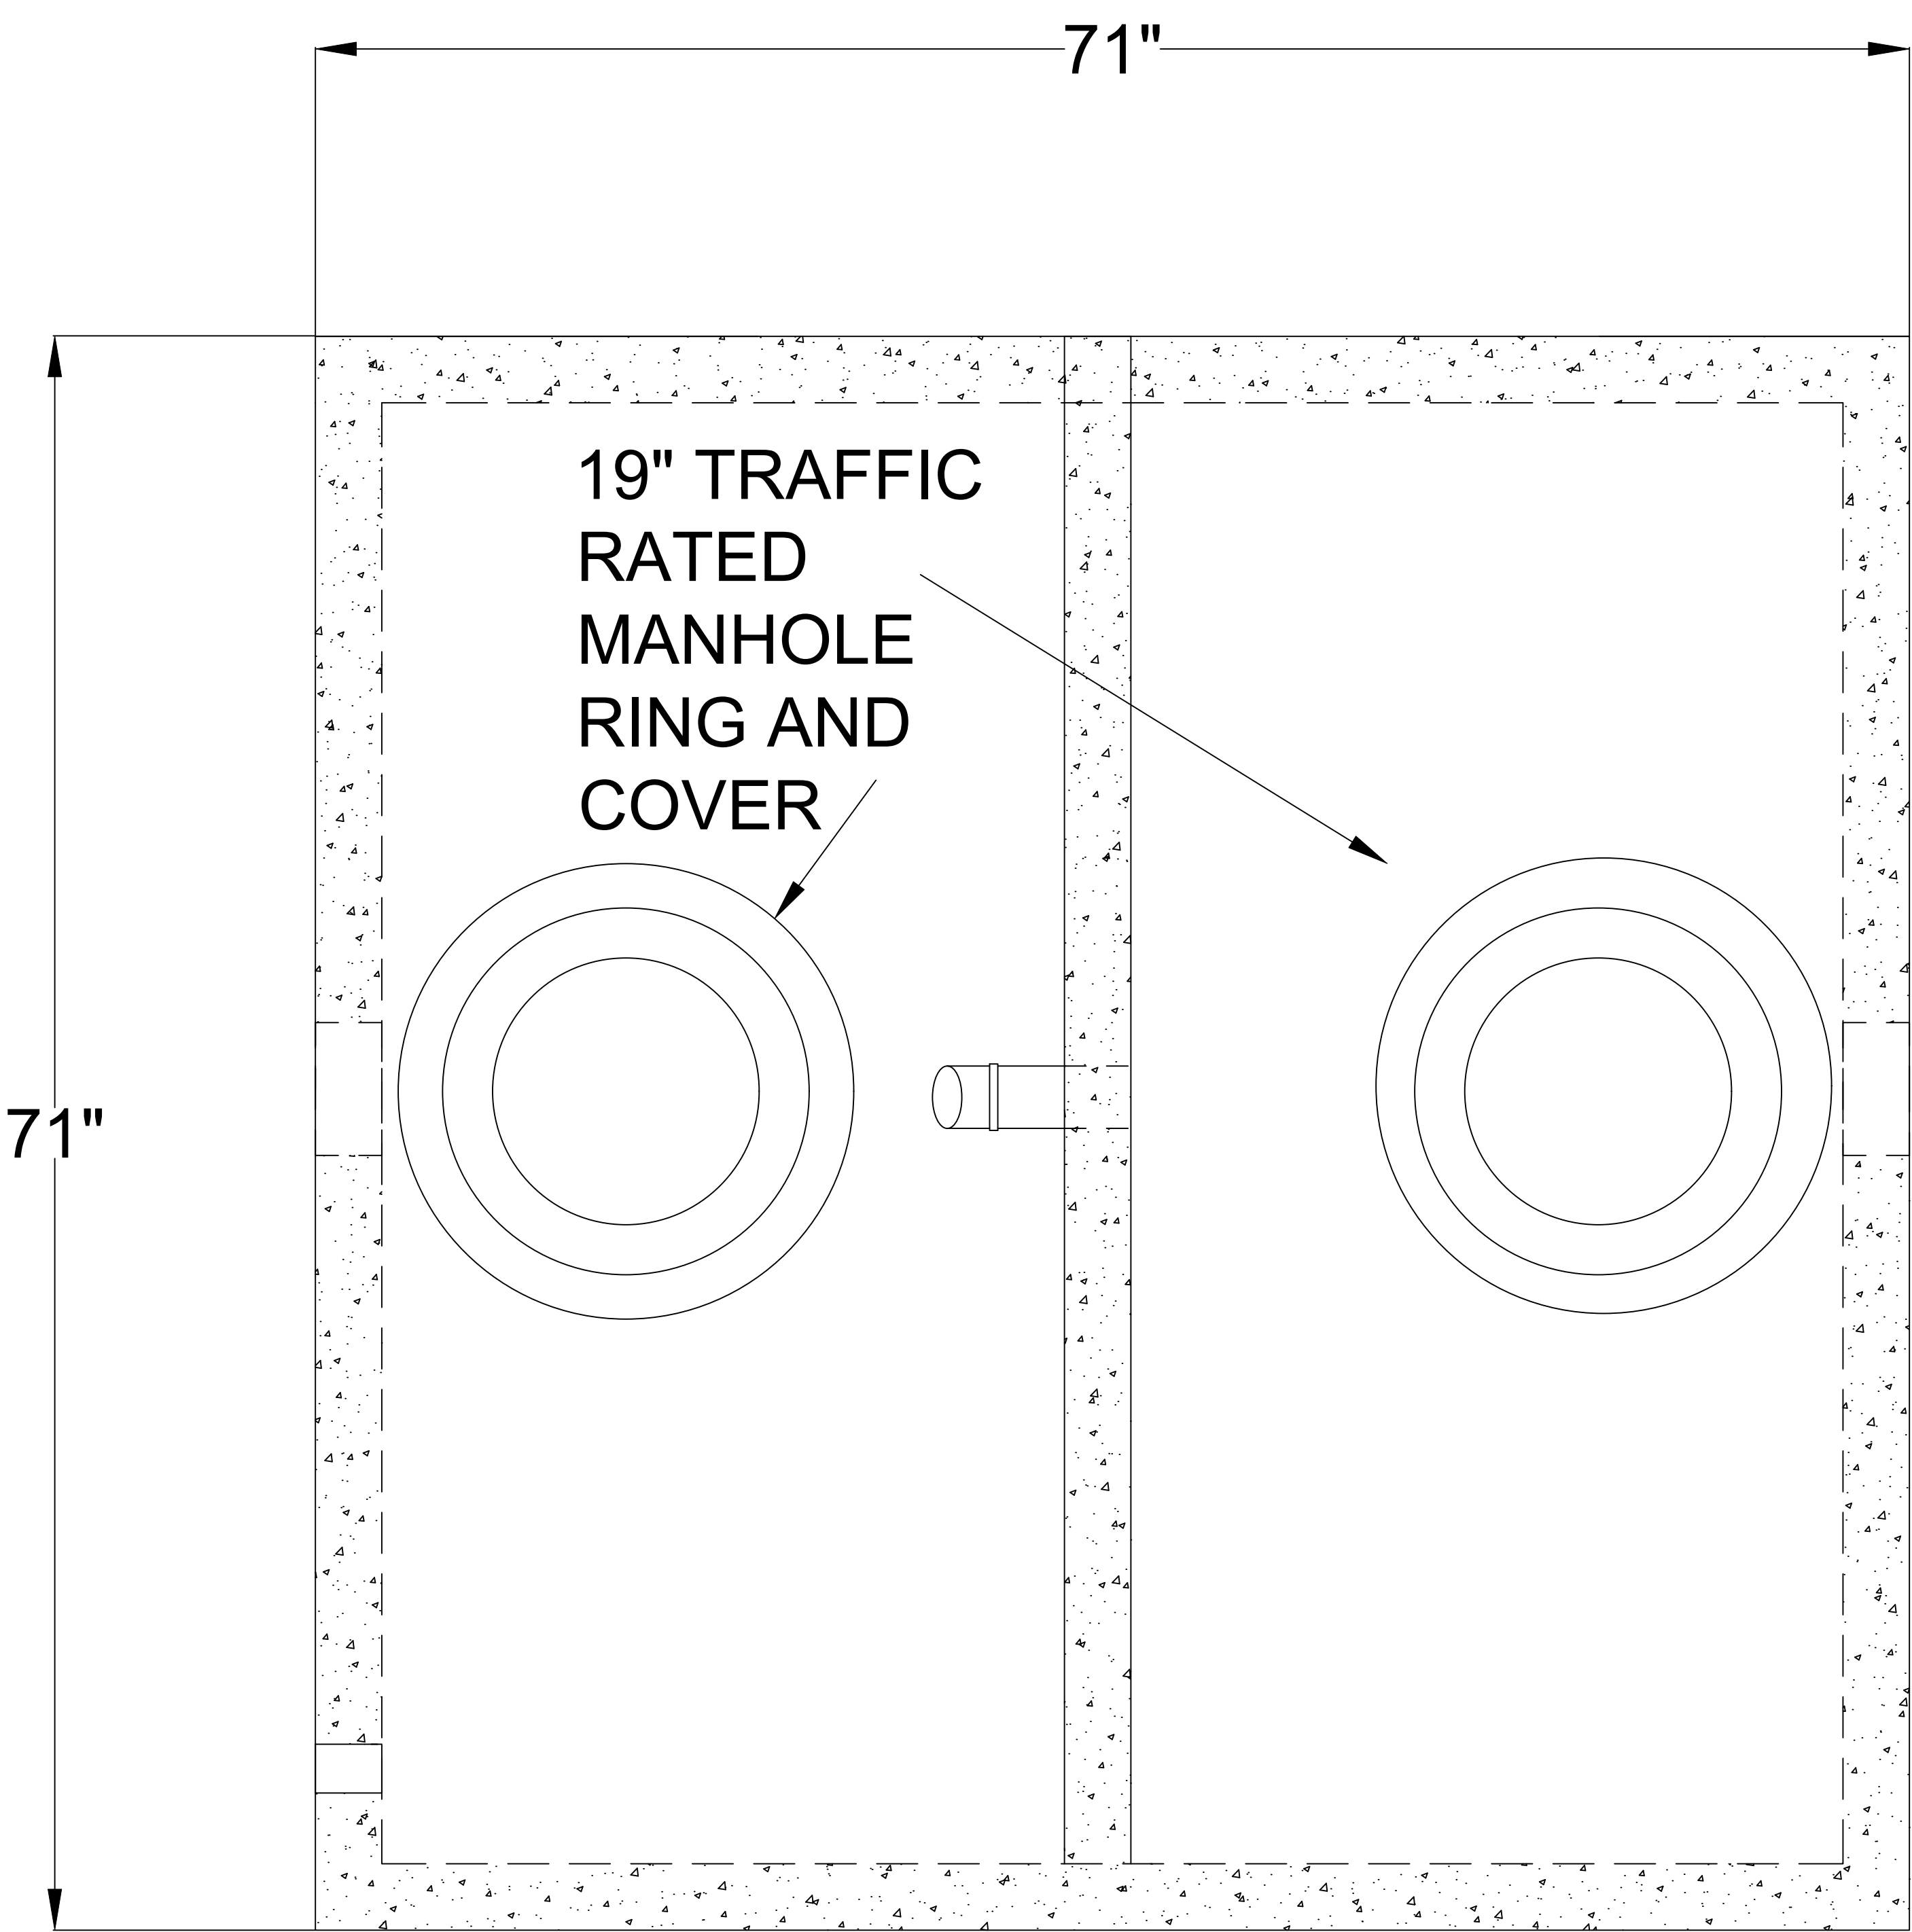

TOP VIEW

Sand Oil interceptor Schedule
Model- NoCMP500os
Capacity USGal-500
Oil Capacity-250gal
Flow Rate-20gpm
Empty Wt-5665lbs
Length-72"
Width-72"
Height-48"
Inlet-37.5"
Outlet-35"

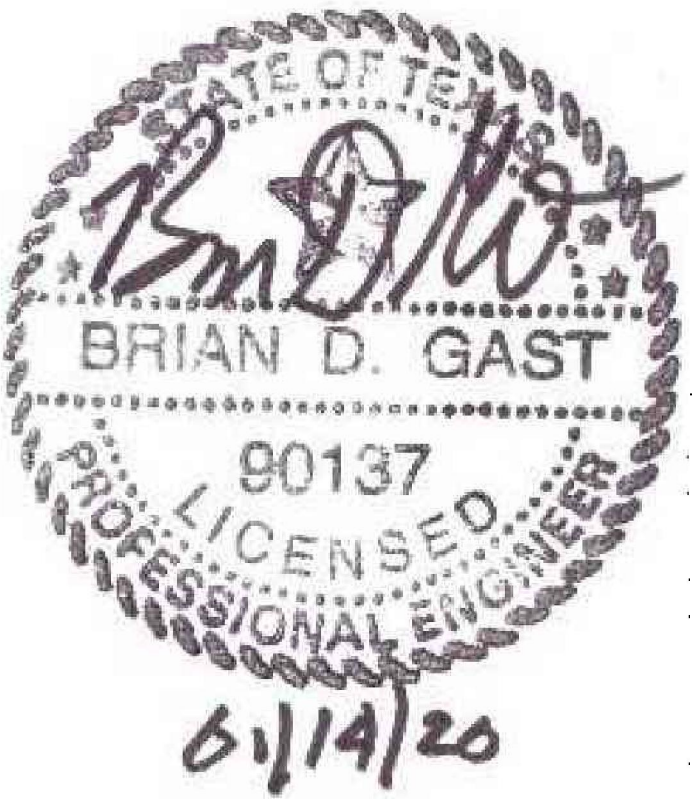

500gallposnocmp90.dwg

FILE NAME:

APPROVED FOR PRODUCTION

DATE:

JOB TITLE:

AUTHORIZED BY

PRINT:

SIGN:

500 GALLON LOW PROFILE
OIL/SAND SEPARATOR
NO CMP